
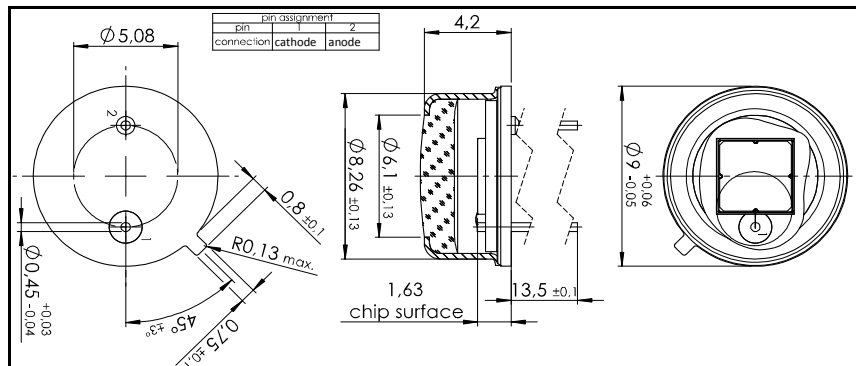


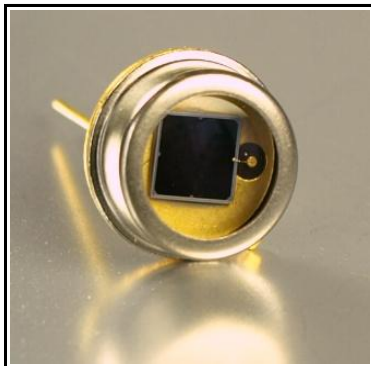

Features

- 13 mm² PIN detector
- High sensitivity
- High shunt resistance
- UV/blue enhanced

Description

UV-blue enhanced square active area PIN photodiode with 13 mm² active area. Metal can type hermetic TO5 package with UV clear glass window.

Application

- UV exposure meters
- Pollution monitoring
- Medical equipment
- Fluorescence detector

RoHS


2002/95/EC




Absolute maximum ratings

Symbol	Parameter	Min	Max	Unit
T _{STG}	Storage temp	-55	125	°C
T _{OP}	Operating temp	-40	100	°C
V _{max}	Max reverse voltage		20	V
I _{PEAK}	Peak DC current		10	mA

Schematic

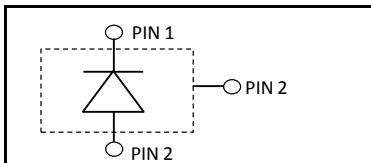

Spectral response (23 °C)

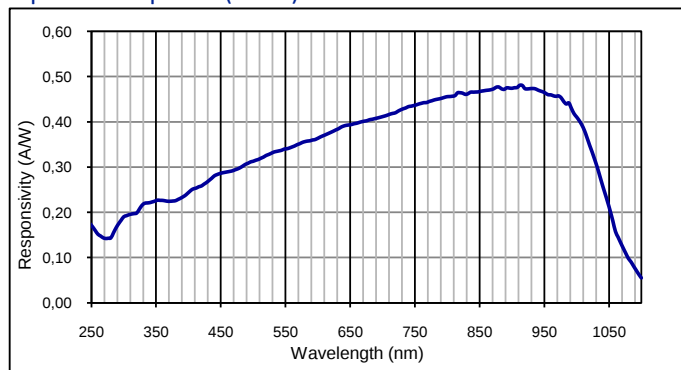

Electro-optical characteristics @ 23 °C

Symbol	Characteristic	Test Condition	Min	Typ	Max	Unit
	Active area		3504 x 3504			µm
	Active area		13			mm ²
I _D	Dark current	V _R = 5 V		0.1	1	nA
C	Capacitance	V _R = 0 V		500		pF
		V _R = 5 V		160		pF
	Responsivity	λ = 340 nm		0.22		A/W
		λ = 900 nm		0.47		A/W
t _R	Rise time	V _R = 0 V; λ = 410 nm; R _L = 50 Ω		1000		ns
		V _R = 5 V; λ = 410 nm; R _L = 50 Ω		400		ns
	Shunt Resistance	V _R = 5 mV		400		MΩ
	N.E.P.	V _R = 5 V; λ = 410 nm		2.3 E-14		W/√Hz
V _{BR}	Breakdown voltage	I _R = 2 µA	20	30		V

European, International Sales:






First Sensor AG
 Peter-Behrens-Strasse 15
 12459 Berlin
 Germany
 T +49 30 6399 2399
 F +49 30 639923-752
 sales.opto@first-sensor.com

USA:



First Sensor Inc.
 5700 Corsa Avenue #105
 Westlake Village
 CA 91362 USA
 T +1 818 706 3400
 F +1 818 889 7053
 sales.us@first-sensor.com

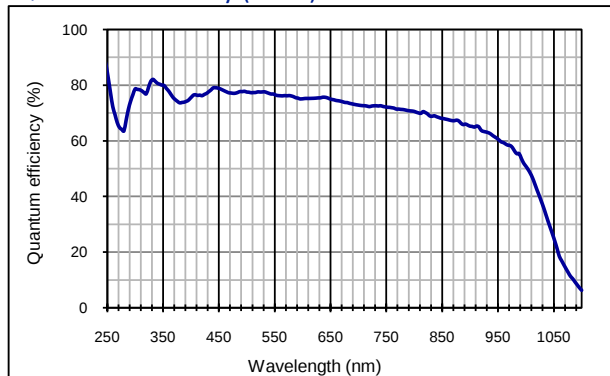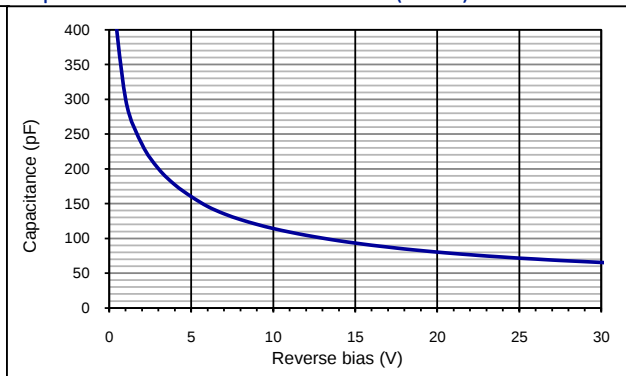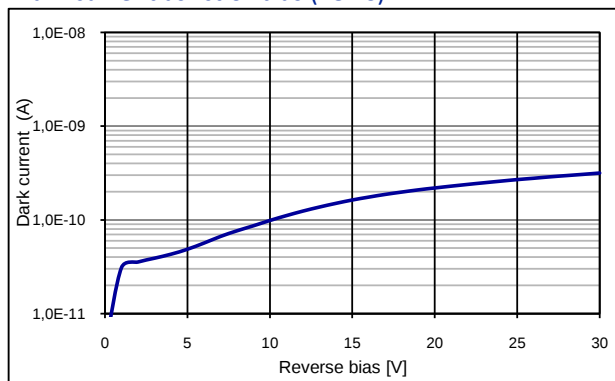Quantum efficiency (23 °C)

Capacitance as fct of reverse bias (23 °C)

Dark current as fct of bias (23 °C)

Package dimension:

Small quantities: Foam pad, boxed (12 cm x 16.5 cm)

Handling:

Please refer to document "Instructions for handling and processing"

Disclaimer: Due to our strive for continuous improvement, specifications are subject to change within our PCN policy according to JESD46C.

European, International Sales:


First Sensor AG
 Peter-Behrens-Strasse 15
 12459 Berlin
 Germany
 T +49 30 6399 2399
 F +49 30 639923-752
 sales.opto@first-sensor.com

USA:


First Sensor Inc.
 5700 Corsa Avenue #105
 Westlake Village
 CA 91362 USA
 T +1 818 706 3400
 F +1 818 889 7053
 sales.us@first-sensor.com

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

First Sensor:

[PS13-2-TO5](#)