


## 7x25 LED Matrix panel based on STP16CPC26

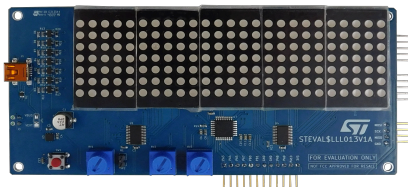

### Features

- Two selected power supply modes:
  - USB
  - External 5 V supply
- Screen refresh rate > 100 Hz
- 32 levels pixel brightness
- Screen brightness set by potentiometer
- Scrolling effects speed set by potentiometer
- PC SW GUI for banner design
- WEEE compliant
- RoHS compliant

### Description

The **STEVAL-LLL013V1** is a 7x25 LED matrix board controlled by two **STP16CPC26** LED drivers.

It can display banners in which each pixel can have a different level of brightness (32 levels).

The screen refresh rate is higher than 100 Hz. The banners can be scrolled horizontally in both directions for lights effects. The banners are loaded by the use of the **STSW-LLL013GUI** PC software app.

The **STP16CPC26** is a monolithic, low voltage, 16-bit constant current LED sink driver with a serial input/output interface.

Two **STP16CPC26** drive a 7x25 LED matrix. The two LED drivers are connected in a daisy chain and controlled by the **STM32F042K6T6** MCU, using an SPI IP interface.

The MCU works as a frame generator for the banners, and as a bridge with the PC software app, by implementing a USB VCP device class.


Additional potentiometers on the board allow you to change the brightness of the whole display and the speed of the banner scrolling effects.

To exploit all the potential features of the board, many hardware resources are available, such as pin connectors that deliver additional MCU features, a JTAG interface, and a serial input/output to cascade other LED drivers.

Product summary	
7x25 LED Matrix panel based on STP16	<a href="#">STEVAL-LLL013V1</a>
GUI for STEVAL-LLL013V1	<a href="#">STSW-LLL013GUI</a>
Low voltage 16-bit constant current LED sink driver	<a href="#">STP16CPC26XTR</a>
Mainstream Arm Cortex-M0 USB line MCU with 32 Kbytes of Flash memory, 48 MHz CPU, USB, CAN and CEC functions	<a href="#">STM32F042K6T6TR</a>
Applications	<a href="#">Home and Professional Appliances</a>

# Schematic diagram

Figure 1. STEVAL-LLL013V1 schematic diagram

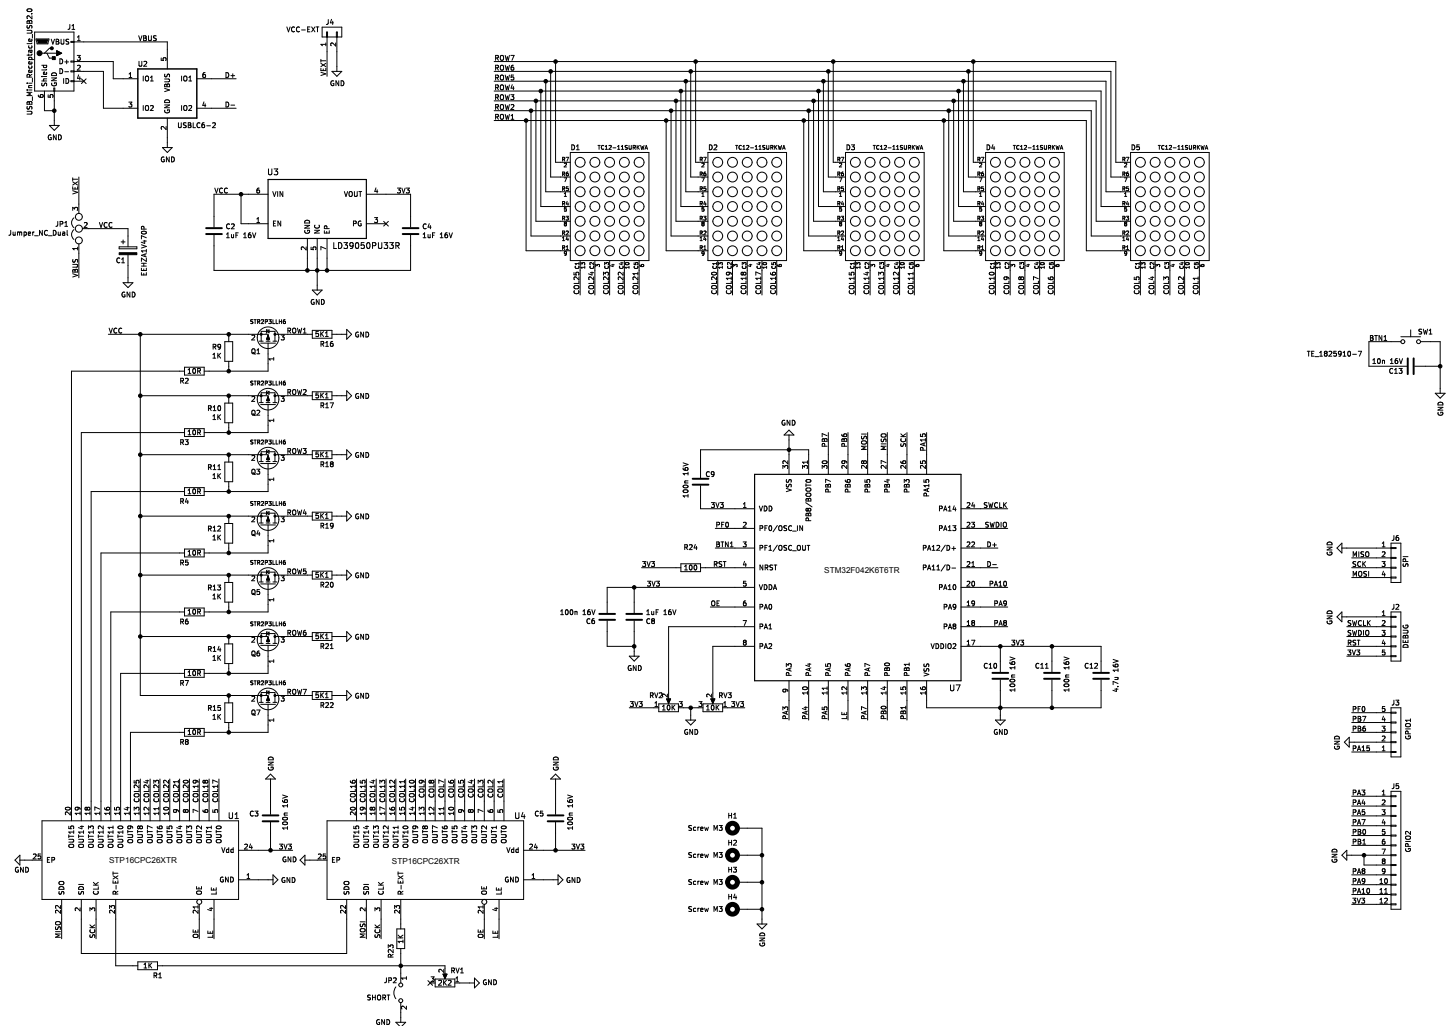

## 2 Board versions

Table 1. STEVAL-LLL013V1 versions

PCB version	Schematic diagrams	Bill of materials
STEVAL\$LLL013V1A <sup>(1)</sup>	<a href="#">STEVAL\$LLL013V1A schematic diagrams</a>	<a href="#">STEVAL\$LLL013V1A bill of materials</a>

1. This code identifies the STEVAL-LLL013V1 evaluation board first version. It is printed on the board PCB.

## Revision history

**Table 2. Document revision history**

Date	Revision	Changes
03-Feb-2023	1	Initial release.

**IMPORTANT NOTICE – READ CAREFULLY**

STMicroelectronics NV and its subsidiaries ("ST") reserve the right to make changes, corrections, enhancements, modifications, and improvements to ST products and/or to this document at any time without notice. Purchasers should obtain the latest relevant information on ST products before placing orders. ST products are sold pursuant to ST's terms and conditions of sale in place at the time of order acknowledgment.

Purchasers are solely responsible for the choice, selection, and use of ST products and ST assumes no liability for application assistance or the design of purchasers' products.

No license, express or implied, to any intellectual property right is granted by ST herein.

Resale of ST products with provisions different from the information set forth herein shall void any warranty granted by ST for such product.

ST and the ST logo are trademarks of ST. For additional information about ST trademarks, refer to [www.st.com/trademarks](http://www.st.com/trademarks). All other product or service names are the property of their respective owners.

Information in this document supersedes and replaces information previously supplied in any prior versions of this document.

© 2023 STMicroelectronics – All rights reserved

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[STMicroelectronics:](#)

[STEVAL-LLL013V1](#)