

## CP0402A4596ELTR High Directivity LGA Termination Directional Couplers

### ITF TECHNOLOGY

The ITF High Directivity LGA Coupler is based on thin-film multilayer technology. The technology provides a miniature part with excellent high frequency performance and rugged construction for reliable automatic assembly.

The ITF Coupler is offered in a variety of frequency bands compatible with various types of high frequency wireless systems.

### APPLICATIONS:

- Mobile communications
- Satellite TV receivers
- GPS
- Vehicle location systems
- Wireless LAN's

### Land Grid Array Advantages:

- Inherent Low Profile
- Self Alignment during Reflow
- Excellent Solderability
- Low Parasitics
- Better Heat Dissipation

### PART NUMBER CODE:

**CP 0402 X XXXX X L TR**  
 Type Frequency Sub- LGA Taped &  
 (MHz) Type Term Reeled

### QUALITY INSPECTION :

Finished parts are 100% tested for electrical parameters and visual characteristics. Each production lot is evaluated on a sample basis for:

- Static Humidity: 85°C, 85% RH, 160 hours
- Endurance : 125°C, Ir, 4 hours

### TERMINATION:


Nickel/ Solder coating compatible with automatic soldering technologies: reflow, wave soldering, vapor phase and manual.

### OPERATING TEMPERATURE:

-40°C to +85°C

### DIMENSIONS - mm (inches)


(Bottom View)

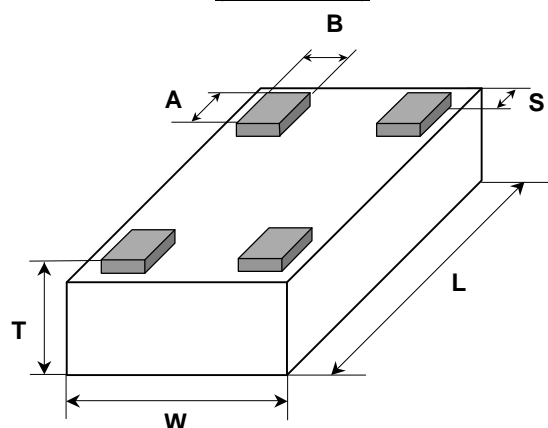


<b>L</b>	1.0±0.05 (0.040±0.002)
<b>W</b>	0.58±0.04 (0.023±0.002)
<b>T</b>	0.35±0.05 (0.014±0.002)

<b>A</b>	0.20±0.05 (0.008±0.002)
<b>B</b>	0.18±0.05 (0.007±0.002)
<b>S</b>	0.05±0.05 (0.002±0.002)

### TERMINALS ( Top View)

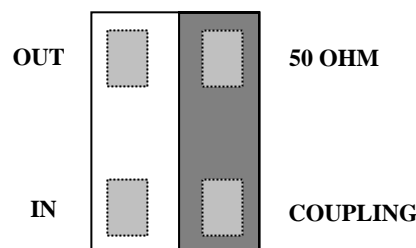


### Recommended Pad Layout (mm)

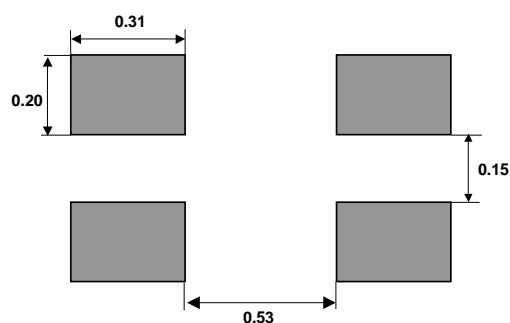

**Directional Coupler Type CP0402A4596ELTR**

P/N	FREQUENCY [ Mhz ]	COUPLING [ dB ]	I. Loss max. [ dB ]	R.Loss [dB]	Directivity [dB]
CP0402A4596ELTR	4596	-12.3±1	-0.8	-15 typ.	15 typ.

**CP0402A4596ELTR**

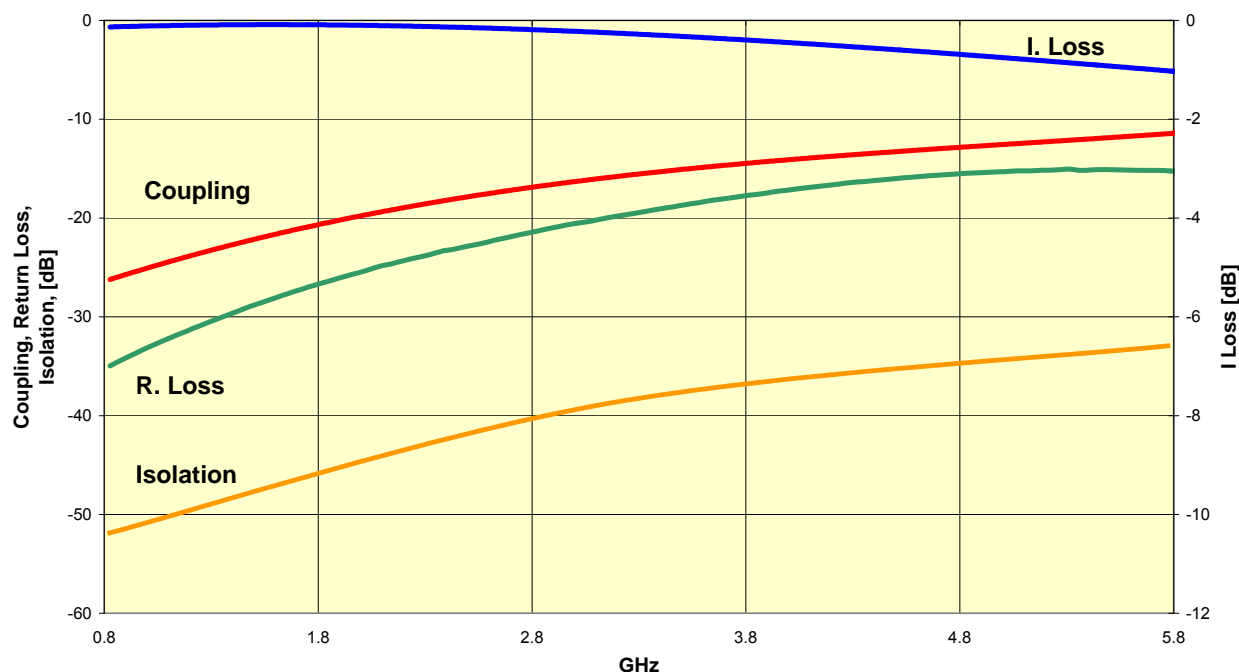

## CP0402 / CP0603 High Directivity Couplers

### Test Jigs

#### GENERAL DESCRIPTION

These jigs are designed for testing the CP0402 and CP0603 High Directivity Couplers using a Vector Network Analyzer.

They consist of a dielectric substrate, having 50Ω microstrips as conducting lines and a bottom ground plane located at a distance of 0.254mm from the microstrips.

The substrate used is Neltec's NH9338ST0254C1BC.

The connectors are SMA type (female), 'Johnson Components Inc.' Product P/N: 142-0701-841.

Both a measurement jig and a calibration jig are provided.

The calibration jig is designed for a full 2-port calibration, and consists of an open line, short line and through line. LOAD calibration can be done by a 50Ω SMA termination.

#### MEASUREMENT PROCEDURE

When measuring a component, it can be either soldered or pressed using a non-metallic stick until all four ports touch the appropriate pads. Set the VNA to the relevant frequency band. Connect the VNA using a 10dB attenuator on the jig terminal connected to port 2. Follow the VNA's instruction manual and use the [calibration jig](#) to perform a full 2-Port calibration in the required bandwidths.

**Place the coupler on the [measurement jig](#) as follows:**

Input (Coupler) → Connector 1 (Jig). Termination (Coupler) → Connector 3 (Jig).  
Output (Coupler) → Connector 2 (Jig). Coupling (Coupler) → Connector 4 (Jig).

**To measure I.Loss connect:**


Connector1 (Jig) → Port1 (VNA)      Connector3 (Jig) → 50Ω  
Connector2 (Jig) → Port2 (VNA)      Connector4 (Jig) → 50Ω.

**To measure R.Loss and Coupling connect:**

Connector1 (Jig) → Port1(VNA)      Connector3 (Jig) → 50Ω  
Connector2 (Jig) → 50Ω      Connector4 (Jig) → Port2 (VNA).

**To measure Isolation connect:**

Connector1 (Jig) → 50Ω      Connector3 (Jig) → 50Ω  
Connector2 (Jig) → Port1(VNA)      Connector4 (Jig) → Port2 (VNA).

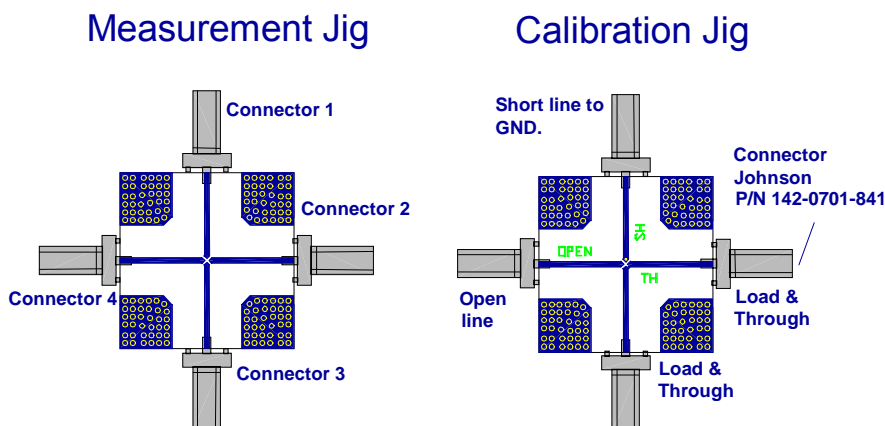

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Kyocera AVX:](#)

[CP0402A4596ELTR](#)