


Features	Benefits
• Industry leading flexibility	Suits your application
• Screw, Fast-on or IEC connection	Simplifies design into system
• Worldwide safety approvals	Supports global use
• Up to 11 outputs	Eliminates need for additional supplies
• 3 year warranty	Low cost of ownership

Input	
Input Voltage / Frequency	90-264Vac / 47 - 63 Hz (440Hz with reduced PFC) 900W version is 150-264Vac only, 650W below 150Vac
Input Fuse	16A / 250Vac HBC Fast acting (not user accessible)
Inrush Current	<40A at 25°C and 264Vac (cold start)
Leakage Current	See 'How To Create A Product Description' for details

The extensive range of output modules and options make it possible to achieve almost any combination of Volts and Amps. You can create your own Vega configuration online at <https://config.emea.tdk-lambda.com/>. This method checks your configuration and offers the optimum solution. Alternatively, you can do this manually by using the guide below.

1. Calculate total output power to select the appropriate converter, then select required Cooling, Connection, Leakage Current and Controls/Signals from the following table:
2. Select Output Modules and options from the output voltages tables.

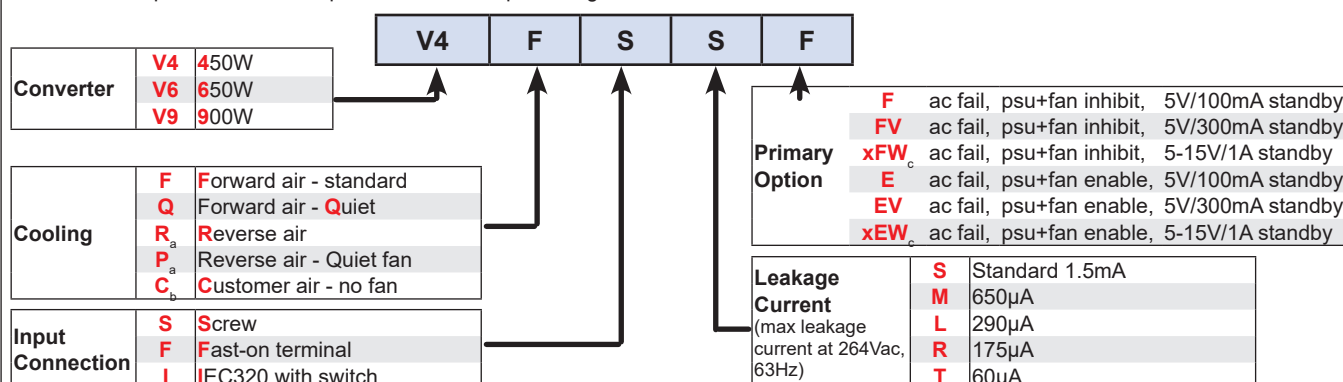

c) xFX and xEW options increase leakage current by $90\mu\text{A}$. Replace 'x' with required output voltage (5FW = 5V standby

3. Contact TDK-Lambda to validate configuration and issue a part number.

OUTPUT VOLTAGES (single output modules)					OUTPUT VOLTAGES (twin output modules)								
Module	Adjustment Range (Volts)		Current (Amps)	Slots	Module	V1 Adjustment Range (Volts)		Current	V2 Adjustment Range (Volts)		Current (Amps)	Slots	
B1L	1.8	- 3.8 _e	20	1	H1L/1L	1.8 - 3.8 _n 12			1.8 - 3.8 _n		8	1	
C1	1.8	- 4.1 _e	35	1	H1L/1H				3.9 - 5.5 _d		8	1	
C1Y	1.8	- 4.1 _e	40	1	H1L/2				5.6 - 9 _f		6	1	
D1L	1.8	- 3.8	50	1.5	H1L/3				9.1 - 16.2 _u		6	1	
E1	1.8	- 3.8 _e	60	2	H1L/4	3.9 - 5.5 _d 12			16.3 - 25 _p		4.5	1	
F1 _a	1.8	- 3.8	80	2	H1H/1L				1.8 - 3.8 _n		8	1	
Z2	1.8	- 3.8 _e	95	3	H1H/1H				3.9 - 5.5 _d		8	1	
Z3	1.8	- 3.8 _e	114	4	H1H/2				5.6 - 9 _f		6	1	
B1H	3.9	- 5.5 _d	20	1	H1H/3	5.6 - 9 _f 10			9.1 - 16.2 _u		6	1	
L1	4.2	- 5.5 _d	35	1	H1H/4				9.1 - 16.2 _u		6	1	
D2	3.8	- 9 _k	45	1.5	H2/1L				16.3 - 25 _p		4.5	1	
D1H	3.9	- 5.5 _d	50	1.5	H2/1H				1.8 - 3.8 _n		8	1	
E2	3.8	- 8 _k	60	2	H2/2	9.1 - 16.2 _u 10			3.9 - 5.5 _d		8	1	
Z18	4.2	- 5.5	66	2	H2/3				5.6 - 9 _f		6	1	
F2 _a	3.8	- 8	75	2	H2/4				9.1 - 16.2 _u		6	1	
Z4	3.9	- 5.5 _d	95	3	H3/1L				16.3 - 25 _p		4.5	1	
Z6	3.9	- 5.5 _d	104	3.5	H3/1H	1.8 - 3.8 _n 10			1.8 - 3.8 _n		8	1	
B2	5	- 9 _f	25	1	H3/2				3.9 - 5.5 _d		8	1	
B3	9.1	- 16.2 _g	12	1	H3/3				5.6 - 9 _f		6	1	
C3	9.1	- 16.2 _g	18	1	H3/4				9.1 - 16.2 _u		6	1	
D3	8	- 16.5 _g	24	1.5	H5/1L	16.3 - 25 _p 10			16.3 - 25 _p		4.5	1	
E3L	8	- 13.9 _i	40	2	H5/1H				1.8 - 3.8 _n		8	1	
Z7	8	- 16.5 _g	45	3	H5/2				3.9 - 5.5 _d		8	1	
EE2	7.6	- 16 _g	45	4	H5/3				5.6 - 9 _f		6	1	
D4	14	- 21.5 _i	18	1.5	H5/4	16.2 - 28 5			9.1 - 16.2 _u		6	1	
E4	14	- 19.9 _m	30	2	Wide Range Programmable Modules								
E3H	14	- 15	36	2									
C4	16.3	- 21.5 _i	14	1	Module				Voltage Range	Current	Slots	Select features from table below	
CC3	18.2	- 32.4 _j	18	2	W2 _a	0.25 _w - 7.5	30	1					
E5L _v	20	- 24	27	2	W5	0.25 _x - 32	8.5	1					
B5	21.6	- 31 _h	6	1	Follow by	F or T	Fixed or Tracking Overvoltage protection						
C5	21.6	- 31 _j	10	1		F or S	Fast-on or Screw output terminals						
D5	21	- 28	15	1.5		R or V	Resistance (0-32kΩ) or Voltage (0-5V) programming						
E5H _v	24	- 28	25	2		1 Inhibit, Fixed Current Limit							
Z19 _{co}	24	- 28	36	3.5		1, 2, 3 or 4 2 Inhibit, Programmable Current Limit (0-5V)							
HH5/3	25.3	- 44.2 _b	5	1	3 Enable, Fixed Current Limit								
DD4	28	- 43 _s	18	3	4 Enable, Programmable Current Limit (0-5V)								
EE4 _c	28	- 38	22.5	4	Follow non wide range modules by F (Fast-on) or S (Screw) output terminals								
HH5/4	32.5	- 53 _t	4.5	1									
BB4	32.6	- 43 _q	10	2									
EE5L _{co}	40	- 48	18	4	Options - Single output Modules*				Options - Twin output Modules*				
C5B4	43	- 48	10	2	N	Output Inhibit, Module Good & Current Sharing				N Output Inhibit, Module Good & Remote Sense			
EE5H _o	48	- 56	18	4						R Remote Sense only			
CC5	48.1	- 62 _r	10	2									
DD5	42	- 56	15	3	* see configuring guide								

a) F1, F2 and W2 modules not for Vega 900
b) 38V max for 900W
c) Only available for Vega 900
d) 5.1V max for 900W
e) 3.4V max for 900W
f) 8V max for 900W
g) 15V max for 900W

h) 28V max for 900W
i) 18V max for 900W
j) 30V max for 900W
k) 7.5V max for 900W
l) 12.5V max for 900W
m) 19V max for 900W
n) 3.4V max for 900W

o) 'N' option not available
p) 24V max for 900W
q) 40V max for 900W
r) 60V max for 900W
s) 36V max for 900W
t) 52V max for 900W
u) 15.5V max for 900W

v) 'N' option not available if more than 1 module fitted
w) 500mA min load below 1V
x) 100mA minimum load below 2V

Isolation		
Input to Output	Reinforced	2 x MOPPs (3rd edition 60601) - units without xFW or xEW primary option fitted 4kVac, 5.7kVdc type tested to 4kVac (equivalent to 5.7kVdc), production tested to 4.3kVdc.
Input to Earth	Basic	1 x MOOP (3rd edition 60601) 2.3kVdc
Output to Output / Output to Earth		200Vdc

Output Specification		
Voltage / Current	See output voltages table	
Turn on time	1.5s max	at 90Vac (150Vac for 900W) and 100% rated output power
Rise time	<50ms	to 90% of voltage, monotonic rise above 10%
Turn on overshoot	<5% or 250mV	Load type dependent, no overshoot with resistive load
Efficiency	up to 75%	at 230Vac & 100% rated power, configuration dependent
Hold up	16ms min	at 90Vac (150Vac for 900W) and 100% rated power
Ripple and Noise	<1% or 50mV	pk-pk, using EIAJ test method & 20MHz bandwidth
Voltage Accuracy	<1%	of set voltage
Remote Sense	Yes	standard on single output modules, max 0.75V total line drop. Option for twin output modules
Minimum Load	No	on any output (except W2 and W5 modules which need 0.5A load to achieve full specification)
Temperature Coefficient	<0.02%	of rated voltage per °C
Load Regulation	<0.5% or 50mV	for 0-100% load change
Line Regulation	<0.1%	for 90-264Vac input change
Cross Regulation	<0.2%	for 100% load change on any output
Transient Response	<6% or 300mV	of set voltage for 50% load change (above 25% load)
Recovery	500µs	for recovery to 1% or 100mV of set voltage
Over Voltage Protection	Yes	Refer to application notes for details
Over Current Protection (singles)	105-125% 110-170%	of rated current, constant current characteristic For EE2, EE4, EE5L, EE5H, Z2, Z18 and Z19 modules
Short Circuit Protection	<150%	of rated current, when output voltage <1%
Over Temperature Protection	Yes	shuts down all outputs and fan. Cycle ac off/on to reset Shutdown temperature varies according to ambient, output power and input voltage. ac fail signal (if fitted) provides 5ms warning of thermal shutdown

Environment	
Temperature	0°C to 65°C operational, -40°C to 70°C storage.
Derating	50°C to 65°C derate total output power and each output current by 2.5% per °C
Low Temp Startup	-20°C
Humidity	5 - 95% RH non condensing
Shock	±3 x 30g shocks in each plane, total 18 shocks 30g shock = 11ms (+/-0.5msec), half sine Conforms to EN60068-2-27, EN60068-2-47, IEC68-2-27, IEC68-2-47, JIS C0041-1987. Conforms to MIL-STD-810E/F, Method 516.5, Pro I, IV, VI
Vibration	Single axis 10 - 500 Hz at 2g (sweep and endurance at resonance) in all 3 planes Conforms to EN60068-2-6, IEC68-2-6 Conforms to MIL-STD-810E, Method 514.4, Pro I, Cat 1, 9
Altitude	5000 metres operational/non operational (IEC inlet 3000m operational, 5000m non operational)
Pollution	Degree 2, Material group IIIb
IP Rating	IP 10

Emissions EN61000-6-3:2007, EN60601-1-2:2001



Radiated Electric Field	EN55011, EN55032	(as per CISPR.11/22) Class B, FCC47 part 15 subpart B see application note for details. Additional filtering required for IEC inlet version. Only for 'S' type leakage variants.
Conducted Emissions	EN55011, EN55032	(as per CISPR.11/22) Class B, FCC47 part 15 subpart B Only for 'S' type leakage variants. 'M' and 'L' types meet Class A
Conducted Harmonics	EN61000-3-2	Class A
Flicker	EN61000-3-3	Compliant - d_{max} only <6%

Immunity EN61000-6-2:2005, EN60601-1-2:2001**Criteria**

Electrostatic Discharge	EN61000-4-2	Level 4	Air discharge 15kV, Contact discharge 8kV	A
Electromagnetic Field	EN61000-4-3	Level 3	12V/m	A
Fast / Burst Transient	EN61000-4-4	Level 4	ac input tested to 4.4kV dc output tested to 2.2kV Tested at 5kHz and 100kHz	A
Surge Immunity	EN61000-4-5	Level 3	Common mode - 2.2kV Differential - 1.1kV	A
Conducted RF Immunity	EN61000-4-6	Level 3	12V	A
Power Frequency Magnetic Field	EN61000-4-8	Level 4	30A/m	A
Voltage Dips, Variations, Interruptions	EN61000-4-11	Class 3		A B for 5s interruptions



Approvals / Accreditations

IEC/EN 62368-1, UL62368-1 / CSA 22.2 No 62368-1	File E135494
IEC/EN 60950-1, UL60950-1 / CSA 22.2 No 60950-1	File E135494
IEC/EN 60601-1, UL/CSA 60601-1, ANSI/AAMI ES60601-1 CAN/CSA-C22.2 No 60601-1-08	File E349607 (only for L, R and T leakage variants)
IEC/EN 61010-1	File E331788
CE Mark (EN62368-1)	Low Voltage Directive (LVD), electromagnetic compatibility (EMC) and Restriction of Hazardous Substances (RoHS)
UKCA (EN62368-1)	Electrical Equipment (Safety) Regulations, electromagnetic compatibility (EMC) and Restriction of Hazardous Substances (RoHS)
CB certificate and Report available on request	<i>Please check with technical sales for status of approvals</i>
Designed and manufactured under the control of ISO9001 and ISO13485 (including risk management).	


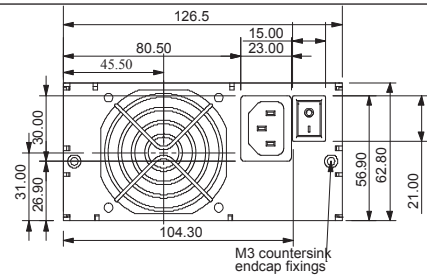
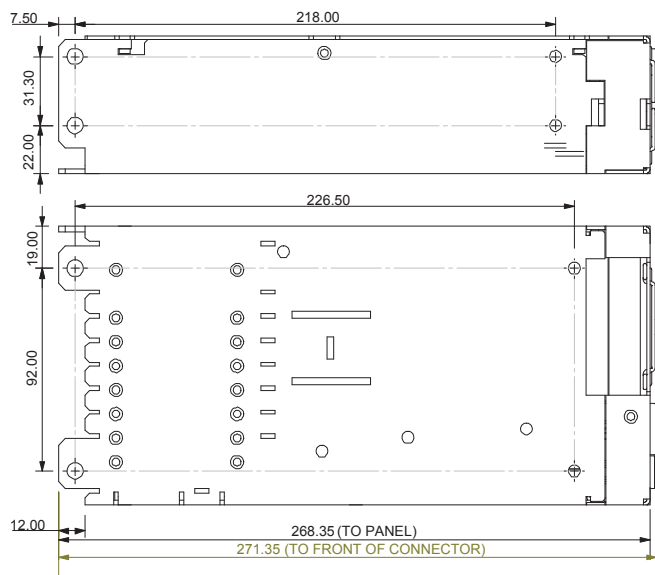


IEC-320 Connector Case


All versions have:-
 8 x M4 Customer fixings
 Max thread penetration:- 4.5mm

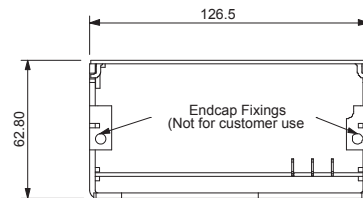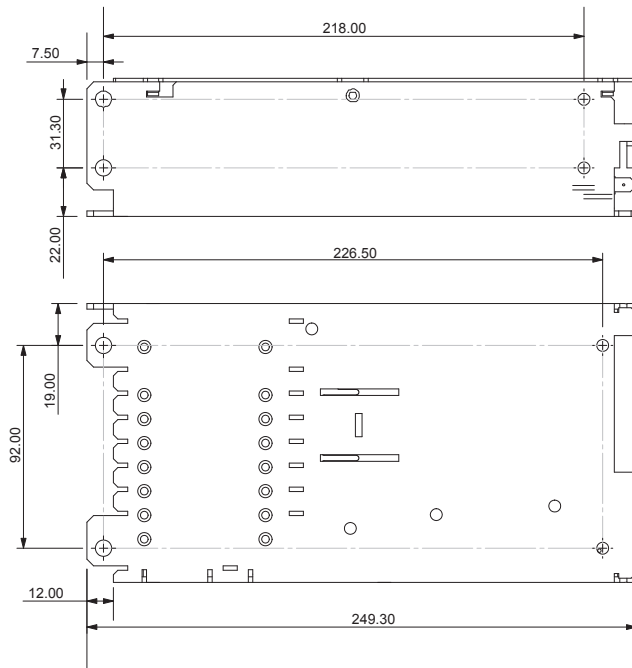

Customer Air Case (no fan)

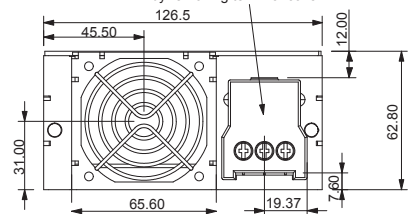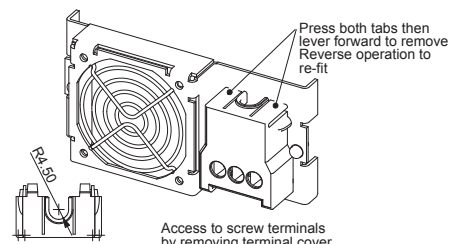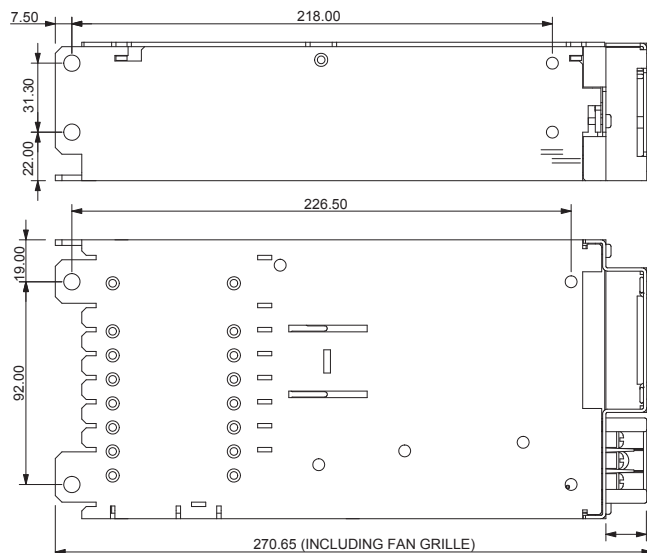

Screw & Fast-on Terminal Case

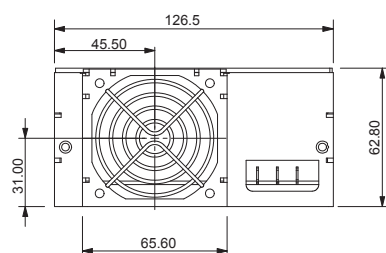

**TDK-Lambda France SAS**

Tel: +33 1 60 12 71 65
 tlf.fr-powersolutions@tdk.com
 www.emea.lambda.tdk.com/fr

**Italy Sales Office**

Tel: +39 02 61 29 38 63
 tlf.it-powersolutions@tdk.com
 www.emea.lambda.tdk.com/it

**Netherlands**

tlf.nl-powersolutions@tdk.com
 www.emea.lambda.tdk.com/nl

**TDK-Lambda Germany GmbH**

Tel: +49 7841 666 0
 tlg.powersolutions@tdk.com
 www.emea.lambda.tdk.com/de

**Austria Sales Office**

Tel: +43 2256 655 84
 tlg.at-powersolutions@tdk.com
 www.emea.lambda.tdk.com/at

**Switzerland Sales Office**

Tel: +41 44 850 53 53
 tlg.ch-powersolutions@tdk.com
 www.emea.lambda.tdk.com/ch

**Nordic Sales Office**

Tel: +45 8853 8086
 tlg.dk-powersolutions@tdk.com
 www.emea.lambda.tdk.com/dk

**TDK-Lambda UK Ltd.**

Tel: +44 (0) 12 71 85 66 66
 tlu.powersolutions@tdk.com
 www.emea.lambda.tdk.com/uk

**TDK-Lambda Ltd.**

Tel: +9 723 902 4333
 tli.powersolutions@tdk.com
 www.emea.lambda.tdk.com/il-en

**TDK-Lambda Americas**

Tel: +1 800-LAMBDA-4 or 1-800-526-2324
 tla.powersolutions@tdk.com
 www.us.lambda.tdk.com

**TDK Electronics do Brasil Ltda**

Tel: +55 11 3289-9599
 sales.br@tdk-electronics.tdk.com
 www.tdk-electronics.tdk.com/en

**TDK-Lambda Corporation**

Tel: +81-3-6778-1113
 www.jp.lambda.tdk.com

**TDK-Lambda (China) Electronics Co. Ltd.**

Tel: +86 21 6485-0777
 tlc.powersolutions@tdk.com
 www.lambda.tdk.com.cn

**TDK-Lambda Singapore Pte Ltd.**

Tel: +65 6251 7211
 tls.marketing@tdk.com
 www.sg.lambda.tdk.com

**TDK India Private Limited, Power Supply Division**

Tel: +91 80 4039-0660
 mathew.philip@tdk.com
 www.sg.lambda.tdk.com



Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TDK-Lambda:](#)

[V6058TY](#) [V609DJN](#) [K40054](#) [V602VSQ](#)