




Product Description

RFMD's SBA5086Z is a high performance InGaP/GaAs Heterojunction Bipolar Transistor MMIC Amplifier. A Darlington configuration designed with InGaP process technology provides broadband performance up to 5GHz with excellent thermal performance. The heterojunction increases breakdown voltage and minimizes leakage current between junctions. Cancellation of emitter junction non-linearities results in higher suppression of intermodulation products. Only a single positive supply voltage, DC-blocking capacitors, a bias resistor, and an optional RF choke are required for operation.

Optimum Technology Matching® Applied

- ☐ GaAs HBT
- ☐ GaAs MESFET
- ☒ InGaP HBT
- ☐ SiGe BiCMOS
- ☐ Si BiCMOS
- ☐ SiGe HBT
- ☐ GaAs pHEMT
- ☐ Si CMOS
- ☐ Si BJT
- ☐ GaN HEMT
- ☐ InP HBT
- ☐ RF MEMS
- ☐ LDMOS

Gain & Return Loss

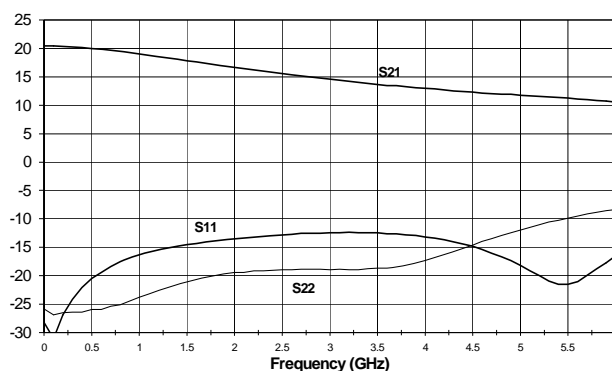

Features

- IP3=34.0dBm at 1950 MHz
- P_{OUT}=13.3dBm at -45dBc ACP IS-95 1950 MHz
- Robust 1000V ESD, Class 1C
- Operates From Single Supply
- Patented Thermal Design

Applications

- PA Driver Amplifier
- Cellular, PCS, GSM, UMTS
- IF Amplifier
- Wireless Data, Satellite Terminals

| Parameter | Specification | | | Unit | Condition |
|---------------------------------------|---------------|------|------|------|--|
| | Min. | Typ. | Max. | | |
| Small Signal Gain | 17.5 | 19.0 | 20.5 | dB | 850 MHz |
| | 15.7 | 17.2 | 18.7 | dB | 1950 MHz |
| Output Power at 1dB Compression | | 19.5 | | dBm | 850 MHz |
| | 18 | 19.5 | | dBm | 1950 MHz |
| Output Third Order Intercept Point | | 36.9 | | dBm | 850 MHz |
| | 32.0 | 34.0 | | dBm | 1950 MHz |
| Output Power | | 13.3 | | dBm | 1950 MHz, -45 dBc ACP IS-95 9 Forward Channels |
| Bandwidth | | 5000 | | MHz | Return Loss > 10dB |
| Input Return Loss | 11.0 | 13.0 | | dB | 1950 MHz |
| Output Return Loss | 14.0 | 19.0 | | dB | 1950 MHz |
| Noise Figure | | 4.5 | 5.5 | dB | 1950 MHz |
| Device Operating Voltage | 4.7 | 4.9 | 5.3 | V | |
| Device Operating Current | 72 | 80 | 88 | mA | |
| Thermal Resistance (junction to lead) | | 102 | | °C/W | |

Test Conditions: V_S=8V, I_D=80mA Typ., OIP₃ Tone Spacing=1 MHz, P_{OUT} per tone=0dBm, R_{BIAS}=39Ω, T_L=25°C, Z_S=Z_L=50Ω

Absolute Maximum Ratings

| Parameter | Rating | Unit |
|--------------------------------|------------|------|
| Device Current (I_D) | 130 | mA |
| Device Voltage (V_D) | 6 | V |
| RF Input Power | +17 | dBm |
| Junction Temp (T_J) | +150 | °C |
| Operating Temp Range (T_L) | -40 to +85 | °C |
| Storage Temp | +150 | °C |
| Operating Dissipated Power | 0.65 | W |

Operation of this device beyond any one of these limits may cause permanent damage. For reliable continuous operation, the device voltage and current must not exceed the maximum operating values specified in the table on page one.

Bias Conditions should also satisfy the following expression:

$$I_D V_D < (T_J - T_L) / R_{TH, j-l} \text{ and } T_L = T_{LEAD}$$



Caution! ESD sensitive device.

Exceeding any one or a combination of the Absolute Maximum Rating conditions may cause permanent damage to the device. Extended application of Absolute Maximum Rating conditions to the device may reduce device reliability. Specified typical performance or functional operation of the device under Absolute Maximum Rating conditions is not implied.

The information in this publication is believed to be accurate and reliable. However, no responsibility is assumed by RF Micro Devices, Inc. ("RFMD") for its use, nor for any infringement of patents, or other rights of third parties, resulting from its use. No license is granted by implication or otherwise under any patent or patent rights of RFMD. RFMD reserves the right to change component circuitry, recommended application circuitry and specifications at any time without prior notice.






RFMD Green: RoHS compliant per EU Directive 2002/95/EC, halogen free per IEC 61249-2-21, < 1000ppm each of antimony trioxide in polymeric materials and red phosphorus as a flame retardant, and <2% antimony in solder.


Typical Performance at Key Operating Frequencies

| Parameter | Unit | 100MHz | 500MHz | 850MHz | 1950MHz | 2400MHz | 3500MHz |
|------------------------------------|------|--------|--------|--------|---------|---------|---------|
| Small Signal Gain | dB | 20.4 | 20.1 | 19.0 | 17.2 | 15.8 | 13.7 |
| Output Third Order Intercept Point | dBm | 36.4 | 36.2 | 36.9 | 34.0 | 33.7 | 30.8 |
| Output Power at 1dB Compression | dBm | 19.8 | 19.7 | 19.5 | 19.5 | 18.7 | 17.1 |
| Input Return Loss | dB | 31 | 20 | 17.5 | 13.0 | 12.9 | 12.4 |
| Output Return Loss | dB | 26 | 26 | 25 | 19.0 | 19 | 18.7 |
| Reverse Isolation | dB | 22.5 | 22.8 | 23 | 23 | 23 | 23 |
| Noise Figure | dB | 4.2 | 4.5 | 4.2 | 4.4 | - | - |


Test Conditions: $V_S = 8V$, $I_D = 80mA$ Typ., OIP_3 Tone Spacing = 1MHz, P_{OUT} per tone = 0dBm, $R_{BIAS} = 39\Omega$, $T_L = 25^\circ C$, $Z_S = Z_L = 50\Omega$

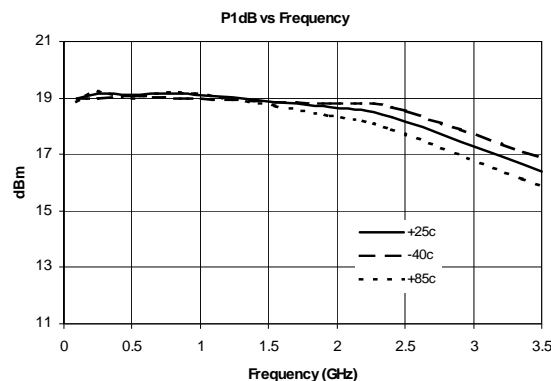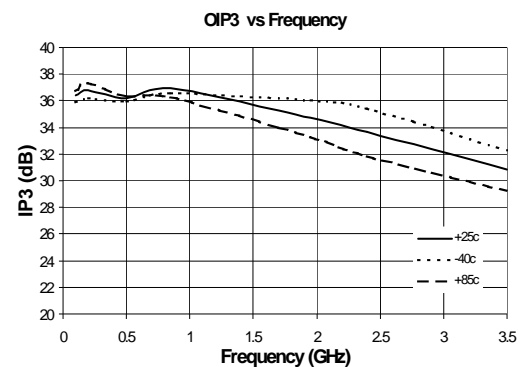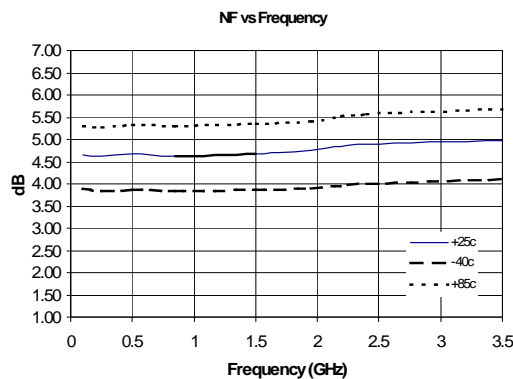


$|S_{11}|$ vs. Frequency

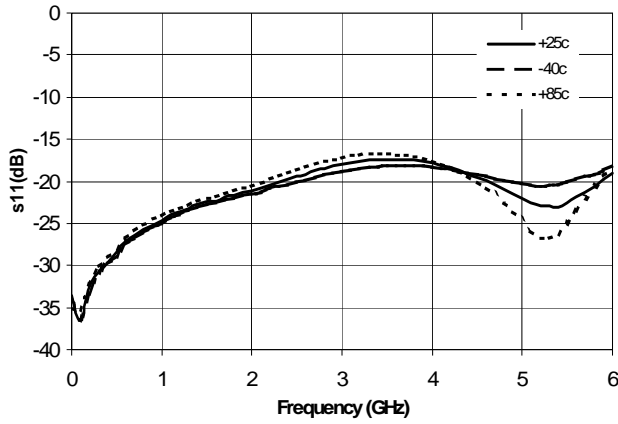


$|S_{21}|$ vs. Frequency

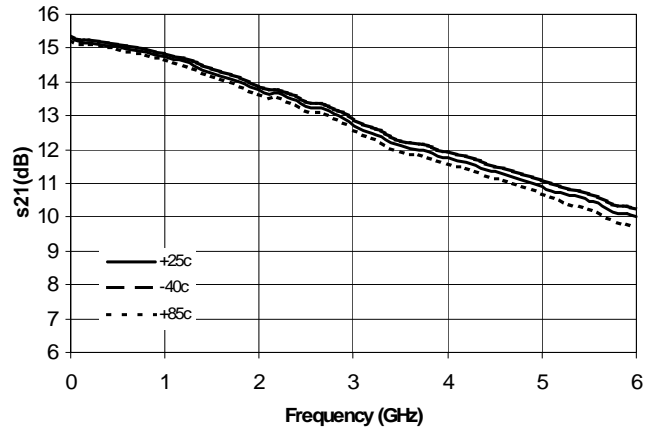


$|S_{12}|$ vs. Frequency

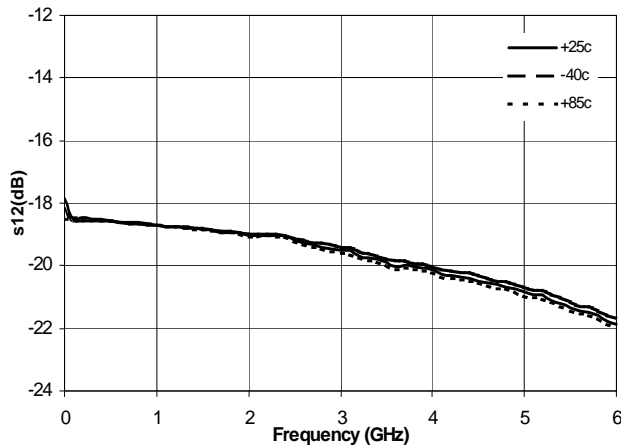


$|S_{22}|$ vs. Frequency

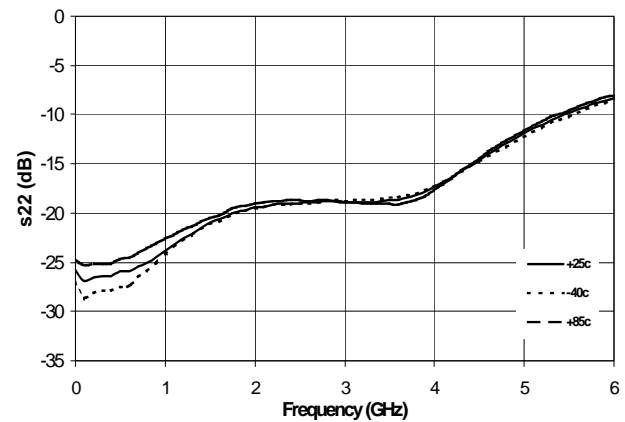


850MHz Adj. Chan. Pwr vs. Channel output Power

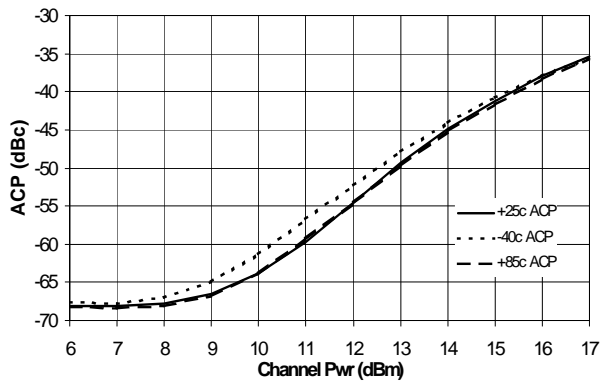


1950MHz Adj. Chan. Pwr Vs Channel Output Power

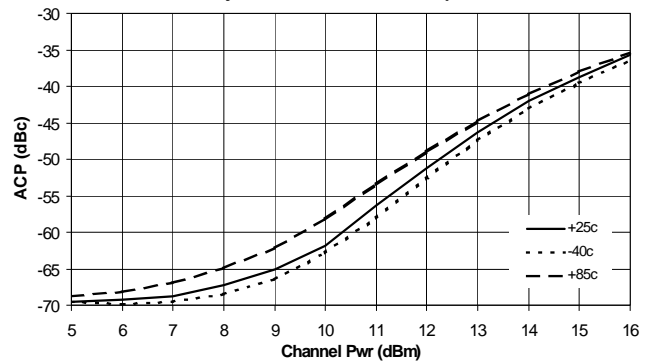

Basic Application Circuit

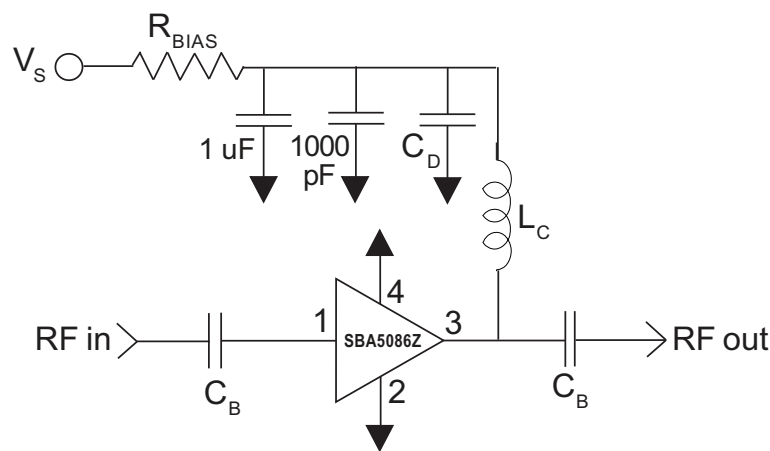

Evaluation Board Layout

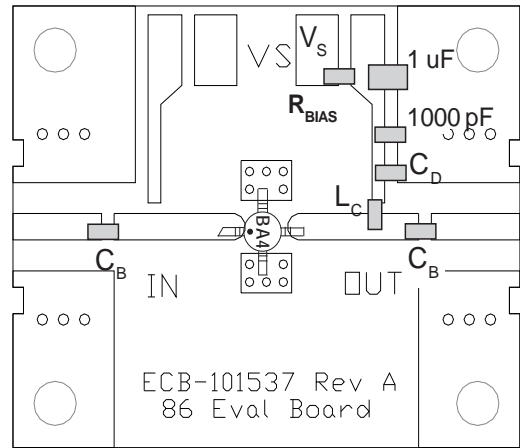

Mounting Instructions:

- 1. Use a large ground pad area under device pins 2 and 4 with many plated through-holes as shown.
- 2. We recommend 1 or 2 ounce copper. Measurements for this data sheet were made on a 31mil thick FR-4 board with 1 ounce copper on both sides.

Application Circuit Element Values

| Reference Designator | 500MHz | 850MHz | 1950MHz | 2400MHz | 3500MHz |
|----------------------|--------|--------|---------|---------|---------|
| C _B | 220pF | 100pF | 68pF | 56pF | 39 pF |
| C _D | 100pF | 68pF | 22pF | 22pF | 15 pF |
| L _C | 68nH | 33nH | 22nH | 18nH | 15 nH |


Recommended Bias Resistor Values for I_D=80 mA, R_{BIAS}=(V_S-V_D) / I_D

| | | | | |
|----------------------------------|------|-----|-----|-----|
| Supply Voltage (V _S) | 7.5V | 8V | 10V | 12V |
| R _{BIAS} | 33Ω | 39Ω | 68Ω | 91Ω |


Note: R_{BIAS} provides DC bias stability over temperature.

| Pin | Function | Description |
|------|-------------|---|
| 1 | RF IN | RF input pin. This pin requires the use of an external DC-blocking capacitor chosen for the frequency of operation. |
| 2, 4 | GND | Connection to ground. Use via holes for best performance to reduce lead inductance as close to ground leads as possible. |
| 3 | RF OUT/BIAS | RF output and bias pin. DC voltage is present on this pin, therefore a DC-blocking capacitor is necessary for proper operation. |


PCB Pad Layout

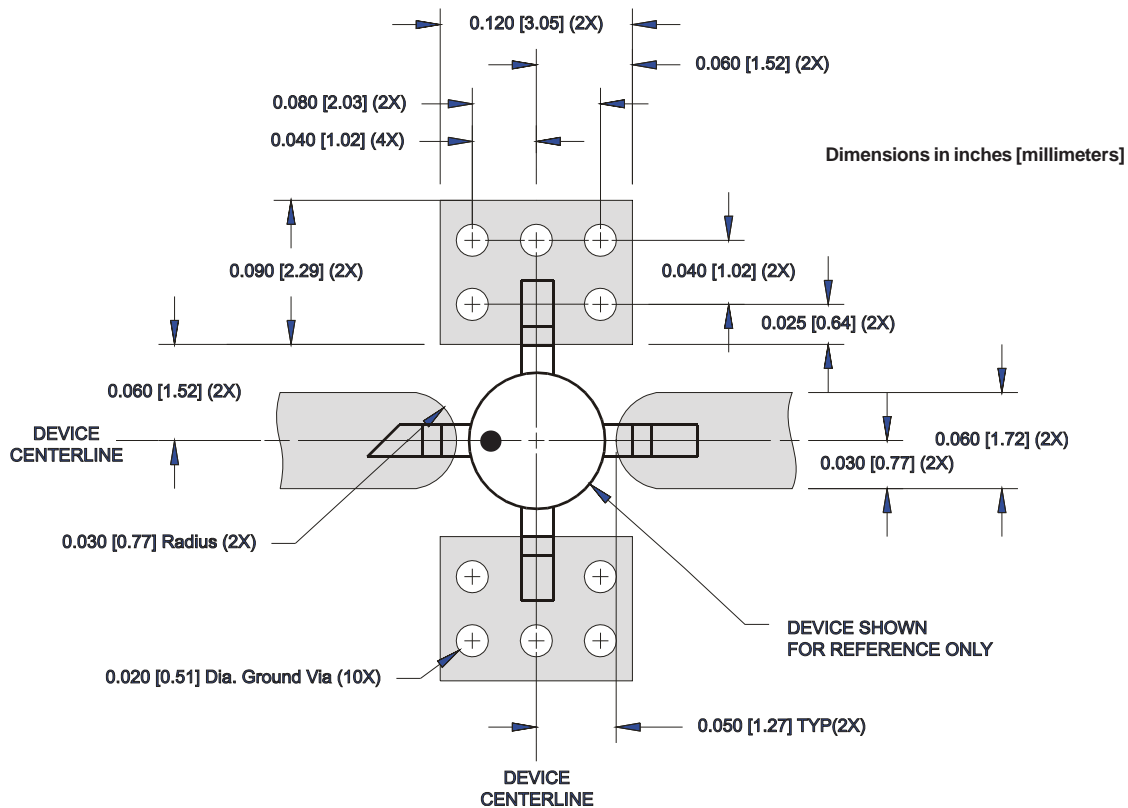

Package Drawing
Dimensions in inches (millimeters)
Refer to drawing posted at www.rfmd.com for tolerances.

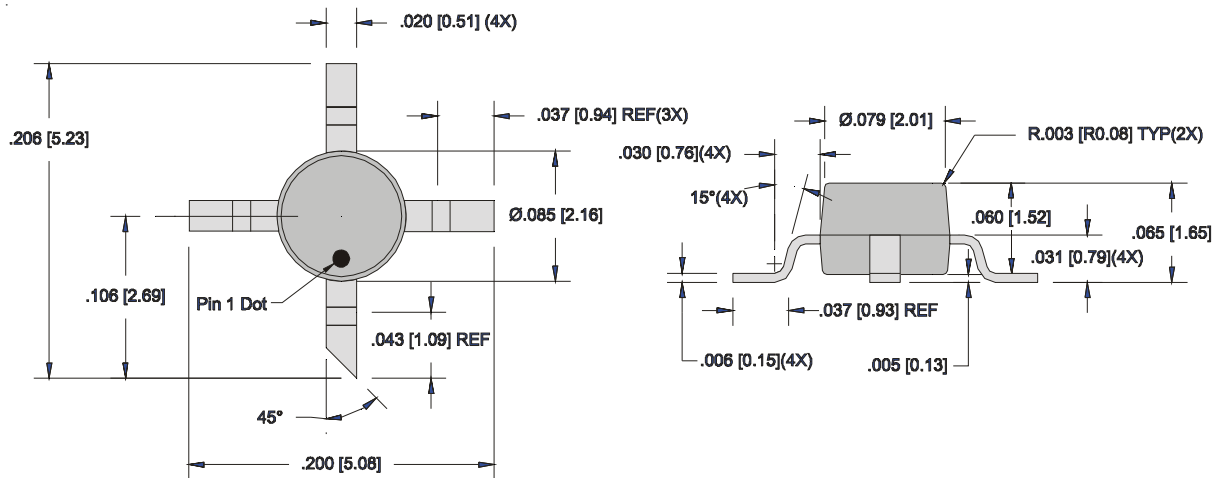

Part Identification



The part will be marked with a “B5Z” designator on the top surface of the package.

Ordering Information

| Ordering Code | Description |
|---------------|---|
| SBA5086Z | 7" Reel with 1000 pieces |
| SBA5086ZSQ | Sample bag with 25 pieces |
| SBA5086ZSR | 7" Sample reel with 100 pieces |
| SBA5086ZPCK1 | 850MHz, 8V Operation PCBA with 5-piece sample bag |

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Qorvo:](#)

[SBA5086Z](#)