


DATASHEET

UFB25SC12E1BC3N



1200V-25A SiC Full-Bridge Module

Rev. C, October 2024

Description

This SiC FET device is based on a unique 'cascode' circuit configuration, in which a normally-on SiC JFET is co-packaged with a Si MOSFET to produce a normally-off SiC FET device. The device's silicon-like gate-drive characteristics allows the use of unipolar gate drives, compatible with Si IGBTs, Si FETs, SiC MOSFETs or Si superjunction devices. Available in the E1B module package, this device exhibits ultra-low gate charge and exceptional reverse recovery characteristics, making it ideal for switching inductive loads, and any application requiring standard gate drive. Advanced Ag sintering die attach technology gives the module superior thermal performance.

Features

- On-resistance: $R_{DS(on)} = 35m\Omega$ (typ)
- Operating temperature: 150°C (max)
- Excellent reverse recovery: $Q_{rr} = 244nC$
- Low body diode voltage: $V_{FSD} = 1.4V$
- Low gate charge: $Q_G = 42.5nC$
- Threshold voltage $V_{G(th)}$: 5V (typ) allowing 0 to 15V drive
- Low intrinsic capacitance
- ESD protected: HBM class 2 and CDM class C3

Typical applications

- EV charging
- PV inverters
- Switch mode power supplies
- Power factor correction modules
- Motor drives
- Induction heating

Part Number	Package	Marking
UFB25SC12E1BC3N	E1B	UFB25SC12E1BC3N



Maximum Ratings

Parameter	Symbol	Test Conditions	Value	Units
Drain-source voltage	V_{DS}		1200	V
Gate-source voltage	V_{GS}	DC	-20 to +20	V
		AC ($f > 1\text{Hz}$)	-25 to +25	V
Continuous drain current ¹	I_D	$T_C = 25^\circ\text{C}$	36	A
		$T_C = 90^\circ\text{C}$	25	A
Pulsed drain current ²	I_{DM}	$T_C = 25^\circ\text{C}$	175	A
Power dissipation per switch	P_{tot}	$T_C = 25^\circ\text{C}$	114	W
Maximum junction temperature	$T_{J,max}$		150	$^\circ\text{C}$
Operating and storage temperature	T_J, T_{STG}		-55 to 150	$^\circ\text{C}$

1. Limited by $T_{J,max}$

2. Pulse width t_p limited by $T_{J,max}$

Thermal Characteristics

Parameter	Symbol	Test Conditions	Value			Units
			Min	Typ	Max	
Thermal resistance, junction-to-case per switch	$R_{\theta JC}$			0.85	1.1	$^\circ\text{C/W}$

NTC Thermistor Characteristics

Parameter	Symbol	Test Conditions	Value			Units
			Min	Typ	Max	
Rated resistance	R_{25}	$T_{NTC} = 25^\circ\text{C}$		5		$k\Omega$
Resistance value tolerance	$\Delta R/R$	$T_{NTC} = 25^\circ\text{C}$	-5		5	%
Power dissipation	P_{25}	$T_{NTC} = 25^\circ\text{C}$			20	mW
B constant	$B_{25/50}$	$R_2 = R_{25} \exp [B_{25/50} (1/T_2 - 1/(298.15\text{ K}))]$		3375		K

Module

Parameter	Symbol	Test Conditions	Value	Units
Isolation voltage	V_{ISOL}	RMS, $f = 50\text{ Hz}$, $t = 1\text{ min}$	3	kV
Internal isolation			Al_2O_3	
Creepage distance		Terminal to heatsink	12.7	mm
		Terminal to terminal	6.3	
Clearance distance		Terminal to heatsink	10	mm
		Terminal to terminal	5	
Stray inductance module	L_{sCE}		11	nH

SiC FET Electrical Characteristics ($T_J = +25^\circ\text{C}$ unless otherwise specified)

Typical Performance - Static

Parameter	Symbol	Test Conditions	Value			Units
			Min	Typ	Max	
Drain-source breakdown voltage	BV_{DS}	$V_{GS}=0V, I_D=4mA$	1200			V
Total drain leakage current	I_{DSS}	$V_{DS}=1200V, V_{GS}=0V, T_J=25^\circ\text{C}$		8	150	μA
		$V_{DS}=1200V, V_{GS}=0V, T_J=150^\circ\text{C}$		35		
Total gate leakage current	I_{GSS}	$V_{DS}=0V, T_J=25^\circ\text{C}, V_{GS}=-20V / +20V$		6	20	μA
Drain-source on-resistance	$R_{DS(on)}$	$V_{GS}=12V, I_D=25A, T_J=25^\circ\text{C}$		35	45	$m\Omega$
		$V_{GS}=12V, I_D=25A, T_J=125^\circ\text{C}$		55		
		$V_{GS}=12V, I_D=25A, T_J=150^\circ\text{C}$		64		
Gate threshold voltage	$V_{G(th)}$	$V_{DS}=5V, I_D=10mA$	4	5	6	V
Gate resistance	R_G	$f=1MHz, \text{open drain}$		4.5		Ω

Typical Performance - Reverse Diode

Parameter	Symbol	Test Conditions	Value			Units
			Min	Typ	Max	
Diode continuous forward current ¹	I_S	$T_C = 25^\circ\text{C}$			36	A
Diode pulse current ²	$I_{S,pulse}$	$T_C = 25^\circ\text{C}$			175	A
Forward voltage	V_{FSD}	$V_{GS}=0V, I_S=20A, T_J=25^\circ\text{C}$		1.4	2	V
		$V_{GS}=0V, I_S=20A, T_J=150^\circ\text{C}$		1.8		
Reverse recovery charge	Q_{rr}	$V_{DS}=800V, I_S=25A, V_{GS}=0V, R_G=33\Omega, di/dt=2200A/\mu s, T_J=25^\circ\text{C}$		244		nC
Reverse recovery time	t_{rr}			29		ns
Reverse recovery charge	Q_{rr}	$V_{DS}=800V, I_S=25A, V_{GS}=0V, R_G=33\Omega, di/dt=2200A/\mu s, T_J=150^\circ\text{C}$		227		nC
Reverse recovery time	t_{rr}			28		ns

Typical Performance - Dynamic

Parameter	Symbol	Test Conditions	Value			Units
			Min	Typ	Max	
Input capacitance	C_{iss}	$V_{DS}=800V, V_{GS}=0V$ $f=100kHz$		1450		pF
Output capacitance	C_{oss}			94		
Reverse transfer capacitance	C_{rss}			1.7		
Effective output capacitance, energy related	$C_{oss(er)}$	$V_{DS}=0V$ to 800V, $V_{GS}=0V$		120		pF
Effective output capacitance, time related	$C_{oss(tr)}$	$V_{DS}=0V$ to 800V, $V_{GS}=0V$		265		pF
C_{OSS} stored energy	E_{oss}	$V_{DS}=800V, V_{GS}=0V$		38		μJ
Total gate charge	Q_G	$V_{DS}=800V, I_D=25A,$ $V_{GS} = -5V$ to 15V		42.5		nC
Gate-drain charge	Q_{GD}			9.5		
Gate-source charge	Q_{GS}			15.5		
Turn-on delay time	$t_{d(on)}$	Notes 3 and 4 $V_{DS}=800V, I_D=25A$, Gate Driver = -5V to +15V, $R_{G_ON}=22\Omega, R_{G_OFF}=22\Omega$, inductive Load,		53		ns
Rise time	t_r			15		
Turn-off delay time	$t_{d(off)}$			54		
Fall time	t_f			11		
Turn-on energy	E_{ON}	FWD: same device with $V_{GS} = 0V$ and $R_G = 22\Omega$, $T_J=25^\circ C$		557		μJ
Turn-off energy	E_{OFF}			44		
Total switching energy	E_{TOTAL}			601		
Turn-on delay time	$t_{d(on)}$	Notes 3 and 4 $V_{DS}=800V, I_D=25A$, Gate Driver = -5V to +15V, $R_{G_ON}=22\Omega, R_{G_OFF}=22\Omega$, inductive Load,		50		ns
Rise time	t_r			12		
Turn-off delay time	$t_{d(off)}$			55		
Fall time	t_f			11		
Turn-on energy	E_{ON}	FWD: same device with $V_{GS} = 0V$ and $R_G = 22\Omega$, $T_J=150^\circ C$		516		μJ
Turn-off energy	E_{OFF}			44		
Total switching energy	E_{TOTAL}			560		

3. Measured with the half-bridge mode switching test circuit in Figure 23.

4. A bus RC snubber ($R_{BS} = 2.5\Omega, C_{BS}=200nF$) must be applied to reduce the power loop high frequency oscillations.

Typical Performance - Dynamic (continued)

Parameter	Symbol	Test Conditions	Value			Units
			Min	Typ	Max	
Turn-on delay time	$t_{d(on)}$	Notes 5 and 6, $V_{DS}=800V$, $I_D=25A$, Gate Driver = -5V to +15V, Turn-on $R_{G,EXT} = 15\Omega$, Turn-off $R_{G,EXT}=10\Omega$, inductive Load,		52.8		ns
Rise time	t_r			22.4		
Turn-off delay time	$t_{d(off)}$			70		
Fall time	t_f			16.8		
Turn-on energy including R_S energy	E_{ON}	FWD: same device with $V_{GS} = 0V$ and $R_G = 10\Omega$, RC snubber: $R_S=10\Omega$ and $C_S=100pF$, $T_J=25^\circ C$		511		μJ
Turn-off energy including R_S energy	E_{OFF}			127		
Total switching energy	E_{TOTAL}			638		
Snubber R_S energy during turn-on	E_{RS_ON}			3		
Snubber R_S energy during turn-off	E_{RS_OFF}			3		
Turn-on delay time	$t_{d(on)}$	Notes 5 and 6, $V_{DS}=800V$, $I_D=25A$, Gate Driver = -5V to +15V, Turn-on $R_{G,EXT} = 15\Omega$, Turn-off $R_{G,EXT}=10\Omega$, inductive Load,		47.2		ns
Rise time	t_r			26.4		
Turn-off delay time	$t_{d(off)}$			73		
Fall time	t_f			17		
Turn-on energy including R_S energy	E_{ON}	FWD: same device with $V_{GS} = 0V$ and $R_G = 10\Omega$, RC snubber: $R_S=10\Omega$ and $C_S=100pF$, $T_J=150^\circ C$		484		μJ
Turn-off energy including R_S energy	E_{OFF}			126		
Total switching energy	E_{TOTAL}			610		
Snubber R_S energy during turn-on	E_{RS_ON}			2.8		
Snubber R_S energy during turn-off	E_{RS_OFF}			3.2		

5. Measured with the chopper mode switching test circuit in Figure 24.

6. In this table, the switching energies (turn-on energy, turn-off energy and total energy) presented include the device RC snubber energy losses.

SiC FET Typical Performance Diagrams

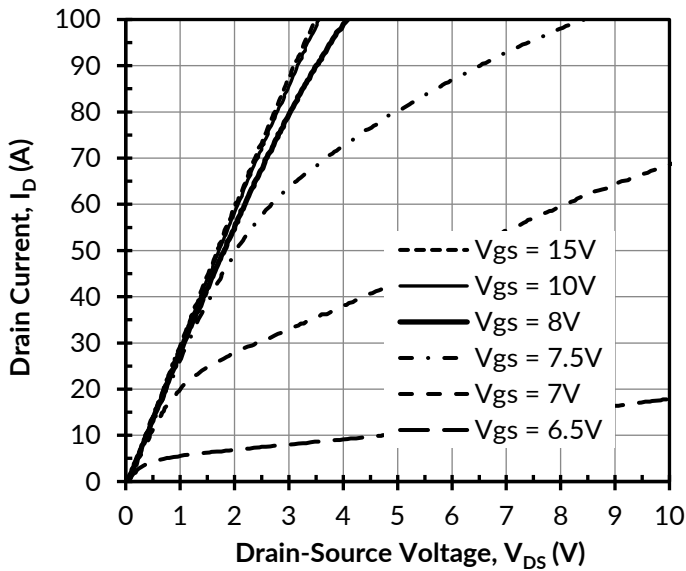


Figure 1. Typical output characteristics at $T_J = -55^\circ\text{C}$, $t_p < 250\mu\text{s}$

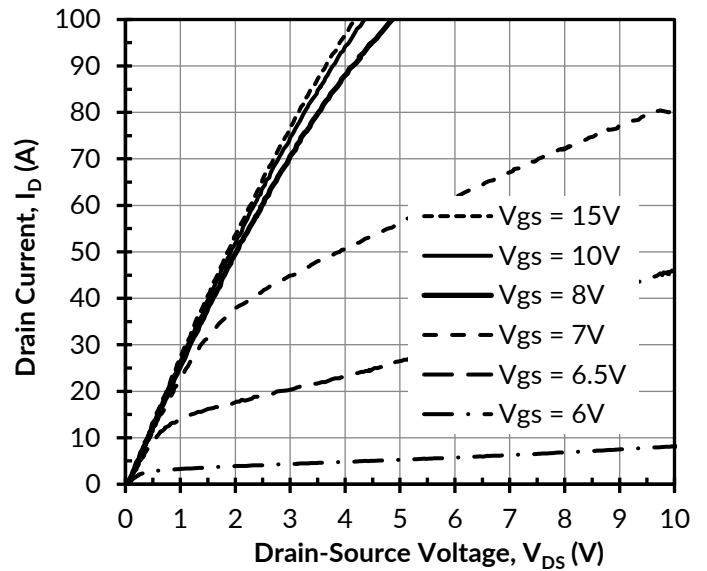


Figure 2. Typical output characteristics at $T_J = 25^\circ\text{C}$, $t_p < 250\mu\text{s}$

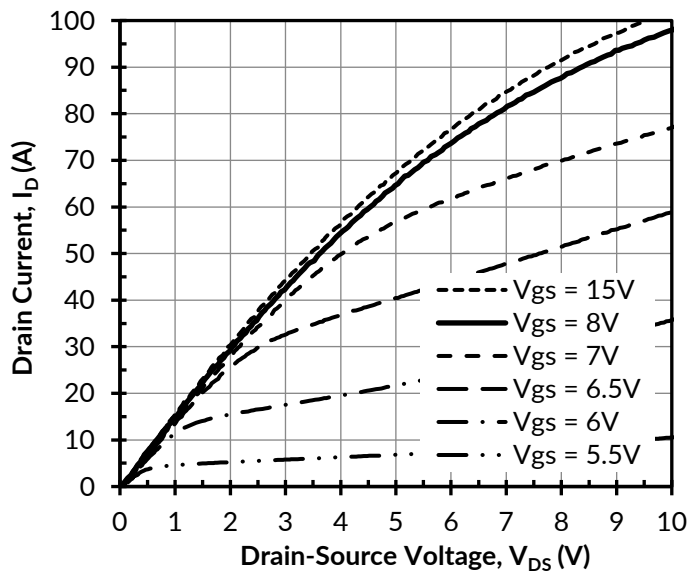


Figure 3. Typical output characteristics at $T_J = 150^\circ\text{C}$, $t_p < 250\mu\text{s}$

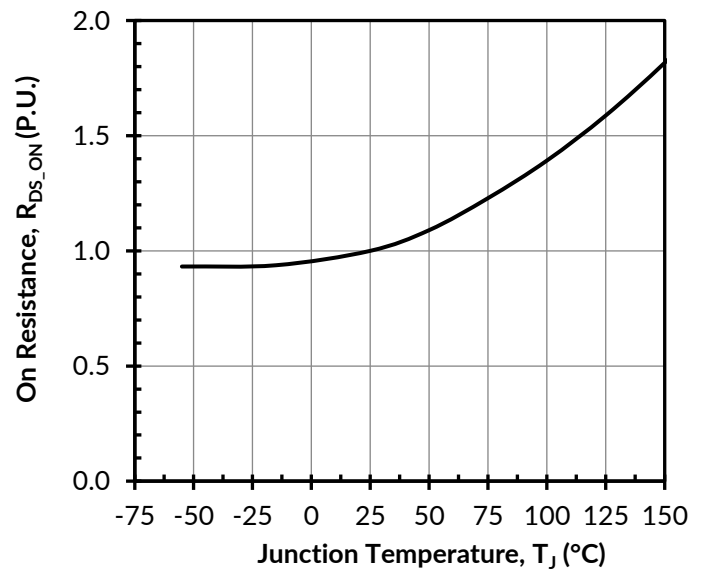


Figure 4. Normalized on-resistance vs. temperature at $V_{GS} = 12\text{V}$ and $I_D = 40\text{A}$

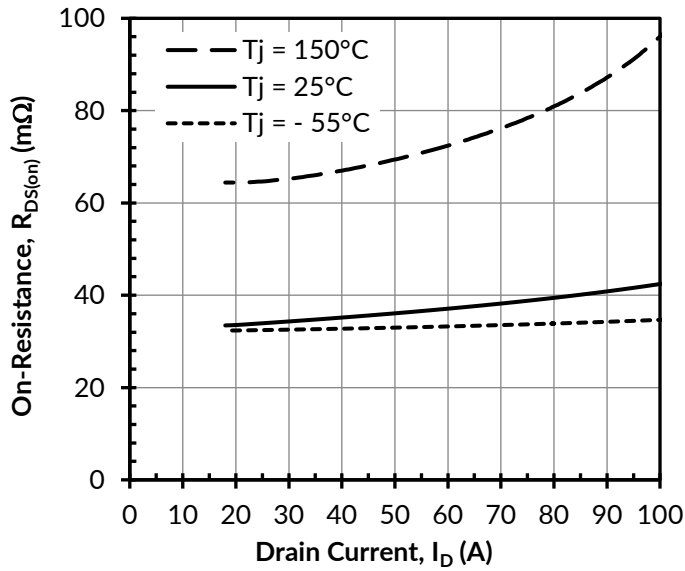


Figure 5. Typical drain-source on-resistances at $V_{GS} = 12\text{V}$

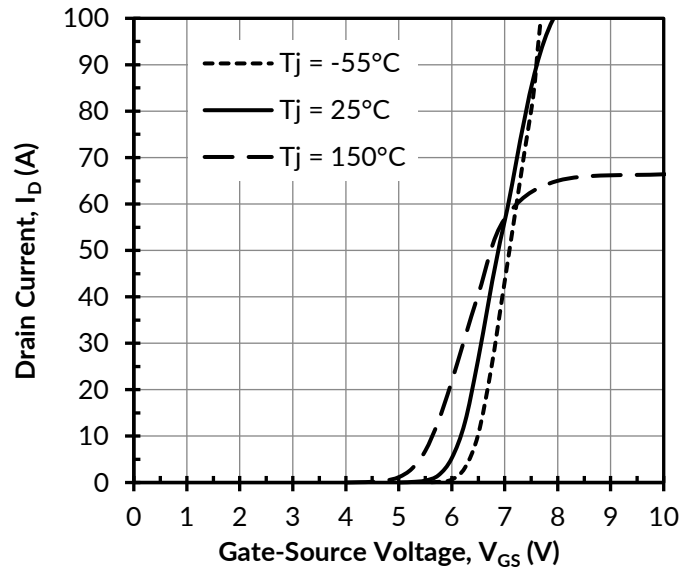


Figure 6. Typical transfer characteristics at $V_{DS} = 5\text{V}$

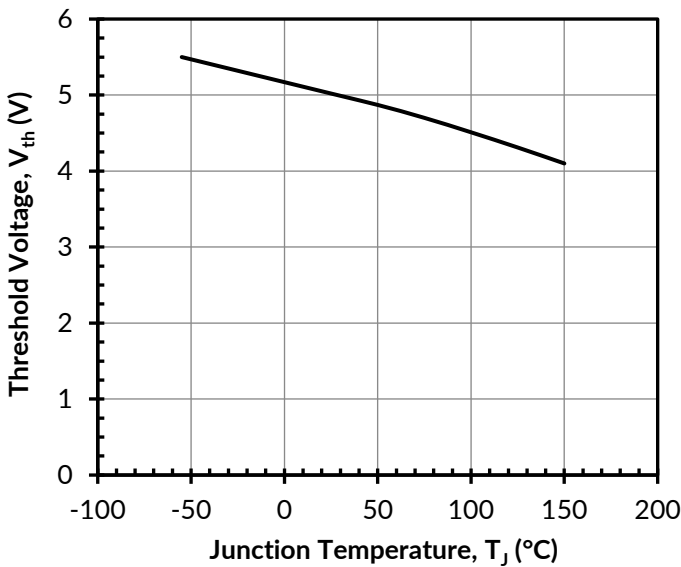


Figure 7. Threshold voltage vs. junction temperature at $V_{DS} = 5\text{V}$ and $I_D = 10\text{mA}$

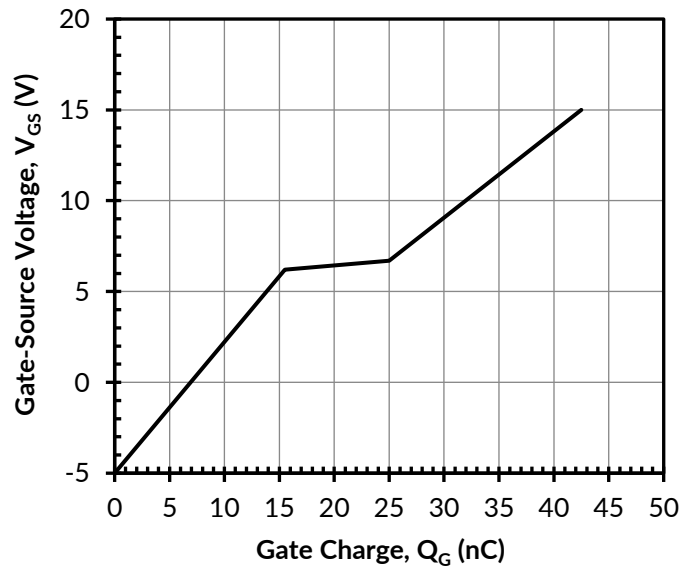


Figure 8. Typical gate charge at $V_{DS} = 800\text{V}$ and $I_D = 25\text{A}$

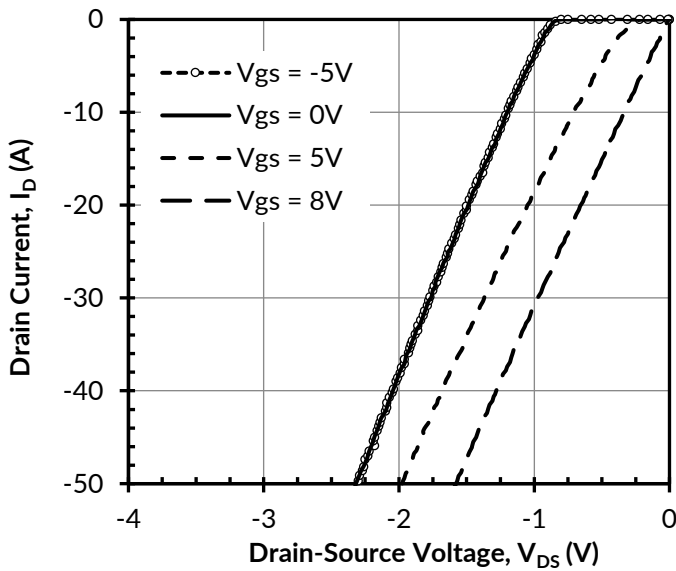


Figure 9. 3rd quadrant characteristics at $T_j = -55^\circ\text{C}$

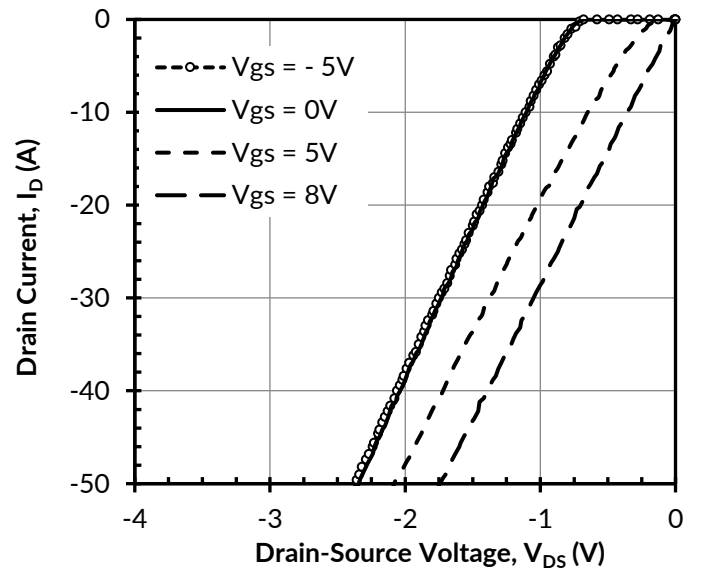


Figure 10. 3rd quadrant characteristics at $T_j = 25^\circ\text{C}$

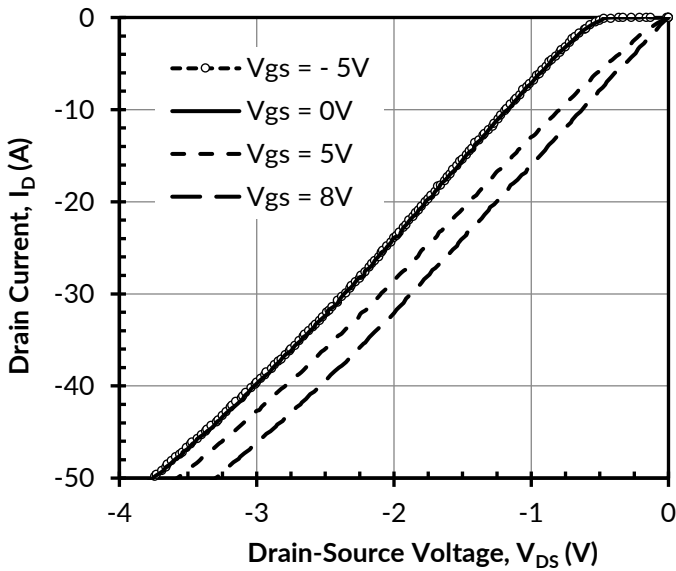


Figure 11. 3rd quadrant characteristics at $T_j = 150^\circ\text{C}$

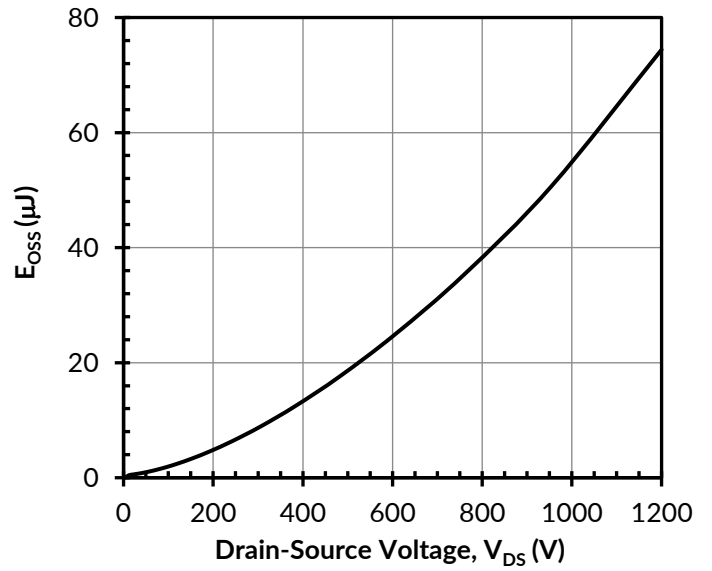


Figure 12. Typical stored energy in C_{oss} at $V_{gs} = 0\text{V}$

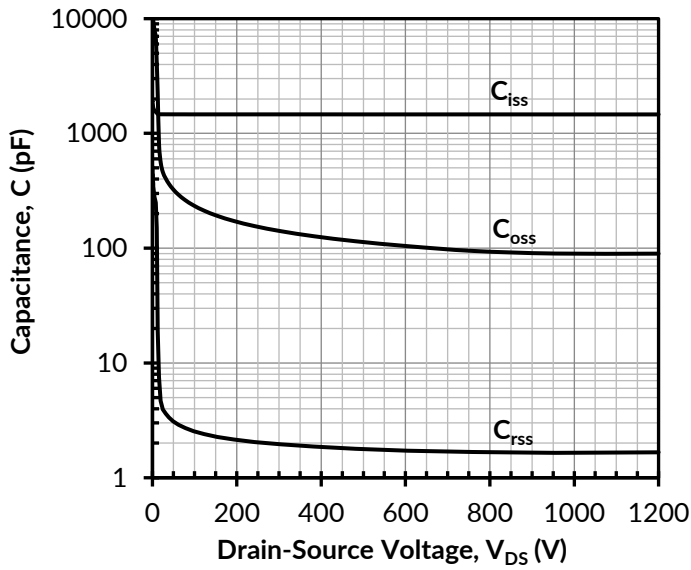


Figure 13. Typical capacitances at $f = 100\text{kHz}$ and $V_{GS} = 0\text{V}$

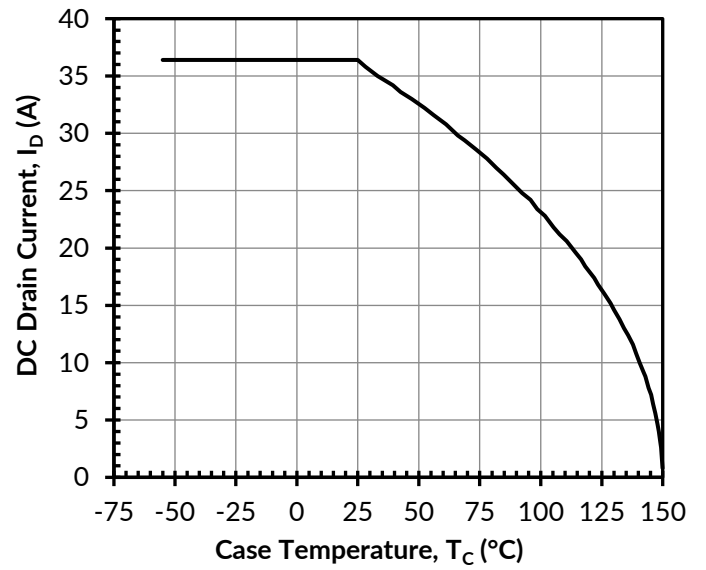


Figure 14. DC drain current derating

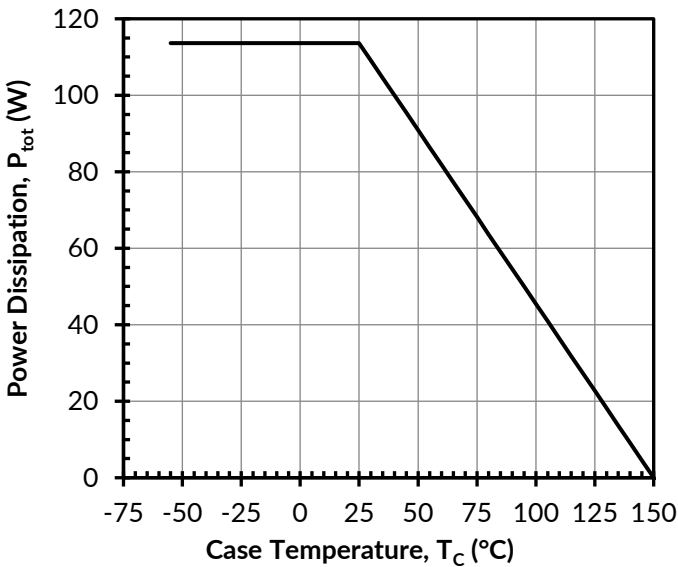


Figure 15. Total power dissipation

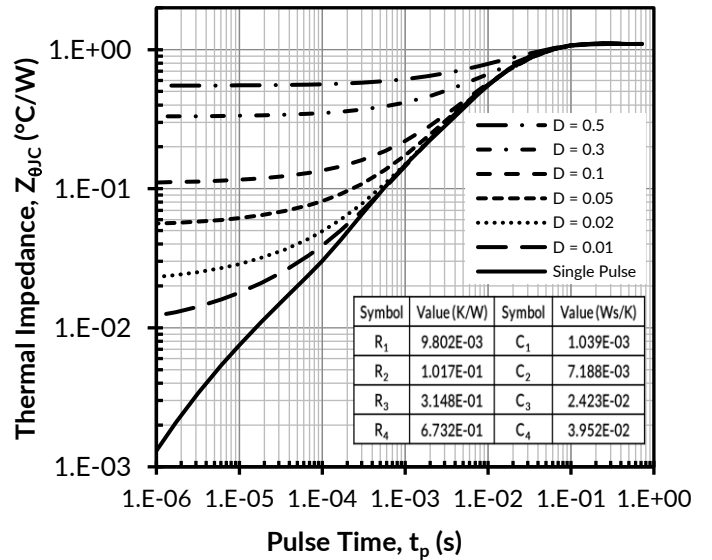


Figure 16. Maximum transient thermal impedance and parameters for thermal equivalent circuit (Foster) model

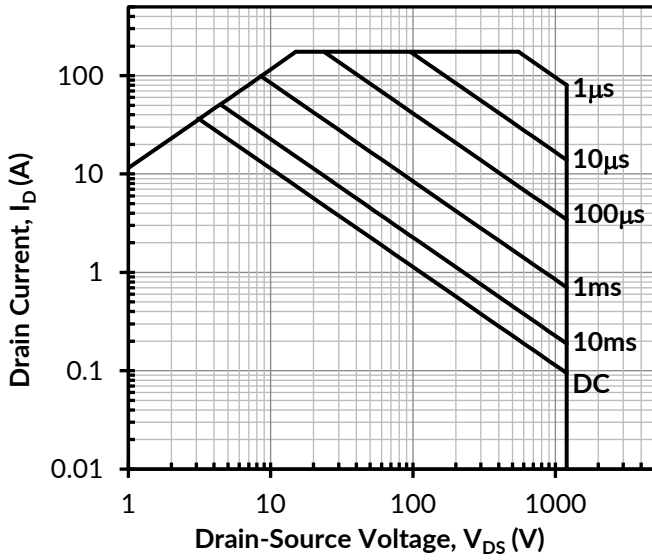


Figure 17. Safe operation area at $T_C = 25^\circ\text{C}$, $D = 0$, Parameter t_p

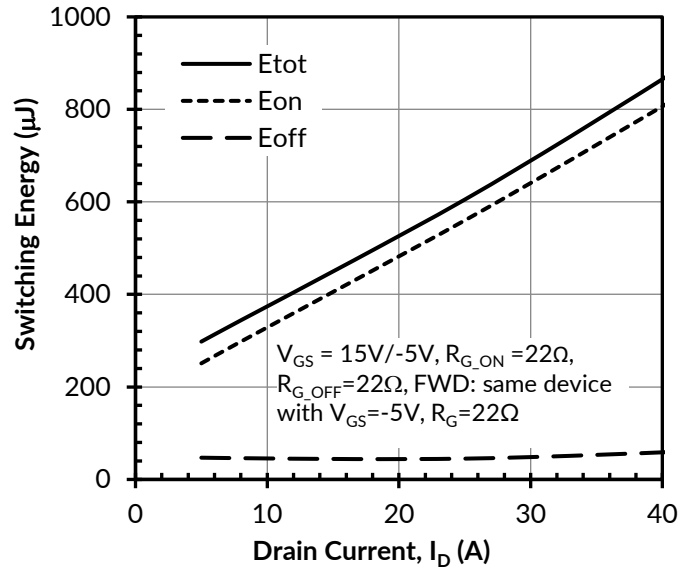


Figure 18. Clamped inductive switching energy vs. drain current at $V_{DS} = 800\text{V}$ and $T_J = 25^\circ\text{C}$

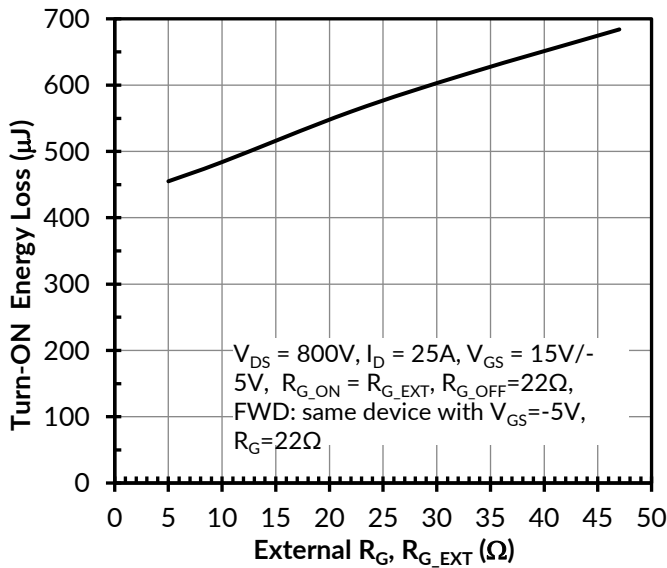


Figure 19. Clamped inductive switching turn-on energy vs. turn-on gate resistance R_G at $T_J = 25^\circ\text{C}$

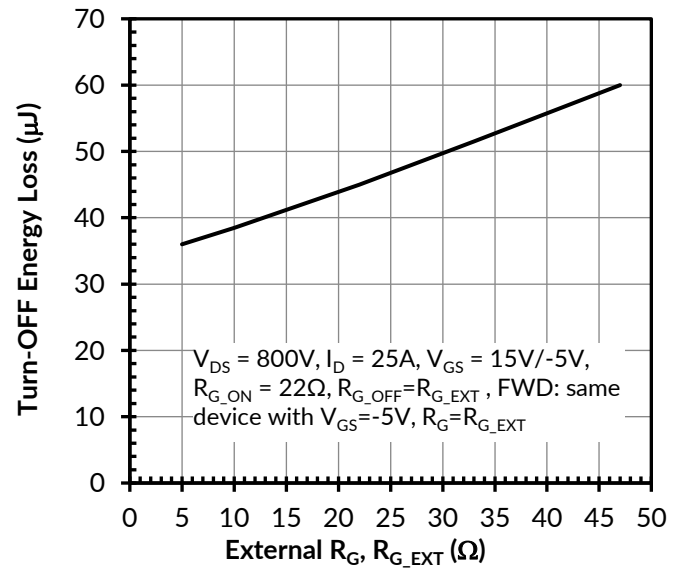


Figure 20. Clamped inductive switching turn-off energy vs. turn-off gate resistance R_G at $T_J = 25^\circ\text{C}$

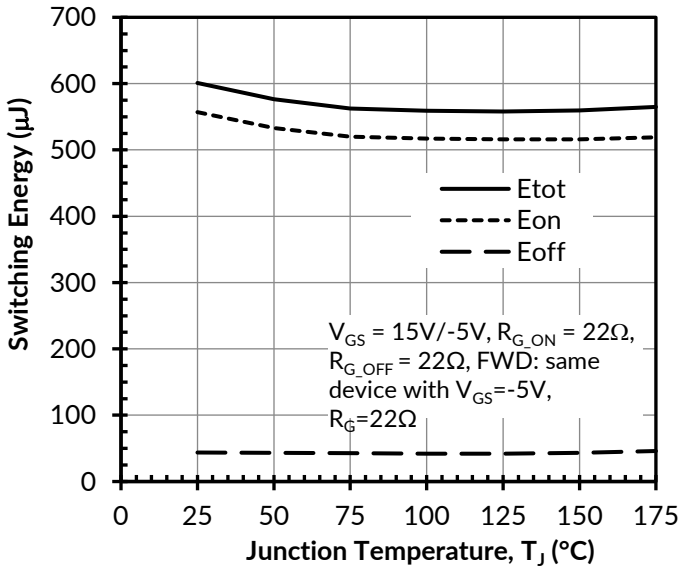


Figure 21. Clamped inductive switching energy vs. junction temperature at $V_{DS} = 800V$ and $I_D = 50A$

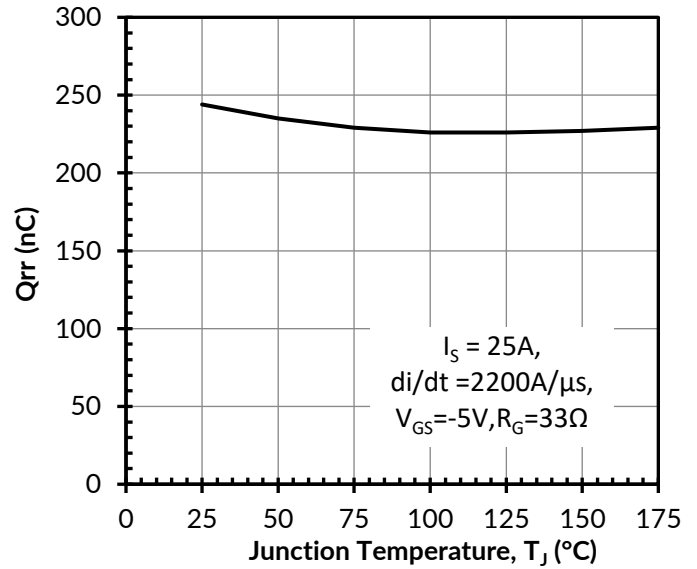


Figure 22. Reverse recovery charge Q_{rr} vs. junction temperature at $V_{DS} = 800V$

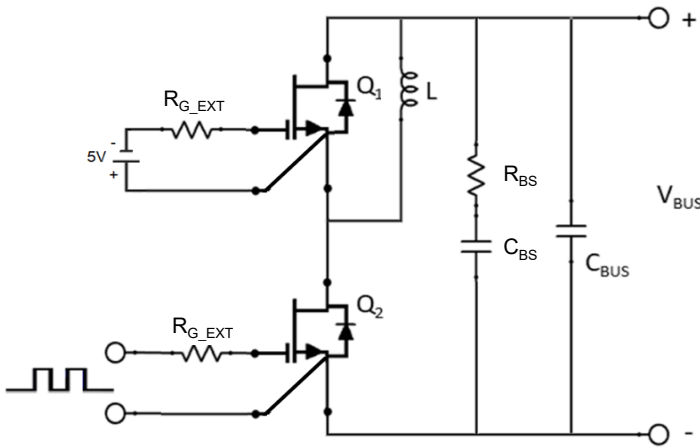


Figure 23. Schematic of the half-bridge mode switching test circuit. Note, a bus RC snubber ($R_{BS} = 2.5\Omega$, $C_{BS} = 200nF$) must be applied to reduce the power loop high frequency oscillations.






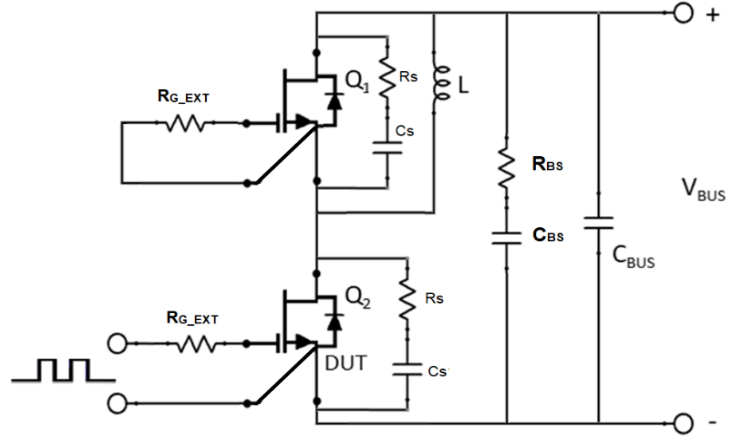


Figure 24. Schematic of the half-bridge mode switching test circuit with device RC snubbers ($R_s = 10\Omega$, $C_s = 100pF$) and a bus RC snubber ($R_{BS} = 2.5\Omega$, $C_{BS} = 200nF$).

Circuit Diagram and Pin Definitions

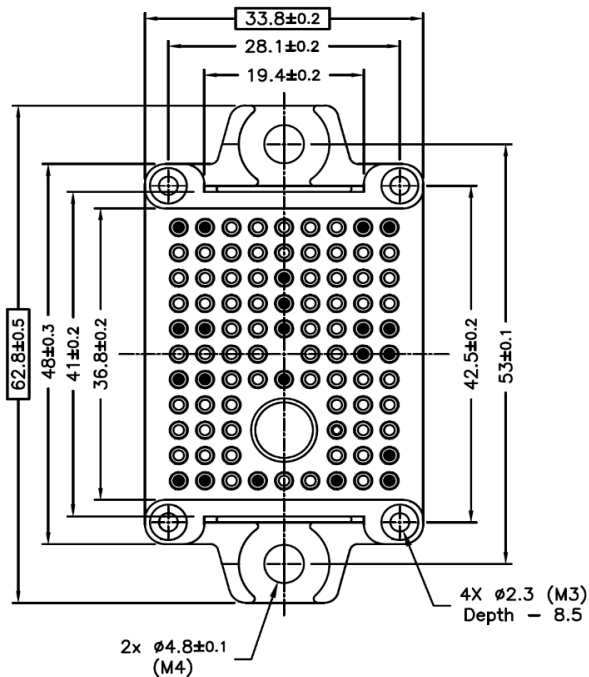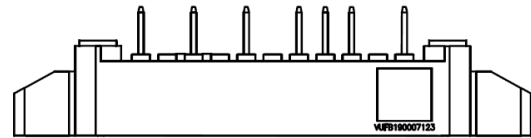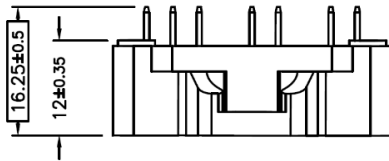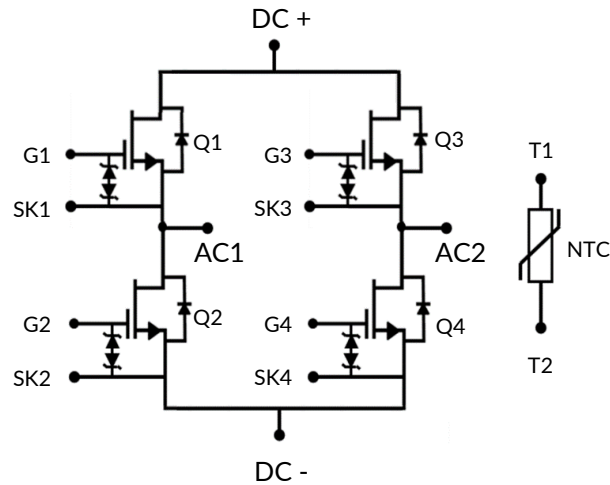

PCB HOLE PATTERN

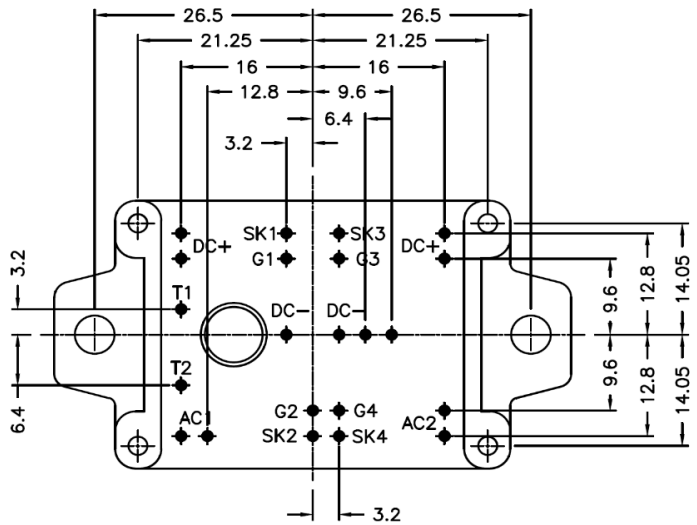

NOTES:

1. All dimensions in millimeters (mm)
2. General tolerance: ± 0.1 mm, unless otherwise specified

Important Mounting Information

This product is recommended for use with solder pin attach and phase change thermal interface materials, and not recommended for implementations using press fit and application of thermal grease. Please refer to mounting guidelines and user guide documents associated with this product for detailed information.

Applications Information

SiC FETs are enhancement-mode power switches formed by a high-voltage SiC depletion-mode JFET and a low-voltage silicon MOSFET connected in series. The silicon MOSFET serves as the control unit while the SiC JFET provides high voltage blocking in the off state. This combination of devices in a single package provides compatibility with standard gate drivers and offers superior performance in terms of low on-resistance ($R_{DS(on)}$), output capacitance (C_{oss}), gate charge (Q_G), and reverse recovery charge (Q_{rr}) leading to low conduction and switching losses. The SiC FETs also provide excellent reverse conduction capability eliminating the need for an external anti-parallel diode.

Like other high performance power switches, proper PCB layout design to minimize circuit parasitics is strongly recommended due to the high dv/dt and di/dt rates. An external gate resistor is recommended when the FET is working in the diode mode in order to achieve the optimum reverse recovery performance. For more information on SiC FET operation, see <https://www.qorvo.com/innovation/power-solutions/sic-power/sic-fet-design-tips>.

A snubber circuit with a small $R_{(G)}$, or gate resistor, provides better EMI suppression with higher efficiency compared to using a high $R_{(G)}$ value. There is no extra gate delay time when using the snubber circuitry, and a small $R_{(G)}$ will better control both the turn-off $V_{(DS)}$ peak spike and ringing duration, while a high $R_{(G)}$ will damp the peak spike but result in a longer delay time. In addition, the total switching loss when using a snubber circuit is less than using high $R_{(G)}$, while greatly reducing $E_{(OFF)}$ from mid-to-full load range with only a small increase in $E_{(ON)}$. Efficiency will therefore improve with higher load current. For more information on how a snubber circuit will improve overall system performance, visit the Qorvo website at <https://www.qorvo.com/innovation/power-solutions/sic-power/sic-fet-design-tips>.

Important notice

The information contained herein is believed to be reliable; however, Qorvo makes no warranties regarding the information contained herein and assumes no responsibility or liability whatsoever for the use of the information contained herein. All information contained herein is subject to change without notice. Customers should obtain and verify the latest relevant information before placing orders for Qorvo products. The information contained herein or any use of such information does not grant, explicitly or implicitly, to any party any patent rights, licenses, or any other intellectual property rights, whether with regard to such information itself or anything described by such information. THIS INFORMATION DOES NOT CONSTITUTE A WARRANTY WITH RESPECT TO THE PRODUCTS DESCRIBED HEREIN, AND QORVO HEREBY DISCLAIMS ANY AND ALL WARRANTIES WITH RESPECT TO SUCH PRODUCTS WHETHER EXPRESS OR IMPLIED BY LAW, COURSE OF DEALING, COURSE OF PERFORMANCE, USAGE OF TRADE OR OTHERWISE, INCLUDING THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. Without limiting the generality of the foregoing, Qorvo products are not warranted or authorized for use as critical components in medical, life-saving, or life-sustaining applications, or other applications where a failure would reasonably be expected to cause severe personal injury or death.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Qorvo:](#)

[UFB25SC12E1BC3N](#)