


Common-mode Suppression Chokes



- Rated currents up to 5 A
- Broadband attenuation characteristics
- Low magnetic leakage flux
- UL rated materials
- RoHS compliant

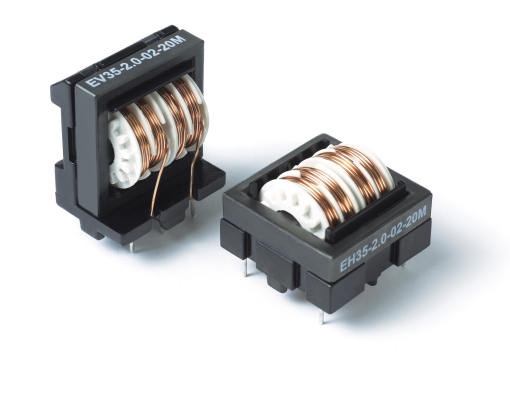

Approvals & Compliances

RoHS

Common-mode suppression chokes are mainly used to filter noise on AC power lines. Noise on commercial power lines could enter the equipment and disturb the proper function. Noise generated by the equipment for example from switch mode power supplies need to be filtered and the spread of such generated noise need to be suppressed. Common-mode suppression chokes together with line bypass capacitors building an AC EMI suppression filter device.


Features and Benefits

- Rated currents up to 5 A
- Compact and light weight
- Low magnetic leakage flux
- Sectional winding
- Standard foot print
- Broad range of available inductances and current ratings
- Custom-specific versions
- Schaffner offers you also EMI measure- ment service to verify that your design will pass the required safety standards

Typical Applications

- Input filters for switch mode power supplies
- Filters to reduce leaking noise
- TVs, VCRs, multimedia and audio equipment
- Office automation, communications and other electronic devices
- Electric ballast
- AC/AC converters

Typical electrical schematic

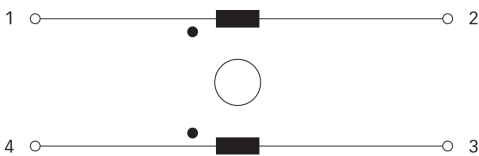

Choke Selection Table

EH choke	Buy (EH)	EV choke	Buy (EV)	L nominal (±30%) [mH]	DC resistance R [mΩ]	Rated current I (50°C) [A]	Weight [g]
EH20-0.3-02-33M		EV20-0.3-02-33M		33	1780	0.3	10
EH20-0.5-02-18M		EV20-0.5-02-18M		18	725	0.5	10
EH20-0.8-02-5M6		EV20-0.8-02-5M6		5.6	245	0.8	10
EH20-1.0-02-3M9		EV20-1.0-02-3M9		3.9	168	1.0	10
EH20-1.2-02-3M3		EV20-1.2-02-3M3		3.3	127	1.2	10
EH20-1.5-02-1M8		EV20-1.5-02-1M8		1.8	72	1.5	10
EH20-2.0-02-0M8		EV20-2.0-02-0M8		0.82	38	2.0	10
EH24-0.5-02-44M		EV24-0.5-02-44M		44	1250	0.5	18
EH24-0.8-02-18M		EV24-0.8-02-18M		18	438	0.8	18
EH24-1.0-02-10M		EV24-1.0-02-10M		10	244	1.0	18
EH24-1.5-02-4M5		EV24-1.5-02-4M5		4.5	116	1.5	18
EH24-2.0-02-2M5		EV24-2.0-02-2M5		2.5	62	2.0	18
EH24-3.0-02-1M2		EV24-3.0-02-1M2		1.2	29	3.0	18
EH24-4.0-02-0M5		EV24-4.0-02-0M5		0.5	16	4.0	18
EH28-1.0-02-75M-X				75	880	1.0	31
EH28-1.0-02-36M		EV28-1.0-02-36M		36	591	1.0	31
EH28-1.5-02-27M-X		EV28-1.5-02-27M-X		27	282	1.5	31
EH28-1.5-02-20M		EV28-1.5-02-20M		20	282	1.5	31
EH28-2.0-02-15M-X				15	196	2.0	33
EH28-2.0-02-11M		EV28-2.0-02-11M		11	162	2.0	31
EH28-3.0-02-9M0-X		EV28-3.0-02-9M0-X		9	115	3.0	31
EH28-3.0-02-5M0		EV28-3.0-02-5M0		5	79	3.0	31
EH28-4.0-02-3M5-X				3.5	52	4.0	31
EH28-4.0-02-2M3		EV28-4.0-02-2M3		2.3	40	4.0	31
EH28-5.0-02-1M1		EV28-5.0-02-1M1		1.1	27	5.0	31
EH35-1.0-02-90M		EV35-1.0-02-90M		90	628	1.0	70
EH35-2.0-02-20M		EV35-2.0-02-20M		20	150	2.0	70
EH35-3.0-02-10M		EV35-3.0-02-10M		10	72	3.0	70
EH35-4.0-02-5M0		EV35-4.0-02-5M0		5	53	4.0	70
EH35-5.0-02-3M6		EV35-5.0-02-3M6		3.6	33	5.0	70

All wires rated 130°C or higher.

Distribution Inventory

Up-to-date inventory levels for global distributors is available at


<https://products.schaffner.com/stock>



Typical Choke Attenuation


Per CISPR 17; 50 Ω/50 Ω asym

EV/EH 20 types

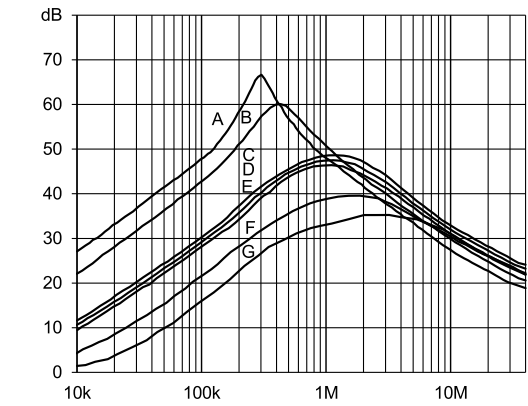


A = 33 mH; B = 18 mH; C = 5.6 mH
D = 3.9 mH; E = 3.3 mH; F = 1.8 mH
G = 0.8 mH

EV/EH 24 types

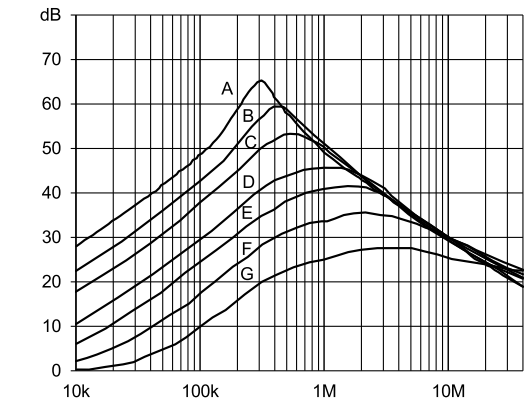


A = 44 mH; B = 18 mH; C = 10 mH
D = 5.5 mH; E = 2.5 mH; F = 1.2 mH
G = 0.5 mH

EV/EH 28 types

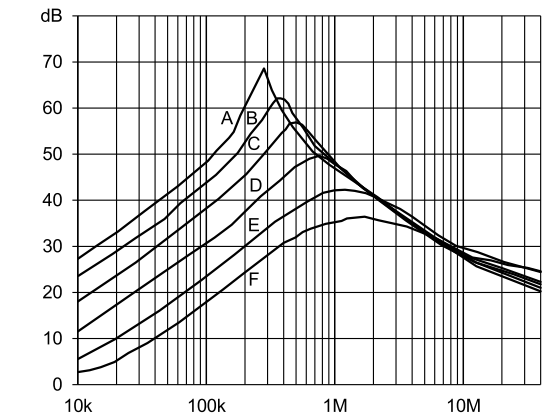


A = 36 mH; B = 20 mH; C = 11 mH
D = 5 mH; E = 2.3 mH; F = 1.1 mH

EV/EH 28 X types

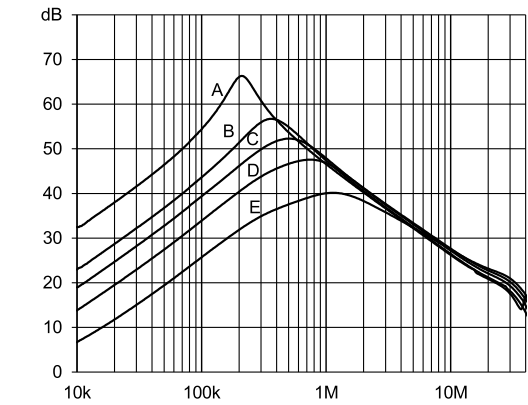

A = 75 mH; B = 27 mH; C = 15 mH
D = 9 mH; E = 3.5 mH


EV/EH 35 types

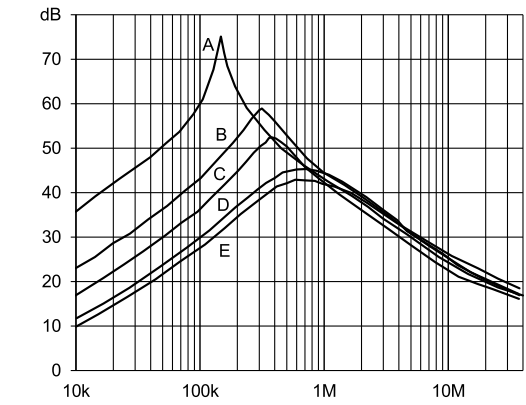


A = 90 mH; B = 20 mH; C = 10 mH
D = 5 mH; E = 3.6 mH

Mechanical Data


EV 20

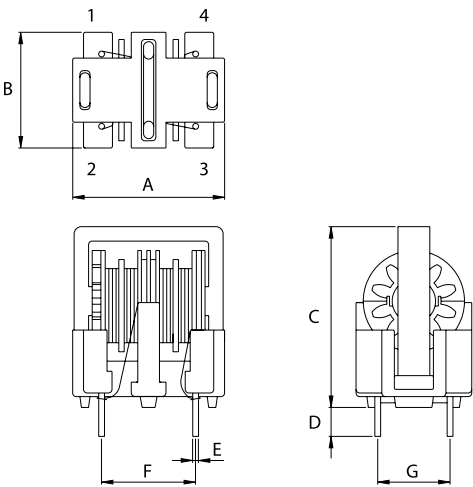


EV 35

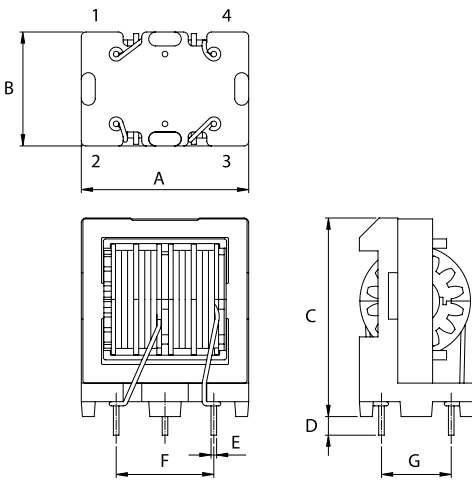

EV 24 and 28

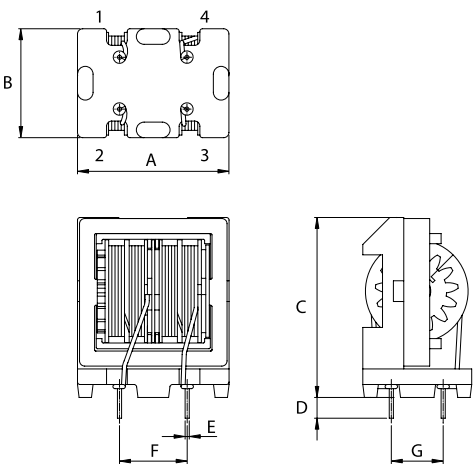

EH 20 to 35

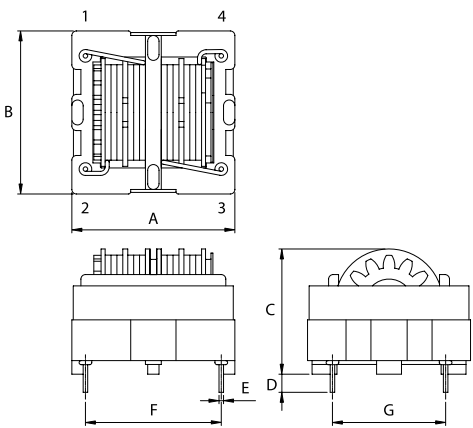

Dimensions

	EV 20	EV 24	EV 28	EV 35	EH 20	EH 24	EH 28	EH35	Tolerances
A	21	24.6	29.2	36	21	24	28	36	±1
B	16	17.4	21	25.5	21	24	28	36	±1
C	25*	29.1	34.7	42.7	17.8	20	22.9	27.7	±1
D	4	4	4	4	4	4	4	4	±1
E	Ø0.8	Ø0.8	Ø0.8	Ø1.2	Ø0.8	Ø0.8	Ø0.8	Ø1.0	±0.1
F	13	13	13	21	13	21	24	30	±0.5
G	10	10	10	15	10	15	20	25	±0.5

All dimensions in mm; 1 inch = 25.4 mm

* Tolarance is +/-2 mm

Please visit www.schaffner.com to find more details on filter connectors.

Headquarters, Global
Innovation and
Development

Switzerland
Schaffner Group
Industrie Nord
Nordstrasse 11e
4542
Luterbach
+41 32 681 66 26
info@schaffner.com

To find your local partner within
Schaffner's global network [schaffner.com](https://www.schaffner.com)

© 2022 Schaffner Group

The content of this document has been carefully checked and understood. However, neither Schaffner nor its subsidiaries assume any liability whatsoever for any errors or inaccuracies of this document and the consequences thereof. Published specifications are subject to change without notice. Product suitability for any area of application must ultimately be determined by the customer. In all cases, products must never be operated outside their published specifications. Schaffner does not guarantee the availability of all published products. This disclaimer shall be governed by substantive Swiss law and resulting disputes shall be settled by the courts at the place of business of Schaffner Holding AG. Latest publications and a complete disclaimer can be downloaded from the Schaffner website. All trademarks recognized.

Sales and Application
Centers

China
Schaffner EMC Ltd. Shanghai
T20-3 C No 565 Chuangye Road Pudong district
201201
Shanghai
+86 2138139500
cschina@schaffner.com

Finland
Schaffner Oy
Sauvonrinne 19 H
8500
Lohja
+358 50 468 7284
finlandsales@schaffner.com

France
Schaffner EMC S.A.S.
16-20 Rue Louis Rameau
95875
Bezons
+33 1 34 34 30 60
francesales@schaffner.com

Germany
Schaffner Deutschland GmbH
Schoemperlenstrasse 12B
76185
Karlsruhe
+49 721 56910
germanysales@schaffner.com

India
Schaffner India Pvt. Ltd
Regus World Trade Centre
WTC 22nd Floor Unit No 2238 Brigade Gateway Campus 26/1 Dr. Rajkumar Road Malleshwaram (W)
560055
Bangalore
+91 8067935355
indiasales@schaffner.com

Italy
Schaffner EMC S.r.l.
Via Ticino, 30
20900
Monza (MB)
+39 039 21 41 070
italysales@schaffner.com

Japan
Schaffner EMC K.K.
ISM Sangenjaya 7F
1-32-12 Kamiuma Setagaya-ku
154-0011
Tokyo
+81 3 5712 3650
japansales@schaffner.com

Singapore
Schaffner EMC Pte Ltd.
Blk 3015A Ubi Road 1 #05-09 Kampong Ubi Industrial Estate
408705
Singapore
+65 63773283
singaporesales@schaffner.com

Spain
Schaffner EMC España
Calle Caléndula 93 Miniparc III Edificio E El Soto de Moraleja Alcobendas
28109
Madrid
+34 917 912 900
spainsales@schaffner.com

Sweden
Schaffner EMC AB
Östermalmstrorg 1
114 42
Stockholm
+46 8 5050 2425
swedensales@schaffner.com

Switzerland
Schaffner EMV AG
Industrie Nord
Nordstrasse 11e
4542
Luterbach
+41 32 681 66 26
switzerlandsales@schaffner.com

Taiwan
Schaffner EMV Ltd.
U-Town
20 Floor-2 No 97 Section 1 XinTai 5th Road XiZhi District
22175
New Taipei City
+886 226975500
taiwansales@schaffner.com

Thailand
Schaffner EMC Co. Ltd.
Sathorn Square Tower
Room 3780 37FL 98 North-Sathorn Rd Silom Bangrak
10500
Bangkok
+66 621056397
thailandsales@schaffner.com

United Kingdom
Schaffner Ltd.
Suite 1 Oakmede Place
Terrace Road
RG42 4JF
Binfield
+44 118 9770070
uksales@schaffner.com

United States
Schaffner EMC Inc.
52 Mayfield Avenue
Edison, New Jersey
+1 732 225 9533
usasales@schaffner.com

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

<u>EH20-0.3-02-33M</u>	<u>EH20-0.8-02-5M6</u>	<u>EH20-1.0-02-3M9</u>	<u>EH20-1.2-02-3M3</u>	<u>EH20-1.5-02-1M8</u>	<u>EH20-2.0-02-0M8</u>
<u>EH24-0.5-02-44M</u>	<u>EH24-0.8-02-18M</u>	<u>EH24-1.0-02-10M</u>	<u>EH24-1.5-02-4M5</u>	<u>EH24-2.0-02-2M5</u>	<u>EH24-3.0-02-1M2</u>
<u>EH24-4.0-02-0M5</u>	<u>EH28-1.0-02-36M</u>	<u>EH28-1.5-02-20M</u>	<u>EH28-2.0-02-11M</u>	<u>EH28-3.0-02-5M0</u>	<u>EH28-4.0-02-2M3</u>
<u>EH28-5.0-02-1M1</u>	<u>EH35-1.0-02-90M</u>	<u>EH35-2.0-02-20M</u>	<u>EH35-3.0-02-10M</u>	<u>EH35-4.0-02-5M0</u>	<u>EH35-5.0-02-3M6</u>
<u>EV20-0.3-02-33M</u>	<u>EV20-0.5-02-18M</u>	<u>EV20-0.8-02-5M6</u>	<u>EV20-1.0-02-3M9</u>	<u>EV20-1.2-02-3M3</u>	<u>EV20-1.5-02-1M8</u>
<u>EV20-2.0-02-0M8</u>	<u>EV24-0.5-02-44M</u>	<u>EV24-0.8-02-18M</u>	<u>EV24-1.0-02-10M</u>	<u>EV24-1.5-02-4M5</u>	<u>EV24-2.0-02-2M5</u>
<u>EV24-3.0-02-1M2</u>	<u>EV24-4.0-02-0M5</u>	<u>EV28-1.0-02-36M</u>	<u>EV28-1.5-02-20M</u>	<u>EV28-3.0-02-5M0</u>	<u>EV28-4.0-02-2M3</u>
<u>EV28-5.0-02-1M1</u>	<u>EV35-1.0-02-90M</u>	<u>EV35-2.0-02-20M</u>	<u>EV35-3.0-02-10M</u>	<u>EV35-4.0-02-5M0</u>	<u>EV35-5.0-02-3M6</u>
<u>EH28-1.0-02-75M-X</u>	<u>EH28-1.5-02-27M-X</u>	<u>EH28-2.0-02-15M-X</u>	<u>EH28-3.0-02-9M0-X</u>	<u>EH28-4.0-02-3M5-X</u>	<u>EV28-1.5-02-27M-X</u>
<u>EV28-3.0-02-9M0-X</u>	<u>EV28-2.0-02-11M</u>	<u>EH20-0.5-02-18M</u>			