

# HIRSCHMANN MOBILITY



## AM/FM (MW/Band II)/ DAB (Band III/L-Band) Screw Antenna

**RDA 015-1450 RD S**  
Pt no.  
**602-452-001**

- Antenna with FLEX mast
- Amplifier integrated in the antenna base
- Remote power fed for AM/FM and DAB amplifier
- Road Vehicle Roof

Subject to alterations

### Technical data


Dimensions (without rod)	95 mm x 55 mm x 39,7 mm	
Rod inclination	76°	
Rod length	474 ±5 mm	
Weight	ca. 151 g	
Tightening torque	max.	5 Nm
Temperature range	-40 – +80°C	
Protection class	IP6k9k (acc. ISO 20653)	
<b>DAB/DAB+</b>		
Frequency range	Band III:	174 – 240 MHz
	L-Band:	1452 – 1492 MHz
Impedance	50 Ohm	
Amplification	Band III:	> 15 dB
	L-Band:	> 10 dB
Noise figure (50 Ohm)	Band III:	< 2 dB
	L-Band:	< 2 dB
VSWR	Band III:	< 2,5
	L-Band:	< 2
Voltage supply	9 – 16 VDC (remote fed)	
Current consumption	35 ±5 mA @ 12 ±0.1 VDC	
Cable type	RG 174	
Cable length	617±30 mm	
Connector	FME male	
<b>AM/FM</b>		
Frequency range	AM:	0,535 MHz – 1,705 MHz
	FM:	87,5 MHz – 108 MHz
Amplification	AM:	0 dB
	FM:	8±2 dB
Noise figure (50 Ohm)	AM:	N.A.
	FM:	< 3,5 dB
Voltage supply	9 – 16 VDC (remote fed)	

## AM/FM (MW/Band II)/ DAB (Band III/L-Band) SCREW ANTENNA





RDA 015-1450 RD S Pt no. 602-452-001

Current consumption	60 ±15 mA @ 12 ±0.1 VDC
Cable type	RG 174
Cable length	325 ±30 mm
Connector	M 10 x 0,75 male

### Technical drawings

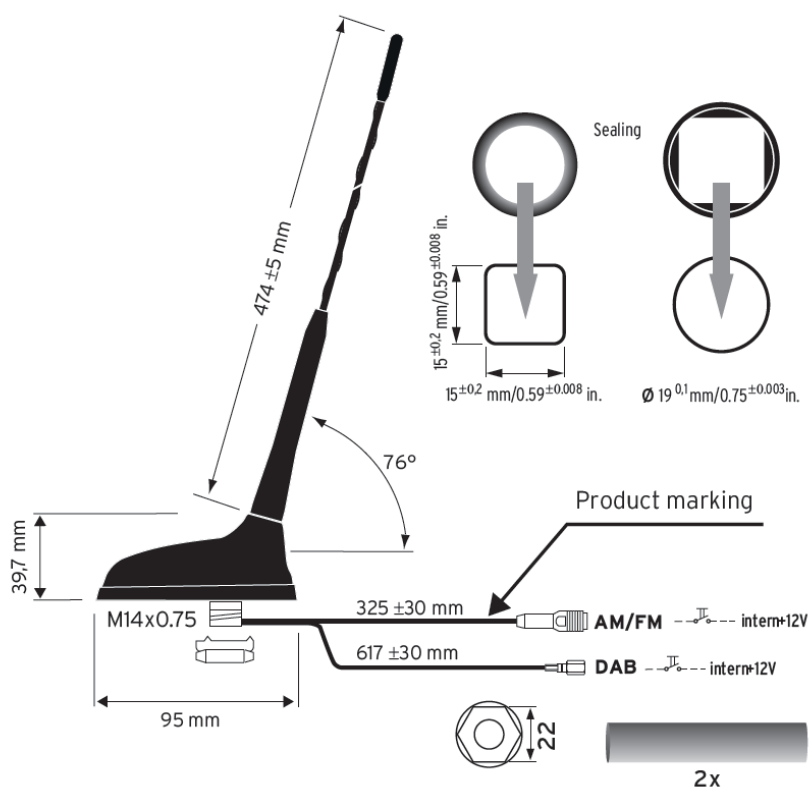

## Installation

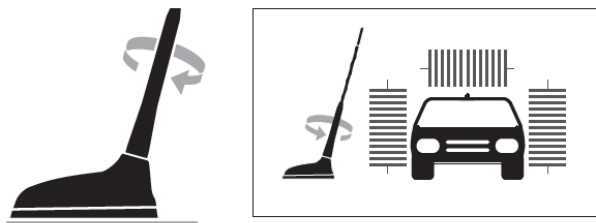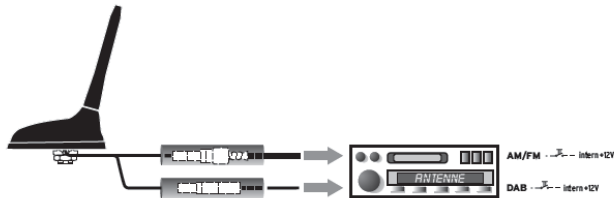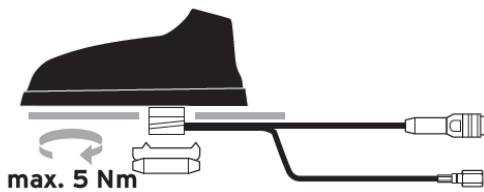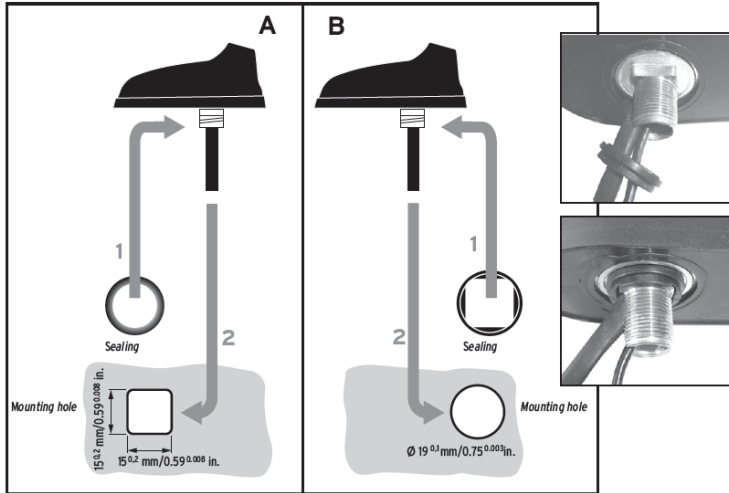

[www.te.com/hirschmann-mobility](http://www.te.com/hirschmann-mobility)  
[hirschmann-mobility@te.com](mailto:hirschmann-mobility@te.com)

TE, TE Connectivity, TE connectivity (logo), and EVERY CONNECTION COUNTS are trademarks.  
Hirschmann is a trademark.

The information given herein, including drawings, illustrations and schematics which are intended for illustration purposes only, is believed to be reliable. However, TE Connectivity makes no warranties as to its accuracy or completeness and disclaims any liability in connection with its use. TE Connectivity's obligations shall only be as set forth in TE Connectivity's Standard Terms and Conditions of Sale for this product and in no case will TE Connectivity be liable for any incidental, indirect or consequential damages arising out of the sale, resale, use or misuse of the product. Users of TE Connectivity products should make their own evaluation to determine the suitability of each such product for the specific application.

© 2019 TE Connectivity Ltd. family of companies All Rights Reserved.

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[602452001](#)