



## ANT-2.4-MMG2-SMA SERIES

### Magnetic Mount 2.4 GHz Antennas

The ANT-2.4-MMG2-SMA antenna is an external magnetic mount multiband antenna designed for WiFi/WLAN and 2.4 GHz ISM band applications such as Bluetooth® and ZigBee®.

The ANT-2.4-MMG2-SMA series antennas provide a ground plane independent dipole antenna solution which mounts to ferrous metallic surfaces using the integrated magnetic base.

The antenna terminates in an SMA plug (male pin) connector on a 1 meter, 2 meter or 3 meter length of RG-174/U coaxial cable.

#### FEATURES

- Performance at 2.4 GHz to 2.5 GHz
  - VSWR:  $\leq 2.2$
  - Peak Gain: 2.8 dBi
  - Efficiency: 46%
- Ground plane independent dipole antenna
- Compact, only 88.5 mm (3.48 in) tall
- Integrated magnetic base securely attaches to ferrous metallic surfaces and allows for repositioning
- SMA plug (male pin) connection

#### APPLICATIONS

- Single-band WiFi/WLAN/802.11
  - WiFi 4
- 2.4 GHz ISM applications
  - Bluetooth®
  - ZigBee®
- U-NII and ISM applications
- Internet of Things (IoT) devices
- Smart Home networking
- Sensing and remote monitoring

#### ORDERING INFORMATION

Part Number	Description
ANT-2.4-MMG2-SMA-1	Magnetic mount 2.4 GHz antenna with an SMA plug (male pin) connector on 1 m (39.37 in) RG-174/U coaxial cable
ANT-2.4-MMG2-SMA-2	Magnetic mount 2.4 GHz antenna with an SMA plug (male pin) connector on 2 m (78.74 in) RG-174/U coaxial cable
ANT-2.4-MMG2-SMA-3	Magnetic mount 2.4 GHz antenna with an SMA plug (male pin) connector on 3 m (118.11 in) RG-174/U coaxial cable

Available from Linx Technologies and select distributors and representatives.

TABLE 1. ELECTRICAL SPECIFICATIONS

ANT-2.4-MMG2	2.4 GHz
Frequency Range	2.4 GHz to 2.5 GHz
VSWR (max)	2.2
Peak Gain (dBi)	2.8
Average Gain (dBi)	-3.5
Efficiency (%)	46

Electrical specifications and plots measured with a 102 mm x 102 mm (4.0 in x 4.0 in) reference ground plane.

TABLE 2. MECHANICAL SPECIFICATIONS

Parameter	Value
Polarization	Linear
Radiation	Omnidirectional
Max Power	10 W
Wavelength	1/2-wave
Electrical Type	Dipole
Impedance	50 Ω
Operating Temp. Range	-40 °C to +90 °C
Dimensions	Height: 27.0 mm (1.10 in) Diameter: 19.0 mm (0.75 in)

Part Number	Connection	Coaxial Cable, minimum inside bend radius	Weight
ANT-2.4-MMG2-SMA-1	SMA plug (male pin)	RG-174/U: 10.2 mm (0.40 in),	1 meter = 37.6 g (1.33 oz)
ANT-2.4-MMG2-SMA-2	SMA plug (male pin)	RG-174/U: 10.2 mm (0.40 in),	2 meters = 51.0 g (1.80 oz)
ANT-2.4-MMG2-SMA-3	SMA plug (male pin)	RG-174/U: 10.2 mm (0.40 in),	3 meters = 64.4 g (2.27 oz)

PRODUCT DIMENSIONS

Figure 1 provides dimensions of the ANT-2.4-MMG2-SMA series antenna.

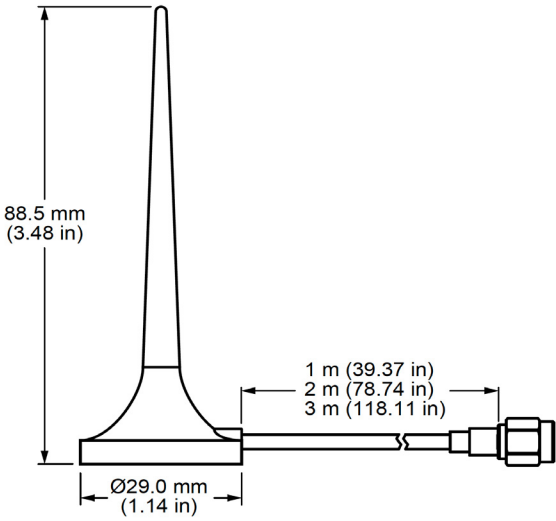


Figure 1. ANT-2.4-MMG2-SMA Series Antenna Dimensions

---

## ANTENNA MOUNTING

The ANT-2.4-MMG2-SMA series antenna has an integrated magnetic base which mounts securely to ferrous metallic surfaces. The antenna should be mounted in a location that is not obstructed by other metallic surfaces which could interfere with signal transmission and reception. The magnetic base allows for the antenna to be repositioned as needed.

## PACKAGING INFORMATION

The ANT-2.4-MMG2-SMA series antenna is individually sealed in a polyethylene bag and packaged in larger bags in of 50 pcs. Bags are packed in cartons in quantities of 250. Distribution channels may offer alternative packaging options.

## ANTENNA ORIENTATION

The ANT-2.4-MMG2-SMA antenna is characterized in two antenna orientations as shown in Figure 2. The antenna free space orientation characterizes use of an antenna attached to an enclosure-mounted connector which is connected by cable to a printed circuit board. Although the antenna is a dipole not requiring a ground plane for function, characterization on an adjacent ground plane (300 mm x 300 mm) provides insight into antenna performance when attached directly to a connector on a metal enclosure. The two orientations represent the most common end-product use cases.

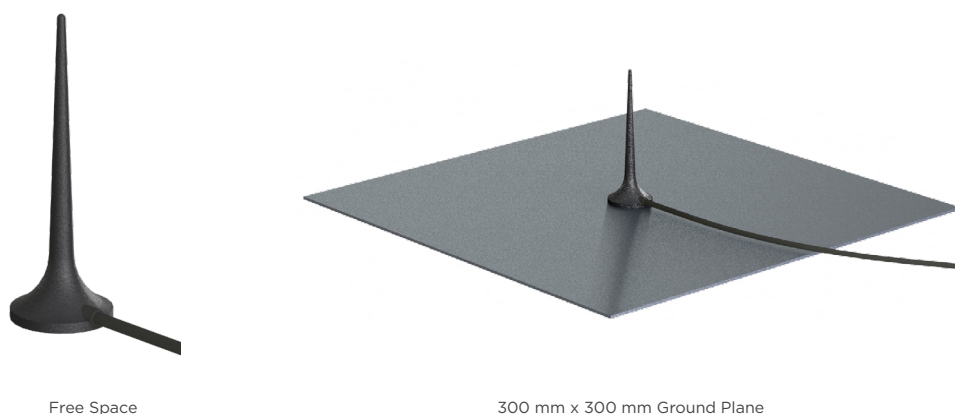


Figure 2. ANT-2.4-MMG2-SMA Test Orientations

## ON GROUND PLANE

The charts on the following pages represent data taken with the antenna oriented at the center of the 300 mm x 300 mm ground plane as shown in Figure 3.

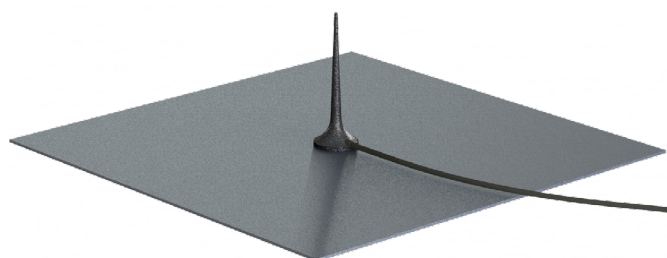


Figure 4. ANT-2.4-MMG2-SMA on Ground Plane

## VSWR

Figure 4 provides the voltage standing wave ratio (VSWR) across the antenna bandwidth. VSWR describes the power reflected from the antenna back to the radio. A lower VSWR value indicates better antenna performance at a given frequency. Reflected power is also shown on the right-side vertical axis as a gauge of the percentage of transmitter power reflected back from the antenna.

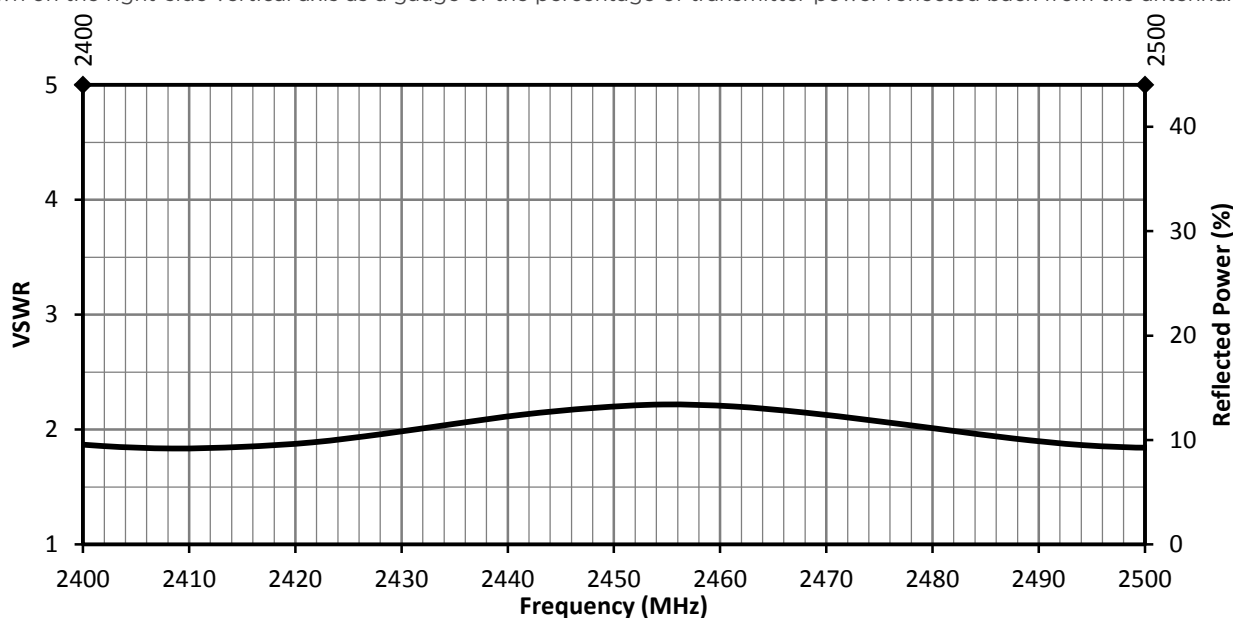


Figure 4. ANT-2.4-MMG2-SMA Antenna VSWR on Ground Plane

## RETURN LOSS

Return loss (Figure 5), represents the loss in power at the antenna due to reflected signals. Like VSWR, a lower return loss value indicates better antenna performance at a given frequency.

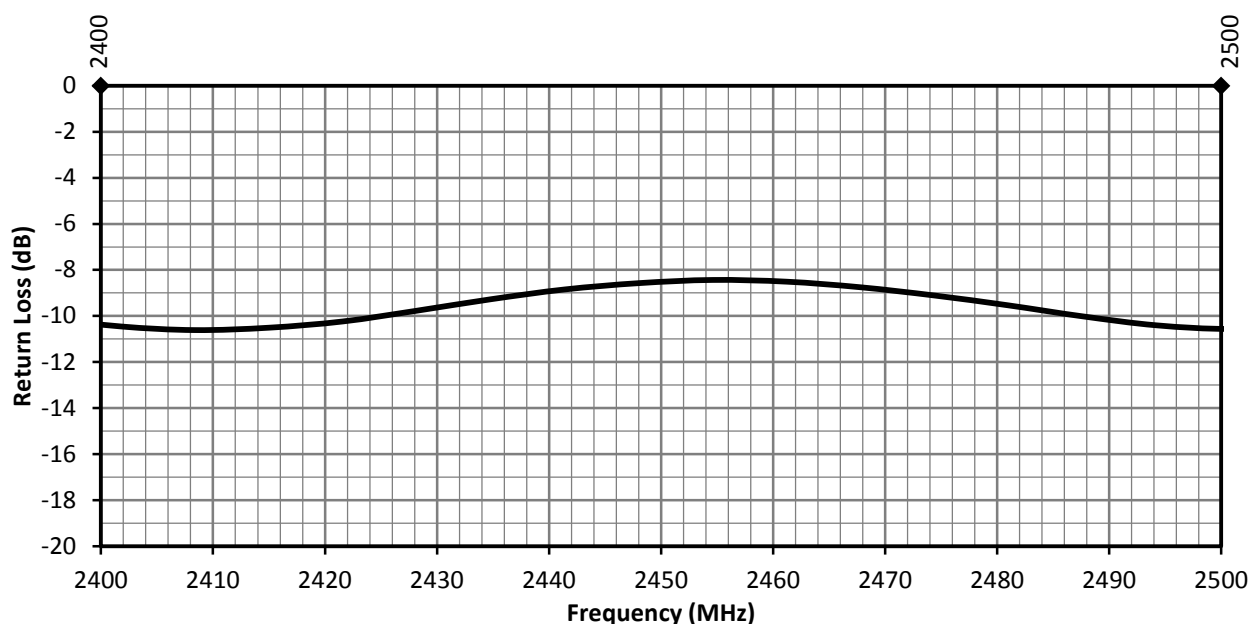


Figure 5. ANT-2.4-MMG2-SMA Antenna Return Loss on Ground Plane

## PEAK GAIN

The peak gain across the antenna bandwidth is shown in Figure 6. Peak gain represents the maximum antenna input power concentration across 3-dimensional space, and therefore peak performance, at a given frequency, but does not consider any directionality in the gain pattern.

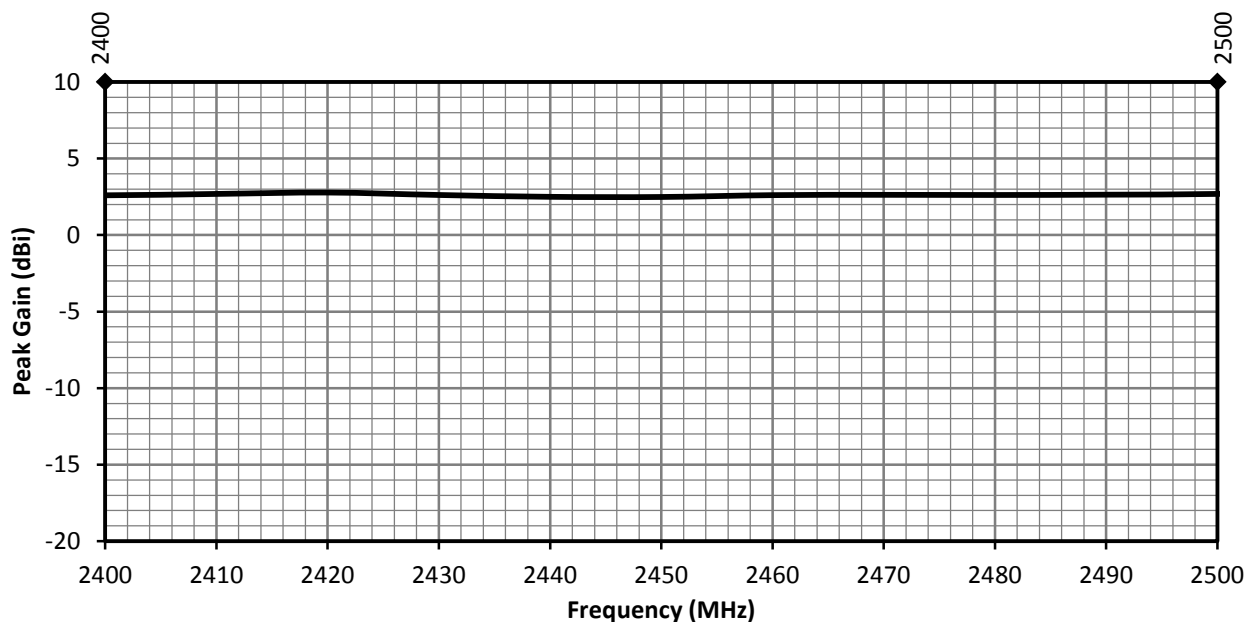


Figure 6 ANT-2.4-MMG2-SMA Antenna Peak Gain on Ground Plane

## AVERAGE GAIN

Average gain (Figure 7), is the average of all antenna gain in 3-dimensional space at each frequency, providing an indication of overall performance without expressing antenna directionality.

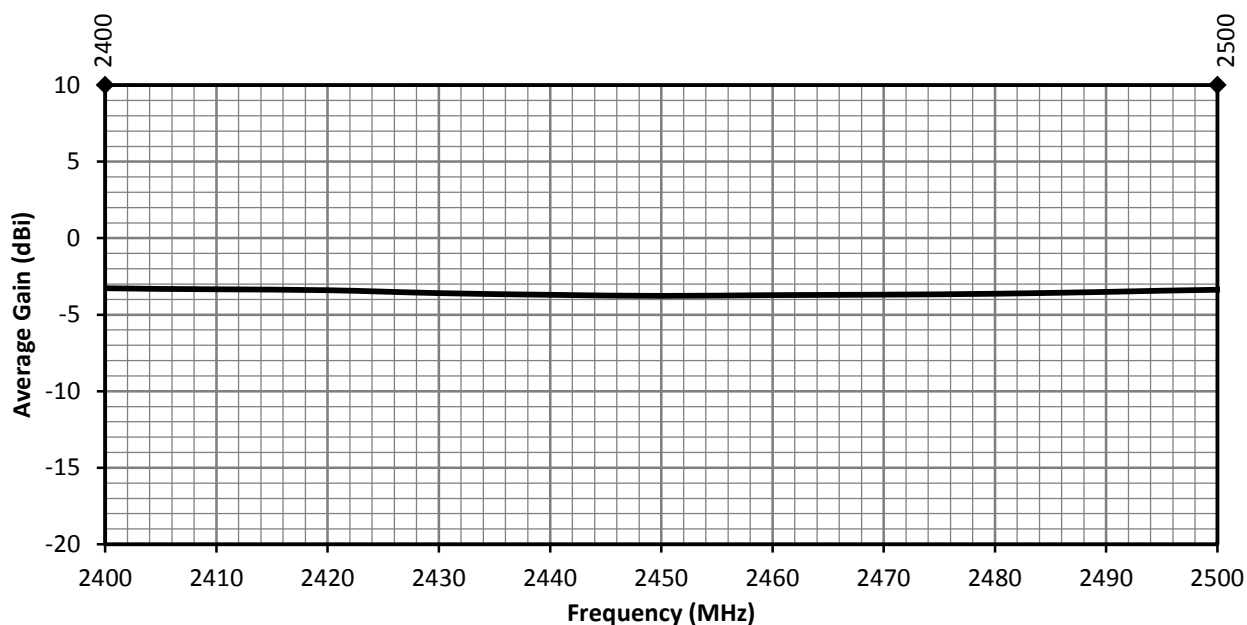


Figure 7. ANT-2.4-MMG2-SMA Antenna Average Gain on Ground Plane

## RADIATION EFFICIENCY

Radiation efficiency (Figure 8), shows the ratio of power delivered to the antenna relative to the power radiated at the antenna, expressed as a percentage, where a higher percentage indicates better performance at a given frequency.


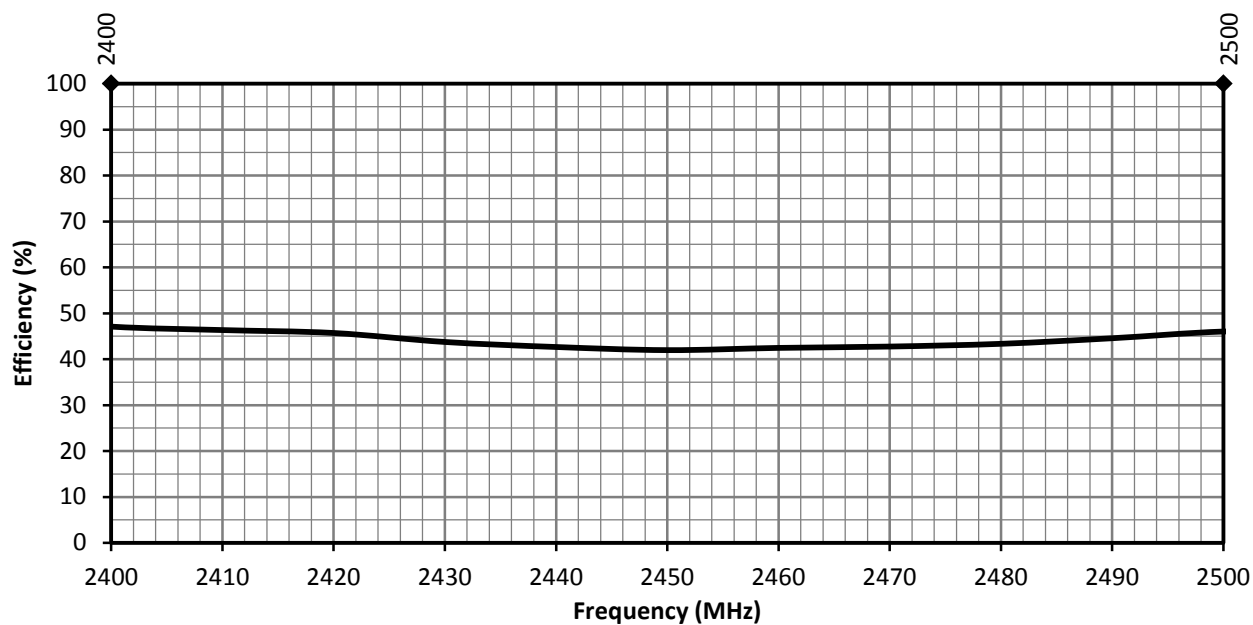


Figure 8. ANT-2.4-MMG2-SMA Antenna Radiation Efficiency on Ground Plane


## RADIATION PATTERNS

Radiation patterns provide information about the directionality and 3-dimensional gain performance of the antenna by plotting gain at specific frequencies in three orthogonal planes. Antenna radiation patterns (Figure 9), are shown using polar plots covering 360 degrees. The antenna graphic above the plots provides reference to the plane of the column of plots below it. Note: when viewed with typical PDF viewing software, zooming into radiation patterns is possible to reveal fine detail.

## RADIATION PATTERNS - ON GROUND PLANE

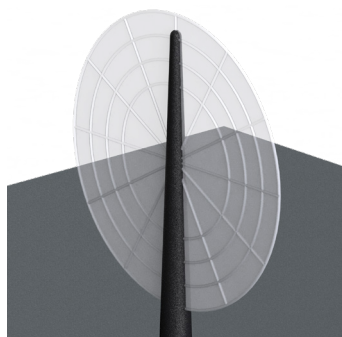

XZ-Plane Gain




YZ-Plane Gain




XY-Plane Gain


## 2400 MHz TO 2500 MHz (2450 MHz)

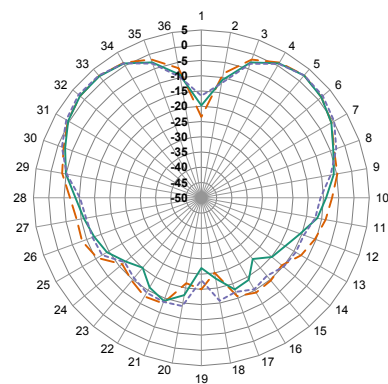

XZ-Plane Gain

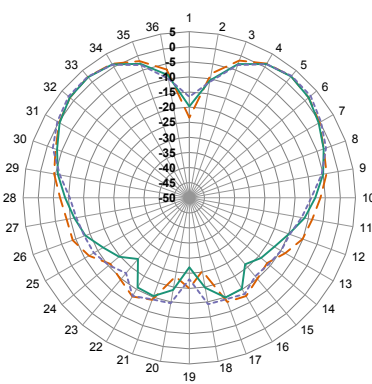

YZ-Plane Gain

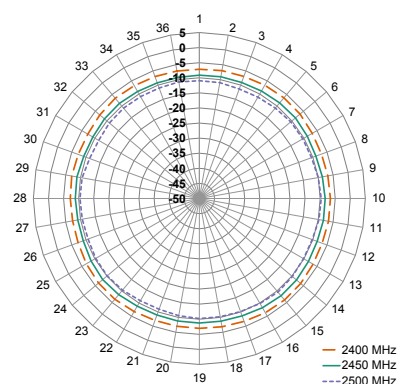

XY-Plane Gain

Figure 10. ANT-410-WRT Radiation Patterns, Free Space

## FREE SPACE, NO GROUND PLANE

The charts on the following pages represent data taken with the antenna oriented in free space as shown in Figure 10.



Figure 10. ANT-5GW-MMG2-SMA No Ground Plane (Free Space)

## VSWR

Figure 11 provides the voltage standing wave ratio (VSWR) across the antenna bandwidth. VSWR describes the power reflected from the antenna back to the radio. A lower VSWR value indicates better antenna performance at a given frequency. Reflected power is also shown on the right-side vertical axis as a gauge of the percentage of transmitter power reflected back from the antenna.

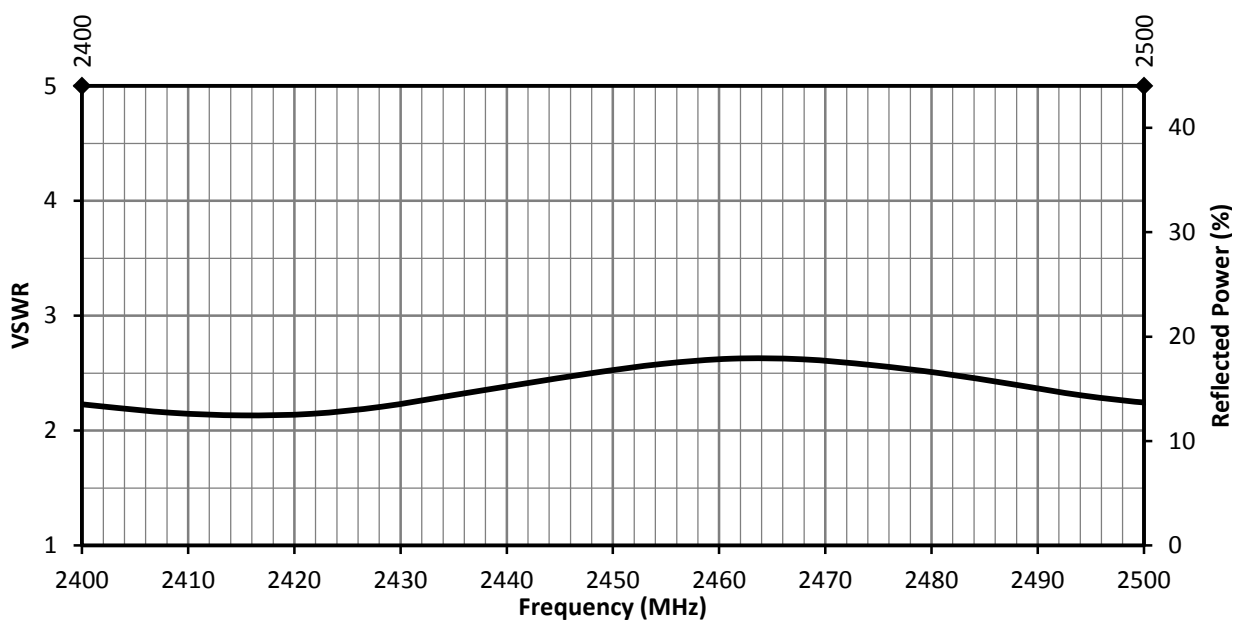


Figure 11. ANT-2.4-MMG2-SMA Antenna VSWR, Free Space



## RETURN LOSS

Return loss (Figure 12), represents the loss in power at the antenna due to reflected signals. Like VSWR, a lower return loss value indicates better antenna performance at a given frequency.

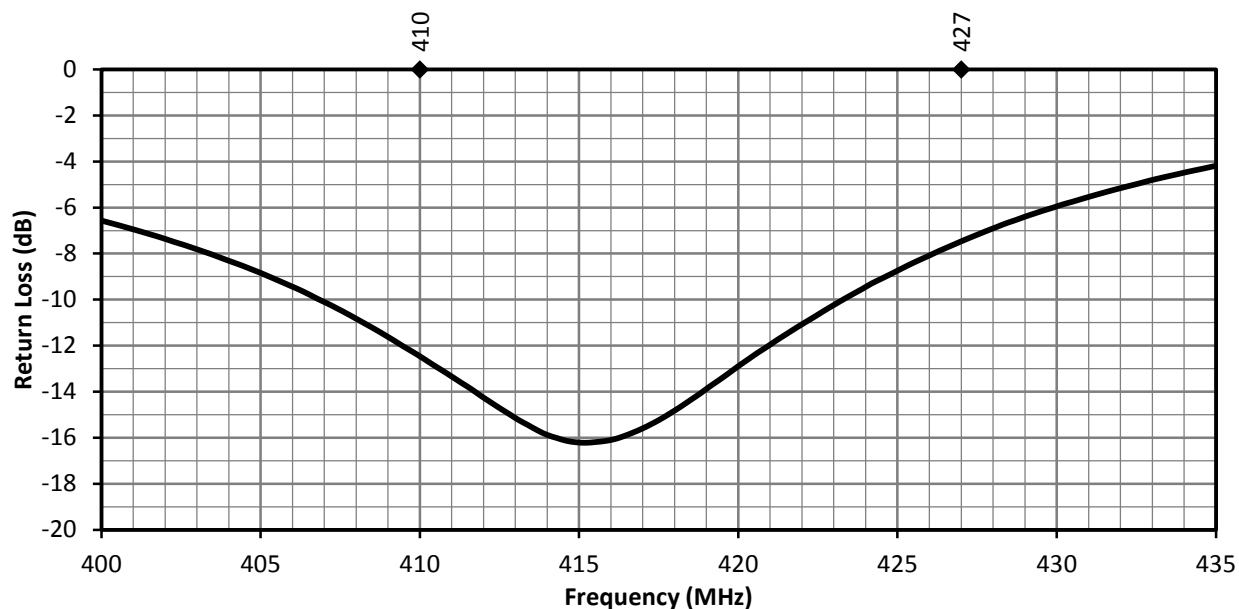


Figure 12 ANT-2.4-MMG2-SMA Antenna Return Loss, Free Space

## PEAK GAIN

The peak gain across the antenna bandwidth is shown in Figure 13. Peak gain represents the maximum antenna input power concentration across 3-dimensional space, and therefore peak performance, at a given frequency, but does not consider any directionality in the gain pattern.

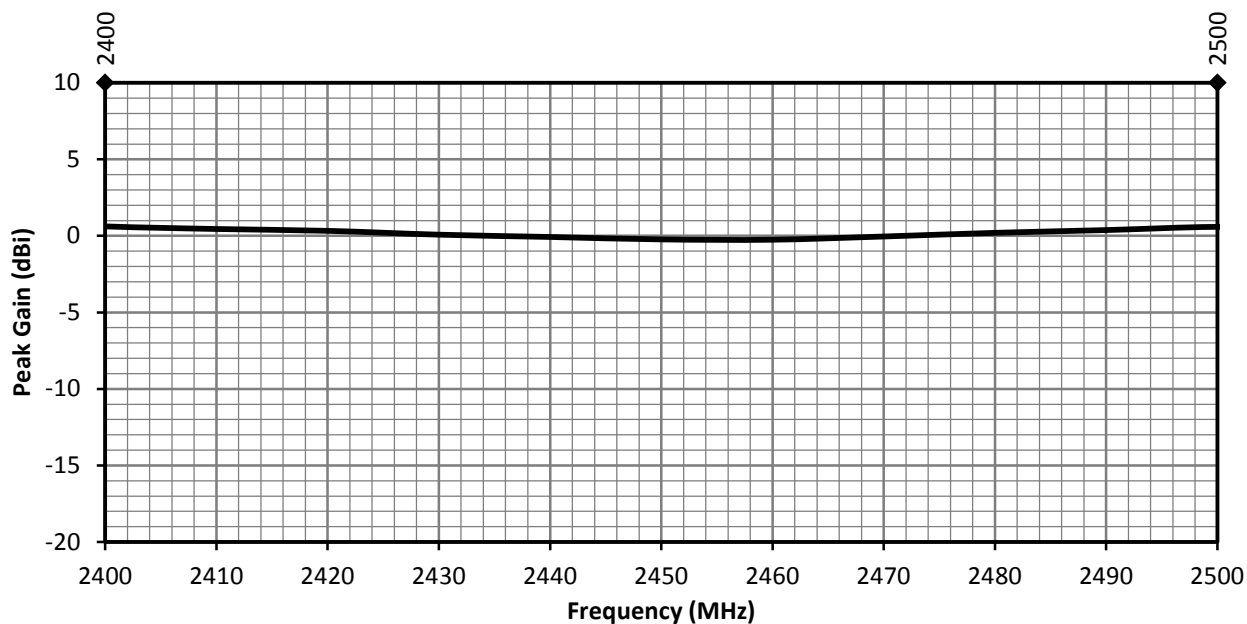


Figure 13. ANT-2.4-MMG2-SMA Antenna Peak Gain, Free Space

## AVERAGE GAIN

Average gain (Figure 14), is the average of all antenna gain in 3-dimensional space at each frequency, providing an indication of overall performance without expressing antenna directionality.

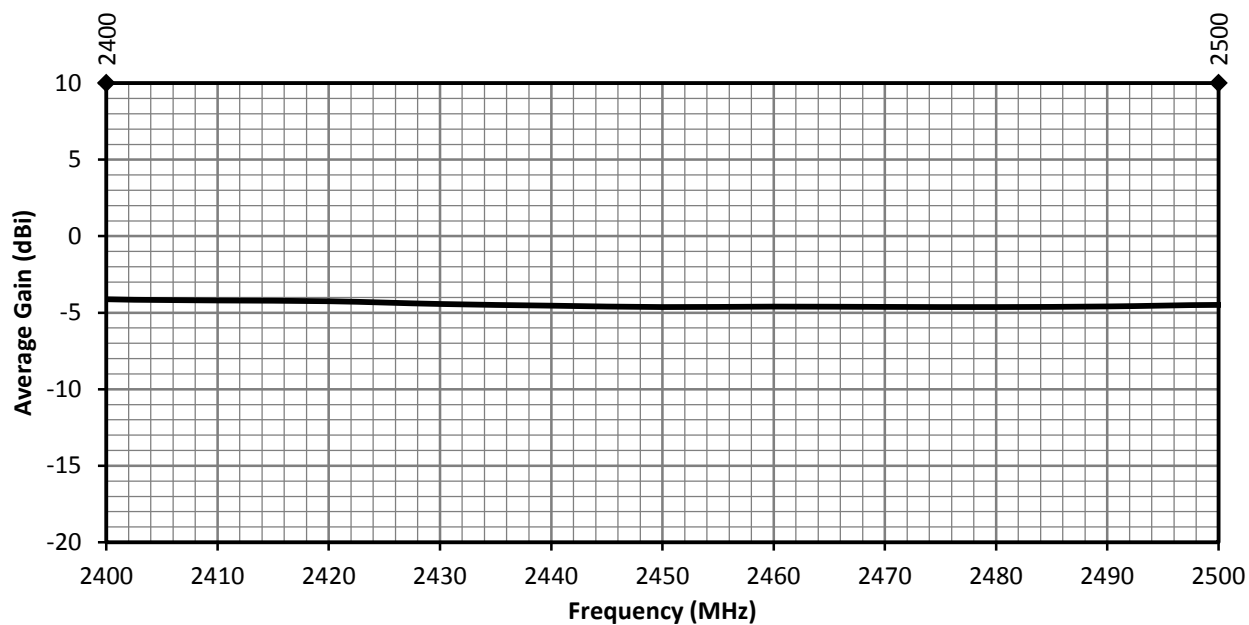


Figure 14. ANT-2.4-MMG2-SMA Antenna Average Gain, Free Space

## RADIATION EFFICIENCY

Radiation efficiency (Figure 15), shows the ratio of power delivered to the antenna relative to the power radiated at the antenna, expressed as a percentage, where a higher percentage indicates better performance at a given frequency.


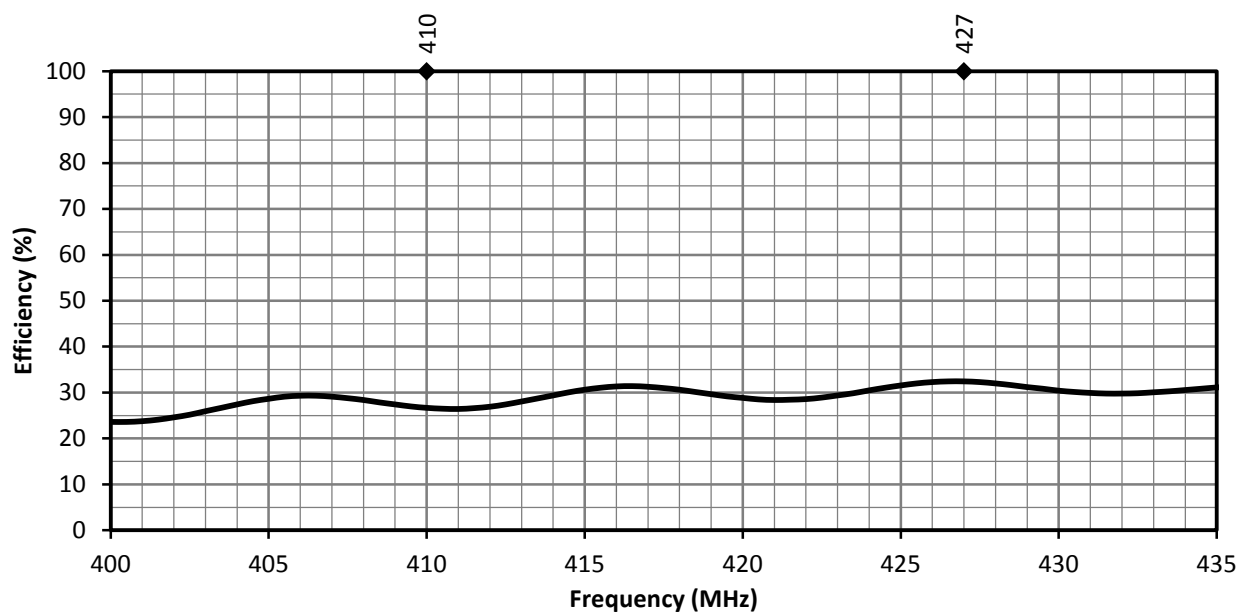


Figure 15. ANT-2.4-MMG2-SMA Antenna Radiation Efficiency, Free Space


## RADIATION PATTERNS

Radiation patterns provide information about the directionality and 3-dimensional gain performance of the antenna by plotting gain at specific frequencies in three orthogonal planes. Antenna radiation patterns (Figure 16), are shown using polar plots covering 360 degrees. The antenna graphic above the plots provides reference to the plane of the column of plots below it. Note: when viewed with typical PDF viewing software, zooming into radiation patterns is possible to reveal fine detail.

### RADIATION PATTERNS - FREE SPACE



XZ-Plane Gain




YZ-Plane Gain




XY-Plane Gain


### 2400 MHz TO 2500 MHz (2450 MHz)

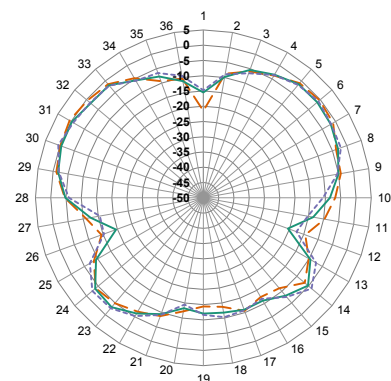

XZ-Plane Gain

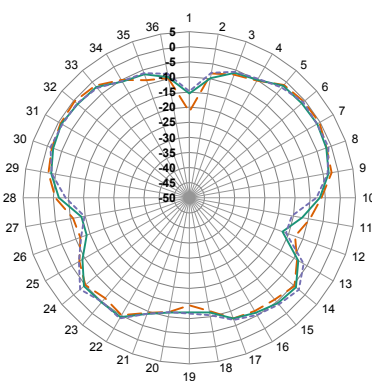

YZ-Plane Gain

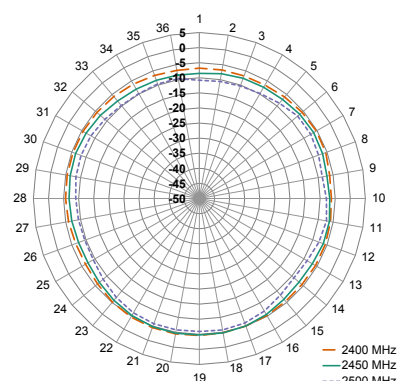

XY-Plane Gain

Figure 16. Radiation Patterns for ANT-2.4-MMG2-SMA Antenna, Free Space

---

## TE TECHNICAL SUPPORT CENTER

USA:	+1 (800) 522-6752
Canada:	+1 (905) 475-6222
Mexico:	+52 (0) 55-1106-0800
Latin/S. America:	+54 (0) 11-4733-2200
Germany:	+49 (0) 6251-133-1999
UK:	+44 (0) 800-267666
France:	+33 (0) 1-3420-8686
Netherlands:	+31 (0) 73-6246-999
China:	+86 (0) 400-820-6015

## te.com

TE Connectivity, TE, TE connectivity (logo), Linx and Linx Technologies are trademarks owned or licensed by the TE Connectivity Ltd. family of companies. All other logos, products and/or company names referred to herein might be trademarks of their respective owners.

The information given herein, including drawings, illustrations and schematics which are intended for illustration purposes only, is believed to be reliable. However, TE Connectivity makes no warranties as to its accuracy or completeness and disclaims any liability in connection with its use. TE Connectivity's obligations shall only be as set forth in TE Connectivity's Standard Terms and Conditions of Sale for this product and in no case will TE Connectivity be liable for any incidental, indirect or consequential damages arising out of the sale, resale, use or misuse of the product. Users of TE Connectivity products should make their own evaluation to determine the suitability of each such product for the specific application.

TE Connectivity warrants to the original end user customer of its products that its products are free from defects in material and workmanship. Subject to conditions and limitations TE Connectivity will, at its option, either repair or replace any part of its products that prove defective because of improper workmanship or materials. This limited warranty is in force for the useful lifetime of the original end product into which the TE Connectivity product is installed. Useful lifetime of the original end product may vary but is not warrantied to exceed one (1) year from the original date of the end product purchase.

©2022 TE Connectivity. All Rights Reserved.

10/22    Original

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[ANT-2.4-MMG2-SMA-2](#)