



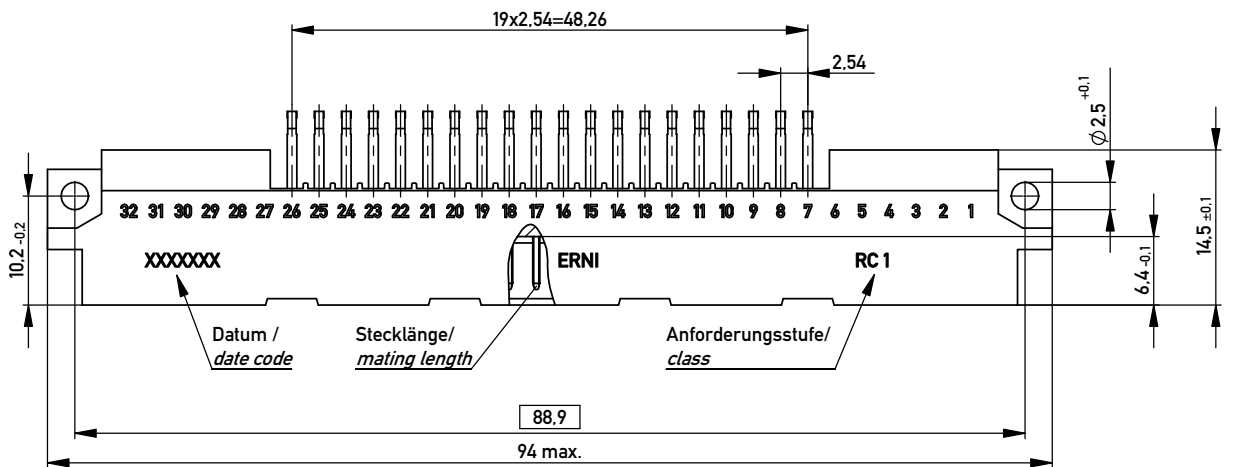


Figure 1 shows a schematic diagram of a 32-column, 3-row grid. The columns are numbered 1 to 32 from right to left. The rows are labeled a, b, and c from bottom to top. The grid is divided into four sections by vertical lines. The first section (columns 1-8) contains two circular features in row 'a' and two in row 'c'. The second section (columns 9-24) contains a 3x16 grid of small squares, each labeled 'S'. The third section (columns 25-32) contains two circular features in row 'a' and two in row 'c'.

Technical drawing of a rectangular plate with a grid of holes. The plate has a total width of 88.9 ± 0.1 mm and a total height of 5.3 ± 0.1 mm. The holes are arranged in a grid with a pitch of 2.54 mm. The grid is 13 columns wide (from 26 to 7) and 4 rows high. The holes have a diameter of 1.0 ± 0.1 mm. The plate has rounded corners with a radius of 2.54 mm. The drawing includes dimension lines and labels for all holes.



L = late mate, early break / nacheilend

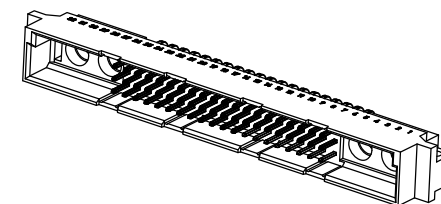

Missing information and dimensions per IEC 60 603-2 / DIN EN 60 603-2

Marking see drawing 294905

Copyright by ERNI GmbH Proprietary notice pursuant to ISO 16016 is to be observed.	Information:			Tolerances	 All Dimensions in mm	Scale	2:1	
	All rights reserved. Only for Information. To ensure that this is the latest version of this drawing, please contact one of the ERNI companies before using.			Subject to modification without prior notice. Drawing will not be updated.		Designation		
						Messerleiste M 60-4 Löt <i>Male Connector M 60-4 Solder</i>		
					 www.ERNI.com	374169		I
Index		Date				Class	STVM	A3

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[ERNI Electronics:](#)

[374169](#)