

NFS40 Series

Single and triple output

Total Power: 40 - 50 W
Input Voltage: 85 - 264 Vac
120 - 370 Vdc


of Outputs: Single, triple

Special Features

- 5.0 x 3.0 x 1.2 inch package (1U applications)
- Industry standard package
- Overvoltage and short circuit protection
- 40 W with free air convection
- 50 W with 20 CFM forced air
- EN55022, EN55011 conducted noise level B
- UL, VDE and CSA safety approvals
- Available RoHS compliant
- 2 year warranty

Safety

- VDE0805/EN60950/IEC950/IEC1010
- File No. 10401-3336-0044
- License No. 2559
- UL60950-1 File No. E13002
- CSA C22.2 No. 950
- File No. LR41062C

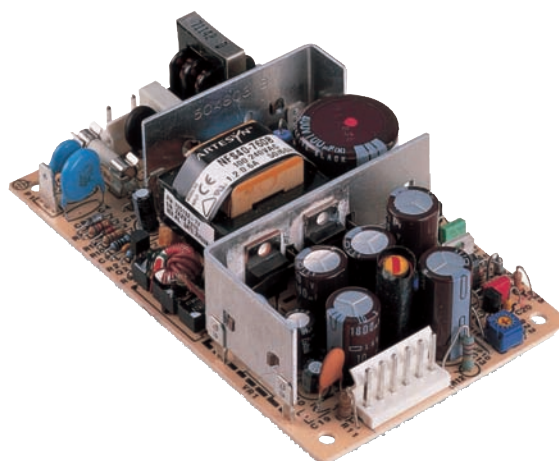

Rev.11.02.11_65
NFS40 Series
1 of 4



Electrical Specifications

| Input | | |
|----------------------------------|---|---------------------------------------|
| Voltage adjustability: | +5 V output on triples Vout on singles | ± 5.0% ± 5.0% |
| Line regulation: LL to HL, FL | Main output Auxiliary outputs | ± 0.2% ± 1.0% |
| Load regulation: FL to NL | Main output Auxiliary outputs | ± 2.0% ± 5.0% |
| Transient response: | +5 V (1.5 - 3 A) | ± 120 mV max. dev. 500 µs recovery |
| Temperature coefficient: | All outputs | ± 0.02%/°C |
| Overvoltage protection: | +5 V output | 53.15 A, 250 Vac In live and neutral |
| Output power limit: | Primary power limited | 90 W input power limit |
| Short circuit protection: | Single outputs Multiple outputs | Continuous Short term |
| Output | | |
| Input voltage range: | Universal input | 85 - 264 Vac 120 - 370 Vdc |
| Input frequency range: | | 47-440 Hz |
| Max. input surge current: | 132 Vac, cold start 264 Vac, cold star | 12 A max. 24 A max. |
| Safety ground leakage current: | 110 Vac, 60 Hz 230 Vac, 50 Hz | 0.13 mA, max. 0.32 mA, max. |



Specifications

All specifications are typical at nominal input, full load at 25 °C unless otherwise stated

EMC Characteristics ^(11, 12)

| | | |
|----------------------|----------------------|------------------|
| Conducted emissions: | EN55022, FCC part 15 | Level B |
| Radiated emissions: | EN55022 | Level A |
| ESD air: | EN61000-4-2, level 3 | Perf. criteria 1 |
| ESD contact: | EN61000-4-2, level 4 | Perf. criteria 1 |
| Surge: | EN61000-4-2, level 3 | Perf. criteria 1 |
| Fast transients: | EN61000-4-4, level 3 | Perf. criteria 1 |
| Radiated immunity: | EN61000-4-3, level 3 | Perf. criteria 2 |
| Conducted immunity: | EN61000-4-6, level 3 | Perf. criteria 2 |

General Specifications

| | | |
|--|--|----------------------|
| Hold-up time: | 110 Vac, 40 W 230 Vac, 40 W | 14 ms 110 ms |
| Efficiency: | | 70% typical |
| Isolation voltage: | Input/output Input/chassis | 3000 Vac 1500 Vac |
| Switching frequency: | Variable | |
| Approvals and standards: (see Notes 9, 13) | VDE0805, EN60950, IEC950, IEC1010, UL1950, CSA C22.2 No. 950 | |
| Weight: | 280 g (9.88 oz) | |
| MTBF demonstrated: | MIL-HDBK-217E | 170,000 hours |

Environmental Specifications

| | | |
|--------------------------|--|-----------------------------|
| Thermal performance: | Operating | 0° C to +70 °C |
| (See notes 8, 10) | Non-operating | -40 °C to +85 °C |
| | 50 °C ambient temp., convection cooled | 40 W |
| | Forced air cooling | 50 W @ 20 CFM |
| | +50 °C to +70 °C ambient | Derate linearly to 50% load |
| | Peak (60 seconds) | 60W |
| Relative humidity: | Non-condensing | 5 to 80% RH |
| Altitude: | Operating | 10,000 feet max. |
| | Non-operating | 40,000 feet max. |
| Vibration (See Note 11): | 5-500 Hz | 2.4 G rms peak |

Ordering Information

| Output Voltage | Output Currents | | | Ripple ⁽⁴⁾ | Total Regulation ⁽⁵⁾ | Model Numbers ^(13, 14, F) |
|----------------|--------------------|---------------------|--------------------|-----------------------|---------------------------------|--------------------------------------|
| | Max ⁽¹⁾ | Peak ⁽²⁾ | Fan ⁽³⁾ | | | |
| +5.1 V (A) | 3 A | 7 A | 5 A | 50 mV | ± 2.0% | NFS40-7608J ^(5,6) |
| +12 V (B) | 2 A | 3 A | 2 A | 120 mV | ± 5.0% | |
| -12 V (C) | 0.35 A | 1 A | 0.5 A | 120 mV | ± 5.0% | |
| +5.1 V (A) | 4 A | 7 A | 5 A | 50 mV | ± 2.0% | NFS40-7628J ⁽¹²⁾ |
| +12 V (B) | 0.35 A | 1 A | 0.5 A | 120 mV | ± 5.0% | |
| -12 V (C) | 0.35 A | 1 A | 0.5 A | 120 mV | ± 5.0% | |
| +5.1 V (A) | 3 A | 7 A | 5 A | 50 mV | ± 2.0% | NFS40-7607J ^(5,6) |
| +12 V (B) | 2 A | 3 A | 2 A | 120 mV | ± 5.0% | |
| -5.0 V (C) | 0.35 A | 1 A | 0.5 A | 50 mV | ± 5.0% | |
| +5.1 V (A) | 3 A | 7 A | 5 A | 50 mV | ± 2.0% | NFS40-7610J ^(5,6) |
| +15 V (B) | 2 A | 2.5 A | 2 A | 150 mV | ± 10.0%/-3.0% | |
| -15 V (C) | 0.35 A | 1 A | 0.5 A | 150 mV | ± 5.0% | |
| 3.3 V | 6 A | 12 A | 8 A | 100 mV | ± 2.0% | NFS40-76S3J |
| +5.1 V | 6 A | 12 A | 8 A | 100 mV | ± 2.0% | NFS40-7605J |
| +12.0 V | 3.3 A | 5 A | 4 A | 120 mV | ± 2.0% | NFS40-7612J |
| +15.0 V | 2.6 A | 4 A | 3.3 A | 150 mV | ± 2.0% | NFS40-7615J |
| +24.0 V | 1.6 A | 2.5 A | 2 A | 240 mV | ± 2.0% | NFS40-7624J |


Notes

- 1 Natural convection cooled, 40 W maximum.
- 2 Peak output current lasting less than 30 seconds with duty cycle less than 10%. During peak loading, outputs may go outside of total regulation limits. Peak total power must not exceed 60 W.
- 3 Forced air, 20 CFM at 1 atmosphere, 50 W maximum.
- 4 Figure is peak-to-peak. Output noise is measured across a 50 MHz bandwidth using a 12 inch twisted pair, terminated with a 47 μ F capacitor.
- 5 Total regulation is defined as the static output regulation at 25 °C, including initial tolerance, line voltage within stated limits, load currents within stated limits, and output voltages adjusted to their factory settings. Also, $0.25 < I(A)/I(B) < 5.0$ to maintain stated regulation. This does not apply to the NFS40-7628J power supply as it has regulated auxiliary outputs.
- 6 A minimum load of 0.5 A is required on the +5 V output to obtain full current from the negative output.
- 7 The NFS40 offers the possibility of power sharing between outputs. Consult factory for details.
- 8 Derating curve is application specific for ambient temperatures >50 °C, for optimum reliability no part of the heatsink should exceed 110 °C and no semiconductor case temperature should exceed 115 °C.
- 9 A 4 W minimum load is recommended to achieve the design MTBF.
- 10 Caution: Allow a minimum of 1 second after disconnecting the power when making thermal measurements.
- 11 Three orthogonal axes, sweep at 1 octave/minute, 5 minute dwell at four major resonances.
- 12 The NFS40-7628J has separately linear regulated +12 V and -12 V outputs. The loading conditions in Notes 5 and 6 do not apply.
- 13 This product is only for inclusion by professional installers within other equipment and must not be operated as a stand alone product.
- 14 The 'J' suffix indicates that these parts are Pb-free (RoHS 6/6) compliant.
- 15 NOTICE: Some models do not support all options. Please contact your local Emerson Network Power representative or use the on-line model number search tool at <http://www.Emerson.com/EmbeddedPower> to find a suitable alternative.


Pin Connections

| J1 | -7608J, -7628J | -7607J | -7610J | SINGLES |
|-------------------|----------------|------------|------------|------------|
| Pin 1 | AC Live | AC Live | AC Live | AC Line |
| Pin 2 | AC Neutral | AC Neutral | AC Neutral | AC Neutral |
| J2 | | | | |
| Pin 1 | +12 V | +12 V | +15 V | +Vout |
| Pin 2 | +5.1 V | +5.1 V | +5.1 V | +Vout |
| Pin 3 | +5.1 V | +5.1 V | +5.1 V | +Vout |
| Pin 4 | Return | Return | Return | Return |
| Pin 5 | Return | Return | Return | Return |
| Pin 6 | -12 V | -5 V | -15 V | Return |
| P1 ^(c) | | | | |
| Pin 1 | Safety Ground | | | |

DERATING CURVE
Output Power (Watts)

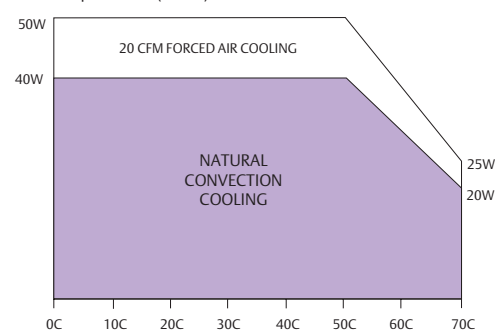

Mechanical Drawing

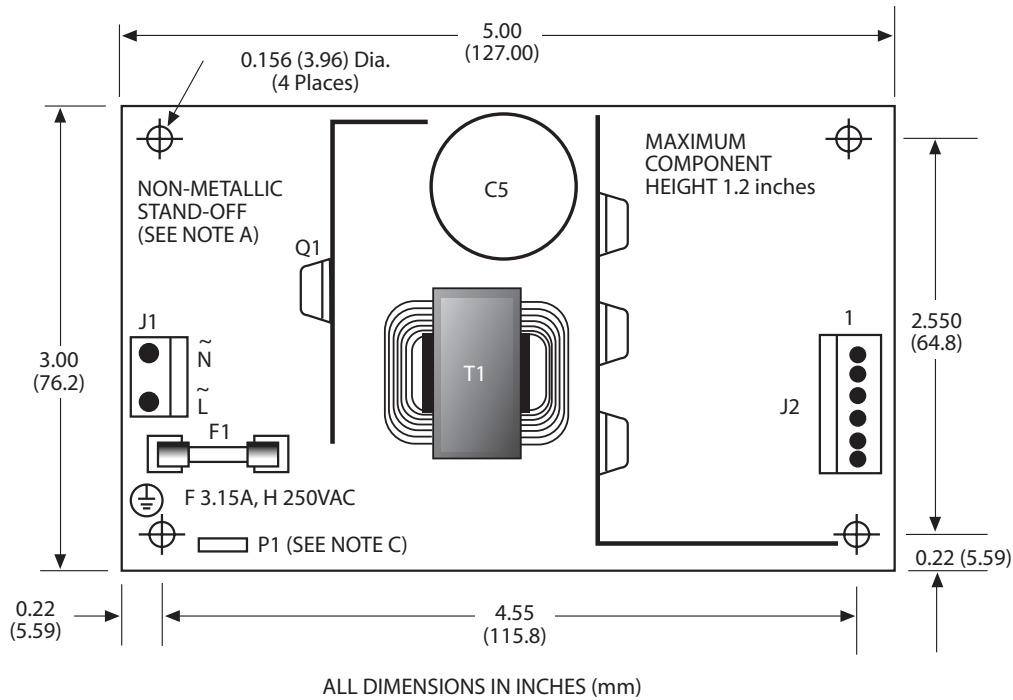

Mechanical Notes

- A** In order to meet safety requirements, a non-metallic stand-off is mandatory for one hole as specified in the mechanical drawing above.
- B** The ground pad of the mounting hole near P1 allows system grounding through a metal stand-off.
- C** To improve conducted noise, the ground pad of the mounting hole near the output connector should be connected with the ground pad of the mounting hole near P1. Use metal stand-offs attached to a common metal chassis. This connection also significantly attenuates common mode noise.
- D** A standard enclosure kit is available for mounting which contains all screws, connectors and necessary mounting hardware. Order part number NFS40CJ.

Americas

5810 Van Allen Way
Carlsbad, CA 92008
USA
Telephone: +1 760 930 4600
Facsimile: +1 760 930 0698

Europe (UK)

Waterfront Business Park
Merry Hill, Dudley
West Midlands, DY5 1LX
United Kingdom
Telephone: +44 (0) 1384 842 211
Facsimile: +44 (0) 1384 843 355

Asia (HK)

14/F, Lu Plaza
2 Wing Yip Street
Kwun Tong, Kowloon
Hong Kong
Telephone: +852 2176 3333
Facsimile: +852 2176 3888

For global contact, visit:

www.Emerson.com/EmbeddedPower
techsupport.embeddedpower@emerson.com

While every precaution has been taken to ensure accuracy and completeness in this literature, Emerson Network Power assumes no responsibility, and disclaims all liability for damages resulting from use of this information or for any errors or omissions.

Emerson Network Power.

The global leader in enabling
business-critical continuity.

- AC Power
- Connectivity
- DC Power
- Embedded Computing
- Embedded Power**
- Monitoring
- Outside Plant
- Power Switching & Controls
- Precision Cooling
- Racks & Integrated Cabinets
- Services
- Surge Protection

EmersonNetworkPower.com

Emerson Network Power and the Emerson Network Power logo are trademarks and service marks of Emerson Electric Co.
©2011 Emerson Electric Co.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Artesyn Embedded Technologies:

[NFS40-7607J](#) [NFS40-7615J](#) [NFS40-76S3J](#) [NFS40-7924J](#) [NFS40-7928J](#) [NFS40-7605J](#) [NFS40-7608J](#) [NFS40-7610J](#) [NFS40-7612J](#) [NFS40-7624J](#) [NFS40-7628J](#) [NFS40-7908J](#) [NFS40-7910J](#) [NFS40CJ](#)