

DATA SHEET

WIRELESS COMPONENTS

PCB type antenna
ANTX100P111B50003
5.150 ~ 5.875 GHz



FEATURES & BENEFITS

- The smallest PCB antenna in the market
- Miniature design allows users to save required space
- Double-side adhesive tape makes it easy to instal in device
- Ranges of types of connector and cable provide a flexible design options
- Halogen free and RoHS compliant

APPLICATIONS

- Tablet / Desktop PC
- Internet TV / STB / Game console / Camera
- WiFi network devices (IEEE 802.11b/g/n)
- Bluetooth / ZigBee devices
- Car Infotainment
- Smart meter
- Lighting control
- POS terminal
- Wireless Industrial Control

ORDERING INFORMATION – GLOBAL PART NUMBER, PHYCOMP CTC & 12NC

All part numbers are identified by the series, packing type, material, size, antenna type, working frequency and packing quantity.

YAGEO BRAND ordering code**GLOBAL PART NUMBER (PREFERRED)**

ANT X100 P III B 5000 3
(1) (2) (3) (4) (5) (6) (7)

(1) FAMILY

ANT = Antenna products

(2) CONNECTOR & CABLE LENGTH (MM)

X = I-PEX
100 = 100mm

(3) ANTENNA TYPE

P=PCB

(4) SERIAL NUMBER

III = SERIAL NUMBER III

(5) PACKAGE TYPE

B = Bulk

(6) WORKING FREQUENCY

5000 = 5.150 ~ 5.875 GHz

(7) CABLE TYPE


3 = 1.13mm diameter Mini-Coaxial Cable

SPECIFICATIONS


DESCRIPTION	VALUE
Working Frequency	5.150 ~ 5.875 GHz
VSWR	2.5:1 max
Peak Gain	3.4 dBi
Polarization	Linear
Radiation Pattern	Omni-directional
Impedance	50 Ω Nominal
Operating Temperature	- 40 °C to 85 °C
Maximum Power	1 W
PCB Dimension	16mm x 10mm x 0.55mm
Radio Connector	I-PEX (20278-112R-13)
Cable Diameter / Length / Color	1.13mm / 100mm / Black
Mounting	Adhesive Tape (HF-DS)

DIMENSIONS

DIMENSION	VALUE
L (mm)	100 $\pm$ 3.00
W (mm)	16 $\pm$ 0.30
H (mm)	10 $\pm$ 0.30
T (mm)	0.55 $\pm$ 0.15
A (mm)	2.30 Max
B (mm)	8 $\pm$ 1.00

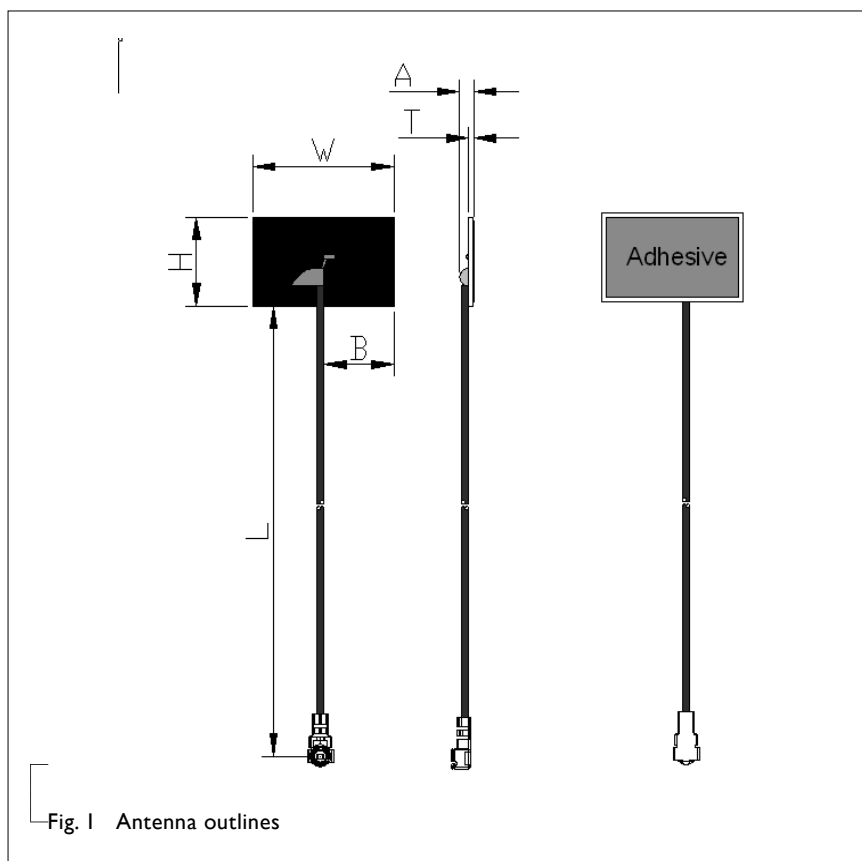OUTLINES

APPLICATION INSTRUCTION

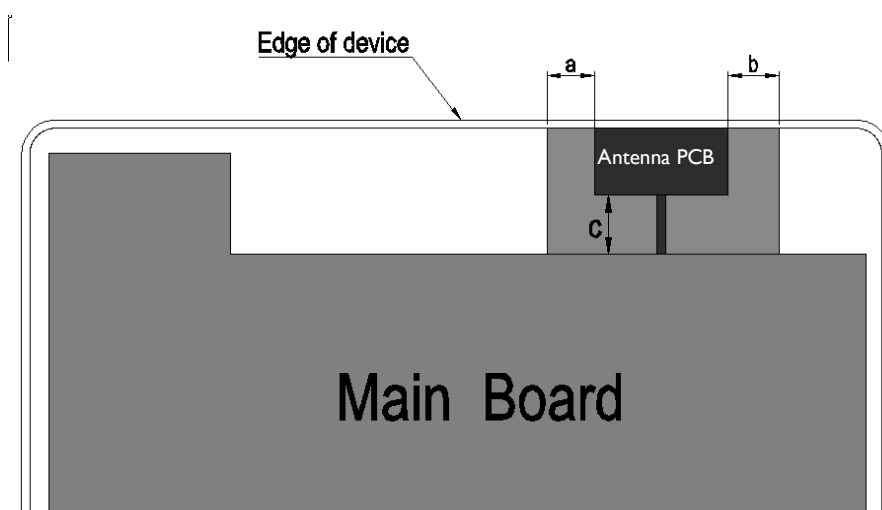

Antenna element should be placed at the edge of device, has minimum clearance from metallic object:

A: 10 mm Min

B: 10 mm Min

C: 10 mm Min

Fig. 2 Application Instruction

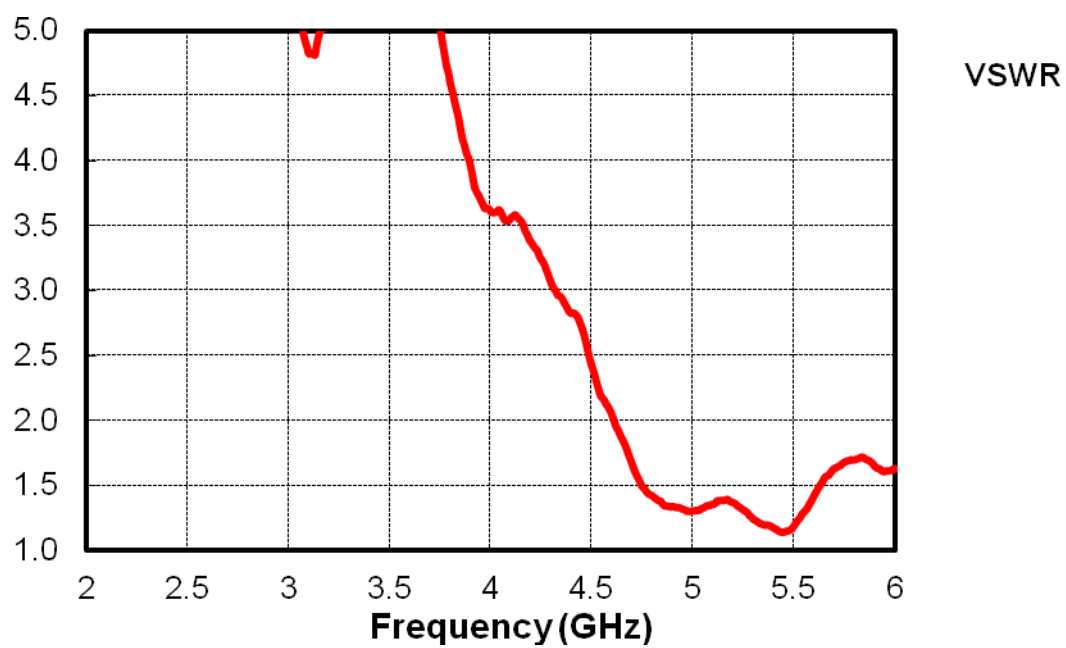
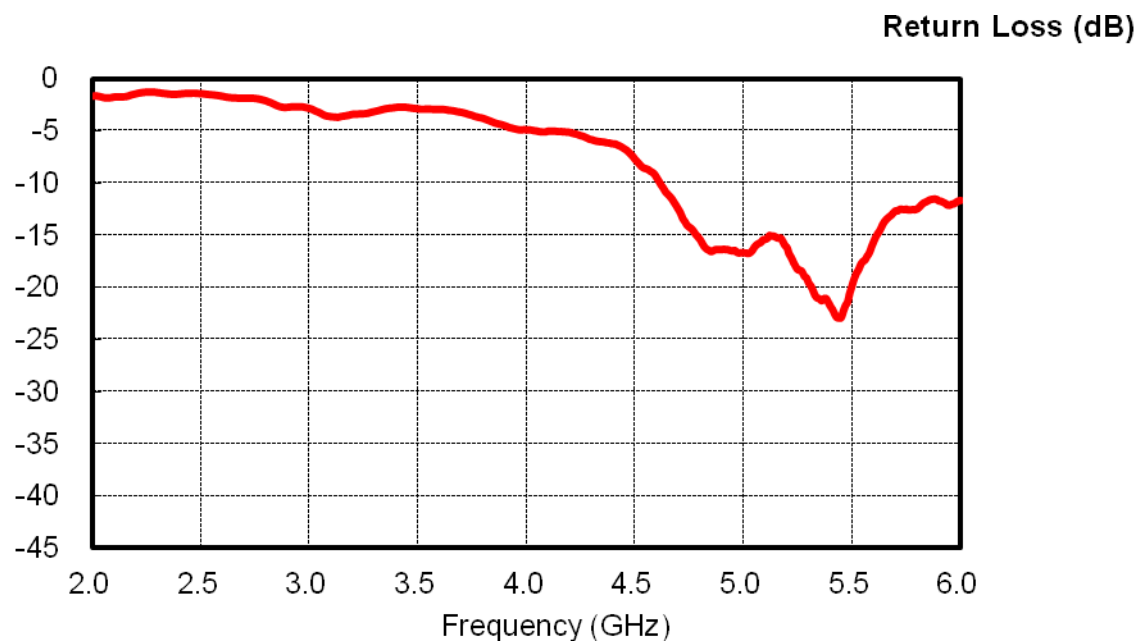
RETURN LOSS & VSWR

Fig. 3 Return loss & VSWR Measurement


ANTENNA GAIN & EFFICIENCY

Table 3


FREQUENCY (GHz)	AVERAGE GAIN (dBi)	EFFICIENCY (%)	PEAK GAIN (dBi)
5.150	-1.8	66.7	3.2
5.350	-1.9	64.2	3.4
5.475	-2.0	62.8	3.4
5.725	-2.2	60.0	3.1
5.875	-2.2	60.8	2.8

ANTENNA RADIATION PATTERNS


Scale: 5 dBi / div Max : 5 dBi Min : -20 dBi

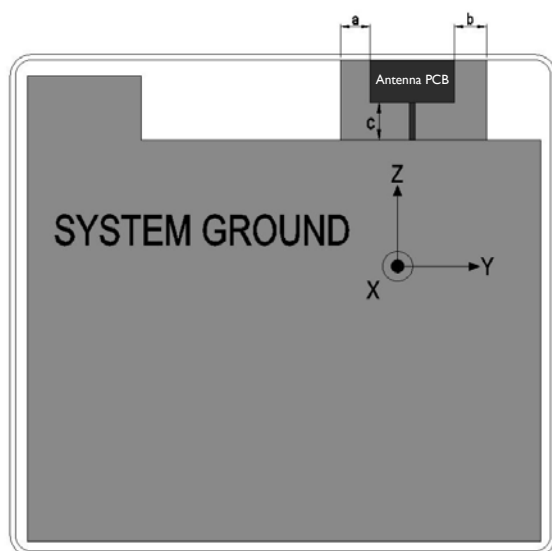


Device Setup & Coordinates

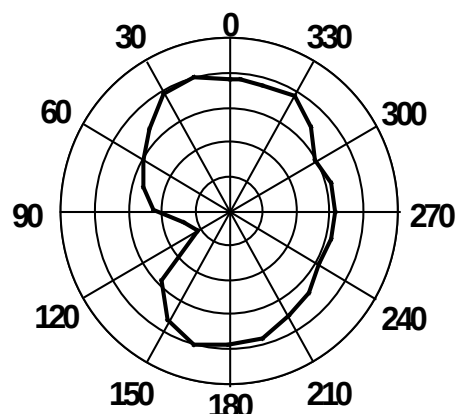

X-Y Plane

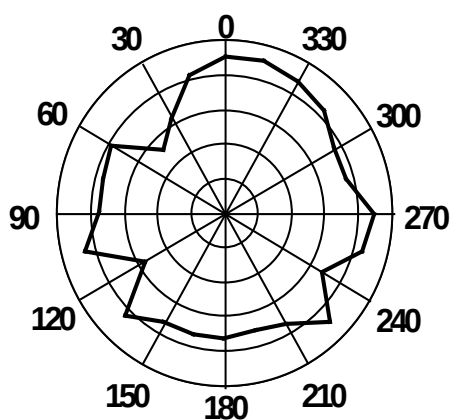

X-Z Plane

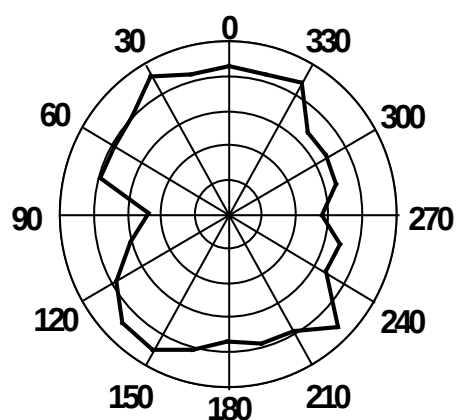

Y-Z Plane

Fig. 4 Antenna radiation patterns at 5.350 GHz

REVISION HISTORY

REVISION	DATE	CHANGE NOTIFICATION	DESCRIPTION
Version 0	Mar. 20, 2015	-	- New data sheet for PCB type antenna, 5.150 ~ 5.875 GHz

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Pulse:](#)

[ANTX100P111B50003](#)