

date 06/12/2015

page 1 of 3

# MODEL: CPE-251 | DESCRIPTION: PIEZO BUZZER INDICATOR

#### **FEATURES**

- wire leads with panel-mount tabs
- 12 Vdc rating
- 3.5 kHz rated frequency fast pulse





#### **SPECIFICATIONS**


parameter	conditions/description	min	typ	max	units
rated voltage			12		Vdc
operating voltage		4		28	Vdc
current consumption	at rated voltage			5	mA
rated frequency		3,000	3,500	4,000	Hz
sound pressure level	at 30 cm, rated voltage	82			dB
tone	fast pulse at rated voltage	2.4	3.0	3.6	Hz
dimensions	Ø28.0 x 25.4				mm
weight				10.1	g
material	ABS UL94 1/16" HB High Heat (black)				
terminal	wire leads				
operating temperature		-30	-	85	°C
storage temperature		-40		95	°C
RoHS	2011/65/EU				

Notes: 1. All specifications measured at  $5\sim35^{\circ}$ C, humidity at  $45\sim85^{\circ}$ K, under  $86\sim106$ kPa pressure, unless otherwise noted.

## **MECHANICAL DRAWING**


units: mm

tolerance: ±0.5 mm

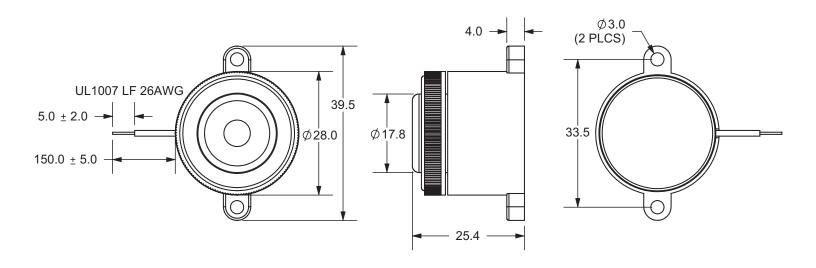

### **PERFORMANCE CURVES**

P: Voltage vs. Sound Pressure Level I: Voltage vs. Current Consumption

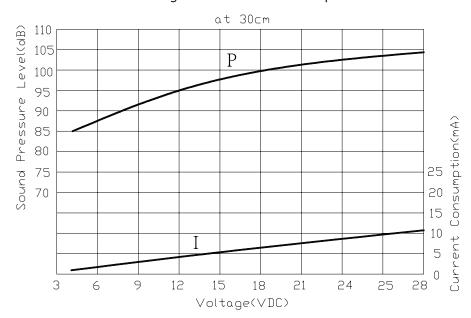

#### **REVISION HISTORY**

rev.	description	date	
1.0	initial release	11/12/2007	
1.01	applied new spec template	06/12/2015	

The revision history provided is for informational purposes only and is believed to be accurate.



**Headquarters** 20050 SW 112th Ave. Tualatin, OR 97062 **800.275.4899** 

Fax 503.612.2383 **cui**.com techsupport@cui.com

CUI offers a one (1) year limited warranty. Complete warranty information is listed on our website.

CUI reserves the right to make changes to the product at any time without notice. Information provided by CUI is believed to be accurate and reliable. However, no responsibility is assumed by CUI for its use, nor for any infringements of patents or other rights of third parties which may result from its use.

# **Mouser Electronics**

**Authorized Distributor** 

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

CUI Inc.: