

## CVS Hardwired Series – Constant Voltage Transformers

Superior voltage regulation of  $\pm 1\%$  sets the SolaHD CVS Series apart from other power conditioning technologies on the market. Extremely tight regulation is accomplished by our ferroresonant transformer technology. The CVS recreates a well regulated sinusoidal waveform that is well isolated from input disturbances including:

- Impulses
- Swells
- Brownouts
- Sags
- Severe waveform distortion

No other power conditioning technology provides as complete a solution against these power quality disturbances. The CVS series is ideal for applications where even a small change in voltage level can lead to unscheduled downtime, misoperation, incorrect data or scrapped production.

## Applications

- Industrial automation and control equipment PLCs
- Analytical laboratory and factory automating equipment
- Photo processing equipment
- Sound/recording systems
- Photographic enlargers
- Broadcast equipment

## Features

- Superior voltage regulation of  $\pm 1\%$
- Surge protection tested to ANSI/IEEE C62.41, Class A & B waveform
- Harmonic filtering
- Hardwired



- Acts as a step-up/step-down transformer
- Galvanic isolation provides exceptional circuit protection
- 25 year typical mean time between failure
- No maintenance required

## Certifications and Compliances

-  Listed
  - UL 1012
  - CSA C22.2 No. 107.1
- RoHS Compliant

## Related Products

- On-line UPS (S4K Industrial)
- Surge Protection
- Three Phase Power Conditioners
- Active Tracking® Filters

## Selection Tables: Single Phase

## Group 1 – CVS Series, 60 Hz

VA	Catalog Number	Voltage Input	Voltage Output	Height in (mm)	Width in (mm)	Depth in (mm)	Ship Weight lbs (kg)	Design Style	Elec Conn
120	<b>23-22-112-2</b>	120, 240	120	8.00 (203.2)	4.00 (101.6)	5.00 (127.0)	13.0 (5.90)	1	J
250	<b>23-23-125-8</b>	120, 240, 480	120	11.00 (279.4)	6.00 (152.4)	8.00 (203.2)	29.0 (13.15)	1	G
500	<b>23-23-150-8</b>	120, 208, 240, 480	120, 240	13.00 (330.2)	9.00 (228.6)	7.00 (177.8)	42.0 (19.05)	1	H
1000	<b>23-23-210-8</b>	120, 208, 240, 480	120, 240	17.00 (431.8)	9.00 (228.6)	7.00 (177.8)	65.0 (29.48)	1	H
2000	<b>23-23-220-8</b>	120, 208, 240, 480	120, 240	18.00 (457.2)	13.00 (330.2)	10.00 (254.0)	111.0 (50.35)	1	H
3000	<b>23-23-230-8</b>	120, 208, 240, 480	120, 240	19.00 (482.6)	13.00 (330.2)	10.00 (254.0)	142.0 (64.41)	1	H
5000	<b>23-23-250-8</b>	120, 208, 240, 480	120, 240	28.00 (711.2)	13.00 (330.2)	10.00 (254.0)	222.0 (100.70)	1	H
7500 *	<b>23-28-275-6</b>	240, 480	120, 240	27.00 (685.8)	25.00 (635.0)	9.00 (228.6)	365.0 (165.56)	2	J

\* This unit is UL Listed only.

## Specifications

Parameter	Condition	Value
<b>Input</b>		
<b>Voltage</b>	Continuous at full load (lower input voltage possible at lighter load)	+10% to -20% of nominal
	For temporary surge or sags	+20% to -35% of nominal
<b>Current</b> <sup>1</sup>	at Full Load & 80% of nominal input voltage	$I_{in} \cong (VA/.87)/(V_{in} \times 80\%)$
<b>Frequency</b>	See Operating Characteristics section for details.	60 Hz
<b>Output</b> <sup>2</sup>		
<b>Line Regulation</b>	$V_{in} > 80\%$ and $< 110\%$ of nominal	$\pm 1\%$
<b>Overload Protection</b>	At Nominal Input Voltage	Current limited at 1.65 times rated current
<b>Output Harmonic Distortion</b>	At Full Load within Input Range	3% total RMS content
<b>Noise Attenuation</b>	-Common Mode	40 dB
	-Transverse Mode	40 dB
<b>General</b>		
<b>Efficiency</b>	At Full Load	Up to 92%
<b>Minimum Loading</b>	—	40%
<b>Storage Temperature</b>	Humidity <95% non-condensing	-20° to 80°C
<b>Operating Temperature</b>	Humidity <95% non-condensing	-20° to 50°C
<b>Audible Noise</b>	Full Resistive Noise	32 dBA to 65 dBA
<b>Warranty</b>	10 year limited warranty	




Notes:

1 - Consult user manual for fuse sizing.

2 - It is recommended that the unit run at a minimum of 40-50% load.


See the Operating Characteristics section for more details.

## Design Styles (CVS and MCR Hardwired)

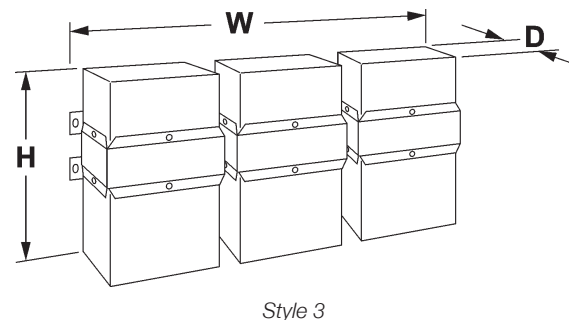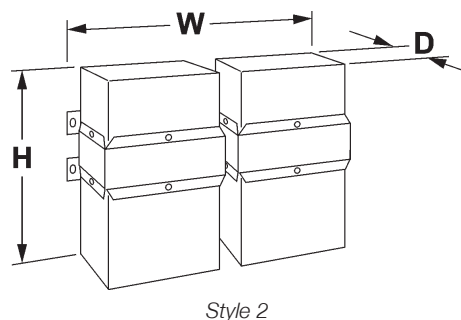

These styles are single phase only.


Electrical Connections

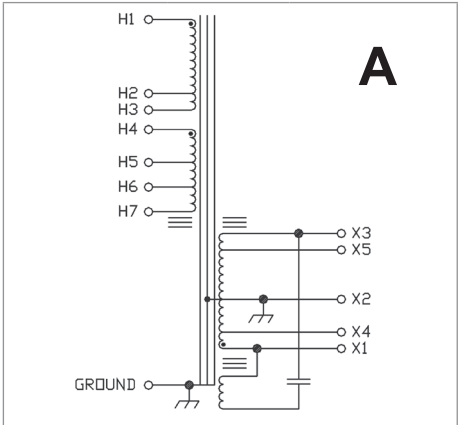

**A**

Primary Voltage	Interconnect	Connect Lines To
208	H1 to H4 H2 to H5	H1 & H5
240	H1 to H4 H3 to H6	H1 & H6
480	H3 to H4	H1 & H6
600	H3 to H4	H1 & H7
Secondary Voltage	Interconnect	Connect Lines To
120		X1 & X2 or X3 & X2
208		X4 & X5
240		X1 & X3


MCR 60 Hz 5000–15000 VA

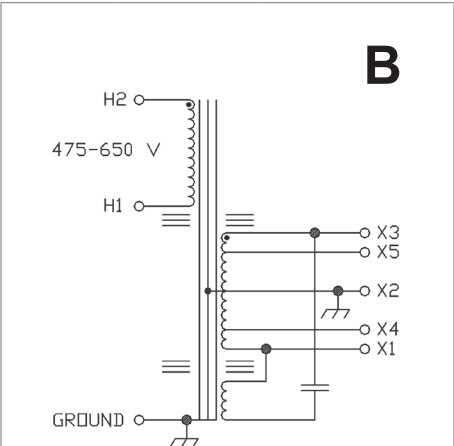

**B**

Primary Voltage	Interconnect	Connect Lines To
475–650 V		H1 & H2
Secondary Voltage	Interconnect	Connect Lines To
120		X1 & X2 or X3 & X2
208		X4 & X5
240		X1 & X3


MCR 60 Hz 500–3000 VA

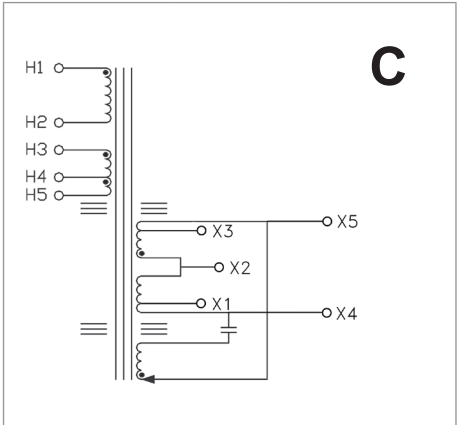

**C**

Primary Voltage	Interconnect	Connect Lines To
110-120	H1 to H3 H2 to H4	H1 & H4
220-240	H2 to H3	H1 & H4
380-415	H2 to H3	H1 & H5
Secondary Voltage	Interconnect	Connect Lines To
110		X1 & X2 or X3 & X2
120		X4 & X2 or X5 & X2
220		X1 & X3
240		X4 & X5


MCR 50 Hz 120–5000 VA

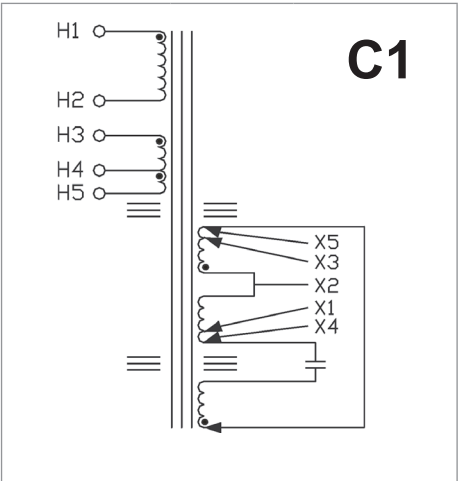

**C1**

Primary Voltage	Interconnect	Connect Lines To
220-240	H1 to H3 H2 to H5	H1 & H5
380-415	H2 to H3	H1 & H4
Secondary Voltage	Interconnect	Connect Lines To
110		X1 & X2 or X2 & X3
120		X4 & X2 or X5 & X2
220		X1 & X3
240		X4 & X5


MCR 50 Hz 7500 VA

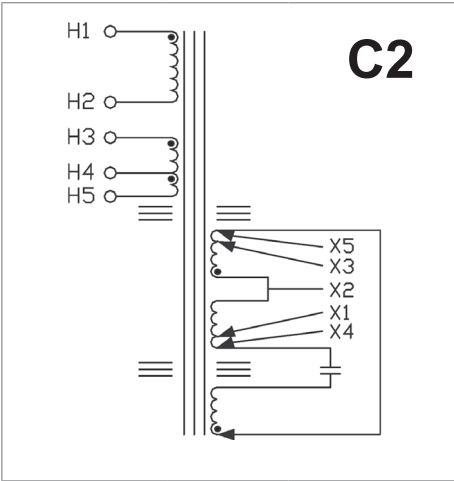

**C2**

Primary Voltage	Interconnect	Connect Lines To
220-240	H2 to H3	H1 & H4
380-415	H2 to H3	H1 & H5
Secondary Voltage	Interconnect	Connect Lines To
110		X1 & X2 or X3 & X2
120		X4 & X2 or X5 & X2
220		X1 & X3
240		X4 & X5

MCR 50 Hz 10000–15000 VA

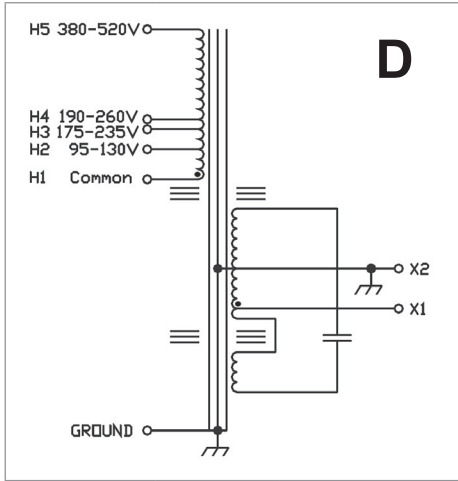


**D**


Primary Voltage	Interconnect	Connect Lines To
120		H1 & H2
208		H1 & H3
240		H1 & H4
480		H1 & H5
Secondary Voltage	Interconnect	Connect Lines To
120		X1 & X2

MCR 60 Hz 120–250 VA


Electrical Connections

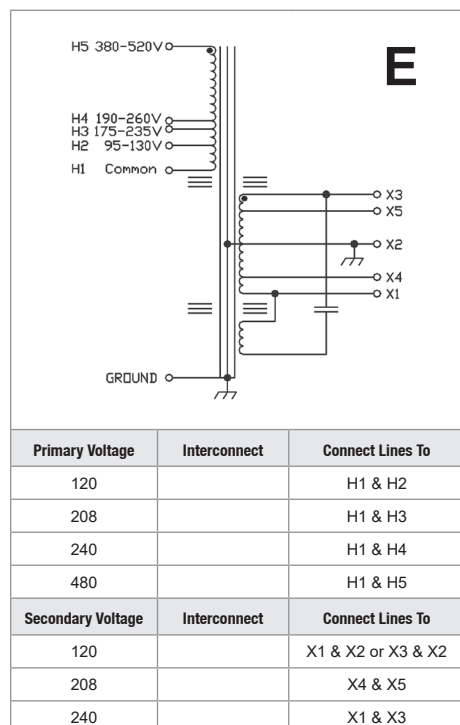


MCR 60 Hz 500-5000 VA

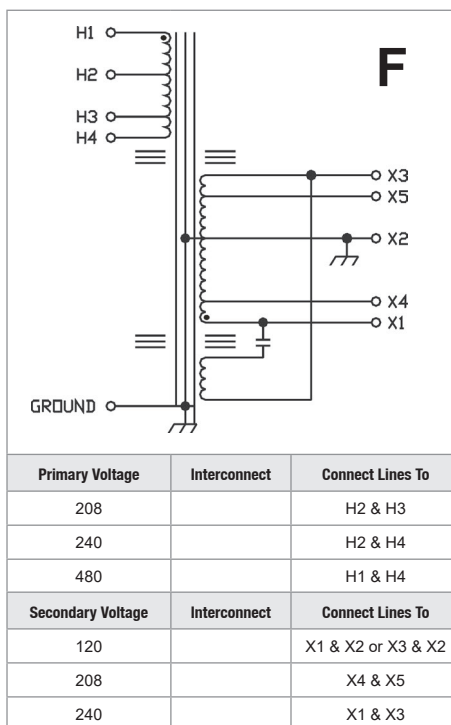

MCR 60 Hz 7500, 10000 and 15000 VA


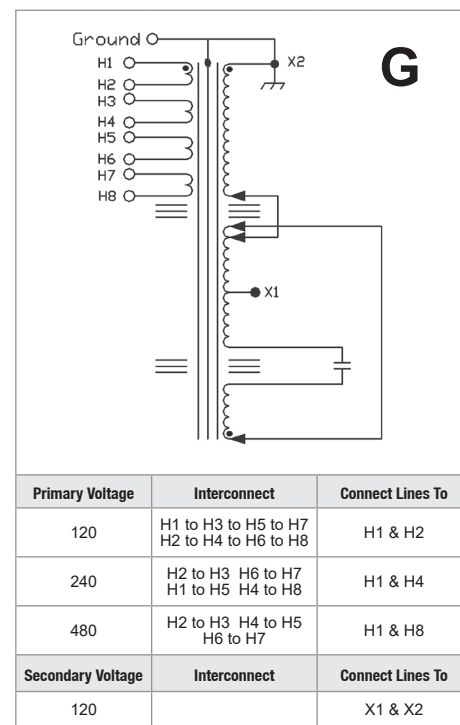


CVS 60 Hz 250 VA only

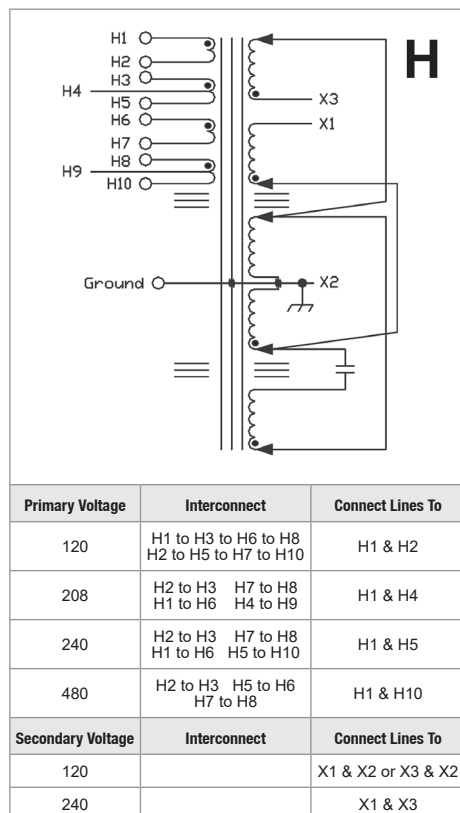

CVS 60 Hz 500-5000 VA

Series-Multiple Primary with Tap for two input voltages J

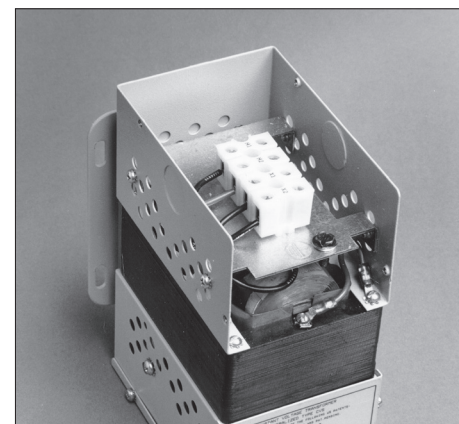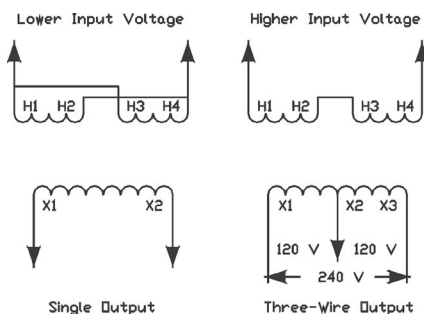

Open MCR/CSV terminal

30 & 60 VA Primary Voltage	120 VA Primary Voltage	7500 VA Primary Voltage	Interconnect	Connect Lines To	Note: Secondaries are not grounded. Ground X <sub>2</sub> per Code.
120	N/A	N/A	Note: H3 & H4 are not used	H1 & H2	
N/A	120	240	H1 to H3 H2 to H4	H1 & H4	
N/A	240	480	H2 to H3	H1 & H4	
30 & 60 VA Secondary Voltage	120 VA Secondary Voltage	7500 VA Secondary Voltage	Interconnect	Connect Lines To	
120	120	N/A		X1 & X2	
N/A	N/A	120		X1 & X2 or X3 & X2	
N/A	N/A	240		X1 & X3	

CVS 60 Hz 30-120 VA & 7500 VA

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[SolaHD:](#)

[23-23-125-8](#) [23-23-220-8](#) [23-23-210-8](#) [23-22-112-2](#) [23-23-250-8](#) [23-28-275-6](#) [23-23-230-8](#) [23-23-150-8](#)