

## FEATURES

- **2-Channel Simultaneous Sampling ADC**
- **70.6dB SNR**
- **88dB SFDR**
- Low Power: 292mW/238mW/200mW Total, 146mW/119mW/100mW per Channel
- Single 1.8V Supply
- Serial LVDS Outputs: 1 or 2 Bits per Channel
- Selectable Input Ranges: 1V<sub>P-P</sub> to 2V<sub>P-P</sub>
- 800MHz Full Power Bandwidth S/H
- Shutdown and Nap Modes
- Serial SPI Port for Configuration
- Pin Compatible 14-Bit and 12-Bit Versions
- 40-Pin (6mm × 6mm) QFN Package

## APPLICATIONS

- Communications
- Cellular Base Stations
- Software Defined Radios
- Portable Medical Imaging
- Multichannel Data Acquisition
- Nondestructive Testing

LT, LT, LTC, LTM, Linear Technology and the Linear logo are registered trademarks of Linear Technology Corporation. All other trademarks are the property of their respective owners.

## DESCRIPTION


The LTC®2268-12/LTC2267-12/LTC2266-12 are 2-channel, simultaneous sampling 12-bit A/D converters designed for digitizing high frequency, wide dynamic range signals. They are perfect for demanding communications applications with AC performance that includes 70.6dB SNR and 88dB spurious free dynamic range (SFDR). Ultralow jitter of 0.15ps<sub>RMS</sub> allows undersampling of IF frequencies with excellent noise performance.

DC specs include ±0.3LSB INL (typ), ±0.1LSB DNL (typ) and no missing codes over temperature. The transition noise is a low 0.3LSB<sub>RMS</sub>.


The digital outputs are serial LVDS to minimize the number of data lines. Each channel outputs two bits at a time (2-lane mode). At lower sampling rates there is a one bit per channel option (1-lane mode). The LVDS drivers have optional internal termination and adjustable output levels to ensure clean signal integrity.

The ENC+ and ENC- inputs may be driven differentially or single-ended with a sine wave, PECL, LVDS, TTL, or CMOS inputs. An internal clock duty cycle stabilizer allows high performance at full speed for a wide range of clock duty cycles.

## TYPICAL APPLICATION

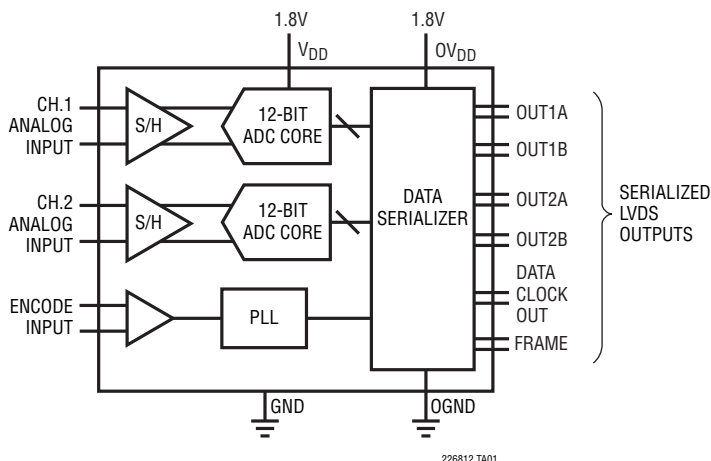

LTC2268-12, 125Msps,  
 2-Tone FFT,  $f_{IN} = 70\text{MHz}$  and  $75\text{MHz}$

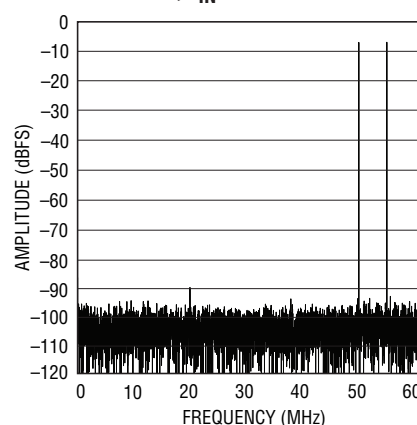

22687612fa

# LTC2268-12/ LTC2267-12/LTC2266-12

## ABSOLUTE MAXIMUM RATINGS

(Note 1)

Supply Voltages

$V_{DD}$ ,  $OV_{DD}$ ..... -0.3V to 2V

Analog Input Voltage ( $A_{IN}^+$ ,  $A_{IN}^-$ ,  
PAR/SER, SENSE) (Note 3)..... -0.3V to ( $V_{DD}+0.2V$ )

Digital Input Voltage ( $ENC^+$ ,  $ENC^-$ ,  $\overline{CS}$ ,  
SDI, SCK) (Note 4)..... -0.3V to 3.9V

SDO (Note 4) ..... -0.3V to 3.9V

Digital Output Voltage ..... -0.3V to ( $OV_{DD}+0.3V$ )


Operating Temperature Range

LTC2268C, 2267C, 2266C..... 0°C to 70°C

LTC2268I, 2267I, 2266I ..... -40°C to 85°C

Storage Temperature Range..... -65°C to 150°C

## PIN CONFIGURATION

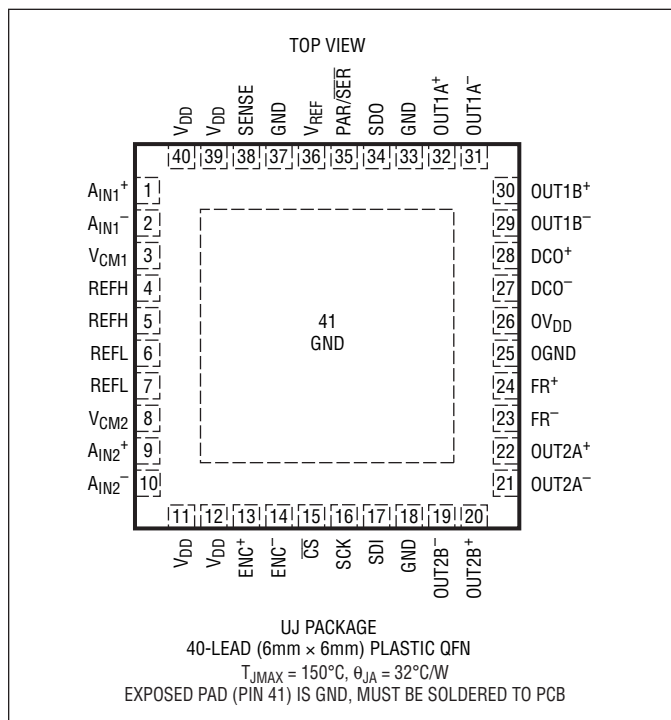

## ORDER INFORMATION

| LEAD FREE FINISH  | TAPE AND REEL       | PART MARKING* | PACKAGE DESCRIPTION             | TEMPERATURE RANGE |
|-------------------|---------------------|---------------|---------------------------------|-------------------|
| LTC2268CUJ-12#PBF | LTC2268CUJ-12#TRPBF | LTC2268UJ-12  | 40-Lead (6mm × 6mm) Plastic QFN | 0°C to 70°C       |
| LTC2268IUJ-12#PBF | LTC2268IUJ-12#TRPBF | LTC2268UJ-12  | 40-Lead (6mm × 6mm) Plastic QFN | -40°C to 85°C     |
| LTC2267CUJ-12#PBF | LTC2267CUJ-12#TRPBF | LTC2267UJ-12  | 40-Lead (6mm × 6mm) Plastic QFN | 0°C to 70°C       |
| LTC2267IUJ-12#PBF | LTC2267IUJ-12#TRPBF | LTC2267UJ-12  | 40-Lead (6mm × 6mm) Plastic QFN | -40°C to 85°C     |
| LTC2266CUJ-12#PBF | LTC2266CUJ-12#TRPBF | LTC2266UJ-12  | 40-Lead (6mm × 6mm) Plastic QFN | 0°C to 70°C       |
| LTC2266IUJ-12#PBF | LTC2266IUJ-12#TRPBF | LTC2266UJ-12  | 40-Lead (6mm × 6mm) Plastic QFN | -40°C to 85°C     |

Consult LTC Marketing for parts specified with wider operating temperature ranges. \*The temperature grade is identified by a label on the shipping container. Consult LTC Marketing for information on non-standard lead based finish parts.

For more information on lead free part marking, go to: <http://www.linear.com/leadfree/>

For more information on tape and reel specifications, go to: <http://www.linear.com/tapeandreel/>

## CONVERTER CHARACTERISTICS

The ● denotes the specifications which apply over the full operating temperature range, otherwise specifications are at  $T_A = 25^\circ\text{C}$ . (Note 5)

| PARAMETER                        | CONDITIONS                               |   | LTC2268-12 |                      |     | LTC2267-12 |                      |     | LTC2266-12 |                      |     | UNITS  |
|----------------------------------|--|---|------------|----------------------|-----|------------|----------------------|-----|------------|----------------------|-----|--|
|                                  |  |   | MIN        | TYP                  | MAX | MIN        | TYP                  | MAX | MIN        | TYP                  | MAX |  |
| Resolution<br>(No Missing Codes) |  | ● | 12         |                      |     | 12         |                      |     | 12         |                      |     | Bits   |
| Integral Linearity Error         | Differential Analog Input<br>(Note 6)    | ● | -1         | $\pm 0.3$            | 1   | -1         | $\pm 0.3$            | 1   | -1         | $\pm 0.3$            | 1   | LSB  |
| Differential Linearity Error     | Differential Analog Input                | ● | -0.5       | $\pm 0.1$            | 0.5 | -0.4       | $\pm 0.1$            | 0.4 | -0.4       | $\pm 0.1$            | 0.4 | LSB  |
| Offset Error                     | (Note 7)                                 | ● | -12        | $\pm 3$              | 12  | -12        | $\pm 3$              | 12  | -12        | $\pm 3$              | 12  | mV   |
| Gain Error                       | Internal Reference<br>External Reference | ● | -2.4       | -0.9<br>-0.9         | 0.6 | -2.4       | -0.9<br>-0.9         | 0.6 | -2.4       | -0.9<br>-0.9         | 0.6 | %FS<br>%FS                                     |
| Offset Drift                     |  |   |            | $\pm 20$             |     |            | $\pm 20$             |     |            | $\pm 20$             |     | $\mu\text{V}/^\circ\text{C}$                   |
| Full-Scale Drift                 | Internal Reference<br>External Reference |   |            | $\pm 30$<br>$\pm 10$ |     |            | $\pm 30$<br>$\pm 10$ |     |            | $\pm 30$<br>$\pm 10$ |     | ppm/ $^\circ\text{C}$<br>ppm/ $^\circ\text{C}$ |
| Gain Matching                    | External Reference                       |   |            | $\pm 0.2$            |     |            | $\pm 0.2$            |     |            | $\pm 0.2$            |     | %FS  |
| Offset Matching                  |  |   |            | $\pm 3$              |     |            | $\pm 3$              |     |            | $\pm 3$              |     | mV   |
| Transition Noise                 | External Reference                       |   |            | 0.3                  |     |            | 0.3                  |     |            | 0.3                  |     | LSB <sub>RMS</sub>                             |

## ANALOG INPUT

The ● denotes the specifications which apply over the full operating temperature range, otherwise specifications are at  $T_A = 25^\circ\text{C}$ . (Note 5)

| SYMBOL       | PARAMETER  | CONDITIONS  |   | MIN                     | TYP               | MAX                     | UNITS   |
|--------------|--|---|---|-------------------------|-------------------|-------------------------|---|
| $V_{IN}$     | Analog Input Range ( $A_{IN}^+ - A_{IN}^-$ )         | $1.7\text{V} < V_{DD} < 1.9\text{V}$                    | ● |                         | 1 to 2            |                         | $V_{P-P}$                                       |
| $V_{IN(CM)}$ | Analog Input Common Mode ( $A_{IN}^+ - A_{IN}^-$ )/2 | Differential Analog Input (Note 8)                      | ● | $V_{CM} - 100\text{mV}$ | $V_{CM}$          | $V_{CM} + 100\text{mV}$ | V   |
| $V_{SENSE}$  | External Voltage Reference Applied to SENSE          | External Reference Mode                                 | ● | 0.625                   | 1.25              | 1.3                     | V   |
| $I_{INCM}$   | Analog Input Common Mode Current                     | Per Pin, 125Msps<br>Per Pin, 105Msps<br>Per Pin, 80Msps | ● |                         | 155<br>130<br>100 |                         | $\mu\text{A}$<br>$\mu\text{A}$<br>$\mu\text{A}$ |
| $I_{IN1}$    | Analog Input Leakage Current (No Encode)             | $0 < A_{IN}^+, A_{IN}^- < V_{DD}$                       | ● | -1                      |                   | 1                       | $\mu\text{A}$                                   |
| $I_{IN2}$    | PAR/SER Input Leakage Current                        | $0 < \text{PAR/SER} < V_{DD}$                           | ● | -3                      |                   | 3                       | $\mu\text{A}$                                   |
| $I_{IN3}$    | SENSE Input Leakage Current                          | $0.625 < \text{SENSE} < 1.3\text{V}$                    | ● | -6                      |                   | 6                       | $\mu\text{A}$                                   |
| $t_{AP}$     | Sample-and-Hold Acquisition Delay Time               |   |   |                         | 0                 |                         | ns  |
| $t_{JITTER}$ | Sample-and-Hold Acquisition Delay Jitter             |   |   |                         | 0.15              |                         | ps <sub>RMS</sub>                               |
| CMRR         | Analog Input Common Mode Rejection Ratio             |   |   |                         | 80                |                         | dB  |
| BW-3B        | Full Power Bandwidth                                 | Figure 6 Test Circuit                                   |   |                         | 800               |                         | MHz   |

# LTC2268-12/ LTC2267-12/LTC2266-12

**DIGITAL ACCURACY** The ● denotes the specifications which apply over the full operating temperature range, otherwise specifications are at  $T_A = 25^\circ\text{C}$ .  $A_{IN} = -1\text{dBFS}$ . (Note 5)

| SYMBOL  | PARAMETER  | CONDITIONS   |   | LTC2268-12 |      |      | LTC2267-12 |      |      | LTC2266-12 |      |      | UNITS |
|---------|--|--------------|---|------------|------|------|------------|------|------|------------|------|------|-------|
|         |  |              |   | MIN        | TYP  | MAX  | MIN        | TYP  | MAX  | MIN        | TYP  | MAX  |       |
| SNR     | Signal-to-Noise Ratio  | 5MHz Input   | ● | 69.6       | 70.6 | 70.3 | 69.2       | 70.6 | 70.3 | 69.4       | 70.6 | 70.3 | dBFS  |
|         |  | 70MHz Input  |   |            | 70.6 |      |            | 70.5 |      |            | 70.5 |      |       |
|         |  | 140MHz Input |   |            | 70.3 |      |            | 70.3 |      |            | 70.3 |      |       |
| SFDR    | Spurious Free Dynamic Range<br>2 <sup>nd</sup> or 3 <sup>rd</sup> Harmonic | 5MHz Input   | ● | 75         | 88   | 82   | 76         | 88   | 82   | 76         | 88   | 82   | dBFS  |
|         |  | 70MHz Input  |   |            | 85   |      |            | 85   |      |            | 85   |      |       |
|         |  | 140MHz Input |   |            | 82   |      |            | 82   |      |            | 82   |      |       |
| S/(N+D) | Signal-to-Noise Plus Distortion<br>Ratio                                   | 5MHz Input   | ● | 69         | 70.6 | 70   | 68.8       | 70.6 | 70   | 69         | 70.4 | 69.9 | dBFS  |
|         |  | 70MHz Input  |   |            | 70.4 |      |            | 70.4 |      |            | 70.3 |      |       |
|         |  | 140MHz Input |   |            | 70   |      |            | 70   |      |            | 69.9 |      |       |
|         | Crosstalk  | 10MHz Input  |   |            | -105 |      |            | -105 |      |            | -105 |      | dBc   |

**INTERNAL REFERENCE CHARACTERISTICS** The ● denotes the specifications which apply over the full operating temperature range, otherwise specifications are at  $T_A = 25^\circ\text{C}$ .  $A_{IN} = -1\text{dBFS}$ . (Note 5)

| PARAMETER                          | CONDITIONS                               | MIN                              | TYP                | MAX                              | UNITS                 |
|------------------------------------|--|----------------------------------|--------------------|----------------------------------|-----------------------|
| $V_{CM}$ Output Voltage            | $I_{OUT} = 0$                            | $0.5 \cdot V_{DD} - 25\text{mV}$ | $0.5 \cdot V_{DD}$ | $0.5 \cdot V_{DD} + 25\text{mV}$ | V                     |
| $V_{CM}$ Output Temperature Drift  |  |                                  | $\pm 25$           |                                  | ppm/ $^\circ\text{C}$ |
| $V_{CM}$ Output Resistance         | $-600\mu\text{A} < I_{OUT} < 1\text{mA}$ |                                  | 4                  |                                  | $\Omega$              |
| $V_{REF}$ Output Voltage           | $I_{OUT} = 0$                            | 1.225                            | 1.25               | 1.275                            | V                     |
| $V_{REF}$ Output Temperature Drift |  |                                  | $\pm 25$           |                                  | ppm/ $^\circ\text{C}$ |
| $V_{REF}$ Output Resistance        | $-400\mu\text{A} < I_{OUT} < 1\text{mA}$ |                                  | 7                  |                                  | $\Omega$              |
| $V_{REF}$ Line Regulation          | $1.7\text{V} < V_{DD} < 1.9\text{V}$     |                                  | 0.6                |                                  | mV/V                  |

**DIGITAL INPUTS AND OUTPUTS** The ● denotes the specifications which apply over the full operating temperature range, otherwise specifications are at  $T_A = 25^\circ\text{C}$ . (Note 5)

| SYMBOL  | PARAMETER                  | CONDITIONS                                 | MIN | TYP | MAX | UNITS      |
|---|----------------------------|--|-----|-----|-----|------------|
| <b>ENCODE INPUTS (ENC<sup>+</sup>, ENC<sup>-</sup>)</b>           |                            |  |     |     |     |            |
| <b>DIFFERENTIAL ENCODE MODE (ENC<sup>-</sup> NOT TIED TO GND)</b> |                            |  |     |     |     |            |
| $V_{ID}$  | Differential Input Voltage | (Note 8)                                   | ●   | 0.2 |     | V          |
| $V_{ICM}$   | Common Mode Input Voltage  | Internally Set                             | ●   | 1.2 | 1.6 | V          |
|   |                            | Externally Set (Note 8)                    |     |     |     | V          |
| $V_{IN}$  | Input Voltage Range        | ENC <sup>+</sup> , ENC <sup>-</sup> to GND | ●   | 0.2 | 3.6 | V          |
| $R_{IN}$  | Input Resistance           | (See Figure 10)                            |     | 10  |     | k $\Omega$ |
| $C_{IN}$  | Input Capacitance          |  |     | 3.5 |     | pF         |
| <b>SINGLE-ENDED ENCODE MODE (ENC<sup>-</sup> TIED TO GND)</b>     |                            |  |     |     |     |            |
| $V_{IH}$  | High Level Input Voltage   | $V_{DD} = 1.8\text{V}$                     | ●   | 1.2 |     | V          |
| $V_{IL}$  | Low Level Input Voltage    | $V_{DD} = 1.8\text{V}$                     | ●   |     | 0.6 | V          |
| $V_{IN}$  | Input Voltage Range        | ENC <sup>+</sup> to GND                    | ●   | 0   | 3.6 | V          |
| $R_{IN}$  | Input Resistance           | (See Figure 11)                            |     | 30  |     | k $\Omega$ |
| $C_{IN}$  | Input Capacitance          |  |     | 3.5 |     | pF         |

22687612fa

## DIGITAL INPUTS AND OUTPUTS

The ● denotes the specifications which apply over the full operating temperature range, otherwise specifications are at  $T_A = 25^\circ\text{C}$ . (Note 5)

| SYMBOL   | PARAMETER                          | CONDITIONS  |        | MIN            | TYP          | MAX            | UNITS         |
|--|------------------------------------|---|--------|----------------|--------------|----------------|---------------|
| <b>DIGITAL INPUTS (CS, SDI, SCK in Serial or Parallel Programming Mode. SDO in Parallel Programming Mode)</b>                  |                                    |   |        |                |              |                |               |
| $V_{IH}$   | High Level Input Voltage           | $V_{DD} = 1.8\text{V}$  | ●      | 1.3            |              |                | V             |
| $V_{IL}$   | Low Level Input Voltage            | $V_{DD} = 1.8\text{V}$  | ●      |                |              | 0.6            | V             |
| $I_{IN}$   | Input Current                      | $V_{IN} = 0\text{V to } 3.6\text{V}$  | ●      | -10            |              | 10             | $\mu\text{A}$ |
| $C_{IN}$   | Input Capacitance                  |   |        |                | 3            |                | pF            |
| <b>SDO OUTPUT (Serial Programming Mode. Open Drain Output. Requires 2k<math>\Omega</math> Pull-Up Resistor if SDO is Used)</b> |                                    |   |        |                |              |                |               |
| $R_{OL}$   | Logic Low Output Resistance to GND | $V_{DD} = 1.8\text{V}$ , SDO = 0V   |        |                | 200          |                | $\Omega$      |
| $I_{OH}$   | Logic High Output Leakage Current  | SDO = 0V to 3.6V  | ●      | -10            |              | 10             | $\mu\text{A}$ |
| $C_{OUT}$  | Output Capacitance                 |   |        |                | 3            |                | pF            |
| <b>DIGITAL DATA OUTPUTS</b>  |                                    |   |        |                |              |                |               |
| $V_{OD}$   | Differential Output Voltage        | 100 $\Omega$ Differential Load, 3.5mA Mode<br>100 $\Omega$ Differential Load, 1.75mA Mode | ●<br>● | 247<br>125     | 350<br>175   | 454<br>250     | mV<br>mV      |
| $V_{OS}$   | Common Mode Output Voltage         | 100 $\Omega$ Differential Load, 3.5mA Mode<br>100 $\Omega$ Differential Load, 1.75mA Mode | ●<br>● | 1.125<br>1.125 | 1.25<br>1.25 | 1.375<br>1.375 | V<br>V        |
| $R_{TERM}$   | On-Chip Termination Resistance     | Termination Enabled, $OV_{DD} = 1.8\text{V}$  |        |                | 100          |                | $\Omega$      |

## POWER REQUIREMENTS

The ● denotes the specifications which apply over the full operating temperature range, otherwise specifications are at  $T_A = 25^\circ\text{C}$ . (Note 9)

| SYMBOL        | PARAMETER   | CONDITIONS  |        | LTC2268-12 |            |            | LTC2267-12 |            |            | LTC2266-12 |            |            | UNITS    |
|---------------|---|---|--------|------------|------------|------------|------------|------------|------------|------------|------------|------------|----------|
|               |   |   |        | MIN        | TYP        | MAX        | MIN        | TYP        | MAX        | MIN        | TYP        | MAX        |          |
| $V_{DD}$      | Analog Supply Voltage   | (Note 10)   | ●      | 1.7        | 1.8        | 1.9        | 1.7        | 1.8        | 1.9        | 1.7        | 1.8        | 1.9        | V        |
| $OV_{DD}$     | Output Supply Voltage   | (Note 10)   | ●      | 1.7        | 1.8        | 1.9        | 1.7        | 1.8        | 1.9        | 1.7        | 1.8        | 1.9        | V        |
| $I_{VDD}$     | Analog Supply Current   | Sine Wave Input                                     | ●      |            | 146        | 165        |            | 116        | 129        |            | 96         | 109        | mA       |
| $I_{OVDD}$    | Digital Supply Current  | 2-Lane Mode, 1.75mA Mode<br>2-Lane Mode, 3.5mA Mode | ●<br>● |            | 16<br>30   | 20<br>34   |            | 16<br>29   | 19<br>33   |            | 15<br>29   | 18<br>32   | mA<br>mA |
| $P_{DISS}$    | Power Dissipation   | 2-Lane Mode, 1.75mA Mode<br>2-Lane Mode, 3.5mA Mode | ●<br>● |            | 292<br>317 | 333<br>358 |            | 238<br>261 | 266<br>292 |            | 200<br>225 | 229<br>254 | mW<br>mW |
| $P_{SLEEP}$   | Sleep Mode Power  |   |        |            | 1          |            |            | 1          |            |            | 1          |            | mW       |
| $P_{NAP}$     | Nap Mode Power  |   |        |            | 70         |            |            | 70         |            |            | 70         |            | mW       |
| $P_{DIFFCLK}$ | Power Increase with Differential Encode Mode Enabled (No Increase for Sleep Mode) |   |        |            | 20         |            |            | 20         |            |            | 20         |            | mW       |

## TIMING CHARACTERISTICS

The ● denotes the specifications which apply over the full operating temperature range, otherwise specifications are at  $T_A = 25^\circ\text{C}$ . (Note 5)

| SYMBOL     | PARAMETER                              | CONDITIONS  |        | LTC2268-12 |        |            | LTC2267-12 |              |            | LTC2266-12 |              |            | UNITS    |
|------------|--|---|--------|------------|--------|------------|------------|--------------|------------|------------|--------------|------------|----------|
|            |  |   |        | MIN        | TYP    | MAX        | MIN        | TYP          | MAX        | MIN        | TYP          | MAX        |          |
| $f_S$      | Sampling Frequency                     | (Notes 10, 11)  | ●      | 5          |        | 125        | 5          |              | 105        | 5          |              | 80         | MHz      |
| $t_{ENCL}$ | ENC Low Time (Note 8)                  | Duty Cycle Stabilizer Off<br>Duty Cycle Stabilizer On | ●<br>● | 3.8<br>2   | 4<br>4 | 100<br>100 | 4.52<br>2  | 4.76<br>4.76 | 100<br>100 | 5.93<br>2  | 6.25<br>6.25 | 100<br>100 | ns<br>ns |
| $t_{ENCH}$ | Analog Supply Current                  | Duty Cycle Stabilizer Off<br>Duty Cycle Stabilizer On | ●<br>● | 3.8<br>2   | 4<br>4 | 100<br>100 | 4.52<br>2  | 4.76<br>4.76 | 100<br>100 | 5.93<br>2  | 6.25<br>6.25 | 100<br>100 | ns<br>ns |
| $t_{AP}$   | Sample-and-Hold Acquisition Delay Time |   |        |            | 0      |            |            | 0            |            |            | 0            |            | ns       |

# LTC2268-12/ LTC2267-12/LTC2266-12

## ELECTRICAL CHARACTERISTICS

The ● denotes the specifications which apply over the full operating temperature range, otherwise specifications are at  $T_A = 25^\circ\text{C}$ .

| SYMBOL   | PARAMETER                | CONDITIONS  |        | MIN                         | TYP   | MAX                         | UNITS    |
|--|--------------------------|---|--------|-----------------------------|---|-----------------------------|----------|
| DIGITAL DATA OUTPUTS (R <sub>TERM</sub> = 100Ω Differential, C <sub>L</sub> = 2pF to GND on Each Output) |                          |   |        |                             |   |                             |          |
| t <sub>SER</sub>   | Serial Data Bit Period   | 2-Lanes, 16-Bit Serialization<br>2-Lanes, 14-Bit Serialization<br>2-Lanes, 12-Bit Serialization<br>1-Lane, 16-Bit Serialization<br>1-Lane, 14-Bit Serialization<br>1-Lane, 12-Bit Serialization |        |                             | 1/(8 • f <sub>S</sub> )<br>1/(7 • f <sub>S</sub> )<br>1/(6 • f <sub>S</sub> )<br>1/(16 • f <sub>S</sub> )<br>1/(14 • f <sub>S</sub> )<br>1/(12 • f <sub>S</sub> ) |                             | s        |
| t <sub>FRAME</sub>   | FR to DCO Delay          | (Note 8)  | ●      | 0.35 • t <sub>SER</sub>     | 0.5 • t <sub>SER</sub>  | 0.65 • t <sub>SER</sub>     | s        |
| t <sub>DATA</sub>  | DATA to DCO Delay        | (Note 8)  | ●      | 0.35 • t <sub>SER</sub>     | 0.5 • t <sub>SER</sub>  | 0.65 • t <sub>SER</sub>     | s        |
| t <sub>PD</sub>  | Propagation Delay        | (Note 8)  | ●      | 0.7n + 2 • t <sub>SER</sub> | 1.1n + 2 • t <sub>SER</sub>   | 1.5n + 2 • t <sub>SER</sub> | s        |
| t <sub>R</sub>   | Output Rise Time         | Data, DCO, FR, 20% to 80%   |        |                             | 0.17  |                             | ns       |
| t <sub>F</sub>   | Output Fall Time         | Data, DCO, FR, 20% to 80%   |        |                             | 0.17  |                             | ns       |
|  | DCO Cycle-Cycle Jitter   | t <sub>SER</sub> = 1ns  |        |                             | 60  |                             | pSp-P    |
|  | Pipeline Latency         |   |        |                             | 6   |                             | Cycles   |
| SPI PORT TIMING (Note 8)   |                          |   |        |                             |   |                             |          |
| t <sub>SCK</sub>   | SCK Period               | Write Mode<br>Readback Mode, C <sub>SDO</sub> = 20pF, R <sub>PULLUP</sub> = 2k  | ●<br>● | 40<br>250                   |   |                             | ns<br>ns |
| t <sub>S</sub>   | CS to SCK Setup Time     |   | ●      | 5                           |   |                             | ns       |
| t <sub>H</sub>   | SCK to CS Setup Time     |   | ●      | 5                           |   |                             | ns       |
| t <sub>DS</sub>  | SDI Setup Time           |   | ●      | 5                           |   |                             | ns       |
| t <sub>DH</sub>  | SDI Hold Time            |   | ●      | 5                           |   |                             | ns       |
| t <sub>DO</sub>  | SCK falling to SDO Valid | Readback Mode, C <sub>SDO</sub> = 20pF, R <sub>PULLUP</sub> = 2k  | ●      |                             |   | 125                         | ns       |

**Note 1:** Stresses beyond those listed under Absolute Maximum Ratings may cause permanent damage to the device. Exposure to any Absolute Maximum Rating condition for extended periods may affect device reliability and lifetime.

**Note 2:** All voltage values are with respect to GND with GND and OGND shorted (unless otherwise noted).

**Note 3:** When these pin voltages are taken below GND or above  $V_{\text{DD}}$ , they will be clamped by internal diodes. This product can handle input currents of greater than 100mA below GND or above  $V_{\text{DD}}$  without latchup.

**Note 4:** When these pin voltages are taken below GND they will be clamped by internal diodes. When these pin voltages are taken above  $V_{\text{DD}}$  they will not be clamped by internal diodes. This product can handle input currents of greater than 100mA below GND without latchup.

**Note 5:**  $V_{\text{DD}} = \text{OV}_{\text{DD}} = 1.8\text{V}$ ,  $f_{\text{SAMPLE}} = 125\text{MHz}$  (LTC2268), 105MHz (LTC2267), or 80MHz (LTC2266), 2-lane output mode, differential  $\text{ENC}^+$ /  $\text{ENC}^- = 2V_{\text{P-P}}$  sine wave, input range =  $2V_{\text{P-P}}$  with differential drive, unless otherwise noted.

**Note 6:** Integral nonlinearity is defined as the deviation of a code from a best fit straight line to the transfer curve. The deviation is measured from the center of the quantization band.

**Note 7:** Offset error is the offset voltage measured from  $-0.5$  LSB when the output code flickers between 0000 0000 0000 and 1111 1111 1111 in 2's complement output mode.

**Note 8:** Guaranteed by design, not subject to test.


**Note 9:**  $V_{\text{DD}} = \text{OV}_{\text{DD}} = 1.8\text{V}$ ,  $f_{\text{SAMPLE}} = 125\text{MHz}$  (LTC2268), 105MHz (LTC2267), or 80MHz (LTC2266), 2-lane output mode,  $\text{ENC}^+ = \text{single-ended } 1.8\text{V}$  square wave,  $\text{ENC}^- = 0\text{V}$ , input range =  $2V_{\text{P-P}}$  with differential drive, unless otherwise noted. The supply current and power dissipation specifications are totals for the entire chip, not per channel.

**Note 10:** Recommended operating conditions.

**Note 11:** The maximum sampling frequency depends on the speed grade of the part and also which serialization mode is used. The maximum serial data rate is 1000Mbps so  $t_{\text{SER}}$  must be greater than or equal to 1ns.


## TIMING DIAGRAMS

### 2-Lane Output Mode, 16-Bit Serialization

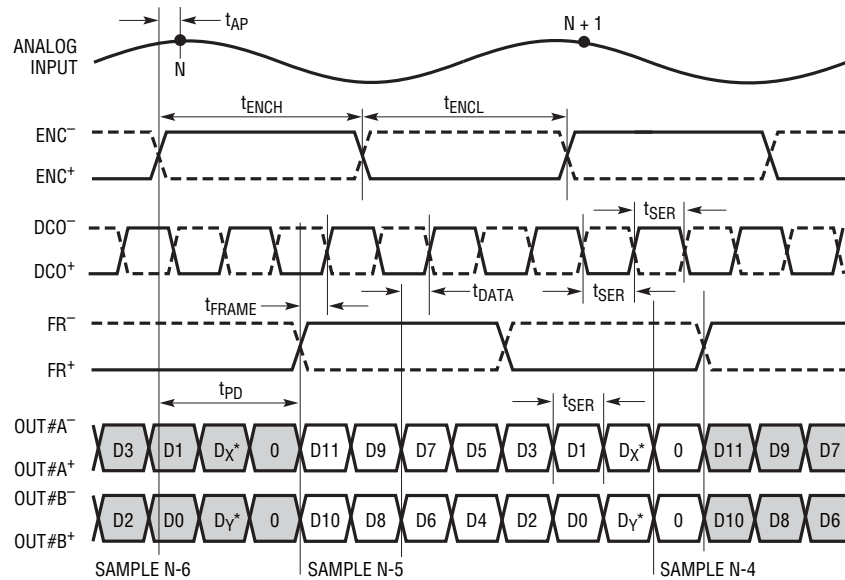

\* $D_X$  AND  $D_Y$  ARE EXTRA NON-DATA BITS FOR COMPLETE SOFTWARE COMPATIBILITY WITH THE 14-BIT VERSIONS OF THESE A/Ds. DURING NORMAL NON-OVERRANGED OPERATION  $D_X$  AND  $D_Y$  ARE SET TO LOGIC 0. SEE THE DATA FORMAT SECTION FOR MORE DETAILS.

### 2-Lane Output Mode, 14-Bit Serialization

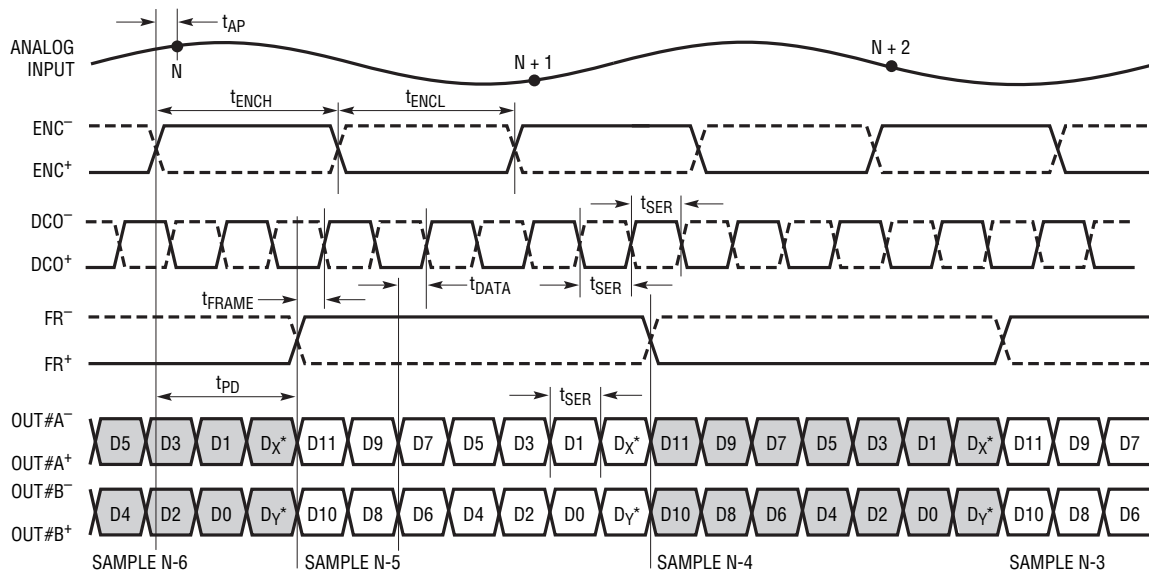


NOTE THAT IN THIS MODE,  $FR^+/FR^-$  HAS TWO TIMES THE PERIOD OF  $ENC^+/ENC^-$


\* $D_X$  AND  $D_Y$  ARE EXTRA NON-DATA BITS FOR COMPLETE SOFTWARE COMPATIBILITY WITH THE 14-BIT VERSIONS OF THESE A/Ds. DURING NORMAL NON-OVERRANGED OPERATION  $D_X$  AND  $D_Y$  ARE SET TO LOGIC 0. SEE THE DATA FORMAT SECTION FOR MORE DETAILS.

## TIMING DIAGRAMS

### 2-Lane Output Mode, 12-Bit Serialization

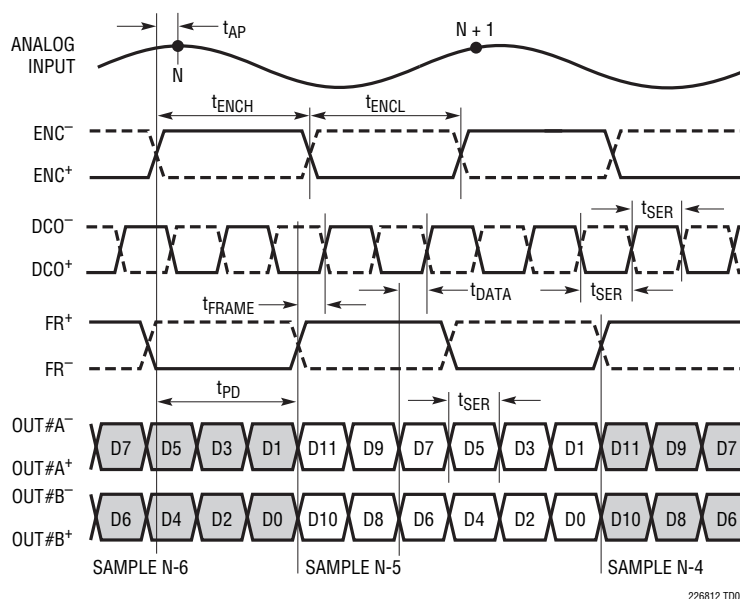

### 1-Lane Output Mode, 16-Bit Serialization

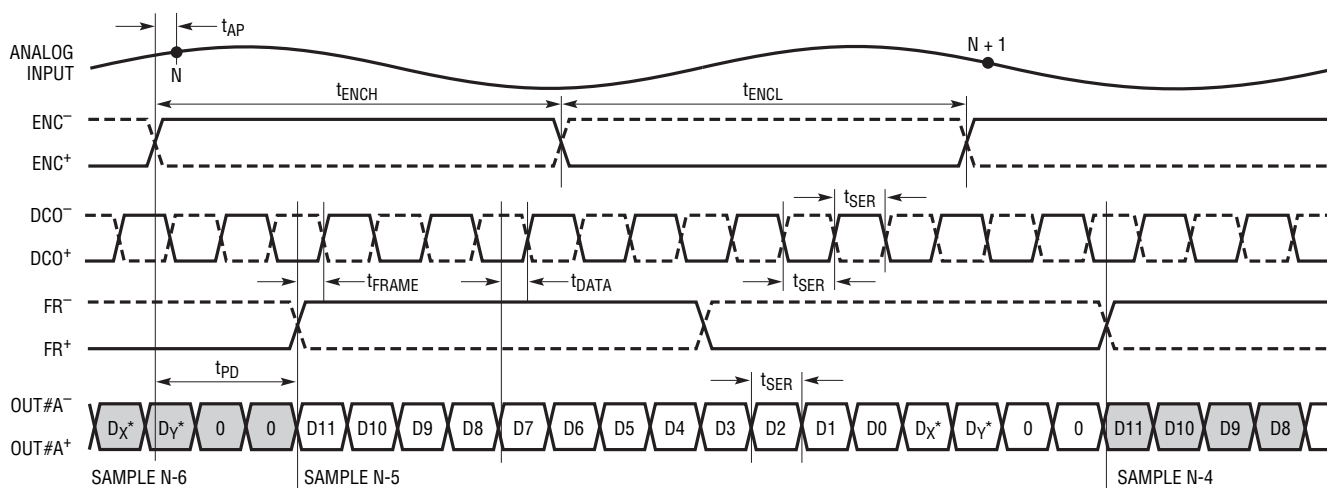


\*D<sub>x</sub> AND D<sub>y</sub> ARE EXTRA NON-DATA BITS FOR COMPLETE SOFTWARE COMPATIBILITY WITH THE 14-BIT VERSIONS OF THESE A/Ds. DURING NORMAL NON-OVERRANGED OPERATION D<sub>x</sub> AND D<sub>y</sub> ARE SET TO LOGIC 0. SEE THE DATA FORMAT SECTION FOR MORE DETAILS.



## TIMING DIAGRAMS


### 1-Lane Output Mode, 14-Bit Serialization

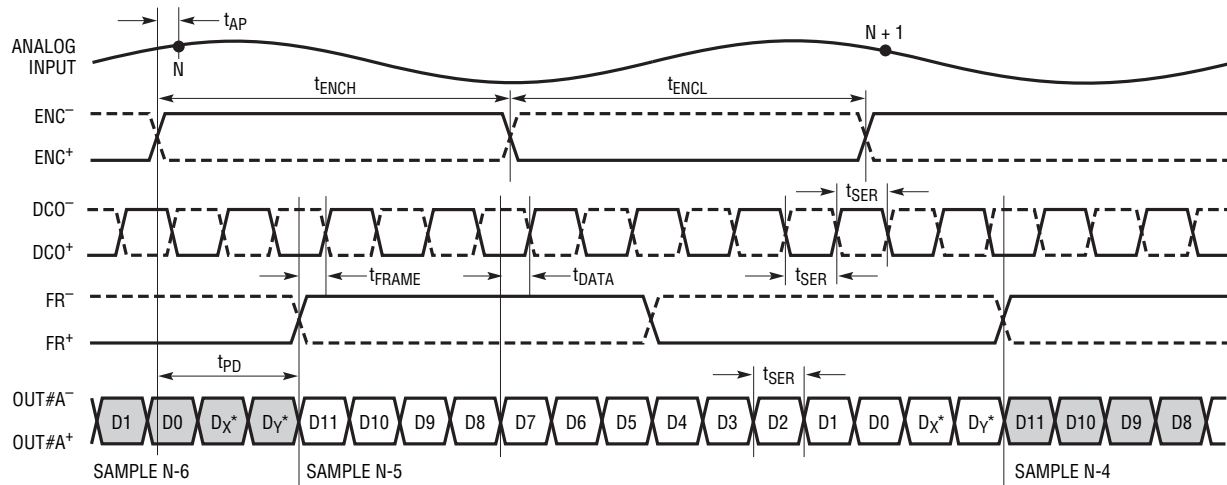

OUT#B<sup>+</sup>, OUT#B<sup>-</sup> ARE DISABLED

\*D<sub>X</sub> AND D<sub>Y</sub> ARE EXTRA NON-DATA BITS FOR COMPLETE SOFTWARE COMPATIBILITY WITH THE 14-BIT VERSIONS OF THESE A/Ds. DURING NORMAL NON-OVERRANGED OPERATION D<sub>X</sub> AND D<sub>Y</sub> ARE SET TO LOGIC 0. SEE THE DATA FORMAT SECTION FOR MORE DETAILS.


### 1-Lane Output Mode, 12-Bit Serialization

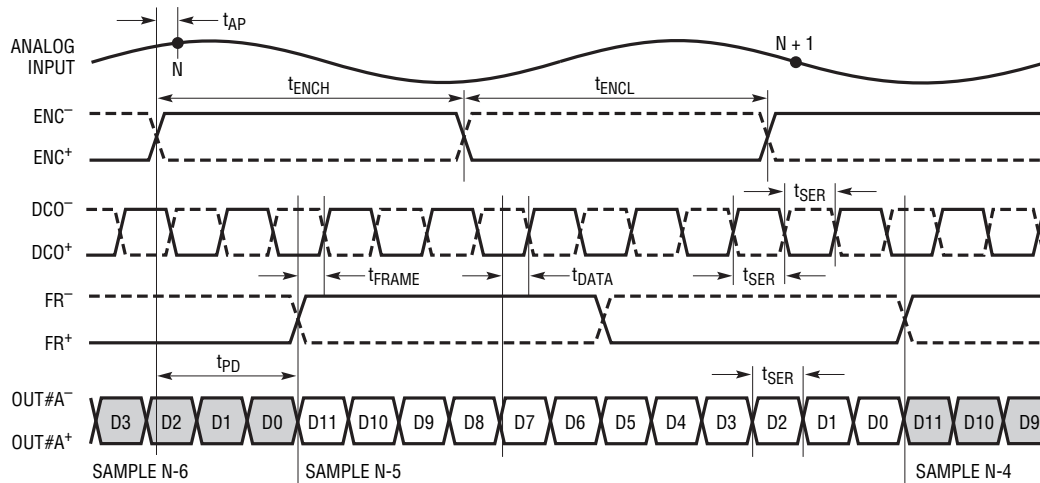


OUT#B<sup>+</sup>, OUT#B<sup>-</sup> ARE DISABLED

## TIMING DIAGRAMS

SPI Port Timing (Readback Mode)

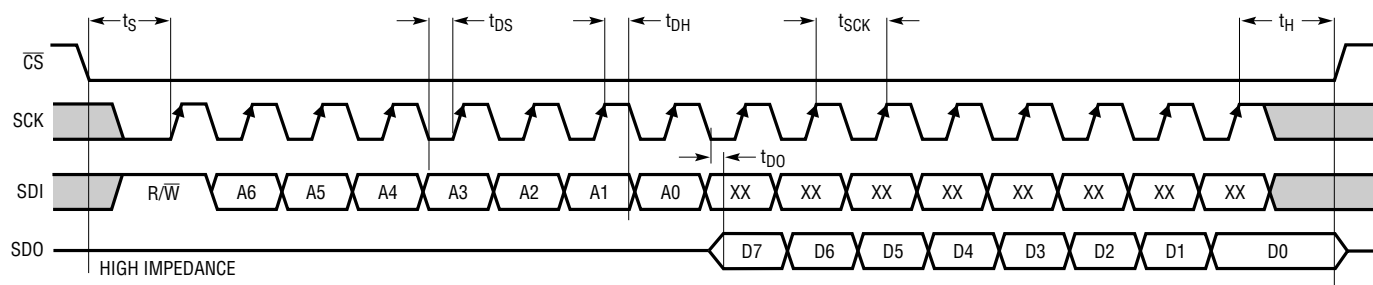


SPI Port Timing (Write Mode)

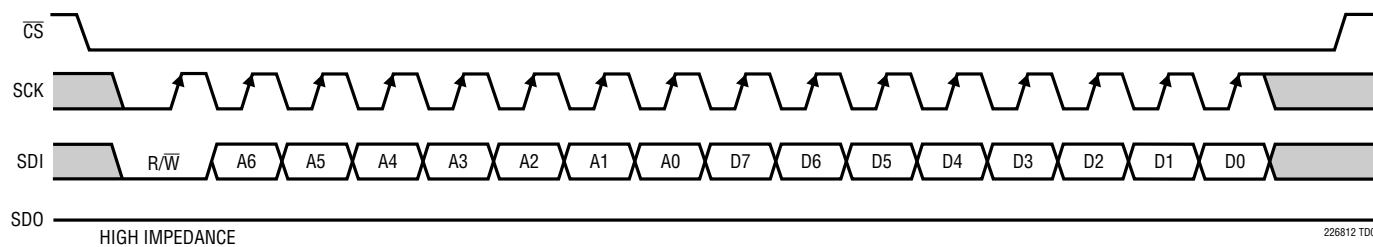

226812 TD07


## TYPICAL PERFORMANCE CHARACTERISTICS

**LTC2268-12: Integral Nonlinearity (INL)**

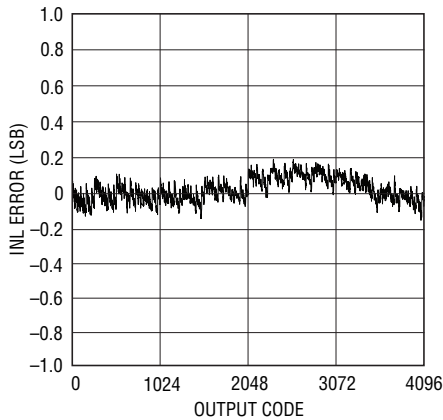


226812 G01

**LTC2268-12: Differential Nonlinearity (DNL)**

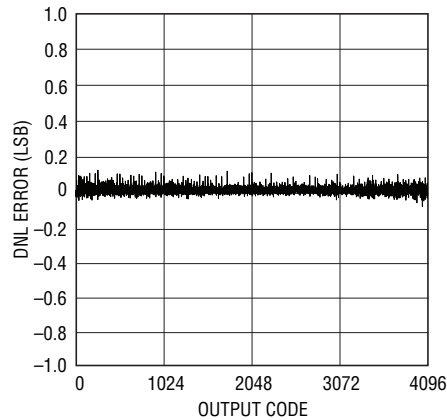


226812 G02

**LTC2268-12: 8k Point FFT,  $f_{IN} = 5\text{MHz}$ ,  $-1\text{dBFS}$ ,  $125\text{Mps}$**

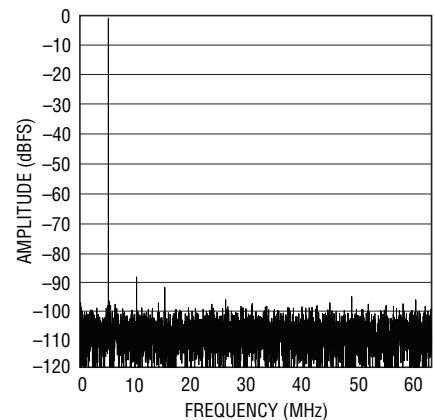


226812 G03

**LTC2268-12: 8k Point FFT,  $f_{IN} = 30\text{MHz}$ ,  $-1\text{dBFS}$ ,  $125\text{Mps}$**

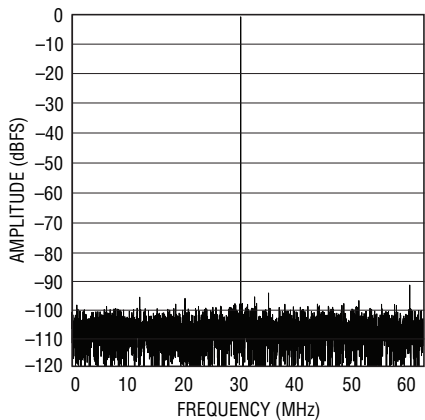


226812 G04

**LTC2268-12: 8k Point FFT,  $f_{IN} = 70\text{MHz}$ ,  $-1\text{dBFS}$ ,  $125\text{Mps}$**

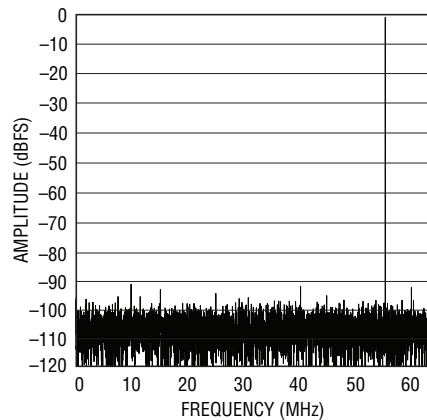


226812 G05

**LTC2268-12: 8k Point FFT,  $f_{IN} = 140\text{MHz}$ ,  $-1\text{dBFS}$ ,  $125\text{Mps}$**

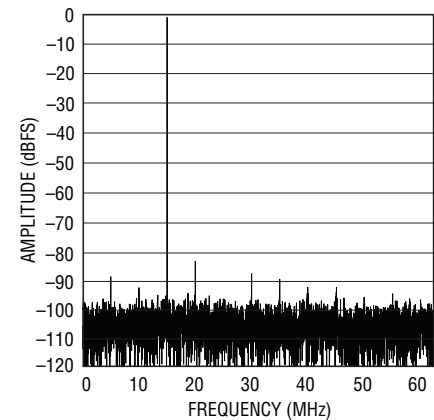


226812 G06

**LTC2268-12: 8k Point 2-Tone FFT,  $f_{IN} = 70\text{MHz}$ ,  $75\text{MHz}$ ,  $-1\text{dBFS}$ ,  $125\text{Mps}$**

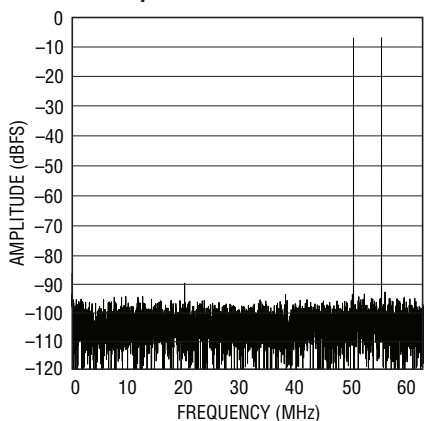


226812 G07

**LTC2268-12: Shorted Input Histogram**

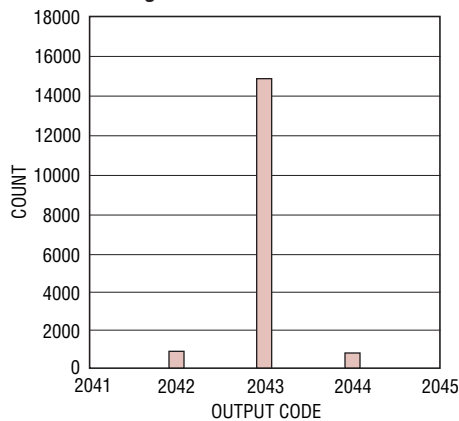

226812 G08

**LTC2268-12: SNR vs Input Frequency,  $-1\text{dBFS}$ ,  $2\text{V}$  Range,  $125\text{Mps}$**

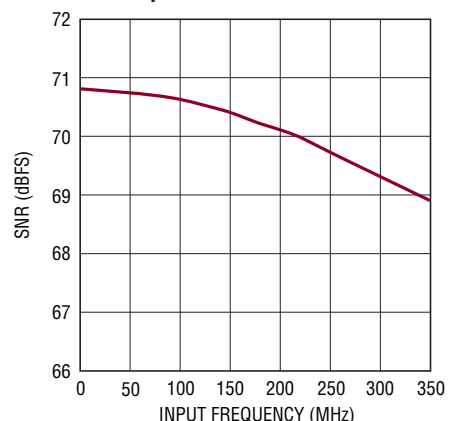


226812 G09

22687612fa


## TYPICAL PERFORMANCE CHARACTERISTICS

**LTC2268-12: SFDR vs Input Frequency, -1dBFS, 2V Range, 125Mps**

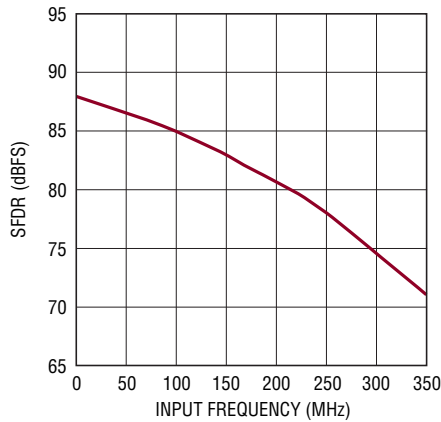


226812 G10

**LTC2268-12: SFDR vs Input Level,  $f_{IN} = 70\text{MHz}$ , 2V Range, 125Mps**

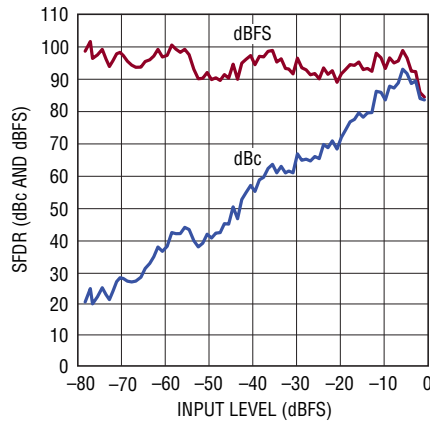


226812 G12

**LTC2268-12: SNR vs Input Level,  $f_{IN} = 70\text{MHz}$ , 2V Range, 125Mps**

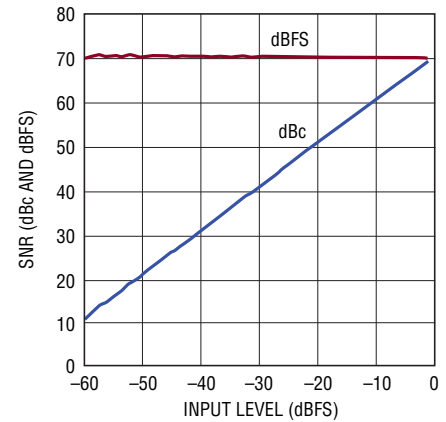


226812 G50

**LTC2268-12:  $I_{VDD}$  vs Sample Rate, 5MHz Sine Wave Input, -1dBFS**

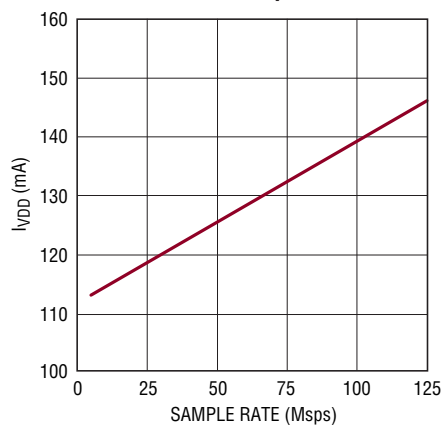


226812 G53

**$I_{VDD}$  vs Sample Rate, 5MHz Sine Wave Input, -1dBFS, 5pF on Each Data Output**

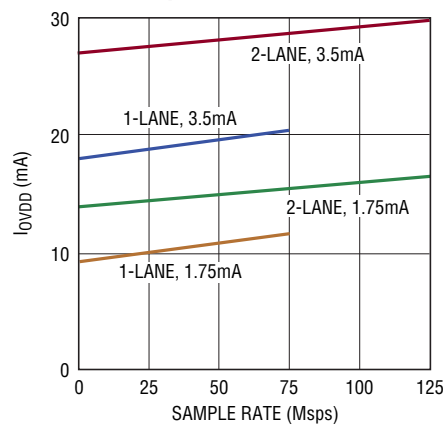


226812 G51

**LTC2268-12: SNR vs SENSE,  $f_{IN} = 5\text{MHz}$ , -1dBFS**

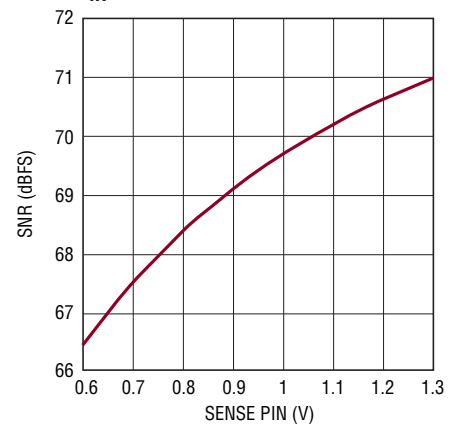


226812 G15

**LTC2267-12: Integral Nonlinearity (INL)**

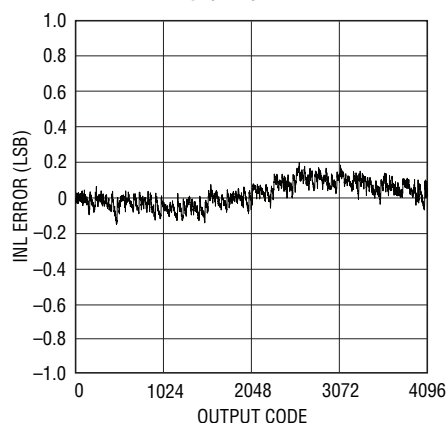


226812 G21

**LTC2267-12: Differential Nonlinearity (DNL)**

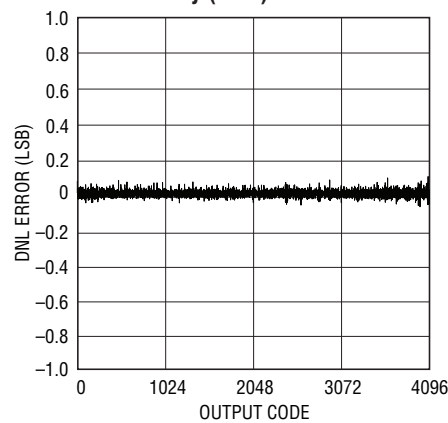

226812 G22

**LTC2267-12: 8k Point FFT,  $f_{IN} = 5\text{MHz}$ , -1dBFS, 105Mps**

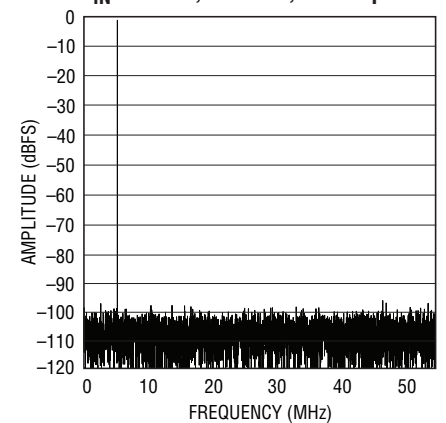


226812 G23

22687612fa


## TYPICAL PERFORMANCE CHARACTERISTICS

LTC2267-12: 8k Point FFT,  
 $f_{IN} = 30\text{MHz}$ ,  $-1\text{dBFS}$ ,  $105\text{Mpsps}$

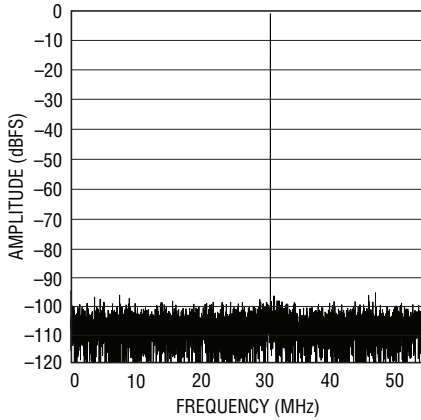


226812 G24

LTC2267-12: 8k Point FFT,  
 $f_{IN} = 70\text{MHz}$ ,  $-1\text{dBFS}$ ,  $105\text{Mpsps}$

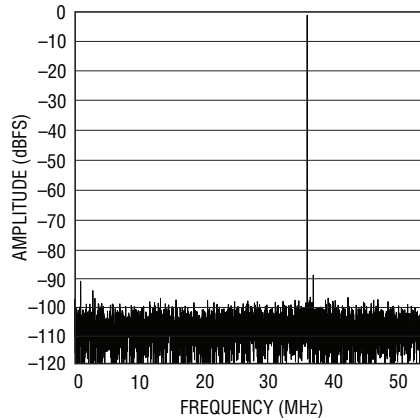


226812 G25

LTC2267-12: 8k Point FFT,  
 $f_{IN} = 140\text{MHz}$ ,  $-1\text{dBFS}$ ,  $105\text{Mpsps}$

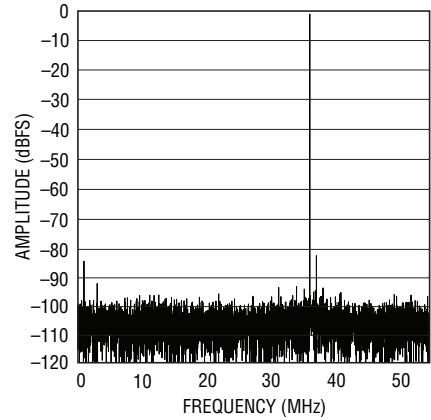


226812 G26

LTC2267-12: 8k Point 2-Tone FFT,  
 $f_{IN} = 70\text{MHz}$ ,  $75\text{MHz}$ ,  $-1\text{dBFS}$ ,  
 $105\text{Mpsps}$

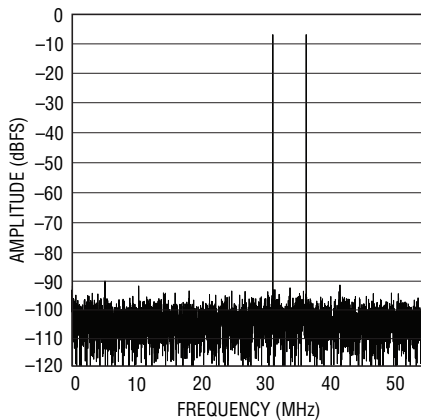


226812 G27

LTC2267-12: Shorted Input  
Histogram

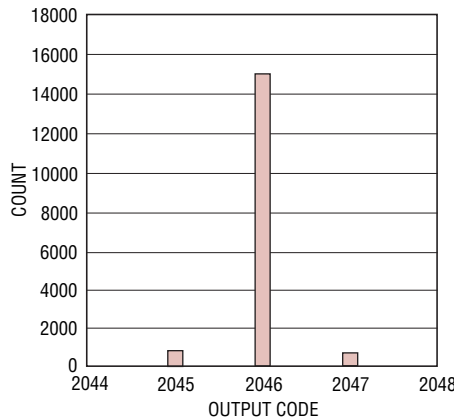


226812 G28

LTC2267-12: SNR vs Input  
Frequency,  $-1\text{dBFS}$ ,  $2\text{V}$  Range,  
 $105\text{Mpsps}$

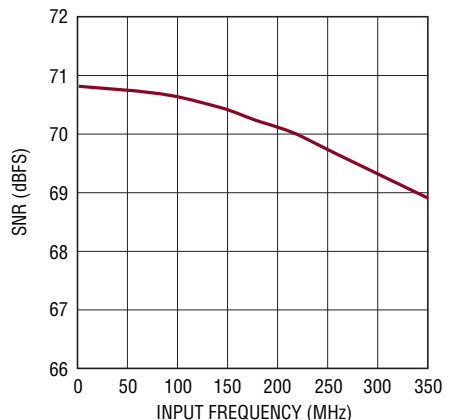


226812 G49

LTC2267-12: SFDR vs Input  
Frequency,  $-1\text{dBFS}$ ,  $2\text{V}$  Range,  
 $105\text{Mpsps}$

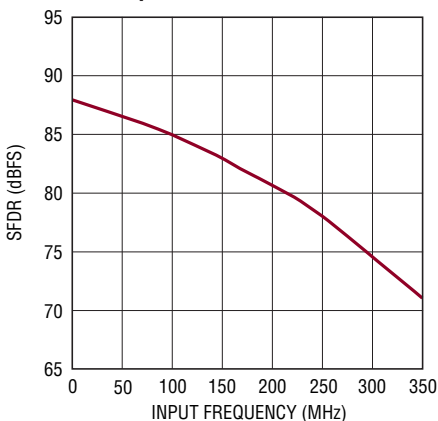


226812 G30

LTC2267-12: SFDR vs Input Level,  
 $f_{IN} = 70\text{MHz}$ ,  $2\text{V}$  Range,  $105\text{Mpsps}$

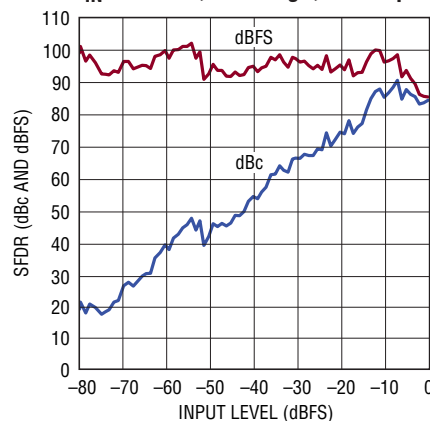

226812 G32

LTC2267-12:  $I_{VDD}$  vs Sample Rate,  
 $5\text{MHz}$  Sine Wave Input,  $-1\text{dB}$

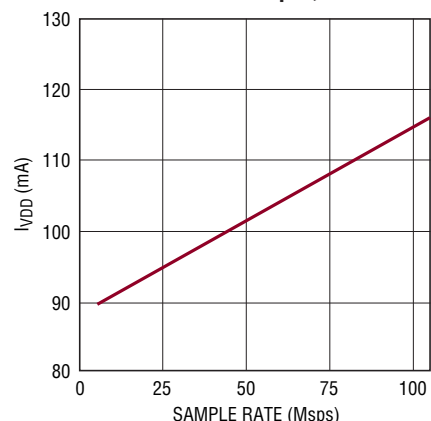


226812 G54

22687612fa


## TYPICAL PERFORMANCE CHARACTERISTICS

**LTC2267-12: SNR vs SENSE,**  
 $f_{IN} = 5\text{MHz}$ ,  $-1\text{dBFS}$

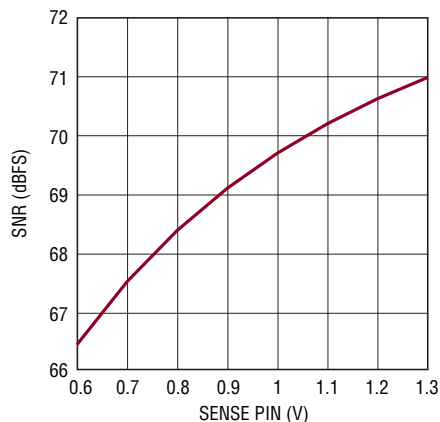


226812 G35

**LTC2266-12: Integral Nonlinearity (INL)**

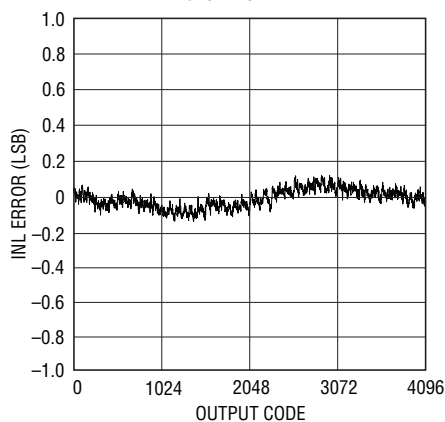


226812 G41

**LTC2266-12: Differential Nonlinearity (DNL)**

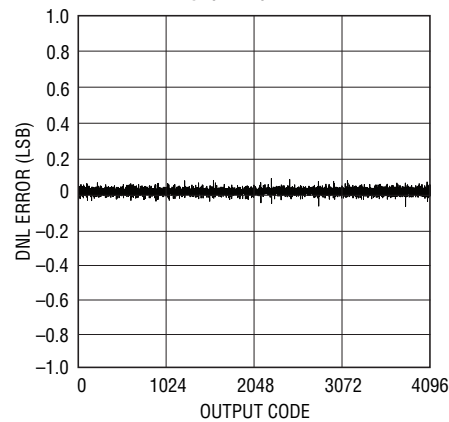


226812 G42

**LTC2266-12: 8k Point FFT,**  
 $f_{IN} = 5\text{MHz}$ ,  $-1\text{dBFS}$ ,  $80\text{Mps}$

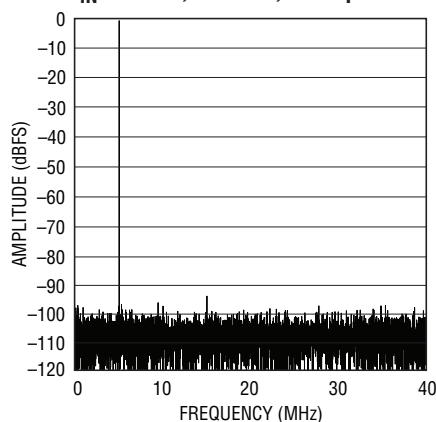


226812 G43

**LTC2266-12: 8k Point FFT,**  
 $f_{IN} = 30\text{MHz}$ ,  $-1\text{dBFS}$ ,  $80\text{Mps}$

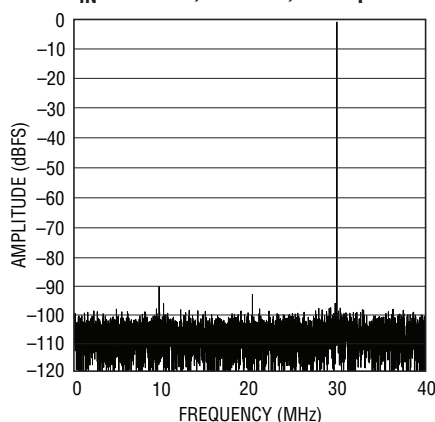


226812 G44

**LTC2266-12: 8k Point FFT,**  
 $f_{IN} = 70\text{MHz}$ ,  $-1\text{dBFS}$ ,  $80\text{Mps}$

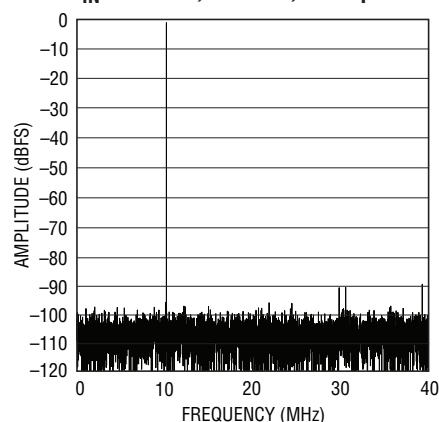


226812 G45

**LTC2266-12: 8k Point FFT,**  
 $f_{IN} = 140\text{MHz}$ ,  $-1\text{dBFS}$ ,  $80\text{Mps}$

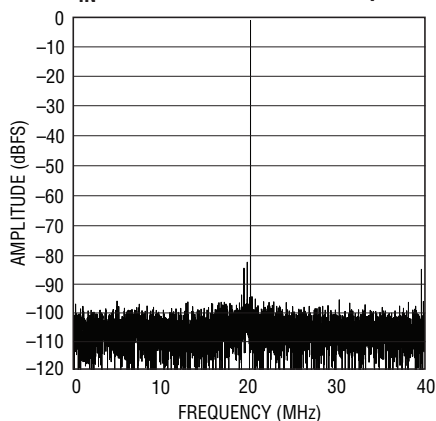


226812 G46

**LTC2266-12: 8k Point 2-Tone FFT,**  
 $f_{IN} = 70\text{MHz}$ ,  $75\text{MHz}$ ,  $-1\text{dBFS}$ ,  $80\text{Mps}$

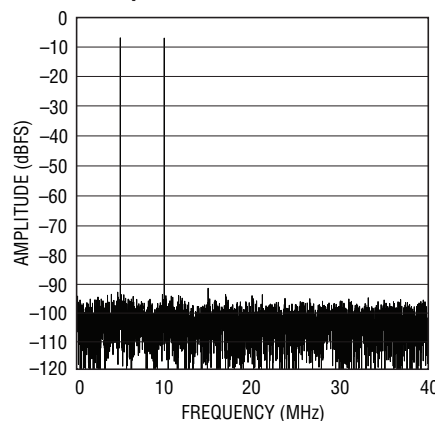

226812 G47

**LTC2266-12: Shorted Input Histogram**

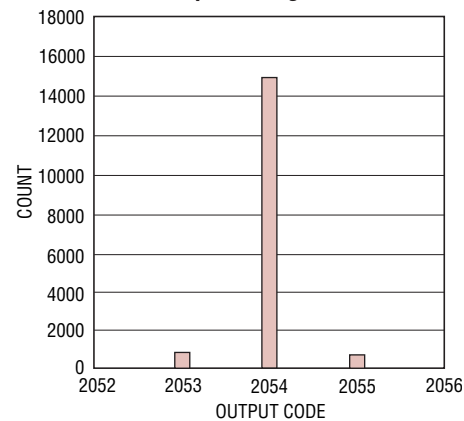


226812 G48


22687612fa

## TYPICAL PERFORMANCE CHARACTERISTICS


**LTC2266-12: SNR vs Input Frequency, -1dBFS, 2V Range, 80Mps**

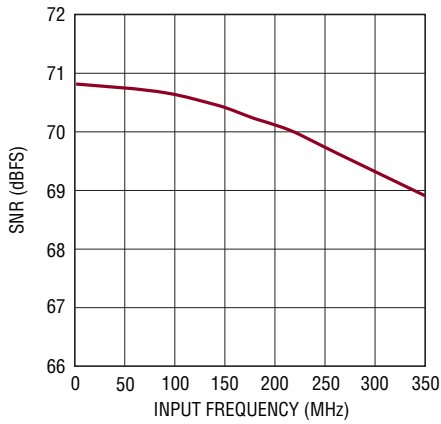


**LTC2266-12: SFDR vs Input Frequency, -1dBFS, 2V Range, 80Mps**

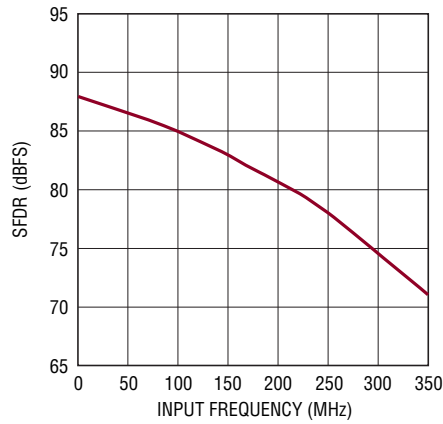


**LTC2266-12: SFDR vs Input Level,  $f_{IN} = 70\text{MHz}$ , 2V Range, 80Mps**

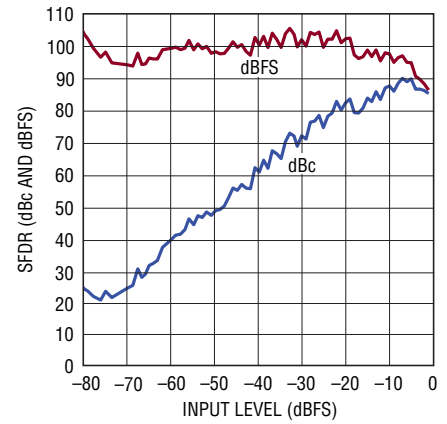


**LTC2266-12:  $I_{VDD}$  vs Sample Rate, 5MHz Sine Wave Input, -1dBFS**

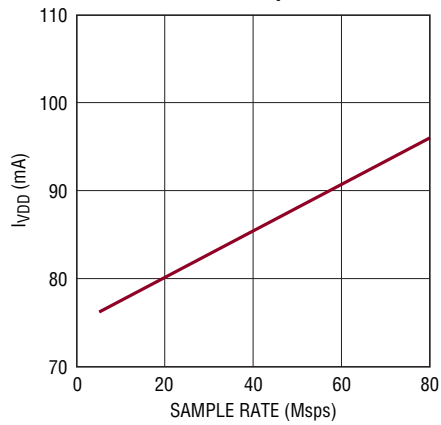

**LTC2266-12: SNR vs SENSE,  $f_{IN} = 5\text{MHz}$ , -1dBFS**

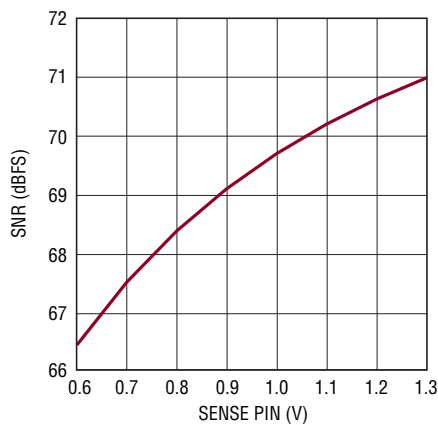

**DCO Cycle-Cycle Jitter vs Serial Data Rate**

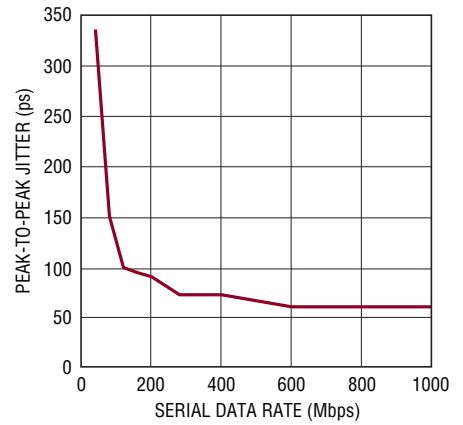

## PIN FUNCTIONS

**A<sub>IN1</sub><sup>+</sup> (Pin 1):** Channel 1 Positive Differential Analog Input.

**A<sub>IN1</sub><sup>-</sup> (Pin 2):** Channel 1 Negative Differential Analog Input.

**V<sub>CM1</sub> (Pin 3):** Common Mode Bias Output, Nominally Equal to V<sub>DD</sub>/2. V<sub>CM</sub> should be used to bias the common mode of the analog inputs of channel 1. Bypass to ground with a 0.1μF ceramic capacitor.

**REFH (Pins 4,5):** ADC High Reference. Bypass to pins 6, 7 with a 2.2μF ceramic capacitor and to ground with a 0.1μF ceramic capacitor.

**REFL (Pins 6,7):** ADC Low Reference. Bypass to pins 4, 5 with a 2.2μF ceramic capacitor and to ground with a 0.1μF ceramic capacitor.

**V<sub>CM2</sub> (Pin 8):** Common Mode Bias Output, Nominally Equal to V<sub>DD</sub>/2. V<sub>CM</sub> should be used to bias the common mode of the analog inputs of channel 2. Bypass to ground with a 0.1μF ceramic capacitor.

**A<sub>IN2</sub><sup>+</sup> (Pin 9):** Channel 2 Positive Differential Analog Input.

**A<sub>IN2</sub><sup>-</sup> (Pin 10):** Channel 2 Negative Differential Analog Input.

**V<sub>DD</sub> (Pins 11, 12, 39, 40):** Analog Power Supply, 1.7V to 1.9V. Bypass to ground with 0.1μF ceramic capacitors. Adjacent pins can share a bypass capacitor.

**ENC<sup>+</sup> (Pin 13):** Encode Input. Conversion starts on the rising edge.

**ENC<sup>-</sup> (Pin 14):** Encode Complement Input. Conversion starts on the falling edge.

**$\overline{\text{CS}}$  (Pin 15):** In serial programming mode, (PAR/ $\overline{\text{SER}}$ =0V),  $\overline{\text{CS}}$  is the serial interface chip select input. When  $\overline{\text{CS}}$  is low, SCK is enabled for shifting data on SDI into the mode control registers. In the parallel programming mode (PAR/ $\overline{\text{SER}}$  = V<sub>DD</sub>),  $\overline{\text{CS}}$  selects 2-lane or 1-lane output mode.  $\overline{\text{CS}}$  can be driven with 1.8V to 3.3V logic.

**SCK (Pin 16):** In serial programming mode, (PAR/ $\overline{\text{SER}}$  = 0V), SCK is the serial interface clock input. In the parallel programming mode (PAR/ $\overline{\text{SER}}$ =V<sub>DD</sub>), SCK selects 3.5mA or 1.75mA LVDS output currents. SCK can be driven with 1.8V to 3.3V logic.

**SDI (Pin 17):** In serial programming mode, (PAR/ $\overline{\text{SER}}$  = 0V), SDI is the serial interface data input. Data on SDI is clocked into the mode control registers on the rising edge of SCK. In the parallel programming mode (PAR/ $\overline{\text{SER}}$  = V<sub>DD</sub>), SDI can be used to power down the part. SDI can be driven with 1.8V to 3.3V logic.

**GND (Pins 18, 33, 37, Exposed Pad Pin 41):** ADC Power Ground. The exposed pad must be soldered to the PCB ground.

**OGND (Pin 25):** Output Driver Ground. Must be shorted to the ground plane by a very low inductance path. Use multiple vias close to the pin.

**OV<sub>DD</sub> (Pin 26):** Output Driver Supply, 1.7V to 1.9V. Bypass to ground with a 0.1μF ceramic capacitor.

**SDO (Pin 34):** In serial programming mode, (PAR/ $\overline{\text{SER}}$  = 0V), SDO is the optional serial interface data output. Data on SDO is read back from the mode control registers and can be latched on the falling edge of SCK. SDO is an open-drain NMOS output that requires an external 2k pull-up resistor to 1.8V – 3.3V. If read back from the mode control registers is not needed, the pull-up resistor is not necessary and SDO can be left unconnected. In the parallel programming mode (PAR/ $\overline{\text{SER}}$ =V<sub>DD</sub>), SDO is an input that enables internal 100Ω termination resistors on the digital outputs. When used as an input, SDO can be driven with 1.8V to 3.3V logic through a 1k series resistor.

**PAR/ $\overline{\text{SER}}$  (Pin 35):** Programming Mode Selection Pin. Connect to ground to enable the serial programming mode.  $\overline{\text{CS}}$ , SCK, SDI, SDO become a serial interface that control the A/D operating modes. Connect to V<sub>DD</sub> to enable the parallel programming mode where  $\overline{\text{CS}}$ , SCK, SDI, SDO become parallel logic inputs that control a reduced set of



## PIN FUNCTIONS

the A/D operating modes.  $\overline{\text{PAR}}/\overline{\text{SER}}$  should be connected directly to ground or the  $V_{DD}$  of the part and not be driven by a logic signal.

**$V_{REF}$  (Pin 36):** Reference Voltage Output. Bypass to ground with a 1 $\mu$ F ceramic capacitor, nominally 1.25V.

**SENSE (Pin 38):** Reference Programming Pin. Connecting SENSE to  $V_{DD}$  selects the internal reference and a  $\pm 1$ V input range. Connecting SENSE to ground selects the internal reference and a  $\pm 0.5$ V input range. An external reference between 0.625V and 1.3V applied to SENSE selects an input range of  $\pm 0.8 \cdot V_{SENSE}$ .

### LVDS Outputs

**All pins below are differential LVDS outputs. The output current level is programmable. There is an optional internal 100 $\Omega$  termination resistor between the pins of each LVDS output pair.**

**OUT2B<sup>-</sup>/OUT2B<sup>+</sup>, OUT2A<sup>-</sup>/OUT2A<sup>+</sup> (Pins 19/20, Pins 21/22):** Serial Data Outputs for Channel 2. In 1-lane output mode only OUT2A<sup>-</sup>/OUT2A<sup>+</sup> are used.

**FR<sup>-</sup>/FR<sup>+</sup> (Pins 23/24):** Frame Start Outputs.

**DCO<sup>-</sup>/DCO<sup>+</sup> (Pins 27/28):** Data Clock Outputs.

**OUT1B<sup>-</sup>/OUT1B<sup>+</sup>, OUT1A<sup>-</sup>/OUT1A<sup>+</sup> (Pins 29/30, Pins 31/32):** Serial Data Outputs for Channel 1. In 1-lane output mode only OUT1A<sup>-</sup>/OUT1A<sup>+</sup> are used.

## BLOCK DIAGRAM

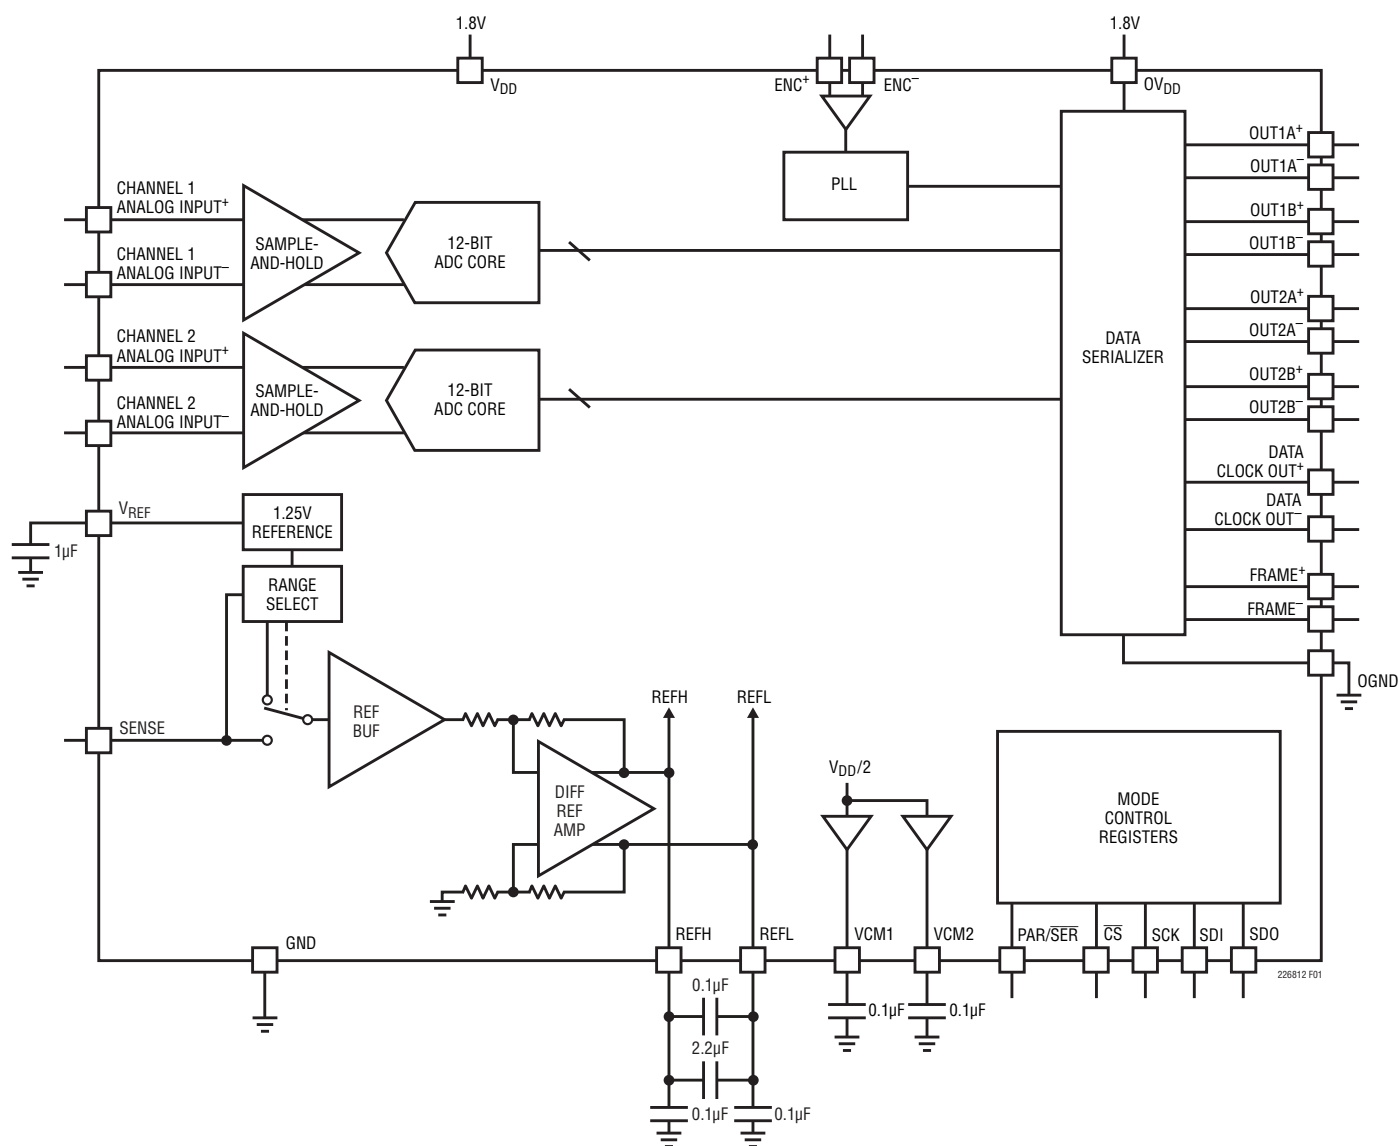


Figure 1. Functional Block Diagram

## APPLICATIONS INFORMATION

### CONVERTER OPERATION

The LTC2268-12/LTC2267-12/LTC2266-12 are low power, 2-channel, 12-bit, 125Msps/105Msps/80Msps A/D converters that are powered by a single 1.8V supply. The analog inputs should be driven differentially. The encode input can be driven differentially for optimal jitter performance, or single ended for lower power consumption. To minimize the number of data lines the digital outputs are serial LVDS. Each channel outputs two bits at a time (2-lane mode). At lower sampling rates there is a one bit per channel option (1-lane mode). Many additional features can be chosen by programming the mode control registers through a serial SPI port.

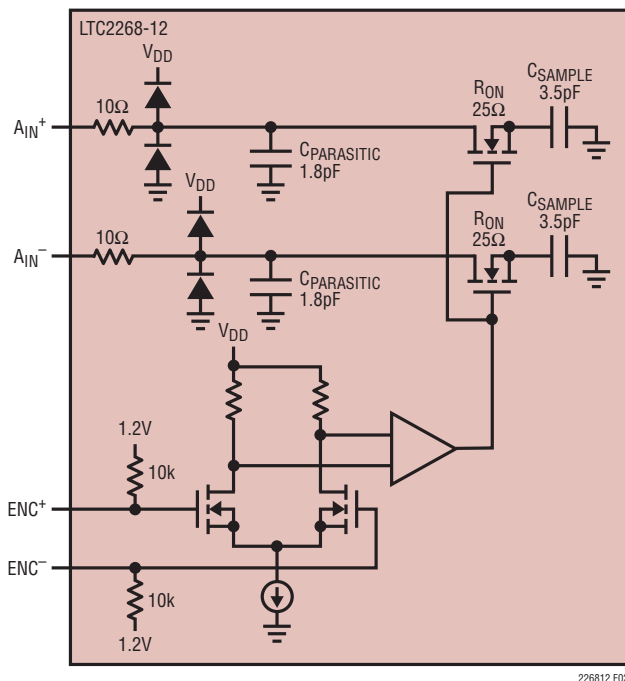


Figure 2. Equivalent Input Circuit. Only One of the Two Analog Channels Is Shown

### ANALOG INPUT

The analog inputs are differential CMOS sample-and-hold circuits (Figure 2). The inputs should be driven differentially around a common mode voltage set by the  $V_{CM1}$  or  $V_{CM2}$  output pins, which are nominally  $V_{DD}/2$ . For the 2V input range, the inputs should swing from  $V_{CM} - 0.5V$  to  $V_{CM} + 0.5V$ . There should be 180° phase difference between the inputs.

The two channels are simultaneously sampled by a shared encode circuit (Figure 2).

### INPUT DRIVE CIRCUITS

#### Input filtering

If possible, there should be an RC lowpass filter right at the analog inputs. This lowpass filter isolates the drive circuitry from the A/D sample-and-hold switching, and also limits wideband noise from the drive circuitry. Figure 3 shows an example of an input RC filter. The RC component values should be chosen based on the application's input frequency.


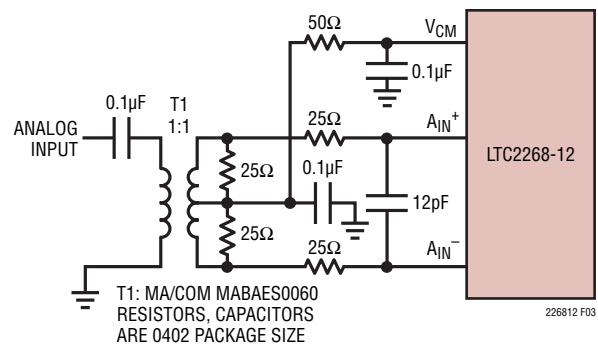


Figure 3. Analog Input Circuit Using a Transformer. Recommended for Input Frequencies from 5MHz to 70MHz


## APPLICATIONS INFORMATION

### Transformer Coupled Circuits

Figure 3 shows the analog input being driven by an RF transformer with a center-tapped secondary. The center tap is biased with  $V_{CM}$ , setting the A/D input at its optimal DC level. At higher input frequencies a transmission line balun transformer (Figures 4 to 6) has better balance, resulting in lower A/D distortion.

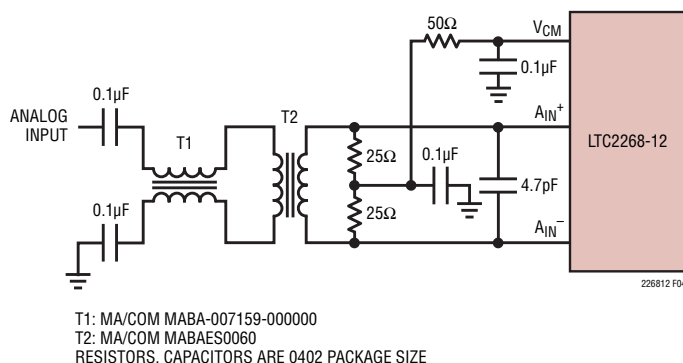

**Figure 4. Recommended Front End Circuit for Input Frequencies from 70MHz to 170MHz**

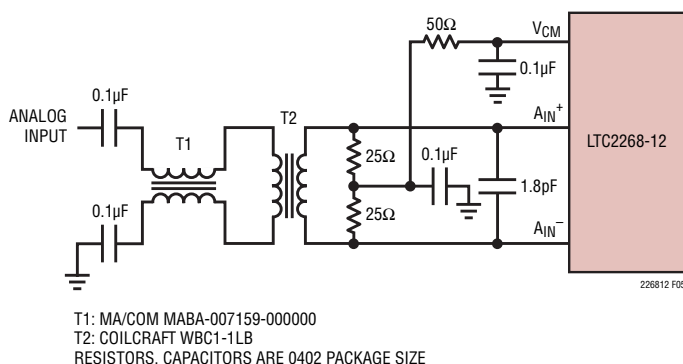


**Figure 5. Recommended Front End Circuit for Input Frequencies from 170MHz to 300MHz**


### Amplifier Circuits

Figure 7 shows the analog input being driven by a high speed differential amplifier. The output of the amplifier is AC-coupled to the A/D so the amplifier's output common mode voltage can be optimally set to minimize distortion.

At very high frequencies an RF gain block will often have lower distortion than a differential amplifier. If the gain block is single-ended, then a transformer circuit (Figures 4 to 6) should convert the signal to differential before driving the A/D.

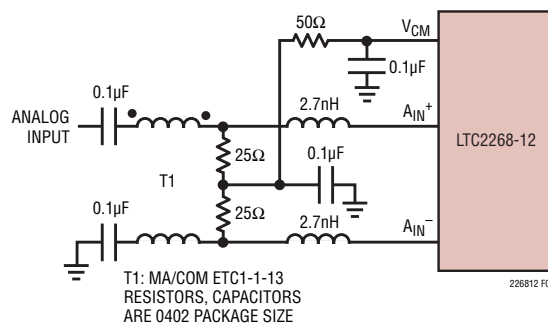

**Figure 6. Recommended Front End Circuit for Input Frequencies Above 300MHz**

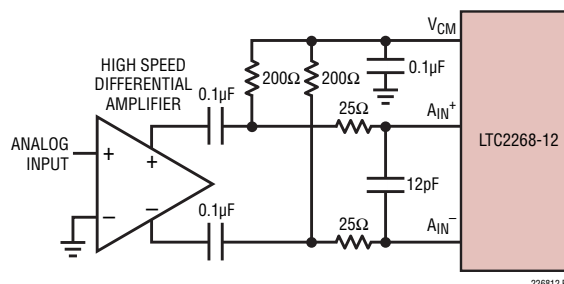

**Figure 7. Front End Circuit Using a High Speed Differential Amplifier**



## APPLICATIONS INFORMATION

The differential encode mode is recommended for sinusoidal, PECL, or LVDS encode inputs (Figures 12 and 13). The encode inputs are internally biased to 1.2V through 10k equivalent resistance. The encode inputs can be taken above  $V_{DD}$  (up to 3.6V), and the common mode range is from 1.1V to 1.6V. In the differential encode mode,  $ENC^-$  should stay at least 200mV above ground to avoid falsely triggering the single-ended encode mode. For good jitter performance  $ENC^+$  should have fast rise and fall times.

The single-ended encode mode should be used with CMOS encode inputs. To select this mode,  $ENC^-$  is connected to ground and  $ENC^+$  is driven with a square wave encode input.  $ENC^+$  can be taken above  $V_{DD}$  (up to 3.6V) so 1.8V to 3.3V CMOS logic levels can be used. The  $ENC^+$  threshold is 0.9V. For good jitter performance  $ENC^+$  should have fast rise and fall times.

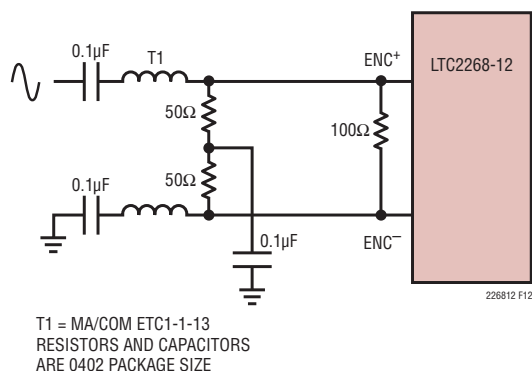


Figure 12. Sinusoidal Encode Drive




Figure 13. PECL or LVDS Encode Drive

### Clock PLL and Duty Cycle Stabilizer

The encode clock is multiplied by an internal phase-locked loop (PLL) to generate the serial digital output data. If the encode signal changes frequency or is turned off, the PLL requires 25µs to lock onto the input clock.

A clock duty cycle stabilizer circuit allows the duty cycle of the applied encode signal to vary from 30% to 70%. In the serial programming mode it is possible to disable the duty cycle stabilizer, but this is not recommended. In the parallel programming mode the duty cycle stabilizer is always enabled.

### DIGITAL OUTPUTS

The digital outputs of the LTC2268-12/LTC2267-12/LTC2266-12 are serialized LVDS signals. Each channel outputs two bits at a time (2-lane mode). At lower sampling rates there is a one bit per channel option (1-lane mode). The data can be serialized with 16-, 14-, or 12-bit serialization (see Timing Diagrams for details).

The output data should be latched on the rising and falling edges of the data clock out (DCO). A data frame output (FR) can be used to determine when the data from a new conversion result begins. In the 2-lane, 14-bit serialization mode, the frequency of the FR output is halved.

The maximum serial data rate for the data outputs is 1Gbps, so the maximum sample rate of the ADC will depend on the serialization mode as well as the speed grade of the ADC (see Table 1). The minimum sample rate for all serialization modes is 5MSPS.

## APPLICATIONS INFORMATION

**Table 1. Maximum Sampling Frequency for All Serialization Modes. Note That These Limits Are for the LTC2268-12. The Sampling Frequency for the Slower Speed Grades Cannot Exceed 105MHz (LTC2267-12) or 80MHz (LTC2266-12).**

| SERIALIZATION MODE |                      | MAXIMUM SAMPLING FREQUENCY, $f_S$ (MHz) | DCO FREQUENCY   | FR FREQUENCY    | SERIAL DATA RATE |
|--------------------|----------------------|---|-----------------|-----------------|------------------|
| 2-Lane             | 16-Bit Serialization | 125                                     | $4 \cdot f_S$   | $f_S$           | $8 \cdot f_S$    |
| 2-Lane             | 14-Bit Serialization | 125                                     | $3.5 \cdot f_S$ | $0.5 \cdot f_S$ | $7 \cdot f_S$    |
| 2-Lane             | 12-Bit Serialization | 125                                     | $3 \cdot f_S$   | $f_S$           | $6 \cdot f_S$    |
| 1-Lane             | 16-Bit Serialization | 62.5                                    | $8 \cdot f_S$   | $f_S$           | $16 \cdot f_S$   |
| 1-Lane             | 14-Bit Serialization | 71.4                                    | $7 \cdot f_S$   | $f_S$           | $14 \cdot f_S$   |
| 1-Lane             | 12-Bit Serialization | 83.3                                    | $6 \cdot f_S$   | $f_S$           | $12 \cdot f_S$   |

By default the outputs are standard LVDS levels: 3.5mA output current and a 1.25V output common mode voltage. An external 100 $\Omega$  differential termination resistor is required for each LVDS output pair. The termination resistors should be located as close as possible to the LVDS receiver.

The outputs are powered by  $OV_{DD}$  and OGND which are isolated from the A/D core power and ground.

### Programmable LVDS Output Current

The default output driver current is 3.5mA. This current can be adjusted by control register A2 in the serial programming mode. Available current levels are 1.75mA, 2.1mA, 2.5mA, 3mA, 3.5mA, 4mA and 4.5mA. In the parallel programming mode the SCK pin can select either 3.5mA or 1.75mA.

### Optional LVDS Driver Internal Termination

In most cases using just an external 100 $\Omega$  termination resistor will give excellent LVDS signal integrity. In addition, an optional internal 100 $\Omega$  termination resistor can be enabled by serially programming mode control register A2. The internal termination helps absorb any reflections caused by imperfect termination at the receiver. When the internal termination is enabled, the output driver current is doubled to maintain the same output voltage swing. In the Parallel Programming Mode, the SDO pin enables internal termination. Internal termination should only be used with 1.75mA, 2.1mA or 2.5mA LVDS output current modes.

### DATA FORMAT

Table 2 shows the relationship between the analog input voltage and the digital data output bits. By default the output data format is offset binary. The 2's complement format can be selected by serially programming mode control register A1.

In addition to the 12 data bits (D11 - D0), two additional bits ( $D_X$  and  $D_Y$ ) are sent out in the 14-bit and 16-bit serialization modes. These extra bits are to ensure complete software compatibility with the 14-bit versions of these A/Ds. During normal operation when the analog inputs are not overranged,  $D_X$  and  $D_Y$  are always logic 0. When the analog inputs are overranged positive,  $D_X$  and  $D_Y$  become logic 1. When the analog inputs are overranged negative,  $D_X$  and  $D_Y$  become logic 0.  $D_X$  and  $D_Y$  can also be controlled by the digital output test pattern. See the Timing Diagrams section for more information.

**Table 2. Output Codes vs Input Voltage**

| $A_{IN}^+ - A_{IN}^-$<br>(2V RANGE) | D11-D0<br>(OFFSET BINARY) | D11-D0<br>(2's COMPLEMENT) | $D_X, D_Y$ |
|-------------------------------------|---------------------------|----------------------------|------------|
| >+1.000000V                         | 1111 1111 1111            | 0111 1111 1111             | 11         |
| +0.999512V                          | 1111 1111 1111            | 0111 1111 1111             | 00         |
| +0.999024V                          | 1111 1111 1110            | 0111 1111 1110             | 00         |
| +0.000488V                          | 1000 0000 0001            | 0000 0000 0001             | 00         |
| 0.000000V                           | 1000 0000 0000            | 0000 0000 0000             | 00         |
| -0.000488V                          | 0111 1111 1111            | 1111 1111 1111             | 00         |
| -0.000976V                          | 0111 1111 1110            | 1111 1111 1110             | 00         |
| -0.999512V                          | 0000 0000 0001            | 1000 0000 0001             | 00         |
| -1.000000V                          | 0000 0000 0000            | 1000 0000 0000             | 00         |
| $\leq -1.000000V$                   | 0000 0000 0000            | 1000 0000 0000             | 00         |



## APPLICATIONS INFORMATION

### Digital Output Randomizer

Interference from the A/D digital outputs is sometimes unavoidable. Digital interference may be from capacitive or inductive coupling or coupling through the ground plane. Even a tiny coupling factor can cause unwanted tones in the ADC output spectrum. By randomizing the digital output before it is transmitted off chip, these unwanted tones can be randomized which reduces the unwanted tone amplitude.

The digital output is *randomized* by applying an exclusive-OR logic operation between the LSB and all other data output bits. To decode, the reverse operation is applied—an exclusive-OR operation is applied between the LSB and all other bits. The FR and DCO outputs are not affected. The output randomizer is enabled by serially programming mode control register A1.

### Digital Output Test Pattern

To allow in-circuit testing of the digital interface to the A/D, there is a test mode that forces the A/D data outputs (D11-D0, D<sub>X</sub>, D<sub>Y</sub>) of both channels to known values. The digital output test patterns are enabled by serially programming mode control registers A3 and A4. When enabled, the test patterns override all other formatting modes: 2's complement and randomizer.

### Output Disable

The digital outputs may be disabled by serially programming mode control register A2. The current drive for all digital outputs including DCO and FR are disabled to save power or enable in-circuit testing. When disabled the common mode of each output pair becomes high impedance, but the differential impedance may remain low.

### Sleep and Nap Modes

The A/D may be placed in sleep or nap modes to conserve power. In sleep mode the entire device is powered down, resulting in 1mW power consumption. Sleep mode is enabled by mode control register A1 (serial programming mode), or by SDI (parallel programming mode). The amount of time required to recover from sleep mode depends on the size of the bypass capacitors on V<sub>REF</sub>, REFH, and REFL. For the suggested values in Figure 8, the A/D will stabilize after 2ms.

In nap mode any combination of A/D channels can be powered down while the internal reference circuits and the PLL stay active, allowing faster wake-up than from sleep mode. Recovering from nap mode requires at least 100 clock cycles. If the application demands very accurate DC settling then an additional 50μs should be allowed so the on-chip references can settle from the slight temperature shift caused by the change in supply current as the A/D leaves nap mode. Nap mode is enabled by mode control register A1 in the serial programming mode.

## DEVICE PROGRAMMING MODES

The operating modes of the LTC2268-12/LTC2267-12/LTC2266-12 can be programmed by either a parallel interface or a simple serial interface. The serial interface has more flexibility and can program all available modes. The parallel interface is more limited and can only program some of the more commonly used modes.

### Parallel Programming Mode

To use the parallel programming mode, PAR/SER should be tied to V<sub>DD</sub>. The CS, SCK, SDI and SDO pins are binary logic inputs that set certain operating modes. These pins can be tied to V<sub>DD</sub> or ground, or driven by 1.8V, 2.5V, or 3.3V CMOS logic. When used as an input, SDO should be driven through a 1k series resistor. Table 3 shows the modes set by CS, SCK, SDI and SDO.

**Table 3. Parallel Programming Mode Control Bits (PAR/SER = V<sub>DD</sub>)**

| PIN | DESCRIPTION  |
|-----|--|
| CS  | <b>2-Lane/1-Lane Selection Bit</b><br>0 = 2-Lane, 16-Bit Serialization Output Mode<br>1 = 1-Lane, 14-Bit Serialization Output Mode |
| SCK | <b>LVDS Current Selection Bit</b><br>0 = 3.5mA LVDS Current Mode<br>1 = 1.75mA LVDS Current Mode                                   |
| SDI | <b>Power Down Control Bit</b><br>0 = Normal Operation<br>1 = Sleep Mode  |
| SDO | <b>Internal 100Ω Termination Selection Bit</b><br>0 = Internal Termination Disabled<br>1 = Internal Termination Enabled            |



## APPLICATIONS INFORMATION

### Serial Programming Mode

To use the serial programming mode,  $\overline{\text{PAR}}/\overline{\text{SER}}$  should be tied to ground. The  $\overline{\text{CS}}$ , SCK, SDI and SDO pins become a serial interface that programs the A/D mode control registers. Data is written to a register with a 16-bit serial word. Data can also be read back from a register to verify its contents.

Serial data transfer starts when  $\overline{\text{CS}}$  is taken low. The data on the SDI pin is latched at the first 16 rising edges of SCK. Any SCK rising edges after the first 16 are ignored. The data transfer ends when  $\overline{\text{CS}}$  is taken high again.

The first bit of the 16-bit input word is the  $\text{R}/\overline{\text{W}}$  bit. The next seven bits are the address of the register (A6:A0). The final eight bits are the register data (D7:D0).

If the  $\text{R}/\overline{\text{W}}$  bit is low, the serial data (D7:D0) will be written to the register set by the address bits (A6:A0). If the  $\text{R}/\overline{\text{W}}$  bit is high, data in the register set by the address bits (A6:A0)

will be read back on the SDO pin (see the Timing Diagrams section). During a read back command the register is not updated and data on SDI is ignored.

The SDO pin is an open-drain output that pulls to ground with a  $200\Omega$  impedance. If register data is read back through SDO, an external 2k pull-up resistor is required. If serial data is only written and read back is not needed, then SDO can be left floating and no pull-up resistor is needed. Table 4 shows a map of the mode control registers.

### Software Reset

If serial programming is used, the mode control registers should be programmed as soon as possible after the power supplies turn on and are stable. The first serial command must be a software reset which will reset all register data bits to logic 0. To perform a software reset, bit D7 in the reset register is written with a logic 1. After the reset SPI write command is complete, bit D7 is automatically set back to zero.

**Table 4. Serial Programming Mode Register Map ( $\overline{\text{PAR}}/\overline{\text{SER}} = \text{GND}$ )**

**REGISTER A0: RESET REGISTER (ADDRESS 00h)**

| D7    | D6 | D5 | D4 | D3 | D2 | D1 | D0 |
|-------|----|----|----|----|----|----|----|
| RESET | X  | X  | X  | X  | X  | X  | X  |

Bit 7 **RESET** Software Reset Bit  
 0 = Not Used  
 1 = Software Reset. All Mode Control Registers Are Reset to 00h. The ADC is momentarily placed in SLEEP mode. This Bit Is Automatically Set Back to Zero at the End of the SPI Write Command. The Reset Register is Write Only.  
 Bits 6-0 Unused, Don't Care Bits.

**REGISTER A1: POWER-DOWN REGISTER (ADDRESS 01h)**

| D7     | D6   | D5       | D4    | D3    | D2 | D1 | D0    |
|--------|------|----------|-------|-------|----|----|-------|
| DCSOFF | RAND | TWOSCOMP | SLEEP | NAP_2 | X  | X  | NAP_1 |

Bit 7 **DCSOFF** Clock Duty Cycle Stabilizer Bit  
 0 = Clock Duty Cycle Stabilizer On  
 1 = Clock Duty Cycle Stabilizer Off. This is Not Recommended.  
 Bit 6 **RAND** Data Output Randomizer Mode Control Bit  
 0 = Data Output Randomizer Mode Off  
 1 = Data Output Randomizer Mode On  
 Bit 5 **TWOSCOMP** Two's Complement Mode Control Bit  
 0 = Offset Binary Data Format  
 1 = Two's Complement Data Format  
 Bits 4,3,0 **SLEEP:NAP\_2:NAP\_1** Sleep/Nap Mode Control Bits  
 000 = Normal Operation  
 0X1 = Channel 1 in Nap Mode  
 01X = Channel 2 in Nap Mode  
 1XX = Sleep Mode. Both Channels Are Disabled  
 Note: Any Combination of Channels Can Be Placed in Nap Mode.  
 Bits 2,1 Unused, Don't Care Bits.

## APPLICATIONS INFORMATION

### REGISTER A2: OUTPUT MODE REGISTER (ADDRESS 02h)

| D7       | D6   | D5     | D4     | D3     | D2       | D1       | D0       |
|----------|--|--------|--------|--------|----------|----------|----------|
| ILVDS2   | ILVDS1   | ILVDS0 | TERMON | OUTOFF | OUTMODE2 | OUTMODE1 | OUTMODE0 |
| Bits 7-5 | <b>ILVDS2:ILVDS0</b> LVDS Output Current Bits<br>000 = 3.5mA LVDS Output Driver Current<br>001 = 4.0mA LVDS Output Driver Current<br>010 = 4.5mA LVDS Output Driver Current<br>011 = Not Used<br>100 = 3.0mA LVDS Output Driver Current<br>101 = 2.5mA LVDS Output Driver Current<br>110 = 2.1mA LVDS Output Driver Current<br>111 = 1.75mA LVDS Output Driver Current |        |        |        |          |          |          |
| Bit 4    | <b>TERMON</b> LVDS Internal Termination Bit<br>0 = Internal Termination Off<br>1 = Internal Termination On. LVDS Output Driver Current is 2x the Current Set by ILVDS2:ILVDS0. Internal termination should only be used with 1.75mA, 2.1mA or 2.5mA LVDS output current modes.   |        |        |        |          |          |          |
| Bit 3    | <b>OUTOFF</b> Output Disable Bit<br>0 = Digital Outputs are enabled.<br>1 = Digital Outputs are disabled.  |        |        |        |          |          |          |
| Bits 2-0 | <b>OUTMODE2:OUTMODE0</b> Digital Output Mode Control Bits<br>000 = 2-Lanes, 16-Bit Serialization<br>001 = 2-Lanes, 14-Bit Serialization<br>010 = 2-Lanes, 12-Bit Serialization<br>011 = Not Used<br>100 = Not Used<br>101 = 1-Lane, 14-Bit Serialization<br>110 = 1-Lane, 12-Bit Serialization<br>111 = 1-Lane, 16-Bit Serialization                                   |        |        |        |          |          |          |

### REGISTER A3: TEST PATTERN MSB REGISTER (ADDRESS 03h)

| D7       | D6  | D5   | D4   | D3  | D2  | D1  | D0  |
|----------|---|------|------|-----|-----|-----|-----|
| OUTTEST  | X   | TP11 | TP10 | TP9 | TP8 | TP7 | TP6 |
| Bit 7    | <b>OUTTEST</b> Digital Output Test Pattern Control Bit<br>0 = Digital Output Test Pattern Off<br>1 = Digital Output Test Pattern On |      |      |     |     |     |     |
| Bit 6    | Unused, Don't Care Bit.   |      |      |     |     |     |     |
| Bits 5-0 | <b>TP11:TP6</b> Test Pattern Data Bits (MSB)<br>TP11:TP6 Set the Test Pattern for Data Bit 11 (MSB) Through Data Bit 6.             |      |      |     |     |     |     |

### REGISTER A4: TEST PATTERN LSB REGISTER (ADDRESS 04h)

| D7       | D6  | D5  | D4  | D3  | D2  | D1  | D0  |
|----------|---|-----|-----|-----|-----|-----|-----|
| TP5      | TP4   | TP3 | TP2 | TP1 | TP0 | TPX | TPY |
| Bits 7-2 | <b>TP5:TP0</b> Test Pattern Data Bits (LSB)<br>TP5:TP0 Set the Test Pattern for Data Bit 5 Through Data Bit 0 (LSB).  |     |     |     |     |     |     |
| Bits 1-0 | <b>TPX:TPY</b> Set the Test Pattern for Extra Bits D <sub>X</sub> and D <sub>Y</sub> . These Bits are for Compatibility with the 14-Bit Version of the A/D. |     |     |     |     |     |     |

## APPLICATIONS INFORMATION

### GROUNDING AND BYPASSING

The LTC2268-12/LTC2267-12/LTC2266-12 requires a printed circuit board with a clean unbroken ground plane. A multilayer board with an internal ground plane in the first layer beneath the ADC is recommended. Layout for the printed circuit board should ensure that digital and analog signal lines are separated as much as possible. In particular, care should be taken not to run any digital track alongside an analog signal track or underneath the ADC.

High quality ceramic bypass capacitors should be used at the  $V_{DD}$ ,  $OV_{DD}$ ,  $V_{CM}$ ,  $V_{REF}$ , REFH and REFL pins. Bypass capacitors must be located as close to the pins as possible. Of particular importance is the  $0.1\mu\text{F}$  capacitor between REFH and REFL. This capacitor should be on the same side of the circuit board as the A/D, and as close to the device as possible (1.5mm or less). Size 0402 ceramic capacitors are recommended. The larger  $2.2\mu\text{F}$  capacitor

between REFH and REFL can be somewhat further away. The traces connecting the pins and bypass capacitors must be kept short and should be made as wide as possible.


The analog inputs, encode signals, and digital outputs should not be routed next to each other. Ground fill and grounded vias should be used as barriers to isolate these signals from each other.

### HEAT TRANSFER


Most of the heat generated by the LTC2268-12/LTC2267-12/LTC2266-12 is transferred from the die through the bottom-side Exposed Pad and package leads onto the printed circuit board. For good electrical and thermal performance, the Exposed Pad must be soldered to a large grounded pad on the PC board. This pad should be connected to the internal ground planes by an array of vias.

## TYPICAL APPLICATIONS

Silkscreen Top

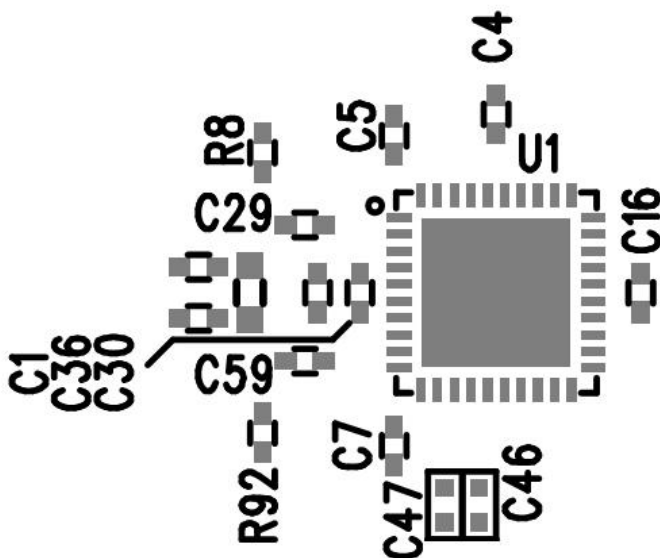


Top Side

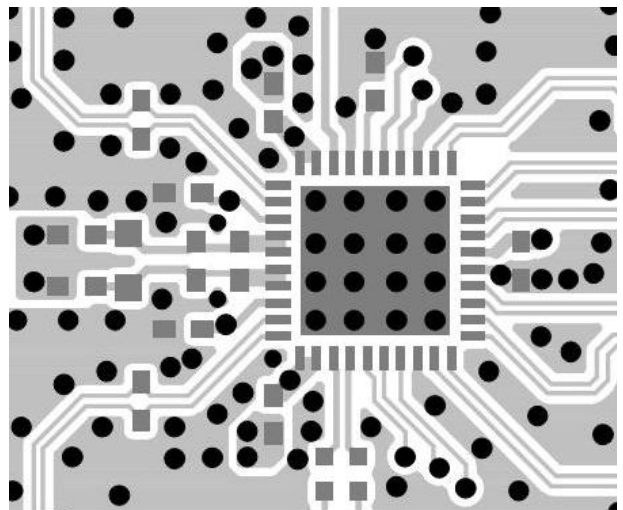


## TYPICAL APPLICATIONS


Inner Layer 2 GND

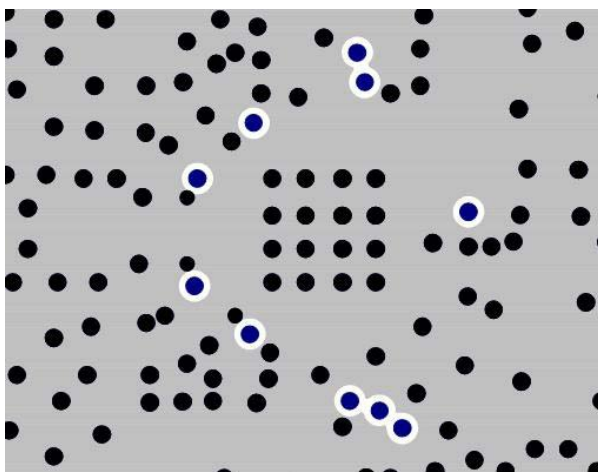


Inner Layer 3

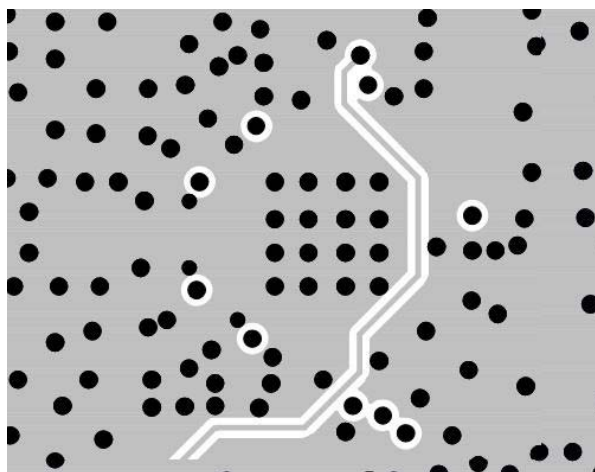


Inner Layer 4

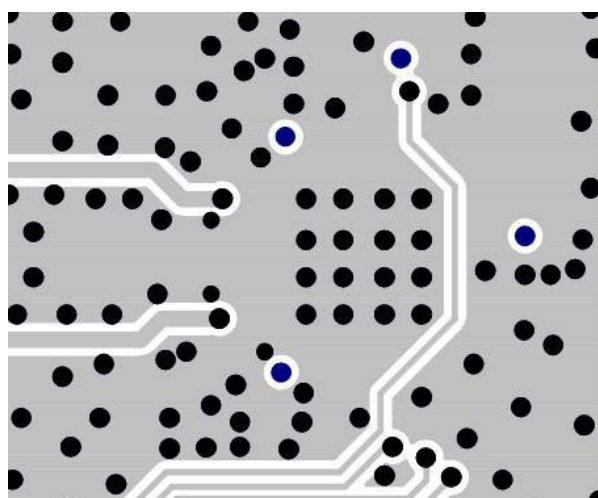

Inner Layer 5 Power

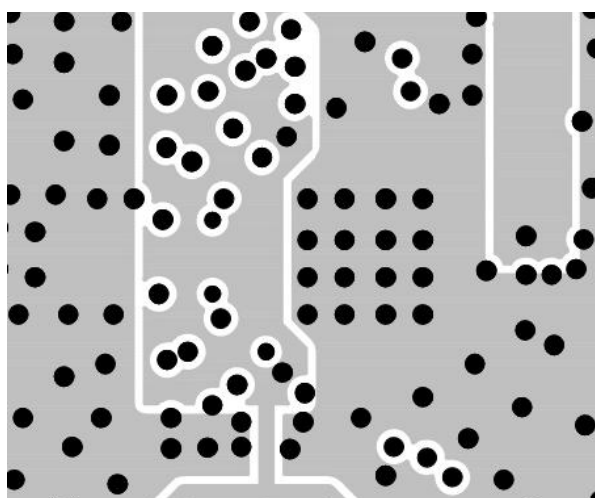

Bottom Side

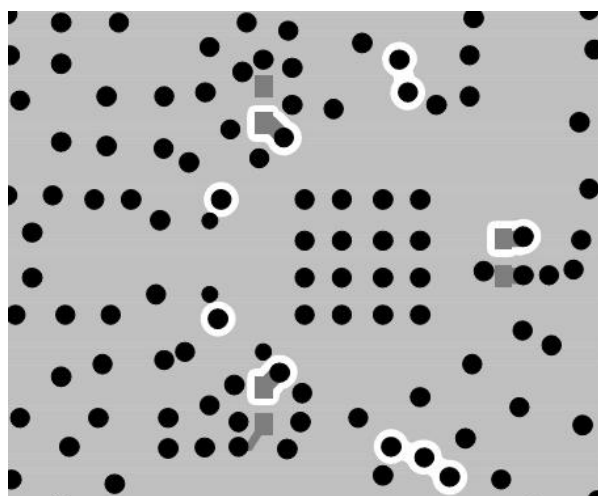

Silkscreen Bottom

C8 =

C9 =

C15 =


The diagram illustrates the pin connections for the LTC2268 ADC. The central component is the LTC2268, with pins numbered 1 through 32. The connections are as follows:

- Power Supply:**
  - VDD: Pins 40, 39, 38, 37, 36, 35, 34, 33, 32, 31, 30, 29, 28, 27, 26, 25, 24, 23, 22, 21, 20, 19, 18, 17, 16, 15, 14, 13, 12, 11, 10, 9, 8, 7, 6, 5, 4, 3, 2, 1.
  - GND: Pins 38, 37, 36, 35, 34, 33, 32, 31, 30, 29, 28, 27, 26, 25, 24, 23, 22, 21, 20, 19, 18, 17, 16, 15, 14, 13, 12, 11, 10, 9, 8, 7, 6, 5, 4, 3, 2, 1.
- Inputs:**
  - AIN1: Pins 1, 2, 3, 4, 5, 6, 7, 8, 9, 10.
  - AIN2: Pins 11, 12, 13, 14, 15, 16, 17, 18, 19, 20.
- Outputs:**
  - OUT1A: Pins 31, 32, 33, 34, 35, 36, 37, 38, 39, 40.
  - OUT1B: Pins 31, 32, 33, 34, 35, 36, 37, 38, 39, 40.
  - OUT2A: Pins 31, 32, 33, 34, 35, 36, 37, 38, 39, 40.
  - OUT2B: Pins 31, 32, 33, 34, 35, 36, 37, 38, 39, 40.
- Control Pins:**
  - SENSE: Pins 38, 39, 40.
  - GND: Pins 38, 37, 36, 35, 34, 33, 32, 31, 30, 29, 28, 27, 26, 25, 24, 23, 22, 21, 20, 19, 18, 17, 16, 15, 14, 13, 12, 11, 10, 9, 8, 7, 6, 5, 4, 3, 2, 1.
  - VREF: Pins 38, 39, 40.
  - PAR/SER: Pins 38, 39, 40.
  - SDO: Pins 38, 39, 40.
  - SDI: Pins 38, 39, 40.
  - CS: Pins 38, 39, 40.
  - SCK: Pins 38, 39, 40.
  - ENC: Pins 38, 39, 40.
- Capacitors:**
  - C1: 0.1μF, connected to pin 1.
  - C2: 0.1μF, connected to pin 2.
  - C3: 0.1μF, connected to pin 3.
  - C4: 1μF, connected to pin 4.
  - C5: 1μF, connected to pin 5.
  - C7: 0.1μF, connected to pin 7.
  - C16: 0.1μF, connected to pin 16.
  - C29: 0.1μF, connected to pin 29.
  - C30: 0.1μF, connected to pin 30.
  - C46: 0.1μF, connected to pin 46.
  - C47: 0.1μF, connected to pin 47.
  - C59: 0.1μF, connected to pin 59.


The diagram is labeled "LTC2268" and includes a reference number "226812 TA02".

## PACKAGE DESCRIPTION

**UJ Package**  
**40-Lead Plastic QFN (6mm × 6mm)**  
(Reference LTC DWG # 05-08-1728 Rev 0)

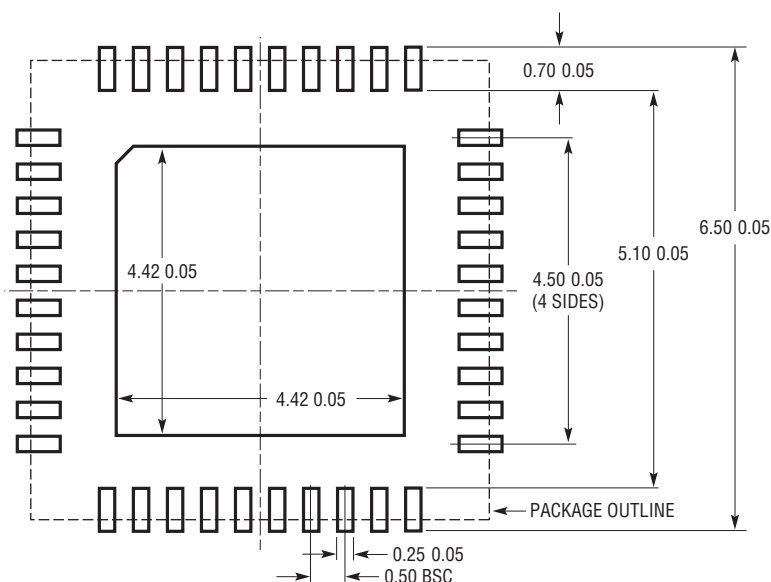

RECOMMENDED SOLDER PAD PITCH AND DIMENSIONS  
APPLY SOLDER MASK TO AREAS THAT ARE NOT SOLDERED

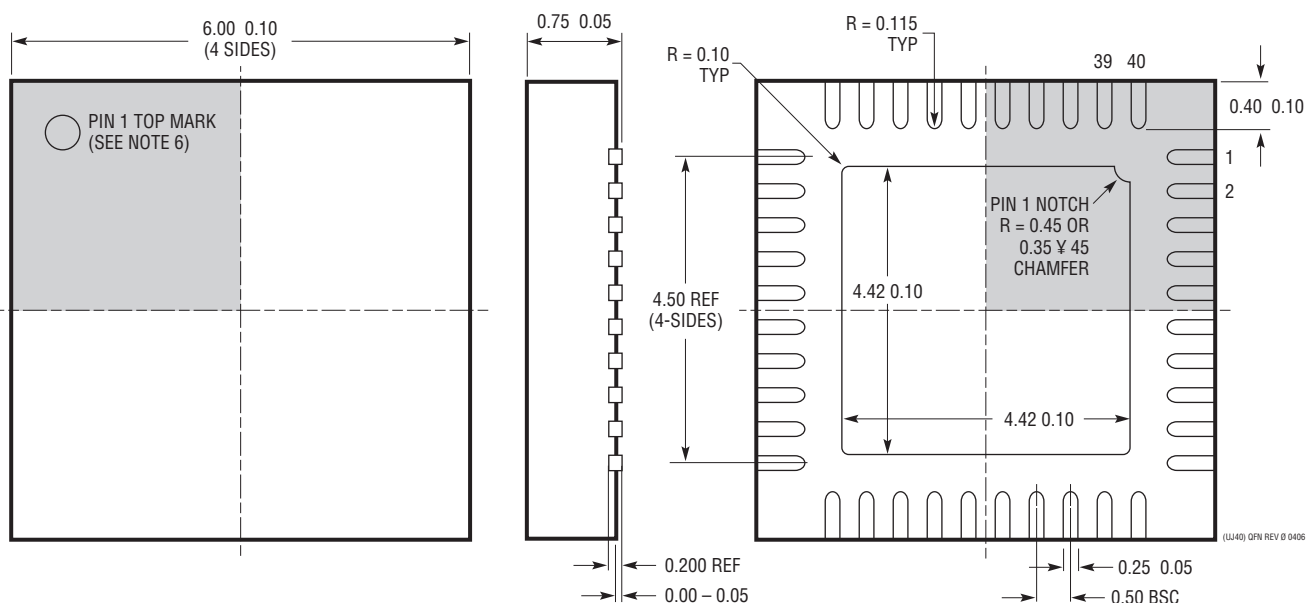

- NOTE:
1. DRAWING IS A JEDEC PACKAGE OUTLINE VARIATION OF (WJJD-2)
  2. DRAWING NOT TO SCALE
  3. ALL DIMENSIONS ARE IN MILLIMETERS
  4. DIMENSIONS OF EXPOSED PAD ON BOTTOM OF PACKAGE DO NOT INCLUDE MOLD FLASH. MOLD FLASH, IF PRESENT, SHALL NOT EXCEED 0.20mm ON ANY SIDE, IF PRESENT
  5. EXPOSED PAD SHALL BE SOLDER PLATED
  6. SHADED AREA IS ONLY A REFERENCE FOR PIN 1 LOCATION ON THE TOP AND BOTTOM OF PACKAGE

BOTTOM VIEW—EXPOSED PAD

## REVISION HISTORY

| REV | DATE | DESCRIPTION  | PAGE NUMBER |
|-----|------|--|-------------|
| A   | 6/11 | Revised Software Reset paragraph and Table 4 in Applications Information section | 25          |



## RELATED PARTS

| PART NUMBER                          | DESCRIPTION  | COMMENTS   |
|--------------------------------------|--|--|
| <b>ADCs</b>                          |  |  |
| LTC2170-14/LTC2171-14/<br>LTC2172-14 | 14-Bit, 25Msps/40Msps/65Msps 1.8V Quad ADCs, Ultralow Power                  | 178mW/234mW/360mW, 73.4dB SNR, 88dB SFDR, Serial LVDS Outputs, 7mm × 8mm QFN-52                            |
| LTC2170-12/LTC2171-12/<br>LTC2172-12 | 12-Bit, 25Msps/40Msps/65Msps 1.8V Quad ADCs, Ultralow Power                  | 178mW/234mW/360mW, 70.5dB SNR, 88dB SFDR, Serial LVDS Outputs, 7mm × 8mm QFN-52                            |
| LTC2173-14/LTC2174-14/<br>LTC2175-14 | 14-Bit, 80Msps/105Msps/125Msps 1.8V Quad ADCs, Ultralow Power                | 373mW/445mW/551mW, 73.2 dB SNR, 88dB SFDR, Serial LVDS Outputs, 7mm × 8mm QFN-52                           |
| LTC2173-12/LTC2174-12/<br>LTC2175-12 | 12-Bit, 80Msps/105Msps/125Msps 1.8V Quad ADCs, Ultralow Power                | 412mW/481mW/567mW, 70.5 dB SNR, 88dB SFDR, Serial LVDS Outputs, 7mm × 8mm QFN-52                           |
| LTC2256-14/LTC2257-14/<br>LTC2258-14 | 14-Bit, 25Msps/40Msps/65Msps 1.8V ADCs, Ultralow Power                       | 35mW/49mW/81mW, 74dB SNR, 88dB SFDR, DDR LVDS/DDR CMOS/CMOS Outputs, 6mm × 6mm QFN-36                      |
| LTC2259-14/LTC2260-14/<br>LTC2261-14 | 14-Bit, 80Msps/105Msps/125Msps 1.8V ADCs, Ultralow Power                     | 89mW/106mW/127mW, 73.4dB SNR, 85dB SFDR, DDR LVDS/DDR CMOS/CMOS Outputs, 6mm × 6mm QFN-36                  |
| LTC2262-14                           | 14-Bit, 150Msps 1.8V ADC, Ultralow Power                                     | 149mW, 72.8dB SNR, 88dB SFDR, DDR LVDS/DDR CMOS/CMOS Outputs, 6mm × 6mm QFN-36                             |
| LTC2263-14/LTC2264-14/<br>LTC2265-14 | 14-Bit, 25Msps/40Msps/65Msps 1.8V Dual ADCs, Ultralow Power                  | 99mW/126mW/191mW, 73.4dB SNR, 88dB SFDR, Serial LVDS Outputs, 6mm × 6mm QFN-36                             |
| LTC2263-12/LTC2264-12/<br>LTC2265-12 | 12-Bit, 25Msps/40Msps/65Msps 1.8V Dual ADCs, Ultralow Power                  | 99mW/126mW/191mW, 70.5dB SNR, 88dB SFDR, Serial LVDS Outputs, 6mm × 6mm QFN-36                             |
| LTC2266-14/LTC2267-14/<br>LTC2268-14 | 14-Bit, 80Msps/105Msps/125Msps 1.8V Dual ADCs, Ultralow Power                | 216mW/250mW/293mW, 73.4dB SNR, 88dB SFDR, Serial LVDS Outputs, 6mm × 6mm QFN-36                            |
| <b>RF Mixers/Demodulators</b>        |  |  |
| LT5517                               | 40MHz to 900MHz Direct Conversion Quadrature Demodulator                     | High IIP3: 21dBm at 800MHz, Integrated LO Quadrature Generator   |
| LT5527                               | 400MHz to 3.7GHz High Linearity Downconverting Mixer                         | 24.5dBm IIP3 at 900MHz, 23.5dBm IIP3 at 3.5GHz, NF = 12.5dB, 50Ω Single-Ended RF and LO Ports              |
| LT5557                               | 400MHz to 3.8GHz High Linearity Downconverting Mixer                         | 23.7dBm IIP3 at 2.6GHz, 23.5dBm IIP3 at 3.5GHz, NF = 13.2dB, 3.3V Supply Operation, Integrated Transformer |
| LT5575                               | 800MHz to 2.7GHz Direct Conversion Quadrature Demodulator                    | High IIP3: 28dBm at 900MHz, Integrated LO Quadrature Generator, Integrated RF and LO Transformer           |
| <b>Amplifiers/Filters</b>            |  |  |
| LTC6412                              | 800MHz, 31dB Range, Analog-Controlled Variable Gain Amplifier                | Continuously Adjustable Gain Control, 35dBm OIP3 at 240MHz, 10dB Noise Figure, 4mm × 4mm QFN-24            |
| LTC6420-20                           | 1.8GHz Dual Low Noise, Low Distortion Differential ADC Drivers for 300MHz IF | Fixed Gain 10V/V, 1nV/√Hz Total Input Noise, 80mA Supply Current per Amplifier, 3mm × 4mm QFN-20           |
| LTC6421-20                           | 1.3GHz Dual Low Noise, Low Distortion Differential ADC Drivers               | Fixed Gain 10V/V, 1nV/√Hz Total Input Noise, 40mA Supply Current per Amplifier, 3mm × 4mm QFN-20           |
| LTC6605-7/ LTC6605-10/<br>LTC6605-14 | Dual Matched 7MHz/10MHz/14MHz Filters with ADC Drivers                       | Dual Matched 2nd Order Lowpass Filters with Differential Drivers, Pin-Programmable Gain, 6mm × 3mm DFN-22  |
| LTM9002                              | 14-Bit Dual Channel IF/Baseband Receiver Subsystem                           | Integrated High Speed ADC, Passive Filters and Fixed Gain Differential Amplifiers                          |



# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Analog Devices Inc.:](#)

[LTC2268CUJ-12#TRPBF](#) [LTC2266IUIJ-12#PBF](#) [LTC2266CUJ-12#PBF](#) [LTC2268IUIJ-12#PBF](#) [LTC2266CUJ-12#TRPBF](#) [LTC2267IUIJ-12#PBF](#) [LTC2268IUIJ-12#TRPBF](#) [LTC2266IUIJ-12#TRPBF](#) [LTC2267IUIJ-12#TRPBF](#) [LTC2267CUJ-12#TRPBF](#) [LTC2267CUJ-12#PBF](#) [LTC2268CUJ-12#PBF](#) [DC1532A-H](#) [DC1532A-I](#) [DC1532A-G](#)