



DI CMOS Protected Analog Switches

AD7511

FEATURES

Latch-Proof

Overvoltage-Proof: $\pm 25V$

Low R_{ON} : 75Ω

Low Dissipation: 3mW

TTL/CMOS Direct Interface

Silicon-Nitride Passivated


Monolithic Dielectrically-Isolated CMOS

Standard 14-/16-Pin DIPs and

20-Terminal Surface Mount Packages

AD7510 and AD7512 are obsolete

DIP FUNCTIONAL DIAGRAMS

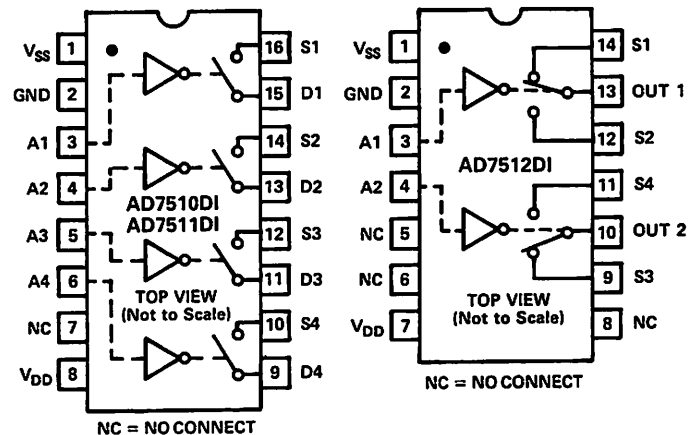

GENERAL DESCRIPTION

The AD7510DI, AD7511DI and AD7512DI are a family of latch proof dielectrically isolated CMOS switches featuring overvoltage protection up to $\pm 25V$ above the power supplies. These benefits are obtained without sacrificing the low "ON" resistance (75Ω) or low leakage current (500pA), the main features of an analog switch.

The AD7510DI and AD7511DI consist of four independent SPST analog switches packaged in either a 16-pin DIP or a 20-terminal surface mount package. They differ only in that the digital control logic is inverted. The AD7512DI has two independent SPDT switches packaged either in a 14-pin DIP or a 20-terminal surface mount package.

Very low power dissipation, overvoltage protection and TTL/CMOS direct interfacing are achieved by combining a unique circuit design and a dielectrically isolated CMOS process. Silicon nitride passivation ensures long term stability while monolithic construction provides reliability.

The AD7510 and AD7512 are no longer available.

CONTROL LOGIC

AD7510DI: Switch "ON" for Address "HIGH"

AD7511DI: Switch "ON" for Address "LOW"

AD7512DI: Address "HIGH" makes S1 to Out 1 and S3 to Out 2

REV. B

[Document Feedback](#)

Information furnished by Analog Devices is believed to be accurate and reliable. However, no responsibility is assumed by Analog Devices for its use, nor for any infringements of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of Analog Devices.

One Technology Way, P.O. Box 9106, Norwood, MA 02062-9106, U.S.A.
Tel: 617/329-4700 Fax: 617/326-8703 Twx: 710/394-6577
Telax: 924491 Cable: ANALOG NORWOODMASS

AD7511

—SPECIFICATIONS

($V_{DD} = +15V$, $V_{SS} = -15V$, unless otherwise noted.)

INDUSTRIAL VERSION (K)


| PARAMETER | MODEL | VERSION | +25°C (N, P, Q) | 0 to +70°C (N, P) -25°C to +85°C (Q) | TEST CONDITIONS |
|-------------------------------|----------------------|---------|------------------------|---|--|
| ANALOG SWITCH | | | | | |
| R_{ON}^1 | All | K | 75Ω typ, 100Ω max | 175Ω max | $-10V \leq V_D \leq +10V$ $I_{DS} = 1.0mA$ |
| R_{ON} vs V_D (V_S) | All | K | 20% typ | | |
| R_{ON} Drift | All | K | +0.5%/°C typ | | $V_D = 0$, $I_{DS} = 1.0mA$ |
| R_{ON} Match | All | K | 1% typ | | |
| R_{ON} Drift Match | All | K | 0.01%/°C typ | | |
| I_D (I_S) $_{OFF}^1$ | All | K | 0.5nA typ, 5nA max | 500nA max | $V_D = -10V$, $V_S = +10V$ and $V_D = +10V$, $V_S = -10V$ |
| I_D (I_S) $_{ON}^1$ | All | K | 10nA max | | $V_S = V_D = +10V$ $V_S = V_D = -10V$ |
| I_{OUT}^1 | AD7512DI | K | 15nA max | 1500nA max | $V_{S1} = V_{OUT} = \pm 10V$, $V_{S2} = \mp 10V$ and $V_{S2} = V_{OUT} = \pm 10V$, $V_{S1} = \mp 10V$ |
| DIGITAL CONTROL | | | | | |
| V_{INL}^1 | All | K | | 0.8V max | $V_{IN} = V_{DD}$ $V_{IN} = 0$ |
| V_{INH}^1 | All | K | | 2.4V min | |
| C_{IN} | All | K | 7pF typ | | |
| I_{INH}^1 | All | K | 10nA max | | |
| I_{INL}^1 | All | K | 10nA max | | |
| DYNAMIC CHARACTERISTICS | | | | | |
| t_{ON} | AD7510DI AD7511DI | K K | 180ns typ 350ns typ | | $V_{IN} = 0$ to +3.0V |
| t_{OFF} | AD7510DI AD7511DI | K K | 350ns typ 180ns typ | | |
| $t_{TRANSITION}$ | AD7512DI | K | 300ns typ | | |
| C_S (C_D) $_{OFF}$ | All | K | 8pF typ | | V_D (V_S) = 0V |
| C_S (C_D) $_{ON}$ | All | K | 17pF typ | | |
| C_{DS} (C_S - $_{OUT}$) | All | K | 1pF typ | | |
| C_{DD} (C_{SS}) | All | K | 0.5pF typ | | |
| C_{OUT} | AD7512DI | K | 17pF typ | | |
| Q_{NJ} | All | K | 30pC typ | | Measured at S or D terminal. $C_L = 1000pF$, $V_{IN} = 0$ to 3V, V_D (V_S) = +10V to -10V |
| POWER SUPPLY | | | | | |
| I_{DD}^1 | All | K | 800μA max | 800μA max | All digital inputs = V_{INH} |
| I_{SS}^1 | All | K | 800μA max | 800μA max | |
| I_{DD}^1 | All | K | 500μA max | 500μA max | All digital inputs = V_{INL} |
| I_{SS}^1 | All | K | 500μA max | 500μA max | |

NOTES

¹100% tested.

Specifications subject to change without notice.

PIN CONFIGURATIONS

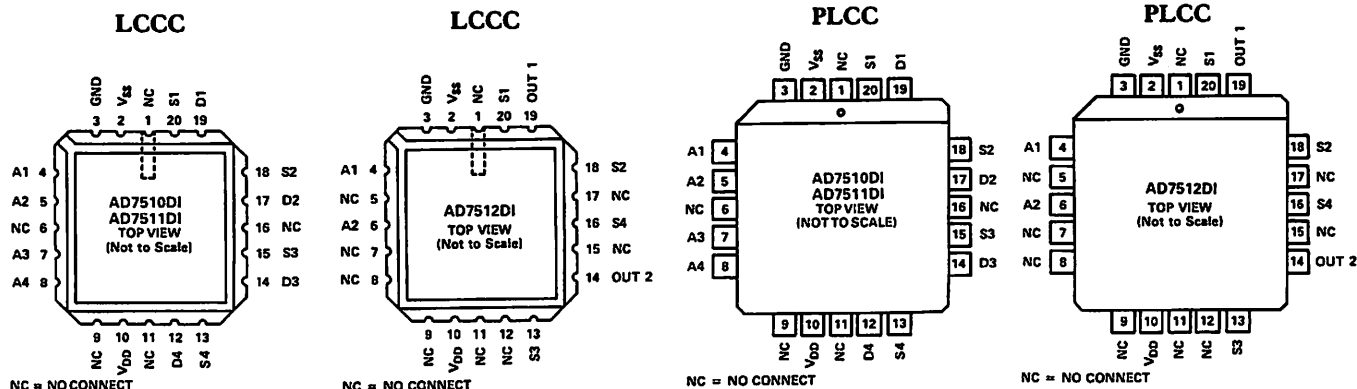

EXTENDED VERSIONS (S, T)

| PARAMETER | MODEL | VERSION | +25°C | -55°C to +125°C | TEST CONDITIONS |
|--------------------------------|----------|---------|-----------|-----------------|--|
| ANALOG SWITCH | | | | | |
| R_{ON}^1 | All | S, T | 100Ω max | 175Ω max | $-10V \leq V_D \leq +10V$ $I_{DS} = 1mA$ |
| $I_D (I_S)_{OFF}^1$ | All | S, T | 3nA max | 200nA max | $V_D = -10V, V_S = +10V$ and $V_D = +10V, V_S = -10V$ |
| $I_D (I_S)_{ON}^1$ | All | S, T | 10 | | $V_S = V_D = +10V$ and $V_S = V_D = -10V$ |
| I_{OUT}^1 | AD7512DI | S, T | 9nA max | 600nA max | $V_{S1} = V_{OUT} = \pm 10V$ $V_{S2} = \mp 10V$ and $V_{S2} = V_{OUT} = \pm 10V$ $V_{S1} = \mp 10V$ |
| DIGITAL CONTROL | | | | | |
| V_{INL}^1 | All | S, T | | 0.8V max | |
| $V_{INH}^{1,2}$ | AD7510DI | S | | 2.4V min | |
| | AD7511DI | T | | 2.4V min | |
| | AD7512DI | T | | 2.4V min | |
| | AD7511DI | S | | 3.0V min | |
| | AD7512DI | S | | 3.0V min | |
| I_{INH}^1 | All | S, T | 10nA max | | $V_{IN} = V_{DD}$ |
| I_{INL}^1 | All | S, T | 10nA max | | $V_{IN} = 0$ |
| DYNAMIC CHARACTERISTICS | | | | | |
| t_{ON}^3 | AD7510DI | S, | 1.0μs max | | $V_{IN} = 0$ to +3V |
| | AD7511DI | S, T | 1.0μs max | | |
| t_{OFF}^3 | AD7510DI | S, T | 1.0μs max | | |
| | AD7511DI | S, T | 1.0μs max | | |
| $t_{TRANSITION}^3$ | AD7512DI | S, T | 1.0μs max | | |
| POWER SUPPLY | | | | | |
| I_{DD}^1 | All | S, T | | 800μA max | All digital inputs = V_{INH} |
| I_{SS}^1 | All | S, T | | 800μA max | |
| I_{DD}^1 | All | S, T | | 500μA max | All digital inputs = V_{INL} |
| I_{SS}^1 | All | S, T | | 500μA max | |

NOTES

¹ 100% tested.² A pullup resistor, typically 1-2kΩ is required to make AD7511DISQ and AD7512DISQ TTL compatible.³ Guaranteed, not production tested.

Specifications subject to change without notice.

ABSOLUTE MAXIMUM RATINGS*

 V_{DD} to GND +17V V_{SS} to GND -17VOvervoltage at $V_D (V_S)$ (1 second surge) $V_{DD} + 25V$
or $V_{SS} - 25V$ (Continuous) $V_{DD} + 20V$
or $V_{SS} - 20V$

or 20mA, Whichever Occurs First

Switch Current (I_{DS} , Continuous) 50mASwitch Current (I_{DS} , Surge)

1ms Duration, 10% Duty Cycle 150mA

Digital Input Voltage Range 0V to $V_{DD} + 0.3V$

Power Dissipation (Any Package)

Up to +75°C 450mW

Derates above +75°C by 6mW/°C

Lead Temperature (Soldering, 10sec) +300°C

Storage Temperature -65°C to +150°C

Operating Temperature

Commercial (KN, KP Versions) 0 to +70°C

Industrial (KQ Versions) -25°C to +85°C

Extended (SQ, TQ, SE, TE Versions) -55°C to +125°C


*Stresses above those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. This is a stress rating only and functional operation of the device at these or any other conditions above those indicated in the operational sections of this specification is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

CAUTION

ESD (electrostatic discharge) sensitive device. The digital control inputs are diode protected; however, permanent damage may occur on unconnected devices subject to high energy electrostatic fields. Unused devices must be stored in conductive foam or shunts. The protective foam should be discharged to the destination socket before devices are removed.



—Circuit Description

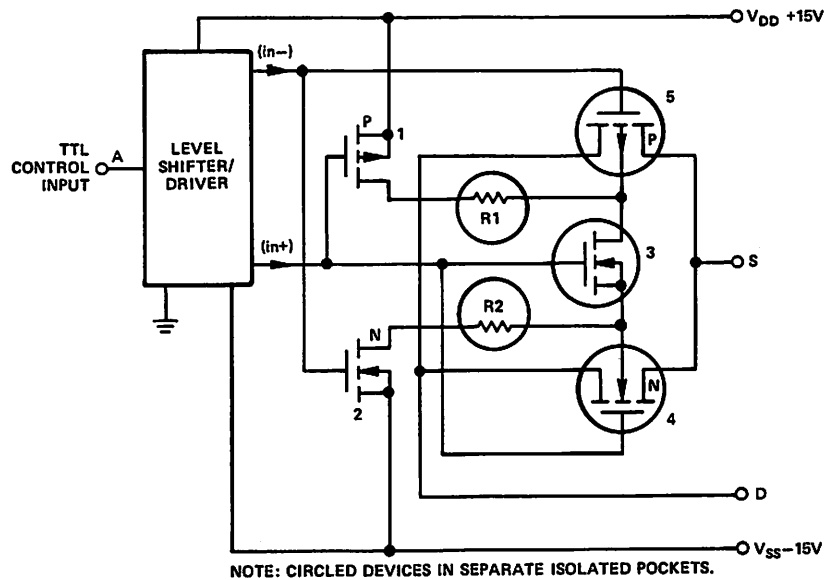

CIRCUIT DESCRIPTION

CMOS devices make excellent analog switches; however, problems with overvoltage and latch-up phenomenon necessitated protection circuitry. These protection circuits, however, either caused degradation of important switch parameters such as R_{ON} or leakage, or provided only limited protection in the event of overvoltage.

The AD7510DI series switches utilize a dielectrically isolated CMOS fabrication process to eliminate the four-layer substrate found in junction-isolated CMOS, thus providing latch-free operation.


A typical switch channel is shown in Figure 2. The output switching element is comprised of device numbers 4 and 5. Operation is as follows: for an “ON” switch, (in +) is V_{DD} and (in -) is V_{SS} from the driver circuits. Device numbers 1 and 2 are “OFF” and number 3 in “ON”. Hence, the backgates of the P- and N-channel output devices (numbers 4 and 5) are tied together and floating. The circled devices are located in separate dielectrically isolated pockets. Floating the output switch backgates with the signal input increases the effective threshold voltage for an applied analog signal, thus providing a flatter R_{ON} versus V_S response.


For an "OFF" switch, device number 3 is "OFF," and the backgates of devices 4 and 5 are tied through $1k\Omega$ resistors (R1 and R2) to the respective supply voltages through the "ON" devices 1 and 2.

If a voltage is applied to the S or D (OUT) terminal which exceeds V_{DD} or V_{SS} , the S- or D-to-backgate diode is forward biased; however, R1 and R2 provide current limiting action to the supplies.


An equivalent circuit of the output switch element in Figure 3 shows that, indeed, the $1\text{ k}\Omega$ limiting resistors are in series with the backgates of the P- and N-channel output devices – *not* in series with the signal path between the S and D terminals.

It is possible to turn on an “OFF” switch by applying a voltage in excess of V_{DD} or V_{SS} to the S or D terminal. If a positive stress voltage is applied to the S or D terminal which exceeds V_{DD} by a threshold, then the P-channel (device 5) will turn on creating a low impedance path between the S and D terminals. A similar situation exists for negative stress voltages which exceed V_{SS} . In this case the N-channel provides the low impedance path between the S and D terminals. The limiting factor on the overvoltage protection is the power dissipation of the package and is $\pm 20V$ continuous (or 20mA whichever occurs first) above the supply voltages.

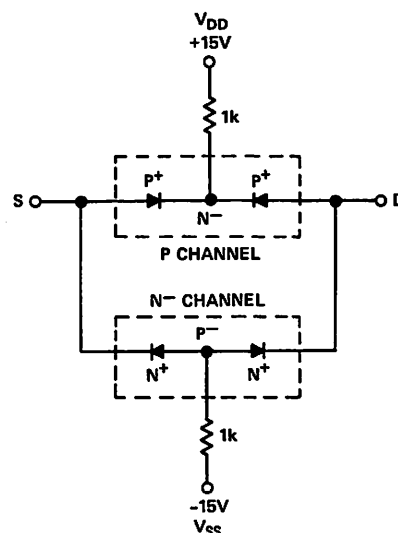


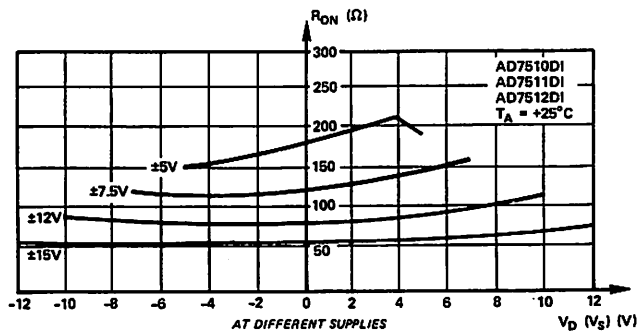


R_{ON} as a Function of V_D (V_S)

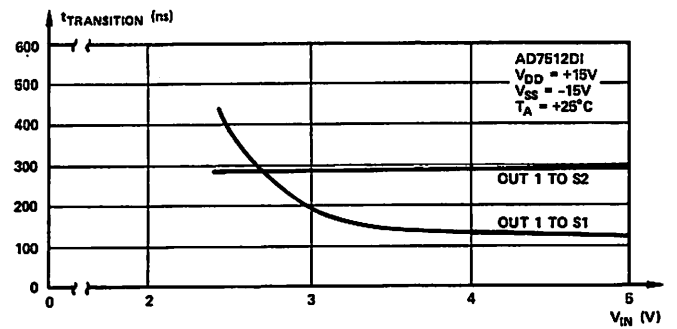


$t_{TRANSITION}$ as a Function of Digital Input Voltage

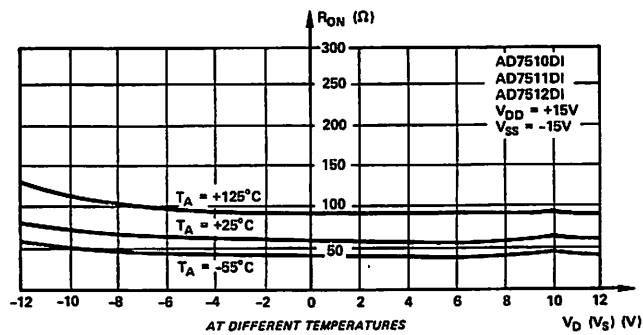


R_{ON} as a Function of V_D (V_S)

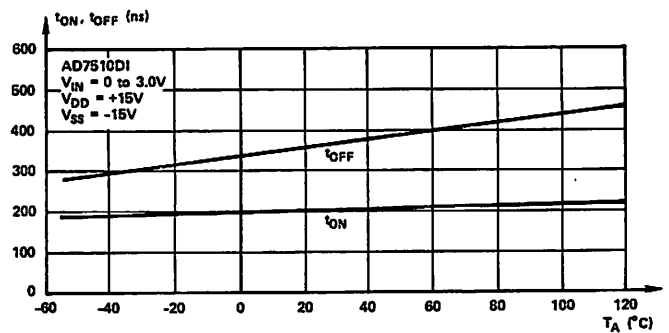

t_{ON} , t_{OFF} as a Function of Temperature

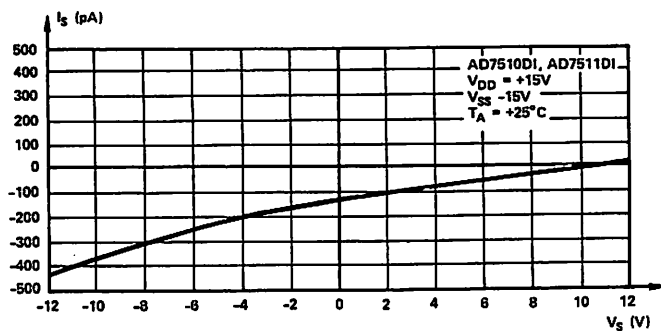


I_S (I_D) $_{OFF}$ vs V_S

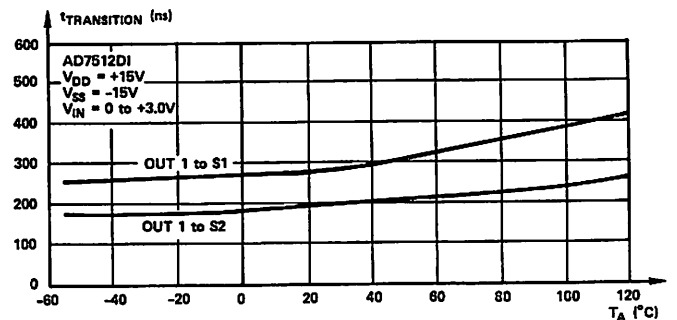


$t_{TRANSITION}$ as a Function of Temperature

TYPICAL SWITCHING CHARACTERISTICS


AD7510DI, AD7511DI

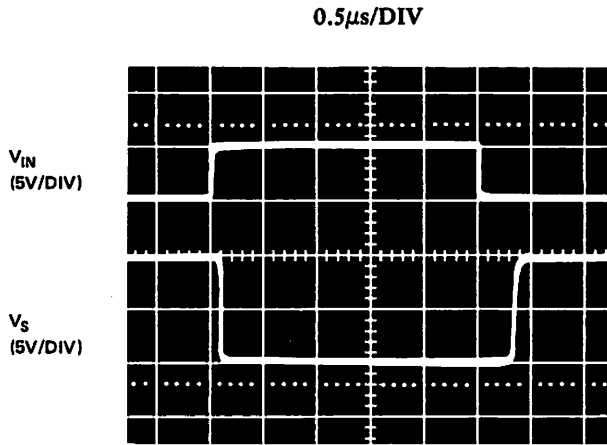


Switching Waveforms for $V_D = -10V$

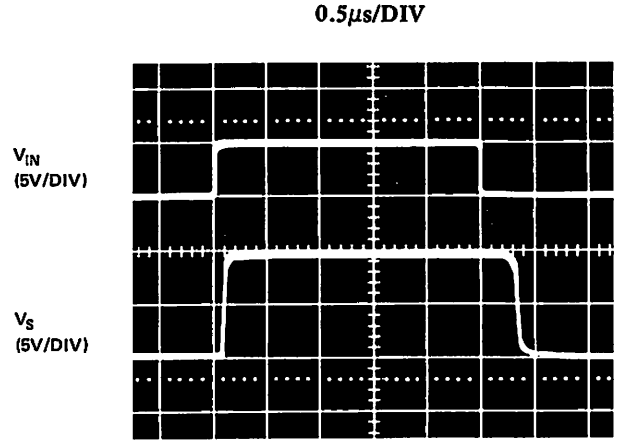

Switching Waveforms for $V_D = +10V$

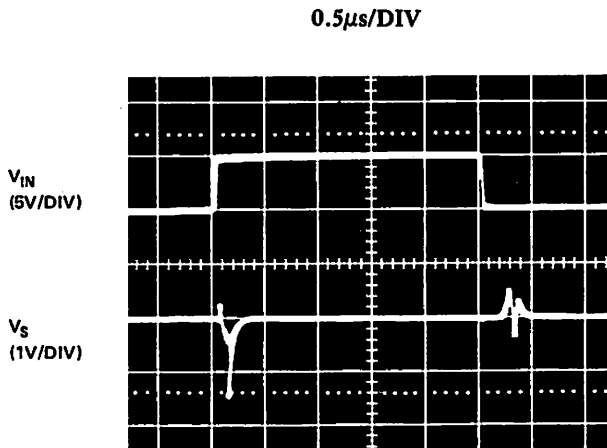


Switching Waveforms for $V_D = \text{Open}$

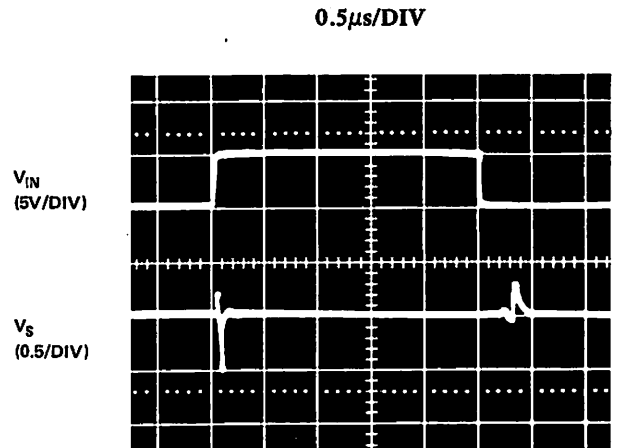


Switching Waveforms for $V_D = 0V$


AD7510DI, AD7511DI TEST CIRCUIT

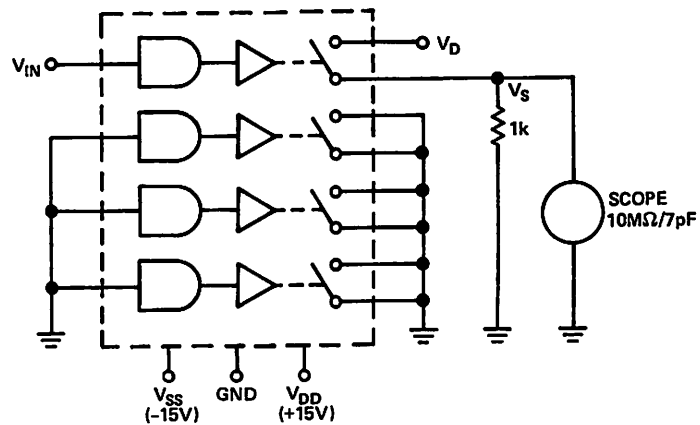


AD7512DI

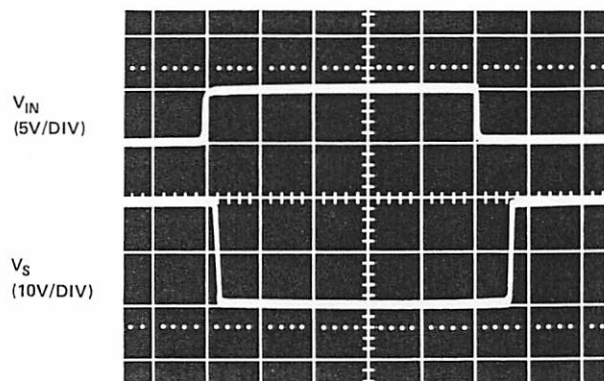0.5 μ s/DIV


Switching Waveforms for
 $V_{S1} = -10V$, $V_{S2} = +10V$, $R_L = 1k$

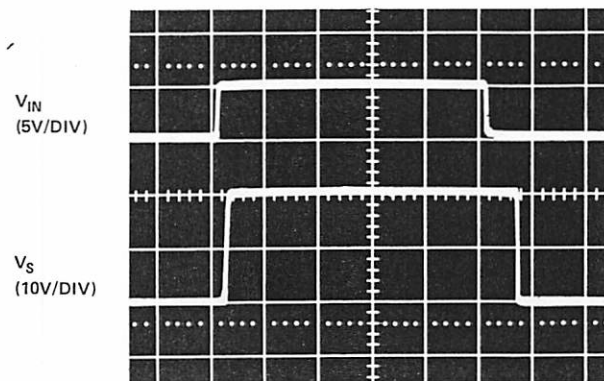0.5 μ s/DIV

Switching Waveforms for
 $V_{S1} = +10V$, $V_{S2} = -10V$, $R_L = \infty$

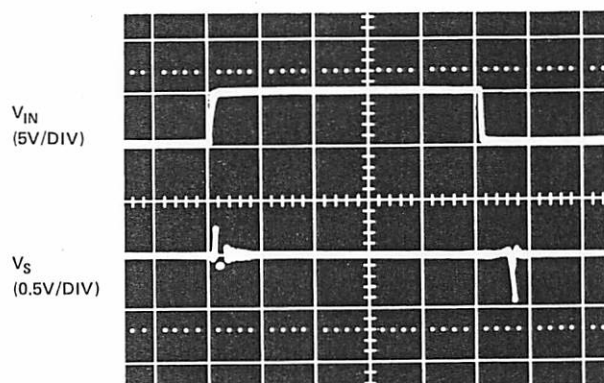
0.5 μ s/DIV

Switching Waveforms for
 V_{S1} and $V_{S2} = 0V$, $R_L = \infty$

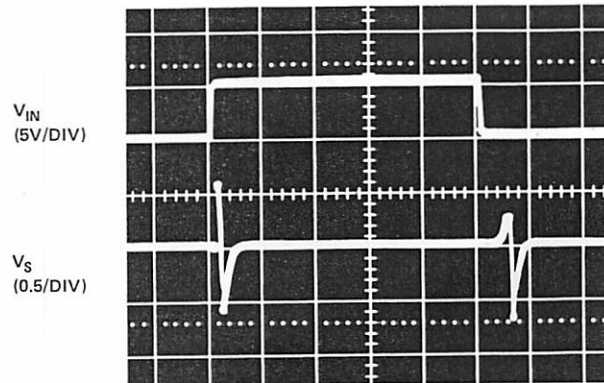0.5 μ s/DIV

Switching Waveforms for
 V_{S1} and $V_{S2} = \text{Open}$, $R_L = 1k$

AD7512DI TEST CIRCUIT

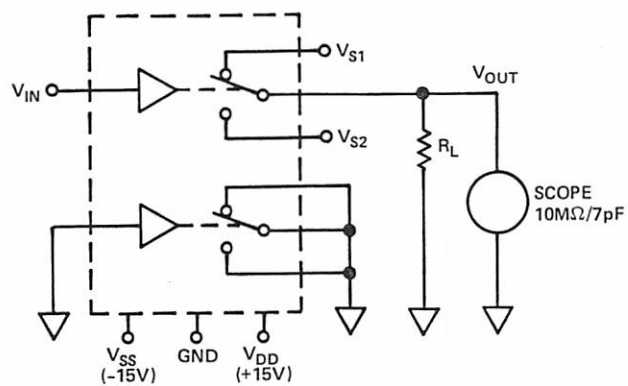


AD7511

TERMINOLOGY

| | | | |
|------------------------------|---|--------------------|---|
| R_{ON} | Ohmic resistance between terminals D and S. | $C_{DD}(C_{SS})$ | Capacitance between terminals D (S) of any two switches. (This will determine the cross coupling between switches vs. frequency.) |
| $R_{ON} \text{ Drift Match}$ | Difference between the R_{ON} drift of any two switches. | t_{ON} | Delay time between the 50% points of the digital input and switch "ON" condition. |
| $R_{ON} \text{ Match}$ | Difference between the R_{ON} of any two switches. | t_{OFF} | Delay time between the 50% points of the digital input and switch "OFF" condition. |
| $I_D(I_S)_{OFF}$ | Current at terminals D or S. This is a leakage current when the switch is "OFF". | $t_{TRANSITION}$ | Delay time when switching from one address state to another. |
| $I_D(I_S)_{ON}$ | Leakage current that flows from the closed switch into the body. (This leakage will show up as the difference between the current I_D going into the switch and the outgoing current I_S .) | V_{INL} | Maximum input voltage for a logic low. |
| $V_D(V_S)$ | Analog voltage on terminal D (S). | V_{INH} | Minimum input voltage for a logic high. |
| $C_S(C_D)$ | Capacitance between terminal S (D) and ground. (This capacitance is specified for the switch open and closed.) | $I_{INL}(I_{INH})$ | Input current of the digital input. |
| C_{DS} | Capacitance between terminals D and S. (This will determine the switch isolation over frequency.) | C_{IN} | Input capacitance to ground of the digital input. |
| | | V_{DD} | Most positive voltage supply. |
| | | V_{SS} | Most negative voltage supply. |
| | | I_{DD} | Positive supply current. |
| | | I_{SS} | Negative supply current. |


OUTLINE DIMENSIONS

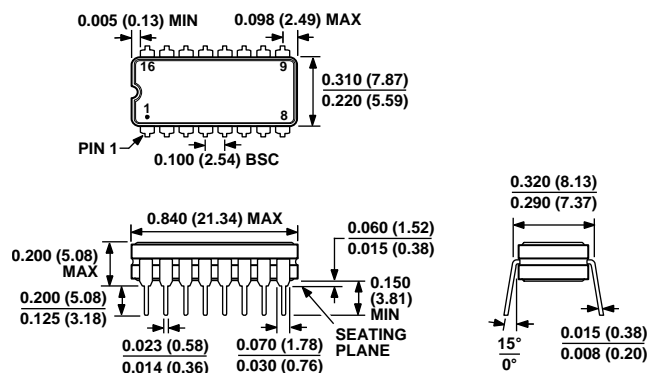

CONTROLLING DIMENSIONS ARE IN INCHES; MILLIMETER DIMENSIONS (IN PARENTHESES) ARE ROUNDED-OFF INCH EQUIVALENTS FOR REFERENCE ONLY AND ARE NOT APPROPRIATE FOR USE IN DESIGN.

Figure 3. 16-Lead Ceramic Dual In-Line Package [CERDIP]
(Q-16)

Dimensions shown in inches and (millimeters)

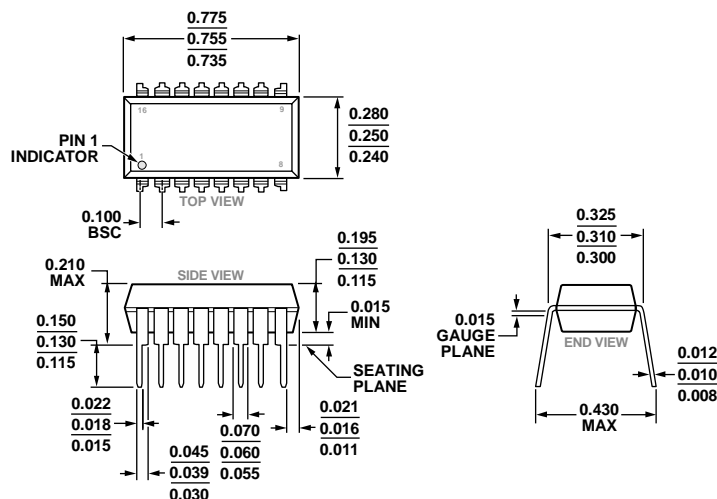

COMPLIANT TO JEDEC STANDARDS MS-001-BB

Figure 4. 16-Lead Plastic Dual In-Line Package [PDIP]
Narrow Body
(N-16)

Dimensions shown in inches

ORDERING GUIDE

| Model ^{1,2} | Temperature Range | Package Description | Package Option |
|----------------------|-------------------|---|----------------|
| AD7511DIJN | 0°C to 70°C | 16-Lead Plastic Dual In-Line Package [PDIP] | N-16 |
| AD7511DIJNZ | 0°C to 70°C | 16-Lead Plastic Dual In-Line Package [PDIP] | N-16 |
| AD7511DIKNZ | 0°C to 70°C | 16-Lead Plastic Dual In-Line Package [PDIP] | N-16 |
| AD7511DIKQ | −25°C to +85°C | 16-Lead Ceramic Dual In-Line Package [CERDIP] | Q-16 |
| AD7511DISQ/883B | −55°C to +125°C | 16-Lead Ceramic Dual In-Line Package [CERDIP] | Q-16 |

¹ Z = RoHS Compliant Part.

² AD7511DISQ/883B is a MIL-STD-883, Class B, processed part.

AD7511

REVISION HISTORY

12/2016—Rev. A to Rev. B

Added AD7510 and AD7512 Obsolete Note..... 1

Updated Outline Dimensions9

Changes to Ordering Guide.....9



Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Analog Devices Inc.:](#)

[AD7511DIKNZ](#)