



# ADRF6602

One Technology Way, P.O. Box 9106, Norwood, MA 02062-9106, U.S.A.  
Tel: 781.329.4700 ©2010–2013 Analog Devices, Inc. All rights reserved.  
**Technical Support** [www.analog.com](http://www.analog.com)

## TABLE OF CONTENTS

|                                                            |    |
|------------------------------------------------------------|----|
| Features .....                                             | 1  |
| Applications .....                                         | 1  |
| General Description .....                                  | 1  |
| Functional Block Diagram .....                             | 1  |
| Revision History .....                                     | 2  |
| Specifications.....                                        | 3  |
| RF Specifications .....                                    | 3  |
| Synthesizer/PLL Specifications.....                        | 4  |
| Logic Input and Power Specifications .....                 | 4  |
| Timing Characteristics .....                               | 5  |
| Absolute Maximum Ratings.....                              | 6  |
| ESD Caution.....                                           | 6  |
| Pin Configuration and Function Descriptions.....           | 7  |
| Typical Performance Characteristics .....                  | 9  |
| RF Frequency Sweep .....                                   | 9  |
| IF Frequency Sweep .....                                   | 10 |
| Spurious Performance.....                                  | 15 |
| Register Structure .....                                   | 16 |
| Register 0—Integer Divide Control (Default: 0x0001C0)..... | 16 |
| Register 1—Modulus Divide Control (Default: 0x003001) ..   | 16 |
| Register 2—Fractional Divide Control (Default: 0x001802)   | 17 |

|                                                                                      |    |
|--------------------------------------------------------------------------------------|----|
| Register 3— $\Sigma$ - $\Delta$ Modulator Dither Control (Default: 0x10000B).....    | 17 |
| Register 4—PLL Charge Pump, PFD, and Reference Path Control (Default: 0x0AA7E4)..... | 18 |
| Register 5—PLL Enable and LO Path Control (Default: 0x0000E5).....                   | 19 |
| Register 6—VCO Control and VCO Enable (Default: 0x1E2106).....                       | 19 |
| Register 7—Mixer Bias Enable and External VCO Enable (Default: 0x000007).....        | 19 |
| Theory of Operation .....                                                            | 20 |
| Programming the ADRF6602.....                                                        | 20 |
| Initialization Sequence .....                                                        | 20 |
| LO Selection Logic .....                                                             | 21 |
| Applications Information .....                                                       | 22 |
| Basic Connections for Operation.....                                                 | 22 |
| AC Test Fixture .....                                                                | 23 |
| Evaluation Board .....                                                               | 24 |
| Evaluation Board Control Software .....                                              | 24 |
| Schematic and Artwork.....                                                           | 26 |
| Evaluation Board Configuration Options.....                                          | 28 |
| Outline Dimensions .....                                                             | 29 |
| Ordering Guide .....                                                                 | 29 |

## REVISION HISTORY

### 10/13—Rev. C to Rev. D

|                                                                                |    |
|--------------------------------------------------------------------------------|----|
| Changed “1550 MHz to 2150 MHz” to “1000 MHz to 3100 MHz” in Product Title..... | 1  |
| Updated Outline Dimensions .....                                               | 29 |

### 9/10—Rev. B to Rev. C

|                                                             |    |
|-------------------------------------------------------------|----|
| Changes to Features Section.....                            | 1  |
| Changes to Table 2.....                                     | 3  |
| Changes to Table 3 and Table 4.....                         | 4  |
| Changes to Table 6.....                                     | 6  |
| Changes to Typical Performance Characteristics Section..... | 9  |
| Added Spurious Performance Section.....                     | 15 |
| Changes to Programming the ADRF6602 Section .....           | 20 |
| Added AC Test Fixture Section and Figure 47 .....           | 23 |
| Changes to Evaluation Board Control Software Section.....   | 24 |

### 7/10—Rev. A to Rev. B

|                         |   |
|-------------------------|---|
| Changes to Table 1..... | 1 |
| Changes to Table 6..... | 6 |

|                           |    |
|---------------------------|----|
| Changes to Figure 20..... | 14 |
| Changes to Figure 21..... | 17 |
| Changes to Figure 22..... | 18 |
| Changes to Figure 23..... | 19 |

### 4/10—Rev. 0 to Rev. A

|                                                       |    |
|-------------------------------------------------------|----|
| Added Table 1 .....                                   | 1  |
| Changes to Figure 1.....                              | 1  |
| Change to Synthesizer/PLL Specifications Section..... | 4  |
| Change to Table 3 .....                               | 4  |
| Changes to Initializing Sequence Section .....        | 15 |
| Changes to Figure 16.....                             | 12 |
| Changes to Figure 17.....                             | 13 |
| Changes to Figure 19.....                             | 14 |
| Changes to Figure 21.....                             | 17 |
| Changes to Figure 24.....                             | 20 |

### 1/10—Revision 0: Initial Version

## SPECIFICATIONS

### RF SPECIFICATIONS

$V_S = 5\text{ V}$ ; ambient temperature ( $T_A$ ) =  $25^\circ\text{C}$ ;  $f_{\text{REF}} = 153.6\text{ MHz}$ ;  $f_{\text{PFD}} = 38.4\text{ MHz}$ ; high-side LO injection;  $f_{\text{IF}} = 140\text{ MHz}$ ; IIP3 optimized using CDAC (0x0) and IP3SET (3.3 V), unless otherwise noted.

Table 2.

| Parameter                       | Test Conditions/Comments                                           | Min  | Typ     | Max  | Unit     |
|---------------------------------|--------------------------------------------------------------------|------|---------|------|----------|
| INTERNAL LO FREQUENCY RANGE     |                                                                    | 1550 |         | 2150 | MHz      |
| RF INPUT FREQUENCY RANGE        | $\pm 3\text{ dB}$ RF input range                                   | 1000 |         | 3100 | MHz      |
| RF INPUT AT 1410 MHz            |                                                                    |      |         |      |          |
| Input Return Loss               | Relative to $50\ \Omega$ (can be improved with external match)     |      | −9      |      | dB       |
| Input P1dB                      |                                                                    |      | 15.5    |      | dBm      |
| Second-Order Intercept (IIP2)   | −5 dBm each tone (10 MHz spacing between tones)                    |      | 54.0    |      | dBm      |
| Third-Order Intercept (IIP3)    | −5 dBm each tone (10 MHz spacing between tones)                    |      | 33.5    |      | dBm      |
| Single-Side Band Noise Figure   | IP3SET = 3.3 V                                                     |      | 15.2    |      | dB       |
|                                 | IP3SET = open                                                      |      | 14.1    |      | dB       |
| LO-to-IF Leakage                | At $1\times$ LO frequency, $50\ \Omega$ termination at the RF port |      | −45     |      | dBm      |
| RF INPUT AT 1760 MHz            |                                                                    |      |         |      |          |
| Input Return Loss               | Relative to $50\ \Omega$ (can be improved with external match)     |      | −15     |      | dB       |
| Input P1dB                      |                                                                    |      | 15      |      | dBm      |
| Second-Order Intercept (IIP2)   | −5 dBm each tone (10 MHz spacing between tones)                    |      | 53.5    |      | dBm      |
| Third-Order Intercept (IIP3)    | −5 dBm each tone (10 MHz spacing between tones)                    |      | 30.8    |      | dBm      |
| Single-Side Band Noise Figure   | IP3SET = 3.3 V                                                     |      | 14.9    |      | dB       |
|                                 | IP3SET = open                                                      |      | 13.5    |      | dB       |
| LO-to-IF Leakage                | At $1\times$ LO frequency, $50\ \Omega$ termination at the RF port |      | −43     |      | dBm      |
| RF INPUT AT 2010 MHz            |                                                                    |      |         |      |          |
| Input Return Loss               | Relative to $50\ \Omega$ (can be improved with external match)     |      | <(−20)  |      | dB       |
| Input P1dB                      |                                                                    |      | 14.8    |      | dBm      |
| Second-Order Intercept (IIP2)   | −5 dBm each tone (10 MHz spacing between tones)                    |      | 60      |      | dBm      |
| Third-Order Intercept (IIP3)    | −5 dBm each tone (10 MHz spacing between tones)                    |      | 29.5    |      | dBm      |
| Single-Side Band Noise Figure   | IP3SET = 3.3 V                                                     |      | 15.8    |      | dB       |
|                                 | IP3SET = open                                                      |      | 14.9    |      | dB       |
| LO-to-IF Leakage                | At $1\times$ LO frequency, $50\ \Omega$ termination at the RF port |      | −45     |      | dBm      |
| IF OUTPUT                       |                                                                    |      |         |      |          |
| Voltage Conversion Gain         | Differential $200\ \Omega$ load                                    |      | 6.5     |      | dB       |
| IF Bandwidth                    | Small signal 3 dB bandwidth                                        |      | 500     |      | MHz      |
| Output Common-Mode Voltage      | External pull-up balun or inductors required                       |      | 5       |      | V        |
| Gain Flatness                   | Over frequency range, any 5 MHz/50 MHz                             |      | 0.2/0.5 |      | dB       |
| Gain Variation                  | Over full temperature range                                        |      | 1.2     |      | dB       |
| Output Swing                    | Differential $200\ \Omega$ load                                    |      | 2       |      | V p-p    |
| Differential Output Return Loss | Measured through 4:1 balun                                         |      | −12     |      | dB       |
| LO INPUT/OUTPUT (LOP, LON)      | Externally applied $1\times$ LO input, internal PLL disabled       |      |         |      |          |
| Frequency Range                 |                                                                    | 250  |         | 6000 | MHz      |
| Output Level (LO as Output)     | $1\times$ LO into a $50\ \Omega$ load, LO output buffer enabled    |      | −7      |      | dBm      |
| Input Level (LO as Input)       |                                                                    | −6   | 0       | +6   | dBm      |
| Input Impedance                 |                                                                    |      | 50      |      | $\Omega$ |

**SYNTHESIZER/PLL SPECIFICATIONS**

$V_S = 5\text{ V}$ ; ambient temperature ( $T_A$ ) =  $25^\circ\text{C}$ ;  $f_{\text{REF}} = 153.6\text{ MHz}$ ;  $f_{\text{REF}} \text{ power} = 4\text{ dBm}$ ;  $f_{\text{PFD}} = 38.4\text{ MHz}$ ; high-side LO injection;  $f_{\text{IF}} = 140\text{ MHz}$ ; IIP3 optimized using CDAC (0x0) and IP3SET (3.3 V), unless otherwise noted.

**Table 3.**

| Parameter                    | Test Conditions/Comments                                                                  | Min  | Typ    | Max  | Unit               |
|------------------------------|-------------------------------------------------------------------------------------------|------|--------|------|--------------------|
| SYNTHESIZER SPECIFICATIONS   | Synthesizer specifications referenced to $1 \times \text{LO}$                             |      |        |      |                    |
| Frequency Range              | Internally generated LO                                                                   | 1550 |        | 2150 | MHz                |
| Figure of Merit <sup>1</sup> | $P_{\text{REF\_IN}} = 0\text{ dBm}$                                                       |      | -220.5 |      | dBc/Hz             |
| Reference Spurs              | $f_{\text{PFD}} = 38.4\text{ MHz}$                                                        |      |        |      |                    |
|                              | $f_{\text{PFD}}/4$                                                                        |      | -105   |      | dBc                |
|                              | $f_{\text{PFD}}$                                                                          |      | -80    |      | dBc                |
|                              | $>f_{\text{PFD}}$                                                                         |      | -80    |      | dBc                |
| PHASE NOISE                  | $f_{\text{LO}} = 1550\text{ MHz to }2150\text{ MHz}$ , $f_{\text{PFD}} = 38.4\text{ MHz}$ |      |        |      |                    |
|                              | 1 kHz to 10 kHz offset                                                                    |      | -92    |      | dBc/Hz             |
|                              | 100 kHz offset                                                                            |      | -103   |      | dBc/Hz             |
|                              | 500 kHz offset                                                                            |      | -122   |      | dBc/Hz             |
|                              | 1 MHz offset                                                                              |      | -128   |      | dBc/Hz             |
|                              | 5 MHz offset                                                                              |      | -140   |      | dBc/Hz             |
|                              | 10 MHz offset                                                                             |      | -147   |      | dBc/Hz             |
|                              | 20 MHz offset                                                                             |      | -150   |      | dBc/Hz             |
| Integrated Phase Noise       | 1 kHz to 40 MHz integration bandwidth                                                     |      | 0.3    |      | $^\circ\text{rms}$ |
| PFD Frequency                |                                                                                           | 20   |        | 40   | MHz                |
| REFERENCE CHARACTERISTICS    | REF_IN, MUXOUT pins                                                                       |      |        |      |                    |
| REF_IN Input Frequency       |                                                                                           | 12   |        | 160  | MHz                |
| REF_IN Input Capacitance     |                                                                                           |      | 4      |      | pF                 |
| MUXOUT Output Level          | $V_{\text{OL}}$ (lock detect output selected)                                             |      |        | 0.25 | V                  |
|                              | $V_{\text{OH}}$ (lock detect output selected)                                             | 2.7  |        |      | V                  |
| MUXOUT Duty Cycle            |                                                                                           |      | 50     |      | %                  |
| CHARGE PUMP                  |                                                                                           |      |        |      |                    |
| Pump Current                 | Programmable to 250 $\mu\text{A}$ , 500 $\mu\text{A}$ , 750 $\mu\text{A}$ , 1 mA          |      | 500    |      | $\mu\text{A}$      |
| Output Compliance Range      |                                                                                           | 1    |        | 2.8  | V                  |

<sup>1</sup> The figure of merit (FOM) is computed as phase noise (dBc/Hz) –  $10\log_{10}(f_{\text{PFD}}) - 20\log_{10}(f_{\text{LO}}/f_{\text{PFD}})$ . The FOM was measured across the full LO range, with  $f_{\text{REF}} = 80\text{ MHz}$ ,  $f_{\text{REF}} \text{ power} = 10\text{ dBm}$  (500 V/ $\mu\text{s}$  slew rate) with a 40 MHz  $f_{\text{PFD}}$ . The FOM was computed at 50 kHz offset.

**LOGIC INPUT AND POWER SPECIFICATIONS**

$V_S = 5\text{ V}$ ; ambient temperature ( $T_A$ ) =  $25^\circ\text{C}$ ;  $f_{\text{REF}} = 153.6\text{ MHz}$ ;  $f_{\text{PFD}} = 38.4\text{ MHz}$ ; high-side LO injection;  $f_{\text{IF}} = 140\text{ MHz}$ ; IIP3 optimized using CDAC (0x0) and IP3SET (3.3 V), unless otherwise noted.

**Table 4.**

| Parameter                                      | Test Conditions/Comments                                                           | Min  | Typ | Max  | Unit          |
|------------------------------------------------|------------------------------------------------------------------------------------|------|-----|------|---------------|
| LOGIC INPUTS                                   | CLK, DATA, LE                                                                      |      |     |      |               |
| Input High Voltage, $V_{\text{INH}}$           |                                                                                    | 1.4  |     | 3.3  | V             |
| Input Low Voltage, $V_{\text{INL}}$            |                                                                                    | 0    |     | 0.7  | V             |
| Input Current, $I_{\text{INH}}/I_{\text{INL}}$ |                                                                                    |      | 0.1 |      | $\mu\text{A}$ |
| Input Capacitance, $C_{\text{IN}}$             |                                                                                    |      | 5   |      | pF            |
| POWER SUPPLIES                                 | VCC1, VCC2, VCC_LO, VCC_MIX, and VCC_V2I pins                                      |      |     |      |               |
| Voltage Range                                  |                                                                                    | 4.75 | 5   | 5.25 | V             |
| Supply Current                                 | PLL only                                                                           |      | 97  |      | mA            |
|                                                | External LO mode (internal PLL disabled, LO output buffer off, IP3SET pin = 3.3 V) |      | 168 |      | mA            |
|                                                | Internal LO mode (internal PLL enabled, IP3SET pin = 3.3 V, LO output buffer on)   |      | 277 |      | mA            |
|                                                | Internal LO mode (internal PLL enabled, IP3SET pin = 3.3 V, LO output buffer off)  |      | 263 |      | mA            |
|                                                | Power-down mode                                                                    |      | 30  |      | mA            |

**TIMING CHARACTERISTICS**VCC2 = 5 V  $\pm$  5%.

Table 5.

| Parameter      | Limit | Unit   | Description            |
|----------------|-------|--------|------------------------|
| t <sub>1</sub> | 20    | ns min | LE setup time          |
| t <sub>2</sub> | 10    | ns min | DATA-to-CLK setup time |
| t <sub>3</sub> | 10    | ns min | DATA-to-CLK hold time  |
| t <sub>4</sub> | 25    | ns min | CLK high duration      |
| t <sub>5</sub> | 25    | ns min | CLK low duration       |
| t <sub>6</sub> | 10    | ns min | CLK-to-LE setup time   |
| t <sub>7</sub> | 20    | ns min | LE pulse width         |

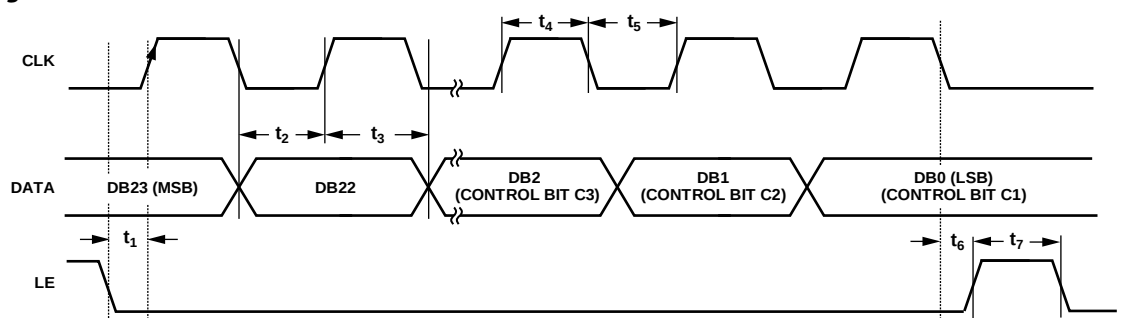
**Timing Diagram**

Figure 2. Timing Diagram

08545-002

## ABSOLUTE MAXIMUM RATINGS

Table 6.

| Parameter                                            | Rating                    |
|------------------------------------------------------|---------------------------|
| Supply Voltage, VCC1, VCC2, VCC_LO, VCC_MIX, VCC_V2I | −0.5 V to +5.5 V          |
| Digital I/O, CLK, DATA, LE                           | −0.3 V to +3.6 V          |
| IFP, IFN                                             | −0.3 V to VCC_V2I + 0.3 V |
| RF <sub>IN</sub>                                     | 16 dBm                    |
| LOP, LON                                             | 13 dBm                    |
| θ <sub>JA</sub> (Exposed Paddle Soldered Down)       | 35°C/W                    |
| Maximum Junction Temperature                         | 150°C                     |
| Operating Temperature Range                          | −40°C to +85°C            |
| Storage Temperature Range                            | −65°C to +150°C           |

Stresses above those listed under Absolute Maximum Ratings may cause permanent damage to the device. This is a stress rating only; functional operation of the device at these or any other conditions above those indicated in the operational section of this specification is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

### ESD CAUTION



**ESD (electrostatic discharge) sensitive device.** Charged devices and circuit boards can discharge without detection. Although this product features patented or proprietary protection circuitry, damage may occur on devices subjected to high energy ESD. Therefore, proper ESD precautions should be taken to avoid performance degradation or loss of functionality.

## PIN CONFIGURATION AND FUNCTION DESCRIPTIONS

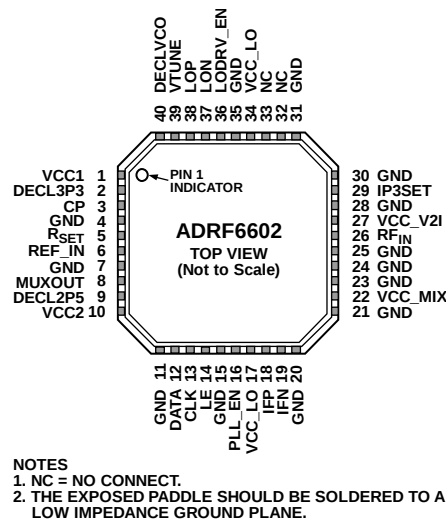


Figure 3. Pin Configuration

Table 7. Pin Function Descriptions

| Pin No.                                          | Mnemonic | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
|--------------------------------------------------|----------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1                                                | VCC1     | Power Supply for the 3.3 V LDO. Power supply voltage range is 4.75 V to 5.25 V. Each power supply pin should be decoupled with a 100 pF capacitor and a 0.1 μF capacitor located close to the pin.                                                                                                                                                                                                                                                                                                           |
| 2                                                | DECL3P3  | Decoupling Node for 3.3 V LDO. Connect a 0.1 μF capacitor between this pin and ground.                                                                                                                                                                                                                                                                                                                                                                                                                       |
| 3                                                | CP       | Charge Pump Output Pin. Connect to VTUNE through loop filter.                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| 4, 7, 11, 15, 20, 21, 23, 24, 25, 28, 30, 31, 35 | GND      | Ground. Connect these pins to a low impedance ground plane.                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| 5                                                | RSET     | Charge Pump Current. The nominal charge pump current can be set to 250 μA, 500 μA, 750 μA, or 1 mA using Bit DB11 and Bit DB10 in Register 4 and by setting Bit DB18 in Register 4 to 0 (internal reference current). In this mode, no external RSET is required. If Bit DB18 is set to 1, the four nominal charge pump currents (I <sub>NOMINAL</sub> ) can be externally adjusted according to the following equation:<br>$R_{SET} = \left( \frac{217.4 \times I_{CP}}{I_{NOMINAL}} \right) - 37.8 \Omega$ |
| 6                                                | REF_IN   | Reference Input. Nominal input level is 1 V p-p. Input range is 12 MHz to 160 MHz.                                                                                                                                                                                                                                                                                                                                                                                                                           |
| 8                                                | MUXOUT   | Multiplexer Output. This output can be programmed to provide the reference output signal or the lock detect signal. The output is selected by programming the appropriate register.                                                                                                                                                                                                                                                                                                                          |
| 9                                                | DECL2P5  | Decoupling Node for 2.5 V LDO. Connect a 0.1 μF capacitor between this pin and ground.                                                                                                                                                                                                                                                                                                                                                                                                                       |
| 10                                               | VCC2     | Power Supply for the 2.5 V LDO. Power supply voltage range is 4.75 V to 5.25 V. Each power supply pin should be decoupled with a 100 pF capacitor and a 0.1 μF capacitor located close to the pin.                                                                                                                                                                                                                                                                                                           |
| 12                                               | DATA     | Serial Data Input. The serial data input is loaded MSB first; the three LSBs are the control bits.                                                                                                                                                                                                                                                                                                                                                                                                           |
| 13                                               | CLK      | Serial Clock Input. The serial clock input is used to clock in the serial data to the registers. The data is latched into the 24-bit shift register on the CLK rising edge. Maximum clock frequency is 20 MHz.                                                                                                                                                                                                                                                                                               |
| 14                                               | LE       | Load Enable. When the LE input pin goes high, the data stored in the shift registers is loaded into one of the eight registers. The relevant latch is selected by the three control bits of the 24-bit word.                                                                                                                                                                                                                                                                                                 |
| 16                                               | PLL_EN   | PLL Enable. Switch between internal PLL and external LO input. When this pin is logic high, the mixer LO is automatically switched to the internal PLL and the internal PLL is powered up. When this pin is logic low, the internal PLL is powered down and the external LO input is routed to the mixer LO inputs. The SPI can also be used to switch modes.                                                                                                                                                |
| 17, 34                                           | VCC_LO   | Power Supply. Power supply voltage range is 4.75 V to 5.25 V. Each power supply pin should be decoupled with a 100 pF capacitor and a 0.1 μF capacitor located close to the pin.                                                                                                                                                                                                                                                                                                                             |
| 18, 19                                           | IFP, IFN | Mixer IF Outputs. These outputs should be pulled to VCC with RF chokes.                                                                                                                                                                                                                                                                                                                                                                                                                                      |

| Pin No. | Mnemonic         | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
|---------|------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 22      | VCC_MIX          | Power Supply. Power supply voltage range is 4.75 V to 5.25 V. Each power supply pin should be decoupled with a 100 pF capacitor and a 0.1 $\mu$ F capacitor located close to the pin.                                                                                                                                                                                                                                                                                                                              |
| 26      | RF <sub>IN</sub> | RF Input (Single-Ended, 50 $\Omega$ ).                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| 27      | VCC_V2I          | Power Supply. Power supply voltage range is 4.75 V to 5.25 V. Each power supply pin should be decoupled with a 100 pF capacitor and a 0.1 $\mu$ F capacitor located close to the pin.                                                                                                                                                                                                                                                                                                                              |
| 29      | IP3SET           | Connect a resistor from this pin to a 5 V supply to adjust IIP3. Normally leave open.                                                                                                                                                                                                                                                                                                                                                                                                                              |
| 32, 33  | NC               | No Connection.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| 36      | LODRV_EN         | LO Driver Enable. Together with Pin 16 (PLL_EN), this digital input pin determines whether the LOP and LON pins operate as inputs or outputs. LOP and LON become inputs if the PLL_EN pin is low or if the PLL_EN pin is set high with the PLEN bit (DB6 in Register 5) set to 0. LOP and LON become outputs if either the LODRV_EN pin or the LDRV bit (DB3 in Register 5) is set to 1 while the PLL_EN pin is set high. External LO drive frequency must be 1 $\times$ LO. This pin should not be left floating. |
| 37, 38  | LON, LOP         | Local Oscillator Input/Output. The internally generated 1 $\times$ LO is available on these pins. When internal LO generation is disabled, an external 1 $\times$ LO can be applied to these pins.                                                                                                                                                                                                                                                                                                                 |
| 39      | VTUNE            | VCO Control Voltage Input. This pin is driven by the output of the loop filter. Nominal input voltage range on this pin is 1.5 V to 2.5 V.                                                                                                                                                                                                                                                                                                                                                                         |
| 40      | DECLVCO          | Decoupling Node for VCO LDO. Connect a 100 pF capacitor and a 10 $\mu$ F capacitor between this pin and ground.                                                                                                                                                                                                                                                                                                                                                                                                    |
|         | EPAD             | Exposed Paddle. The exposed paddle should be soldered to a low impedance ground plane.                                                                                                                                                                                                                                                                                                                                                                                                                             |

## TYPICAL PERFORMANCE CHARACTERISTICS

### RF FREQUENCY SWEEP

CDAC = 0x0, internally generated high-side LO,  $RF_{IN} = -5$  dBm,  $f_{IF} = 140$  MHz, unless otherwise noted.

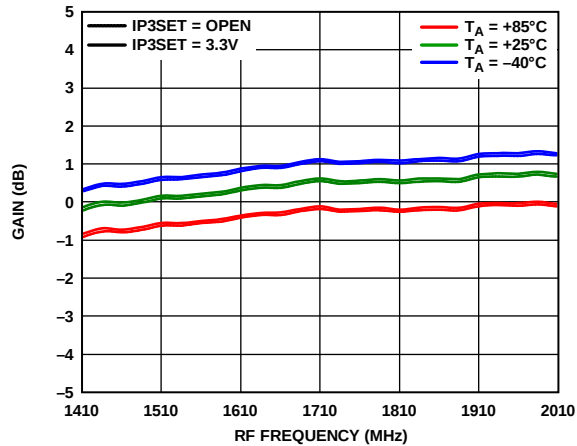


Figure 4. Gain vs. RF Frequency

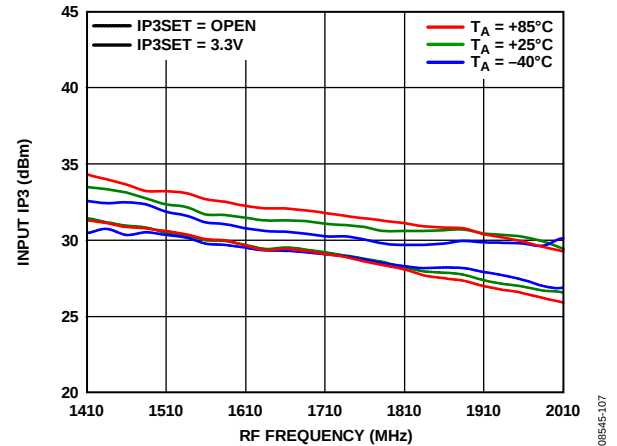


Figure 7. Input IP3 vs. RF Frequency

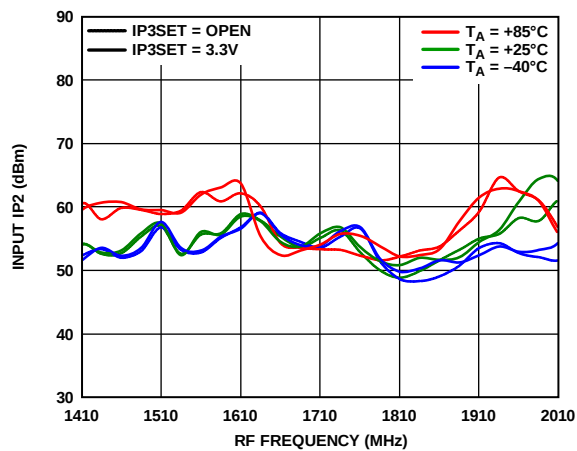


Figure 5. Input IP2 vs. RF Frequency

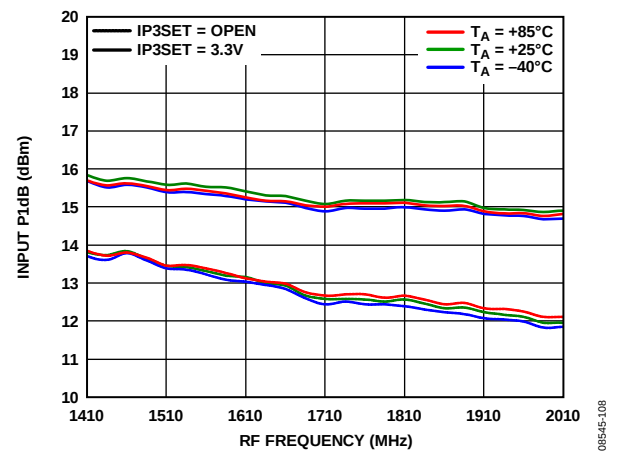


Figure 8. Input P1dB vs. RF Frequency

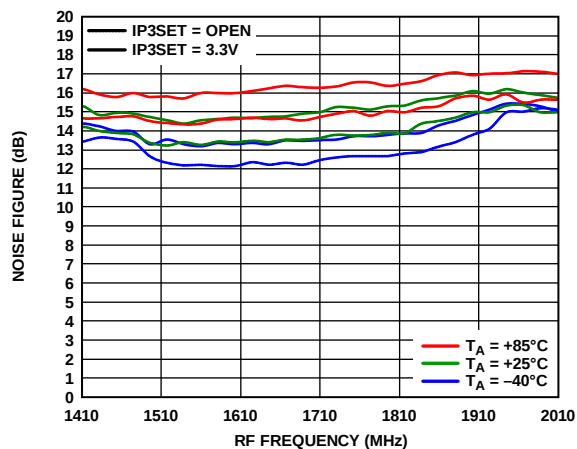


Figure 6. Noise Figure vs. RF Frequency

## IF FREQUENCY SWEEP

CDAC = 0x0, internally generated swept low-side LO,  $f_{RF} = 1960$  MHz,  $RF_{IN} = -5$  dBm, unless otherwise noted.

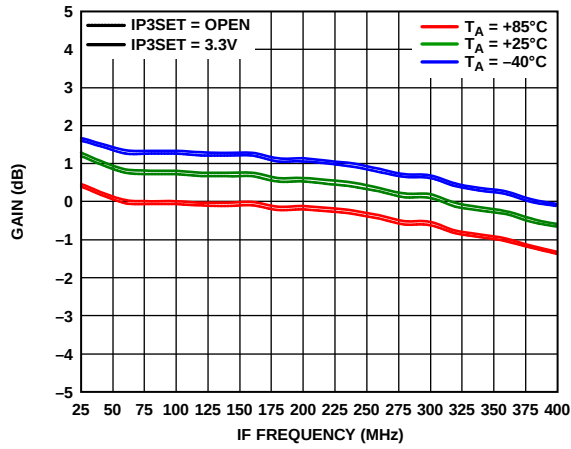


Figure 9. Gain vs. IF Frequency

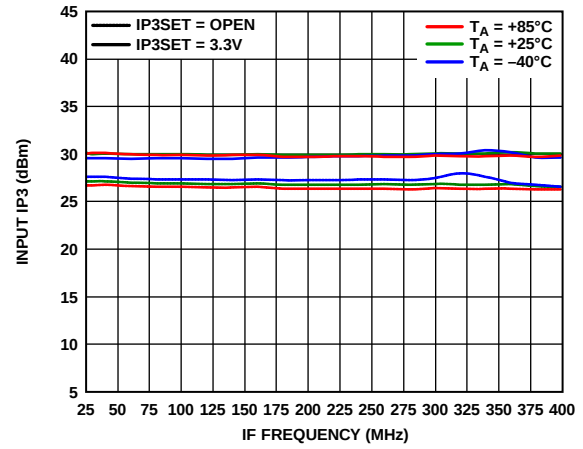
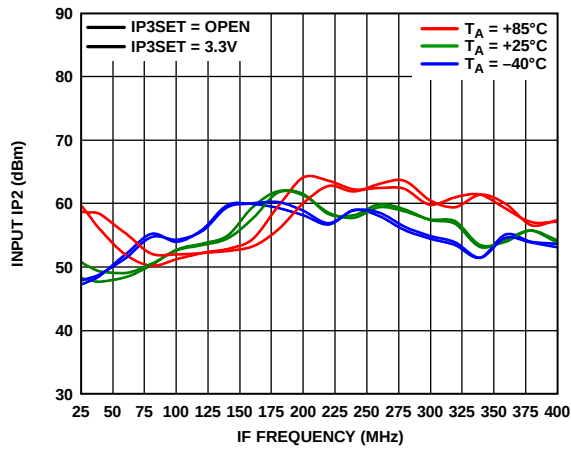
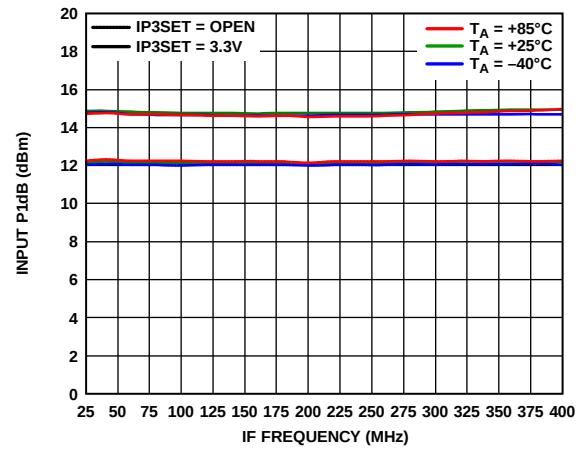
Figure 12. Input IP3 vs. IF Frequency,  $RF_{IN} = -5$  dBmFigure 10. Input IP2 vs. IF Frequency,  $RF_{IN} = -5$  dBm

Figure 13. Input P1dB vs. IF Frequency

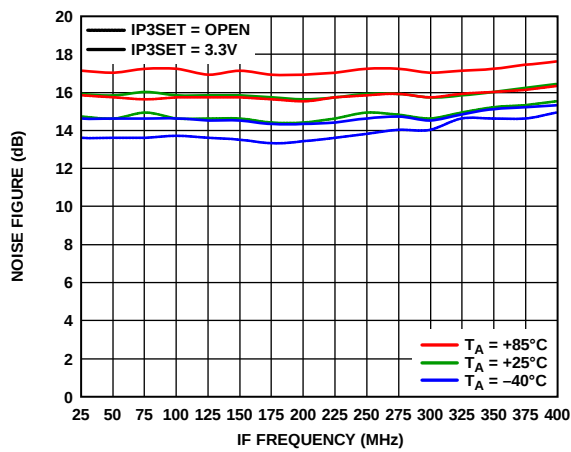


Figure 11. Noise Figure vs. IF Frequency

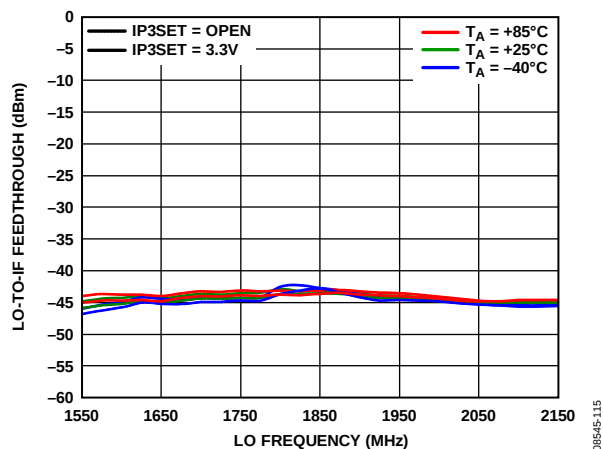


Figure 14. LO-to-IF Feedthrough vs. LO Frequency, LO Output Turned Off, CDAC = 0x0

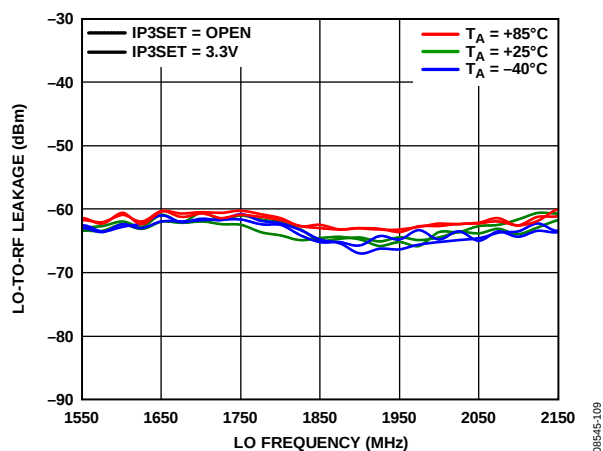


Figure 15. LO-to-RF Leakage vs. LO Frequency, LO Output Turned Off

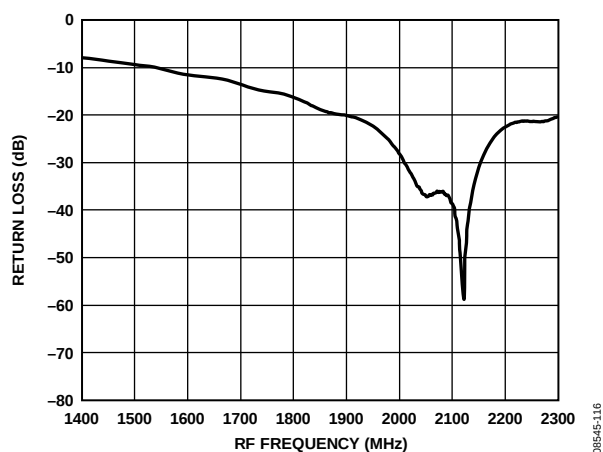


Figure 16. RF Input Return Loss vs. RF Frequency

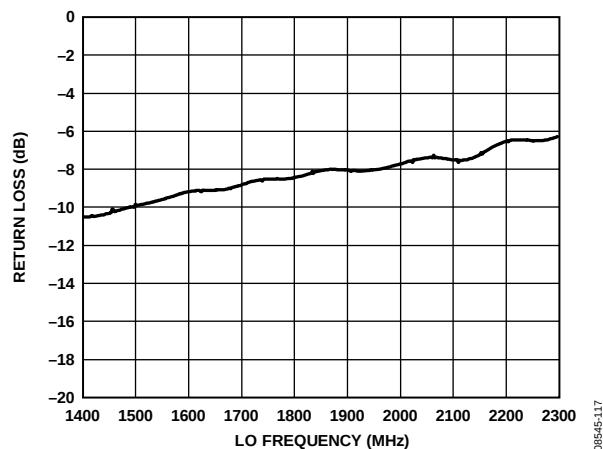


Figure 17. LO Input Return Loss vs. LO Frequency (Including TC1-1-13 Balun)

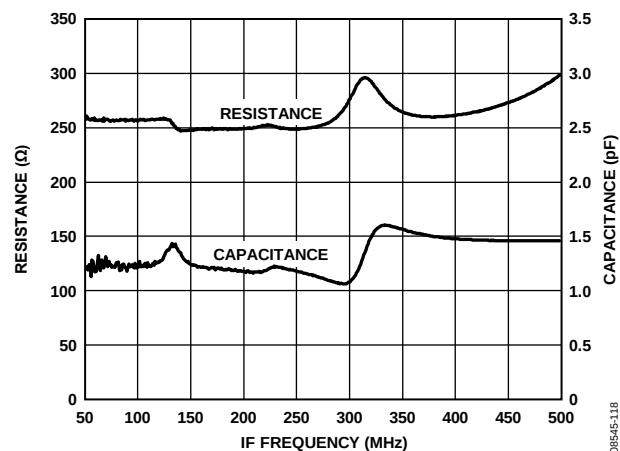


Figure 18. IF Differential Output Impedance (R Parallel C Equivalent)

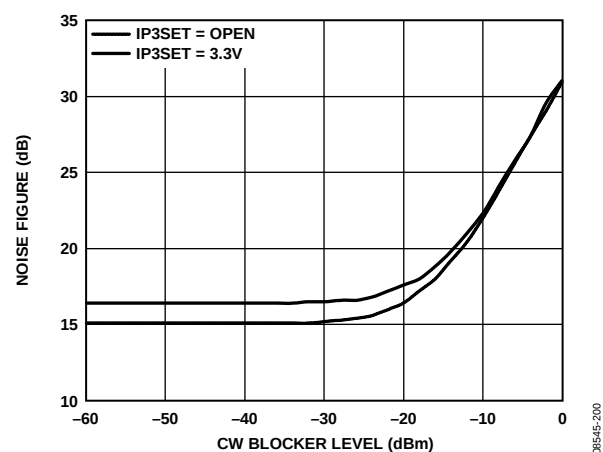


Figure 19. SSB Noise Figure vs. 5 MHz Offset Blocker Level, LO Frequency = 2105 MHz, RF Frequency = 1965 MHz

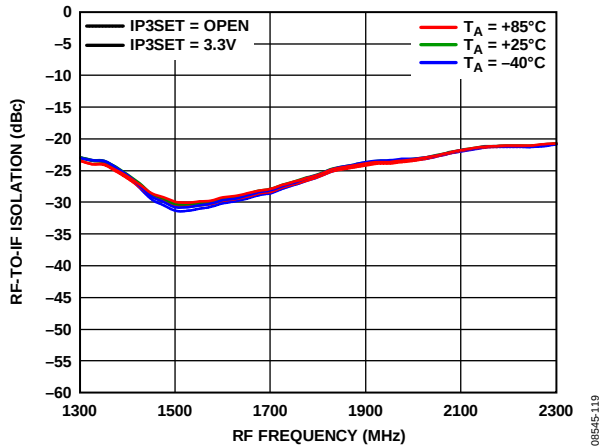


Figure 20. RF-to-IF Leakage vs. RF Frequency, High-Side LO, IF = 140 MHz, LO Output Turned Off

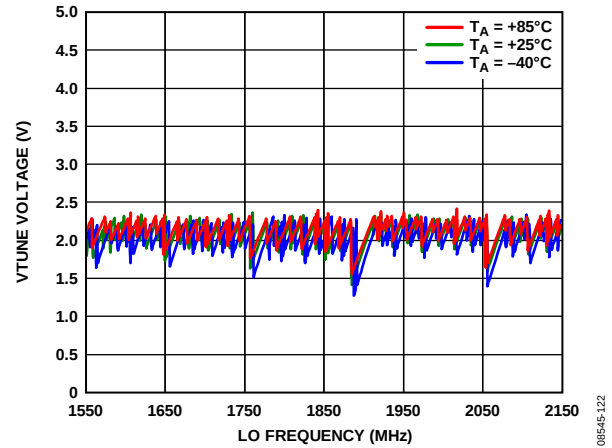


Figure 23. VTUNE vs. LO Frequency

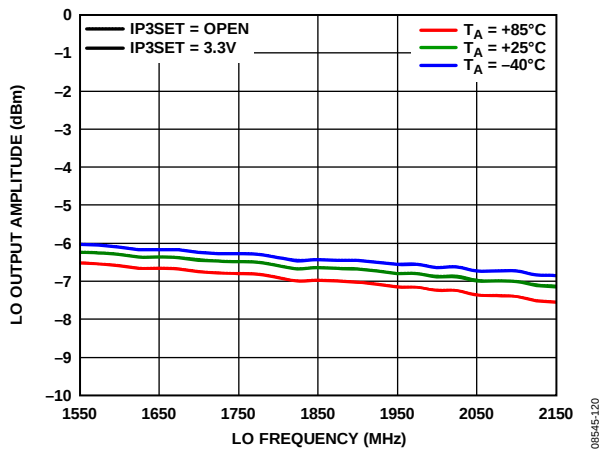


Figure 21. LO Output Amplitude vs. LO Frequency

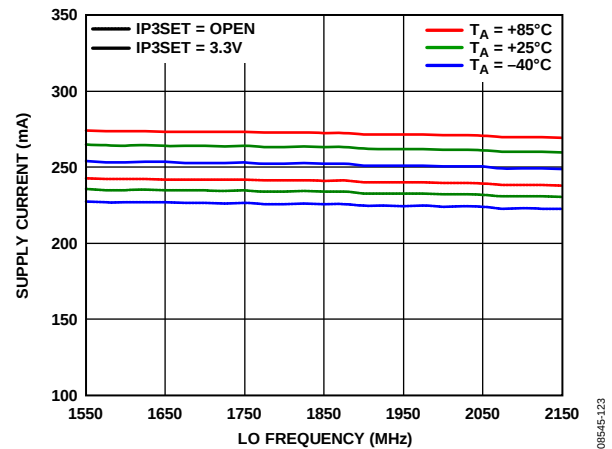


Figure 24. Supply Current vs. LO Frequency

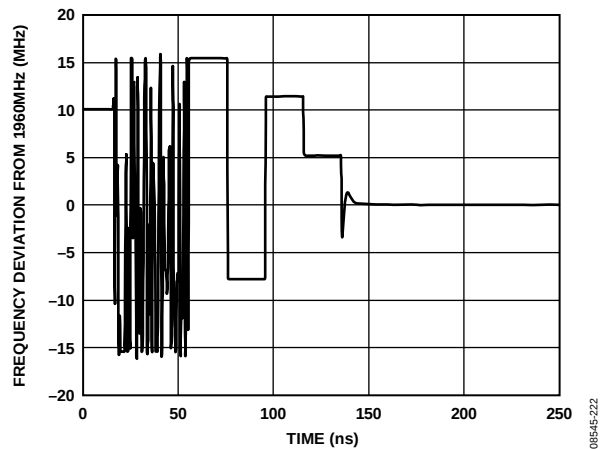


Figure 22. Frequency Deviation from LO Frequency at LO = 1.97 GHz to 1.96 GHz vs. Lock Time

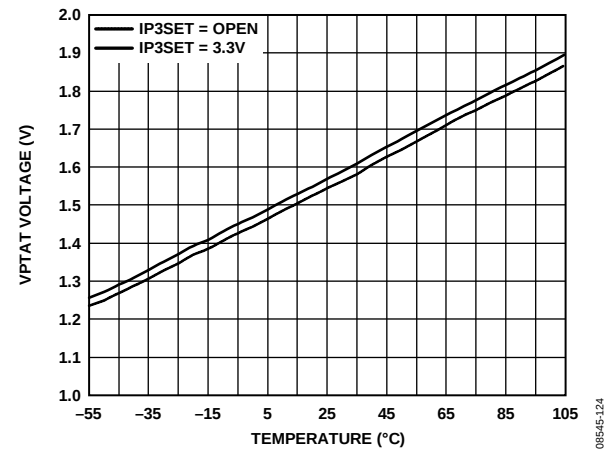


Figure 25. VPTAT Voltage vs. Temperature (IP3SET = Optimized, Open)

Complementary cumulative distribution function (CCDF),  $f_{RF} = 1960 \text{ MHz}$ ,  $f_{IF} = 140 \text{ MHz}$ .

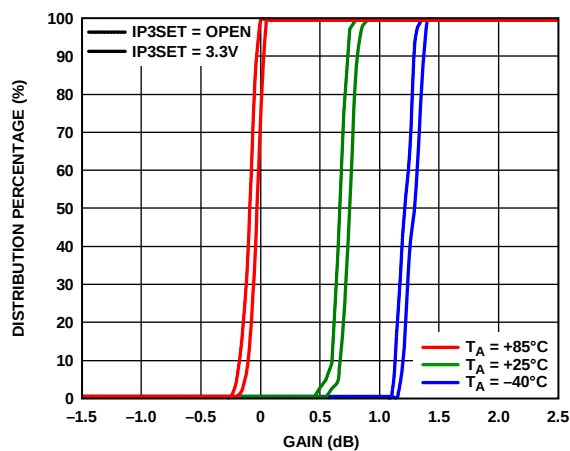


Figure 26. Gain

08545-125

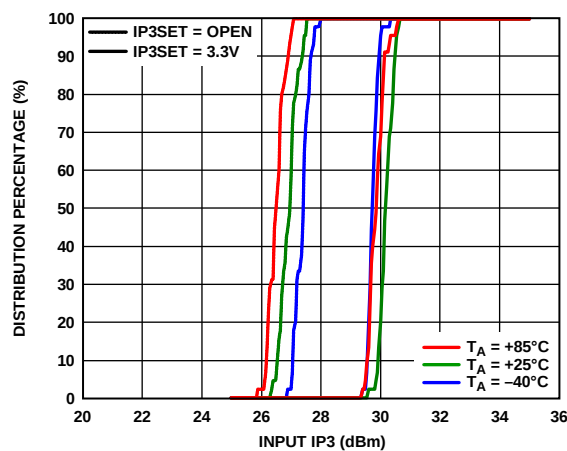


Figure 29. Input IP3

08545-128

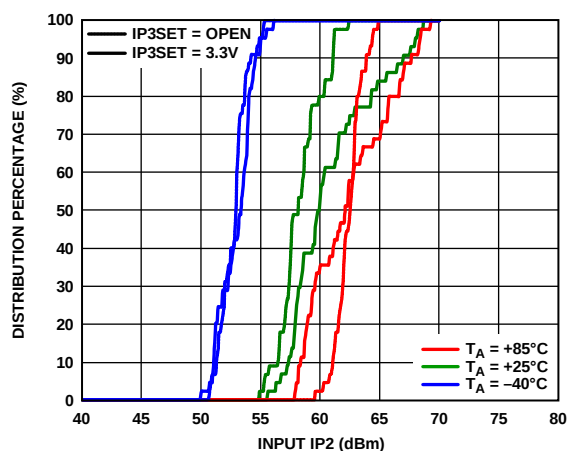


Figure 27. Input IP2

08545-126

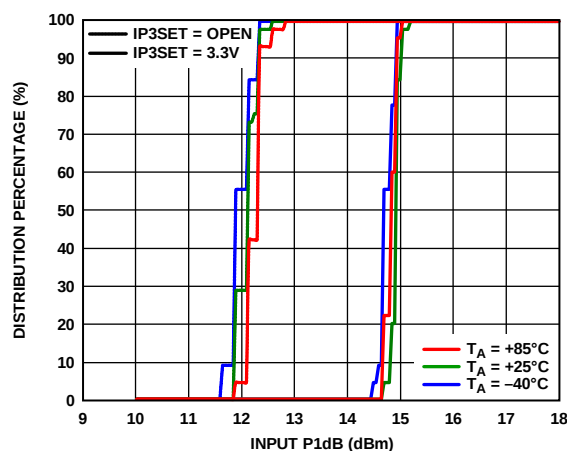


Figure 30. Input P1dB

08545-129

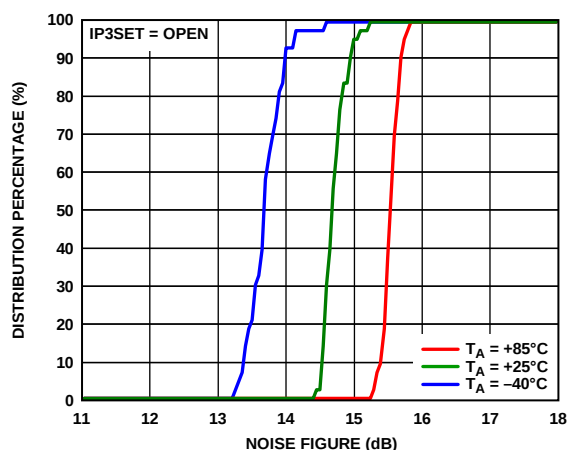


Figure 28. Noise Figure

08545-127

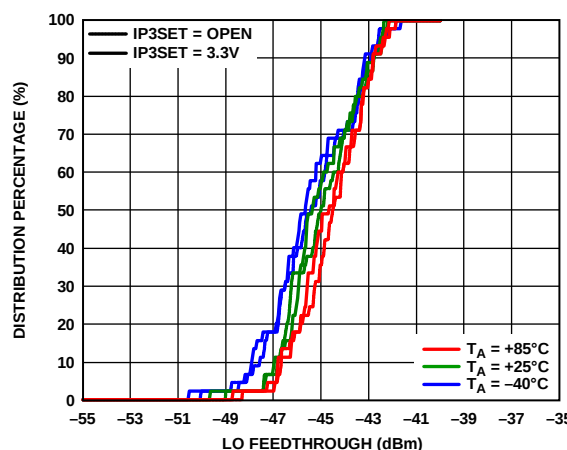


Figure 31. LO Feedthrough to IF, LO Output Turned Off

08545-130

Measured at IF output, CDAC = 0x0, IP3SET = open, internally generated high-side LO,  $f_{REF} = 153.6$  MHz,  $f_{PFD} = 38.4$  MHz,  $RF_{IN} = -5$  dBm,  $f_{IF} = 140$  MHz, unless otherwise noted. Phase noise measurements made at LO output, unless otherwise noted.

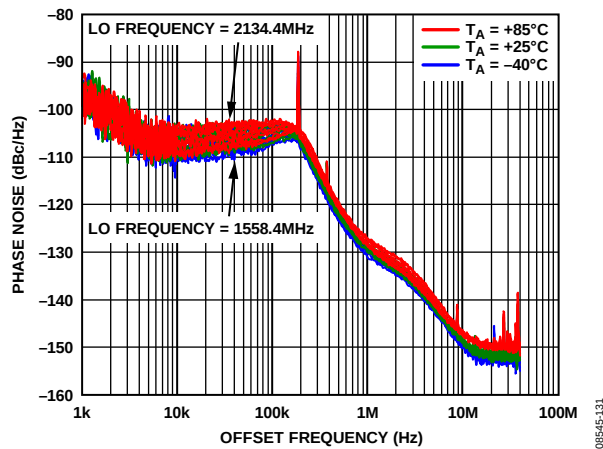


Figure 32. Phase Noise vs. Offset Frequency

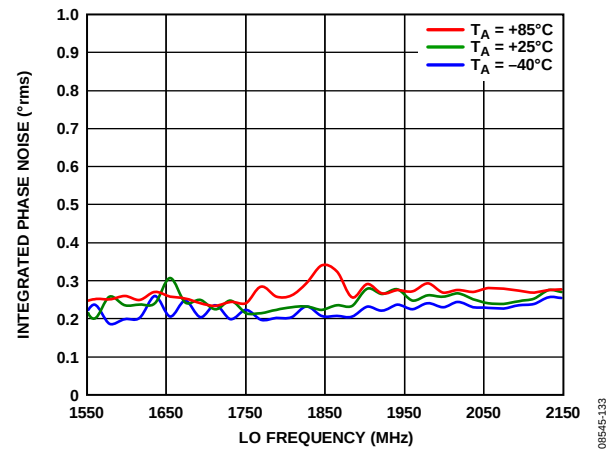


Figure 35. Integrated Phase Noise vs. LO Frequency

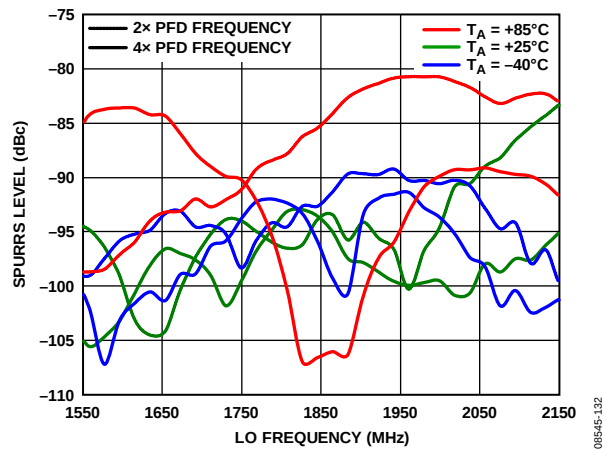


Figure 33. PLL Reference Spurs vs. LO Frequency (2x PFD and 4x PFD)

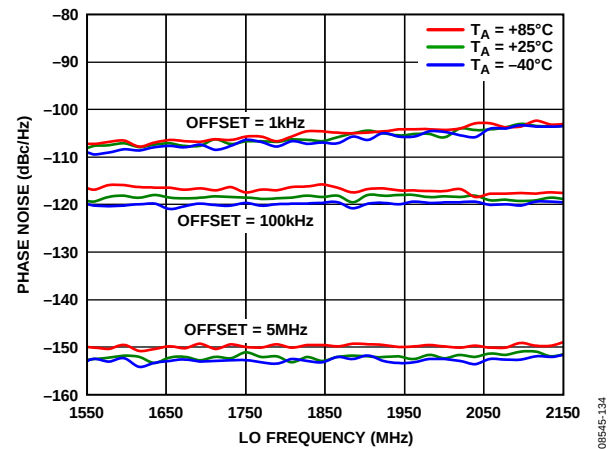


Figure 36. Phase Noise vs. LO Frequency (1 kHz, 100 kHz, and 5 MHz Steps)

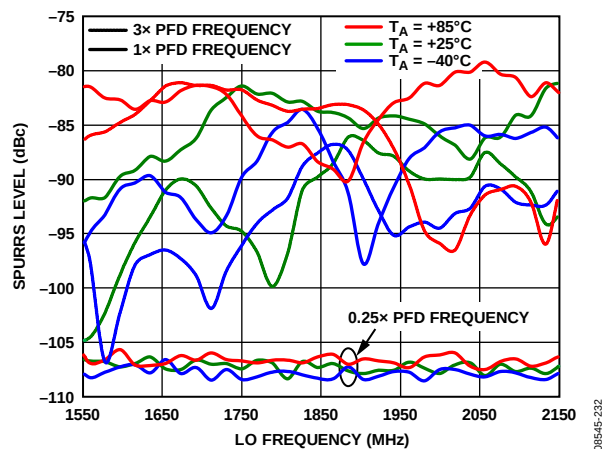


Figure 34. PLL Reference Spurs vs. LO Frequency (0.25x PFD, 1x PFD, and 3x PFD)

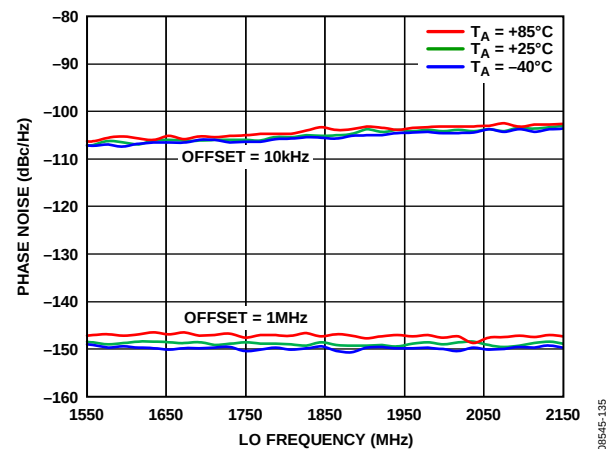


Figure 37. Phase Noise vs. LO Frequency (10 kHz, 1 MHz Steps)

**SPURIOUS PERFORMANCE**

$(N \times f_{RF}) - (M \times f_{LO})$  spur measurements were made using the standard evaluation board (see the Evaluation Board section). Mixer spurious products were measured in dB relative to the carrier (dBc) from the IF output power level. All spurious components greater than  $-125$  dBc are shown.

LO = 1550 MHz, RF = 1410 MHz (horizontal axis is m, vertical axis is n), and  $RF_{IN}$  power =  $-10$  dBm.

| M |   |         |         |         |         |         |
|---|---|---------|---------|---------|---------|---------|
| N |   | 0       | 1       | 2       | 3       | 4       |
|   | 0 | -95.78  | -36.11  | -38.06  | -43.03  |         |
|   | 1 | -27.96  | 0.00    | -75.14  | -44.01  | -81.04  |
|   | 2 | -80.82  | -84.22  | -70.69  | -83.52  | -90.50  |
|   | 3 | -105.61 | -93.37  | -112.15 | -84.67  | -121.89 |
|   | 4 | -120.72 | -121.95 | -123.15 | -120.95 | -123.77 |
|   | 5 |         | -122.11 | -122.03 | -122.97 | -123.53 |
|   | 6 |         |         | -122.02 | -121.46 | -122.62 |
|   | 7 |         |         |         | -122.03 | -121.44 |

LO = 1900 MHz, RF = 1760 MHz (horizontal axis is m, vertical axis is n), and  $RF_{IN}$  power =  $-10$  dBm.

| M |   |         |         |         |         |         |
|---|---|---------|---------|---------|---------|---------|
| N |   | 0       | 1       | 2       | 3       | 4       |
|   | 0 | -96.17  | -35.62  | -23.14  | -51.42  |         |
|   | 1 | -23.66  | 0.00    | -63.13  | -40.94  | -68.37  |
|   | 2 | -69.90  | -80.06  | -71.05  | -86.55  | -95.26  |
|   | 3 | -105.85 | -107.79 | -104.24 | -78.66  | -121.43 |
|   | 4 |         | -122.72 | -121.39 | -122.69 | -124.20 |
|   | 5 |         |         | -122.78 | -122.48 | -117.55 |
|   | 6 |         |         |         | -122.39 | -123.67 |
|   | 7 |         |         |         |         | -119.57 |

LO = 2150 MHz, RF = 2010 MHz (horizontal axis is m, vertical axis is n), and  $RF_{IN}$  power =  $-10$  dBm.

| M |   |        |         |         |         |         |
|---|---|--------|---------|---------|---------|---------|
| N |   | 0      | 1       | 2       | 3       | 4       |
|   | 0 | -94.96 | -36.89  | -22.24  | +9.56   | +9.56   |
|   | 1 | -21.91 | 0.00    | -69.83  | -31.34  | +9.56   |
|   | 2 | -76.22 | -77.24  | -75.74  | -80.30  | -87.09  |
|   | 3 |        | -97.36  | -101.06 | -76.16  | -121.60 |
|   | 4 |        | -122.66 | -122.37 | -120.59 | -125.16 |
|   | 5 |        |         | -122.76 | -121.11 | -124.51 |
|   | 6 |        |         |         | -122.63 | -122.41 |
|   | 7 |        |         |         |         | -122.93 |

## REGISTER STRUCTURE

This section provides the register maps for the [ADRF6602](#). The three LSBs determine the register that is programmed.

### REGISTER 0—INTEGER DIVIDE CONTROL (DEFAULT: 0x0001C0)

| RESERVED |      |      |      |      |      |      |      |      |      |      |      |      | DIVIDE MODE | INTEGER DIVIDE RATIO |     |     |     |     |     |     | CONTROL BITS |       |       |
|----------|------|------|------|------|------|------|------|------|------|------|------|------|-------------|----------------------|-----|-----|-----|-----|-----|-----|--------------|-------|-------|
| DB23     | DB22 | DB21 | DB20 | DB19 | DB18 | DB17 | DB16 | DB15 | DB14 | DB13 | DB12 | DB11 | DB10        | DB9                  | DB8 | DB7 | DB6 | DB5 | DB4 | DB3 | DB2          | DB1   | DB0   |
| 0        | 0    | 0    | 0    | 0    | 0    | 0    | 0    | 0    | 0    | 0    | 0    | 0    | DM          | ID6                  | ID5 | ID4 | ID3 | ID2 | ID1 | ID0 | C3(0)        | C2(0) | C1(0) |

DM

DIVIDE MODE

0

FRACTIONAL (DEFAULT)

1

INTEGER

| ID6 | ID5 | ID4 | ID3 | ID2 | ID1 | ID0 | INTEGER DIVIDE RATIO    |
|-----|-----|-----|-----|-----|-----|-----|-------------------------|
| 0   | 0   | 1   | 0   | 1   | 0   | 1   | 21 (INTEGER MODE ONLY)  |
| 0   | 0   | 1   | 0   | 1   | 1   | 0   | 22 (INTEGER MODE ONLY)  |
| 0   | 0   | 1   | 0   | 1   | 1   | 1   | 23 (INTEGER MODE ONLY)  |
| 0   | 0   | 1   | 1   | 0   | 0   | 0   | 24                      |
| ... | ... | ... | ... | ... | ... | ... | ...                     |
| ... | ... | ... | ... | ... | ... | ... | ...                     |
| 0   | 1   | 1   | 1   | 0   | 0   | 0   | 56 (DEFAULT)            |
| ... | ... | ... | ... | ... | ... | ... | ...                     |
| ... | ... | ... | ... | ... | ... | ... | ...                     |
| 1   | 1   | 1   | 0   | 1   | 1   | 1   | 119                     |
| 1   | 1   | 1   | 1   | 0   | 0   | 0   | 120 (INTEGER MODE ONLY) |
| 1   | 1   | 1   | 1   | 0   | 0   | 1   | 121 (INTEGER MODE ONLY) |
| 1   | 1   | 1   | 1   | 0   | 1   | 0   | 122 (INTEGER MODE ONLY) |
| 1   | 1   | 1   | 1   | 0   | 1   | 1   | 123 (INTEGER MODE ONLY) |

Figure 38. Register 0—Integer Divide Control Register Map

### REGISTER 1—MODULUS DIVIDE CONTROL (DEFAULT: 0x003001)

| RESERVED |      |      |      |      |      |      |      |      |      | MODULUS VALUE |      |      |      |     |     |     |     |     |     | CONTROL BITS |       |       |       |
|----------|------|------|------|------|------|------|------|------|------|---------------|------|------|------|-----|-----|-----|-----|-----|-----|--------------|-------|-------|-------|
| DB23     | DB22 | DB21 | DB20 | DB19 | DB18 | DB17 | DB16 | DB15 | DB14 | DB13          | DB12 | DB11 | DB10 | DB9 | DB8 | DB7 | DB6 | DB5 | DB4 | DB3          | DB2   | DB1   | DB0   |
| 0        | 0    | 0    | 0    | 0    | 0    | 0    | 0    | 0    | 0    | MD10          | MD9  | MD8  | MD7  | MD6 | MD5 | MD4 | MD3 | MD2 | MD1 | MD0          | C3(0) | C2(0) | C1(1) |

| MD10 | MD9 | MD8 | MD7 | MD6 | MD5 | MD4 | MD3 | MD2 | MD1 | MD0 | MODULUS VALUE  |
|------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|----------------|
| 0    | 0   | 0   | 0   | 0   | 0   | 0   | 0   | 0   | 0   | 1   | 1              |
| 0    | 0   | 0   | 0   | 0   | 0   | 0   | 0   | 0   | 1   | 0   | 2              |
| ...  | ... | ... | ... | ... | ... | ... | ... | ... | ... | ... | ...            |
| ...  | ... | ... | ... | ... | ... | ... | ... | ... | ... | ... | ...            |
| 1    | 1   | 0   | 0   | 0   | 0   | 0   | 0   | 0   | 0   | 0   | 1536 (DEFAULT) |
| ...  | ... | ... | ... | ... | ... | ... | ... | ... | ... | ... | ...            |
| ...  | ... | ... | ... | ... | ... | ... | ... | ... | ... | ... | ...            |
| 1    | 1   | 1   | 1   | 1   | 1   | 1   | 1   | 1   | 1   | 1   | 2047           |

Figure 39. Register 1—Modulus Divide Control Register Map

**REGISTER 2—FRACTIONAL DIVIDE CONTROL (DEFAULT: 0x001802)**

| RESERVED |      |      |      |      |      |      |      |      |      | FRACTIONAL VALUE |      |      |      |     |     |     |     |     |     | CONTROL BITS |       |       |       |
|----------|------|------|------|------|------|------|------|------|------|------------------|------|------|------|-----|-----|-----|-----|-----|-----|--------------|-------|-------|-------|
| DB23     | DB22 | DB21 | DB20 | DB19 | DB18 | DB17 | DB16 | DB15 | DB14 | DB13             | DB12 | DB11 | DB10 | DB9 | DB8 | DB7 | DB6 | DB5 | DB4 | DB3          | DB2   | DB1   | DB0   |
| 0        | 0    | 0    | 0    | 0    | 0    | 0    | 0    | 0    | 0    | FD10             | FD9  | FD8  | FD7  | FD6 | FD5 | FD4 | FD3 | FD2 | FD1 | FD0          | C3(0) | C2(1) | C1(0) |

| FD10                                       | FD9 | FD8 | FD7 | FD6 | FD5 | FD4 | FD3 | FD2 | FD1 | FD0 | FRACTIONAL VALUE |
|--------------------------------------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|------------------|
| 0                                          | 0   | 0   | 0   | 0   | 0   | 0   | 0   | 0   | 0   | 0   | 0                |
| 0                                          | 0   | 0   | 0   | 0   | 0   | 0   | 0   | 0   | 0   | 1   | 1                |
| ...                                        | ... | ... | ... | ... | ... | ... | ... | ... | ... | ... | ...              |
| ...                                        | ... | ... | ... | ... | ... | ... | ... | ... | ... | ... | ...              |
| 0                                          | 1   | 1   | 0   | 0   | 0   | 0   | 0   | 0   | 0   | 0   | 768 (DEFAULT)    |
| ...                                        | ... | ... | ... | ... | ... | ... | ... | ... | ... | ... | ...              |
| ...                                        | ... | ... | ... | ... | ... | ... | ... | ... | ... | ... | ...              |
| FRACTIONAL VALUE MUST BE LESS THAN MODULUS |     |     |     |     |     |     |     |     |     |     | <MDR             |

Figure 40. Register 2—Fractional Divide Control Register Map

**REGISTER 3— $\Sigma$ - $\Delta$  MODULATOR DITHER CONTROL (DEFAULT: 0x10000B)**

| DITHER MAGNITUDE |       |       | DITHER ENABLE | DITHER RESTART VALUE |      |      |      |      |      |      |      |      |      |     |     |     |     |     |     | CONTROL BITS |       |       |       |
|------------------|-------|-------|---------------|----------------------|------|------|------|------|------|------|------|------|------|-----|-----|-----|-----|-----|-----|--------------|-------|-------|-------|
| DB23             | DB22  | DB21  | DB20          | DB19                 | DB18 | DB17 | DB16 | DB15 | DB14 | DB13 | DB12 | DB11 | DB10 | DB9 | DB8 | DB7 | DB6 | DB5 | DB4 | DB3          | DB2   | DB1   | DB0   |
| 0                | DITH1 | DITH0 | DEN           | DV16                 | DV15 | DV14 | DV13 | DV12 | DV11 | DV10 | DV9  | DV8  | DV7  | DV6 | DV5 | DV4 | DV3 | DV2 | DV1 | DV0          | C3(0) | C2(1) | C1(1) |

| DITH1 | DITH0 | DITHER MAGNITUDE |
|-------|-------|------------------|
| 0     | 0     | 15 (DEFAULT)     |
| 0     | 1     | 7                |
| 1     | 0     | 3                |
| 1     | 1     | 1 (RECOMMENDED)  |

| DEN | DITHER ENABLE                 |
|-----|-------------------------------|
| 0   | DISABLE                       |
| 1   | ENABLE (DEFAULT, RECOMMENDED) |

| DV16 | DV15 | DV14 | DV13 | DV12 | DV11 | DV10 | DV9 | DV8 | DV7 | DV6 | DV5 | DV4 | DV3 | DV2 | DV1 | DV0 | DITHER RESTART VALUE |
|------|------|------|------|------|------|------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|----------------------|
| 0    | 0    | 0    | 0    | 0    | 0    | 0    | 0   | 0   | 0   | 0   | 0   | 0   | 0   | 0   | 0   | 1   | 0x00001 (DEFAULT)    |
| ...  | ...  | ...  | ...  | ...  | ...  | ...  | ... | ... | ... | ... | ... | ... | ... | ... | ... | ... | ...                  |
| ...  | ...  | ...  | ...  | ...  | ...  | ...  | ... | ... | ... | ... | ... | ... | ... | ... | ... | ... | ...                  |
| 1    | 1    | 1    | 1    | 1    | 1    | 1    | 1   | 1   | 1   | 1   | 1   | 1   | 1   | 1   | 1   | 1   | 0x1FFFF              |

Figure 41. Register 3— $\Sigma$ - $\Delta$  Modulator Dither Control Register Map

## REGISTER 4—PLL CHARGE PUMP, PFD, AND REFERENCE PATH CONTROL (DEFAULT: 0x0AA7E4)

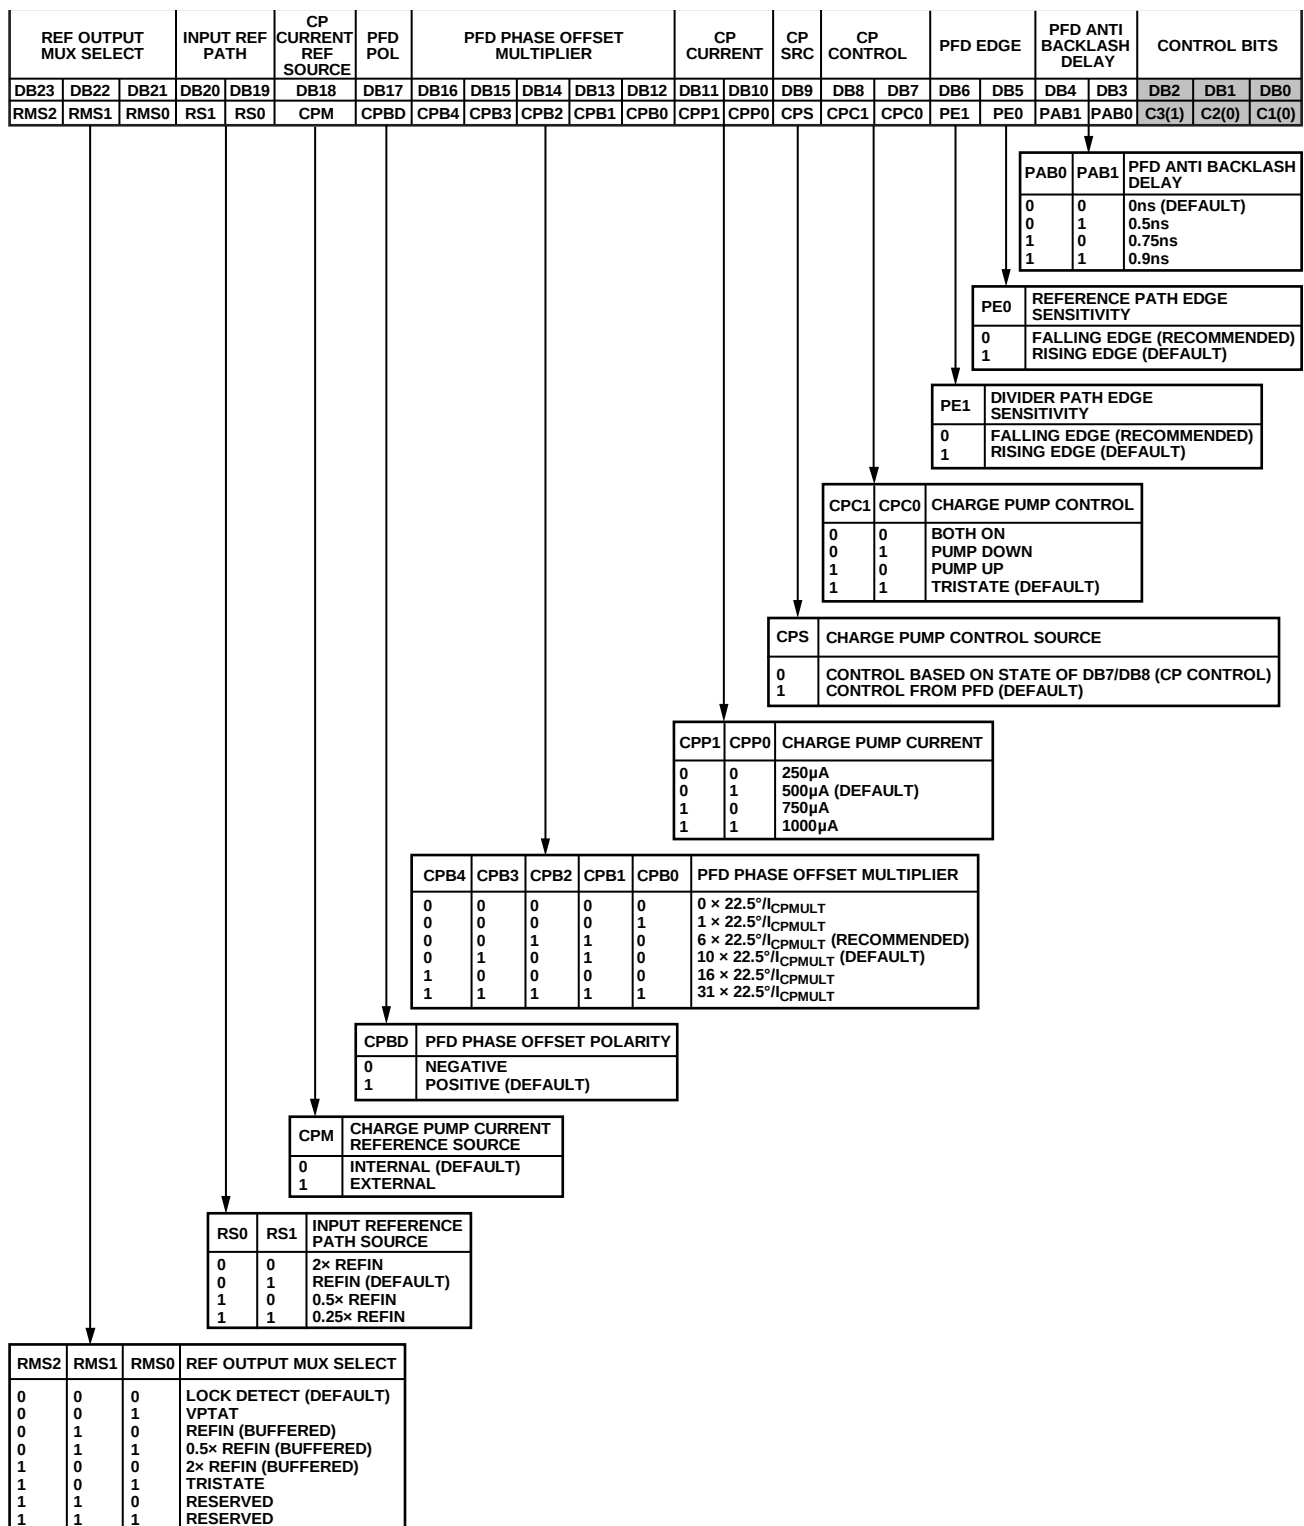


Figure 42. Register 4—PLL Charge Pump, PFD, and Reference Path Control Register Map

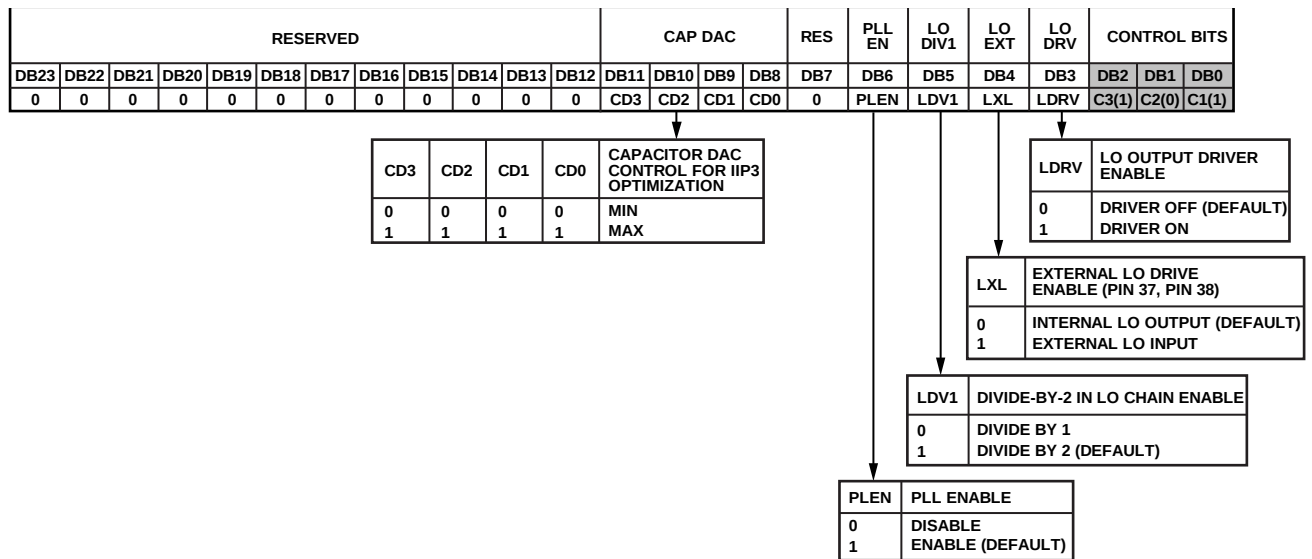
**REGISTER 5—PLL ENABLE AND LO PATH CONTROL (DEFAULT: 0x0000E5)**

Figure 43. Register 5—PLL Enable and LO Path Control Register Map

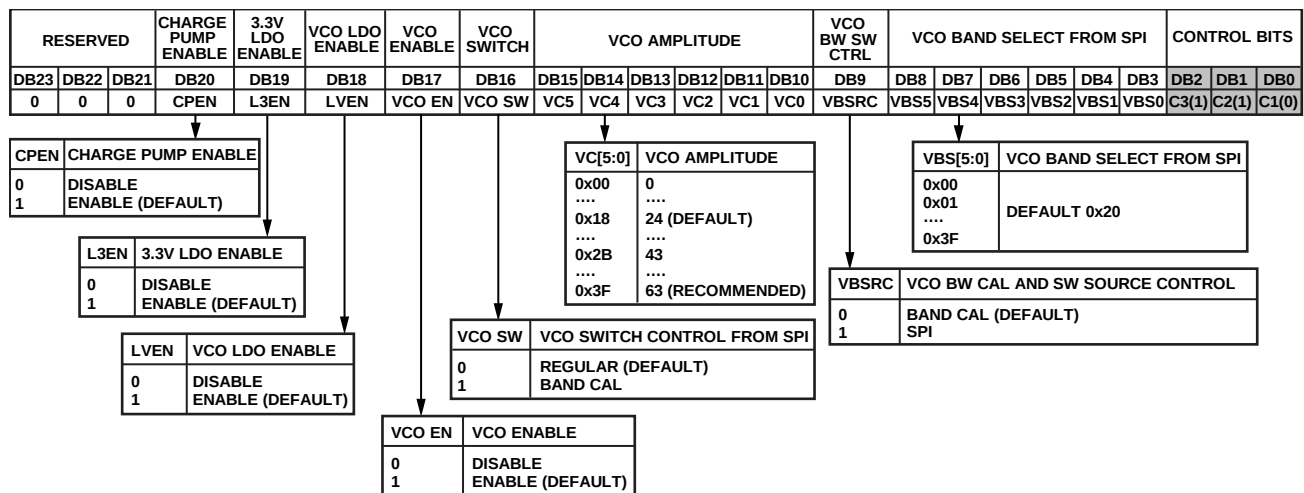
**REGISTER 6—VCO CONTROL AND VCO ENABLE (DEFAULT: 0x1E2106)**

Figure 44. Register 6—VCO Control and VCO Enable Register Map

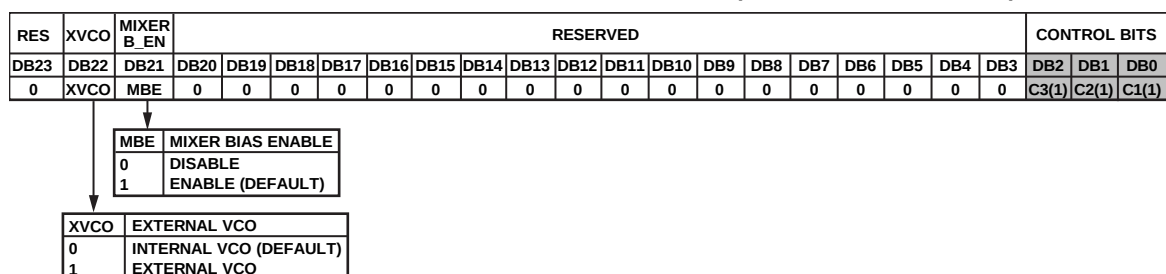
**REGISTER 7—MIXER BIAS ENABLE AND EXTERNAL VCO ENABLE (DEFAULT: 0x000007)**

Figure 45. Register 7—Mixer Bias Enable and External VCO Enable Register Map

## THEORY OF OPERATION

The [ADRF6602](#) integrates a high performance downconverting mixer with a state-of-the-art fractional-N PLL. The PLL also integrates a low noise VCO. The SPI port allows the user to control the fractional-N PLL functions and the mixer optimization functions, as well as allowing for an externally applied LO or VCO.

The mixer core within the [ADRF6602](#) is the next generation of an industry-leading family of mixers from Analog Devices, Inc. The RF input is converted to a current and then mixed down to IF using high performance NPN transistors. The mixer output currents are transformed to a differential output. The high performance active mixer core results in an exceptional IIP3 and IP1dB, with a very low output noise floor for excellent dynamic range. Over the specified frequency range, the [ADRF6602](#) typically provides IF input P1dB of 14.5 dBm and IIP3 of 30 dBm.

Improved performance at specific frequencies can be achieved with the use of the internal capacitor DAC (CDAC), which is programmable via the SPI port, and by using a resistor to a 5 V supply from the IP3SET pin (Pin 29). Adjustment of the capacitor DAC allows increments in phase shift at internal nodes in the [ADRF6602](#), thus allowing cancellation of third-order distortion with no change in supply current. Connecting a resistor to a 5 V supply from the IP3SET pin increases the internal mixer core current, thereby improving overall IIP2 and IIP3, as well as IP1dB. Using the IP3SET pin for this purpose increases the overall supply current.

The fractional divide function of the PLL allows the frequency multiplication value from REF\_IN to LO output to be a fractional value rather than be restricted to an integer value as in traditional PLLs. In operation, this multiplication value is  $INT + (FRAC/MOD)$ , where INT is the integer value, FRAC is the fractional value, and MOD is the modulus value, all programmable via the SPI port. In other fractional-N PLL designs, fractional multiplication is achieved by periodically changing the fractional value in a deterministic way. The disadvantage of this approach is often spurious components close to the fundamental signal. In the [ADRF6602](#), a  $\Sigma$ - $\Delta$  modulator is used to distribute the fractional value randomly, thus significantly reducing the spurious content due to the fractional function.

### PROGRAMMING THE [ADRF6602](#)

The [ADRF6602](#) is programmed via a 3-pin SPI port. The timing requirements for the SPI port are shown in Figure 2. Eight programmable registers, each with 24 bits, control the operation of the device. The register functions are listed in Table 8.

**Table 8. Register Functions**

| Register   | Function                                     |
|------------|----------------------------------------------|
| Register 0 | Integer divide control for the PLL           |
| Register 1 | Modulus divide control for the PLL           |
| Register 2 | Fractional divide control for the PLL        |
| Register 3 | $\Sigma$ - $\Delta$ modulator dither control |
| Register 4 | PLL charge pump, PFD, reference path control |
| Register 5 | PLL enable and LO path control               |
| Register 6 | VCO control and VCO enable                   |
| Register 7 | Mixer bias enable and external VCO enable    |

Note that internal calibration for the PLL must be run when the [ADRF6602](#) is initialized at a given frequency. This calibration is run automatically whenever Register 0, Register 1, or Register 2 is programmed. Because the other registers affect PLL performance, Register 0, Register 1, and Register 2 should always be programmed last and in this order: Register 0, Register 1, Register 2.

To program the frequency of the [ADRF6602](#), the user typically programs only Register 0, Register 1, and Register 2. However, if registers other than these are programmed first, a short delay should be inserted before programming Register 0. This delay ensures that the VCO band calibration has sufficient time to complete before the final band calibration for Register 0 is initiated.

Software is available on the [ADRF6602](#) product page under the Evaluation Boards & Development Kits section that allows easy programming from a PC running Windows XP or Vista.

### INITIALIZATION SEQUENCE

To ensure proper power-up of the [ADRF6602](#), it is important to reset the PLL circuitry after the VCC supply rail settles to  $5\text{ V} \pm 0.25\text{ V}$ . Resetting the PLL ensures that the internal bias cells are properly configured, even under poor supply start-up conditions.

To ensure that the PLL is reset after power-up, follow this procedure:

1. Disable the PLL by setting the PLEN bit to 0 (Register 5, Bit DB6).
2. After a delay of >100 ms, set the PLEN bit to 1 (Register 5, Bit DB6).

After this procedure is followed, the other registers should be programmed in this order: Register 7, Register 6, Register 4, Register 3, Register 2, Register 1. Then, after a delay of >100 ms, Register 0 should be programmed.

## LO SELECTION LOGIC

The downconverting mixer in the [ADRF6602](#) can be used without the internal PLL by applying an external differential LO to Pin 37 and Pin 38 (LON and LOP). In addition, when using an LO generated by the internal PLL, the LO signal can be accessed directly at these same pins. This function can be used for debugging purposes, or the internally generated LO can be used as the LO for a separate mixer.

The operation of the LO generation and whether LOP and LON are inputs or outputs are determined by the logic levels applied at Pin 16 (PLL\_EN) and Pin 36 (LODRV\_EN), as well as Bit DB3 (LDRV) and Bit DB6 (PLEN) in Register 5. The combination of externally applied logic and internal bits required for particular LO functions is given in Table 9.

**Table 9. LO Selection Logic**

| Pins <sup>1</sup> |                   | Register 5 Bits <sup>1</sup> |                | Outputs       |          |
|-------------------|-------------------|------------------------------|----------------|---------------|----------|
| Pin 16 (PLL_EN)   | Pin 36 (LODRV_EN) | Bit DB6 (PLEN)               | Bit DB3 (LDRV) | Output Buffer | LO       |
| 0                 | X                 | 0                            | X              | Disabled      | External |
| 0                 | X                 | 1                            | X              | Disabled      | External |
| 1                 | X                 | 0                            | X              | Disabled      | External |
| 1                 | 0                 | 1                            | 0              | Disabled      | Internal |
| 1                 | X                 | 1                            | 1              | Enabled       | Internal |
| 1                 | 1                 | 1                            | X              | Enabled       | Internal |

<sup>1</sup> X = don't care.

## APPLICATIONS INFORMATION

### BASIC CONNECTIONS FOR OPERATION

Figure 46 shows the schematic for the [ADRF6602](#) evaluation board. The six power supply pins should be individually decoupled using 100 pF and 0.1  $\mu$ F capacitors located as close as possible to the device. In addition, the internal decoupling nodes (DECL3P3, DECL2P5, and DECLVCO) should be decoupled with the capacitor values shown in Figure 46.

The RF input is internally ac-coupled and needs no external bias. The IF outputs are open collector, and a bias inductor is required from these outputs to VCC.

A peak-to-peak differential swing on RF<sub>IN</sub> of 1 V (0.353 V rms for a sine wave input) results in an IF output power of 3.8 dBm.

The reference frequency for the PLL should be from 12 MHz to 160 MHz and should be applied to the REF\_IN pin, which should

be ac-coupled and terminated with a 50  $\Omega$  resistor as shown in Figure 46. The reference signal, or a divided-down version of the reference signal, can be brought back off chip at the multiplexer output pin (MUXOUT). A lock detect signal and a voltage proportional to the ambient temperature can also be selected on the multiplexer output pin.

The loop filter is connected between the CP and VTUNE pins. When connected in this way, the internal VCO is operational. For information about the loop filter components, see the Evaluation Board Configuration Options section.

Operation with an external VCO is also possible. In this case, the loop filter components should be referred to ground. The output of the loop filter is connected to the input voltage pin of the external VCO. The output of the VCO is brought back into the device on the LOP and LON pins, using a balun if necessary.

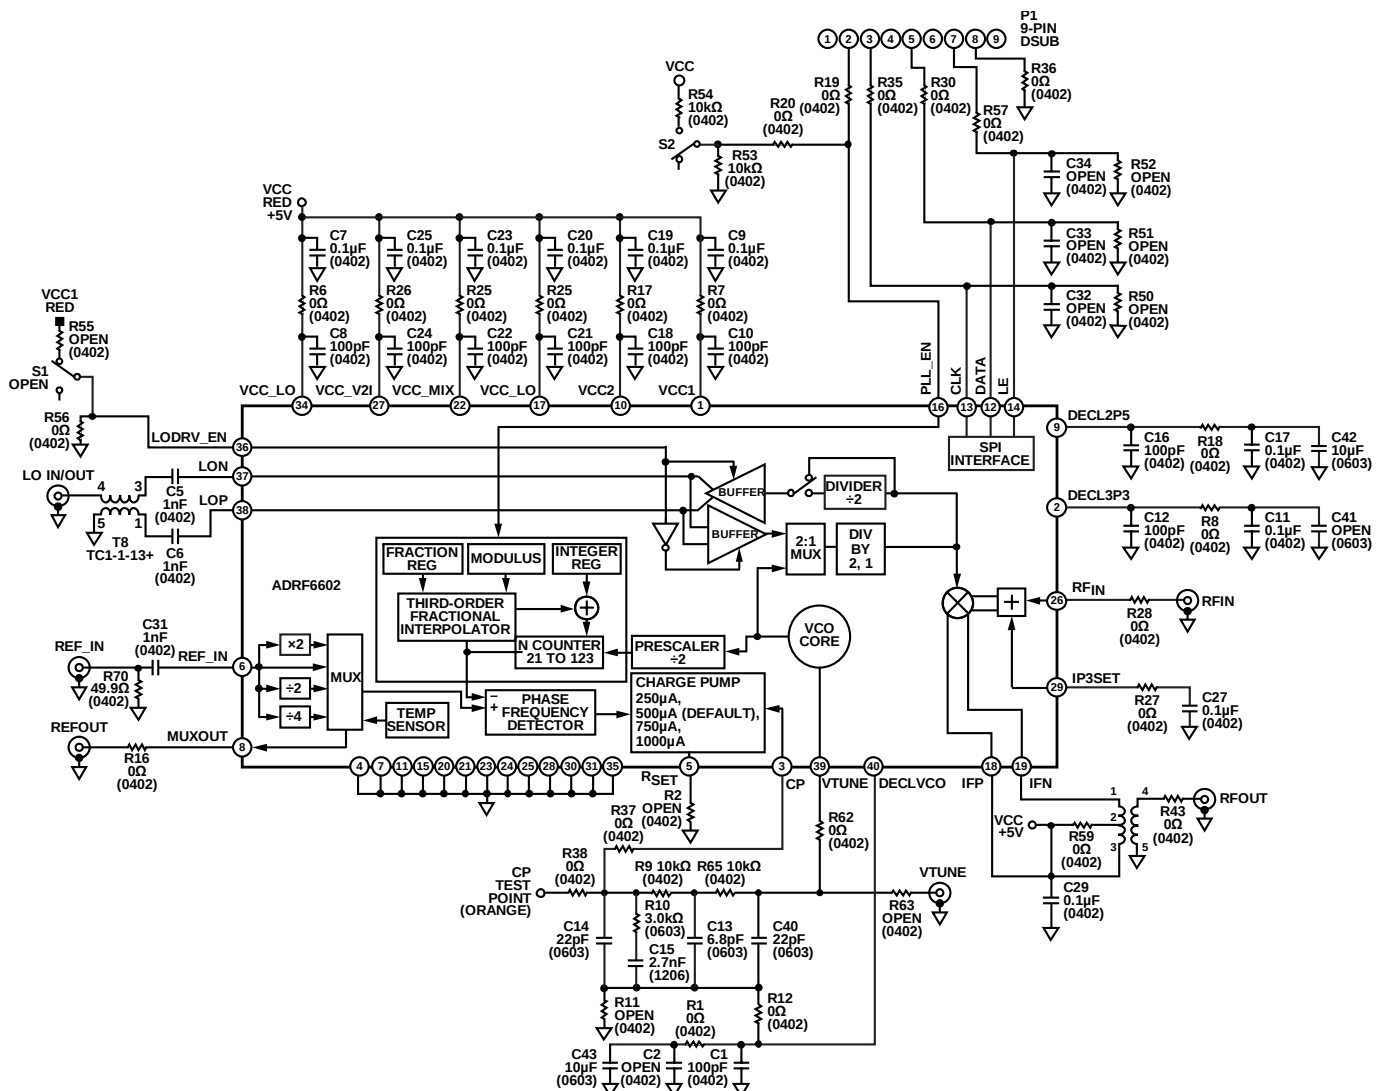


Figure 46. Basic Connections for Operation of the [ADRF6602](#)

## AC TEST FIXTURE

Characterization data for the [ADRF6602](#) was taken under very strict test conditions. All possible techniques were used to achieve optimum accuracy and to remove degrading effects of

the signal generation and measurement equipment. Figure 47 shows the typical AC test set up used in the characterization of the [ADRF6602](#).

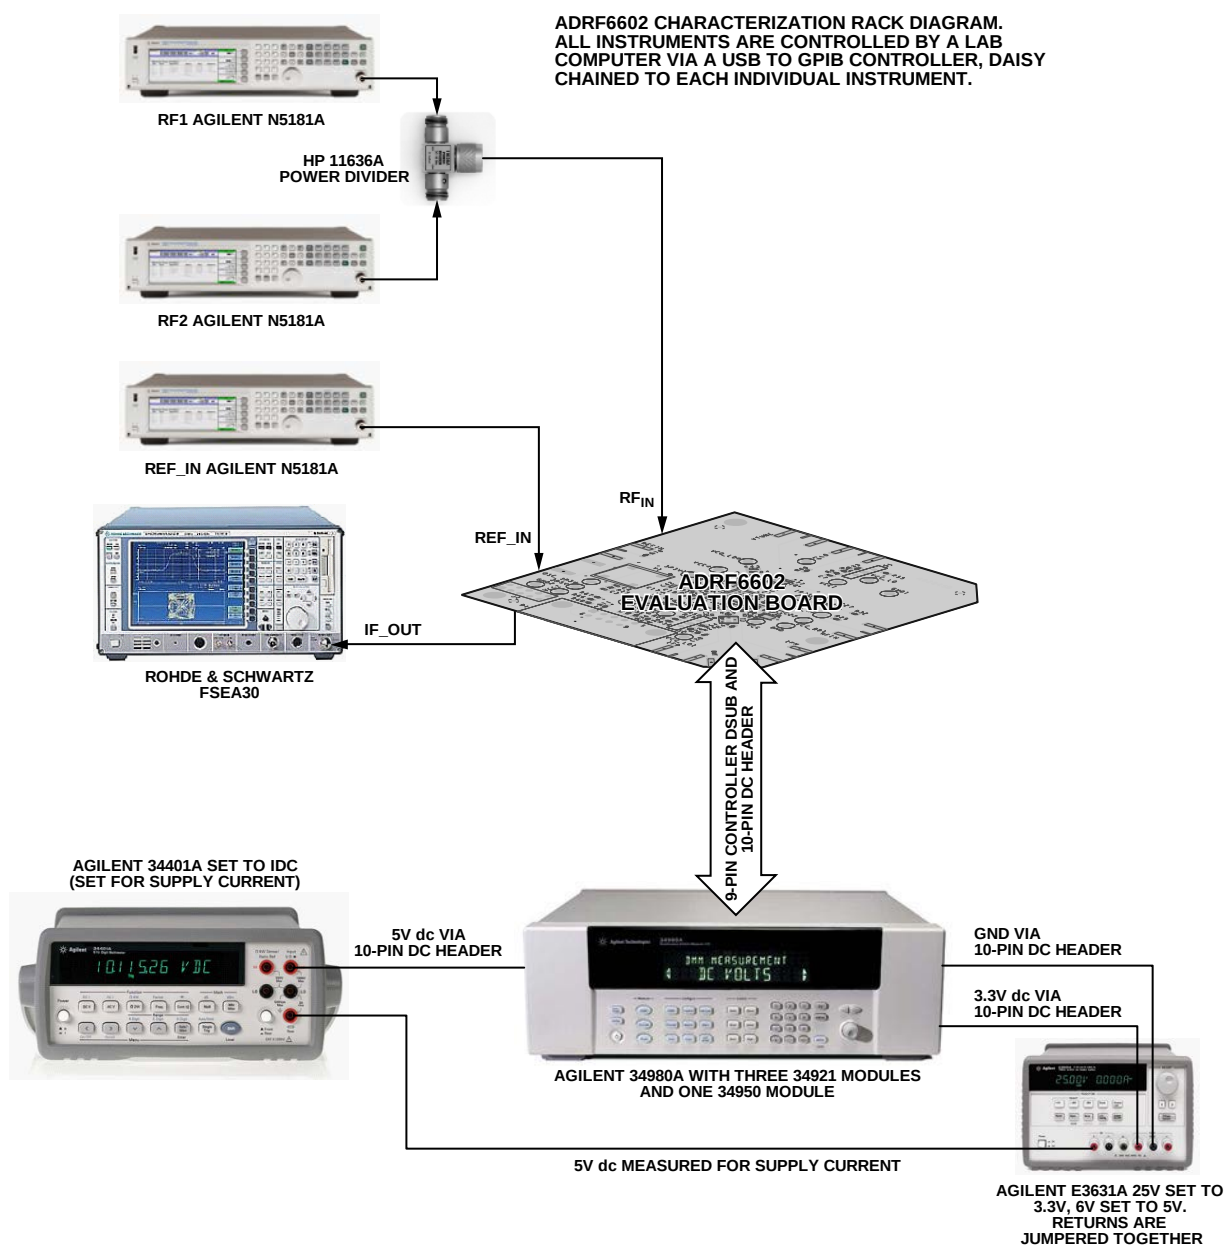


Figure 47. [ADRF6602](#) AC Test Set Up

08545-047

## EVALUATION BOARD

Figure 50 shows the schematic of the RoHS-compliant evaluation board for the [ADRF6602](#). This board has four layers and was designed using Rogers 4350 hybrid material to minimize high frequency losses. FR4 material is also adequate if the design can accept the slightly higher trace loss of this material.

The evaluation board is designed to operate using the internal VCO of the device (the default configuration) or with an external VCO. To use an external VCO, R62 and R12 should be removed. Place 0  $\Omega$  resistors in R63 and R11. The input of the external VCO should be connected to the VTUNE SMA connector, and the external VCO output should be connected to the LO IN/OUT SMA connector. In addition to these hardware changes, internal register settings must also be changed to enable operation with an external VCO (see the Register 6—VCO Control and VCO Enable (Default: 0x1E2106) section).

Additional configuration options for the evaluation board are described in Table 10.

## EVALUATION BOARD CONTROL SOFTWARE

Software to program the [ADRF6602](#) is available for download on the [ADRF6602](#) product page under the Evaluation Boards & Development Kits section. To install the software

1. Download and extract the zip file:  
ADRF6x0x\_3p0p0\_XP\_install.exe file.
2. Follow the instructions in the read me file.

The evaluation board can be connected to the PC using a PC parallel port or a USB port. These options are selectable from the opening menu of the software interface (see Figure 48). The evaluation board is shipped with a 25-pin parallel port cable for connection to the PC parallel port.

To connect the evaluation board to a USB port, a USB adapter board ([EVAL-ADF4XXXZ-USB](#)) must be purchased from Analog Devices. This board connects to the PC using a standard USB cable with a USB mini-connector at one end. An additional 25-pin male to 9-pin female adapter is required to mate the ADF4XXXZ-USB board to the 9-pin D-Sub connector on the [ADRF6602](#) evaluation board.

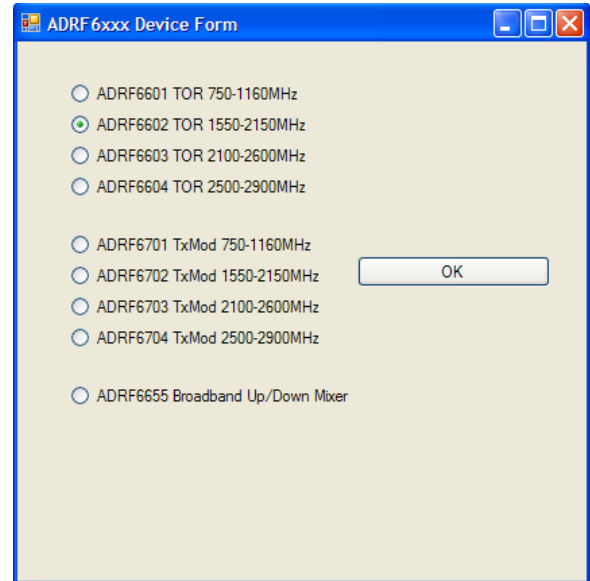


Figure 48. Control Software Opening Menu

Figure 49 shows the main menu of the control software with the default settings displayed.

**Analog Devices ADRF6x0x Software - ADRF6602 TOR 1550-2150MHz**

**Device**

LO Path and Modulator Control

LO Output Driver Disabled

Mixer LO Source - Internal VCO

PLL Enabled

**RF Section**

Divide Mode: Fractional

Ref Input Frequency: 38.4 MHz

PFD Frequency: 38.4 MHz

Modulus: 1536

VCO Frequency(2xLO): 1940 MHz

LO Frequency: 1940 MHz

Channel Step Size: 25 kHz

**Charge Pump (CP)**

Current Reference Source: Internal(250uA)

Current Multiplier: x2

CP Current (uA)= 500uA

Charge Pump Control: Hi-Z

CP Control Source: PFD

PFD Phase Offset Multiplier (0-31): 10 x 22.5°/CP current multiplier

PFD Phase Offset Polarity: positive

PFD Phase Offset: 112.5°

**Output Reference Mux Source**

Lock Detect: [v]

**SDM Dither Control**

Dither Restart Value: 1

SDM Dither Enable: Dither En [v]

SDM Dither Magnitude: 1 [v]

VCO Band Select from SPI: 32

VCO Amplitude Setting: 55

VCO Band Select and SW Source: Band Cal [v]

**VCO Controls and Enables**

VCO Enable: [v]

VCO LDO Enable: [v]

3.3V LDO Enable: [v]

Charge Pump Enable: [v]

External VCO Enable: Disable [v]

VCO Switch Control from SPI: Regular [v]

**PFD**

PFD Divider Path Edge Sensitivity: Falling Edge [v]

PFD Reference Path Edge Sensitivity: Rising Edge [v]

PFD Anti Backlash Delay: 0 nsec [v]

Cap DAC Value: 0

Spare (R7) Value: 0

**To be Loaded in Registers on Next Update**

| MSB  | Binary | LSB  | Hex  |
|------|--------|------|------|
| 0000 | 0000   | 0000 | 0000 |
| 0000 | 0000   | 0000 | 0000 |
| 0000 | 0000   | 0000 | 0000 |
| 0000 | 0000   | 0000 | 0000 |
| 0110 | 0000   | 0000 | 0000 |

**All Registers Updated**

R0 Updated R4 Updated

R1 Updated R5 Updated

R2 Updated R6 Updated

R3 Updated R7 Updated

**To be Loaded in Registers on Next Update**

| MSB  | Binary | LSB  | Hex  |
|------|--------|------|------|
| 0000 | 1010   | 1010 | 0111 |
| 0000 | 0000   | 0000 | 0110 |
| 0000 | 0000   | 0000 | 0110 |
| 0001 | 1110   | 1101 | 1101 |
| 0000 | 0000   | 0000 | 0000 |

**ANALOG DEVICES**

06545-026

Figure 49. Main Screen of the ADRF6602 Evaluation Board Software

## SCHEMATIC AND ARTWORK

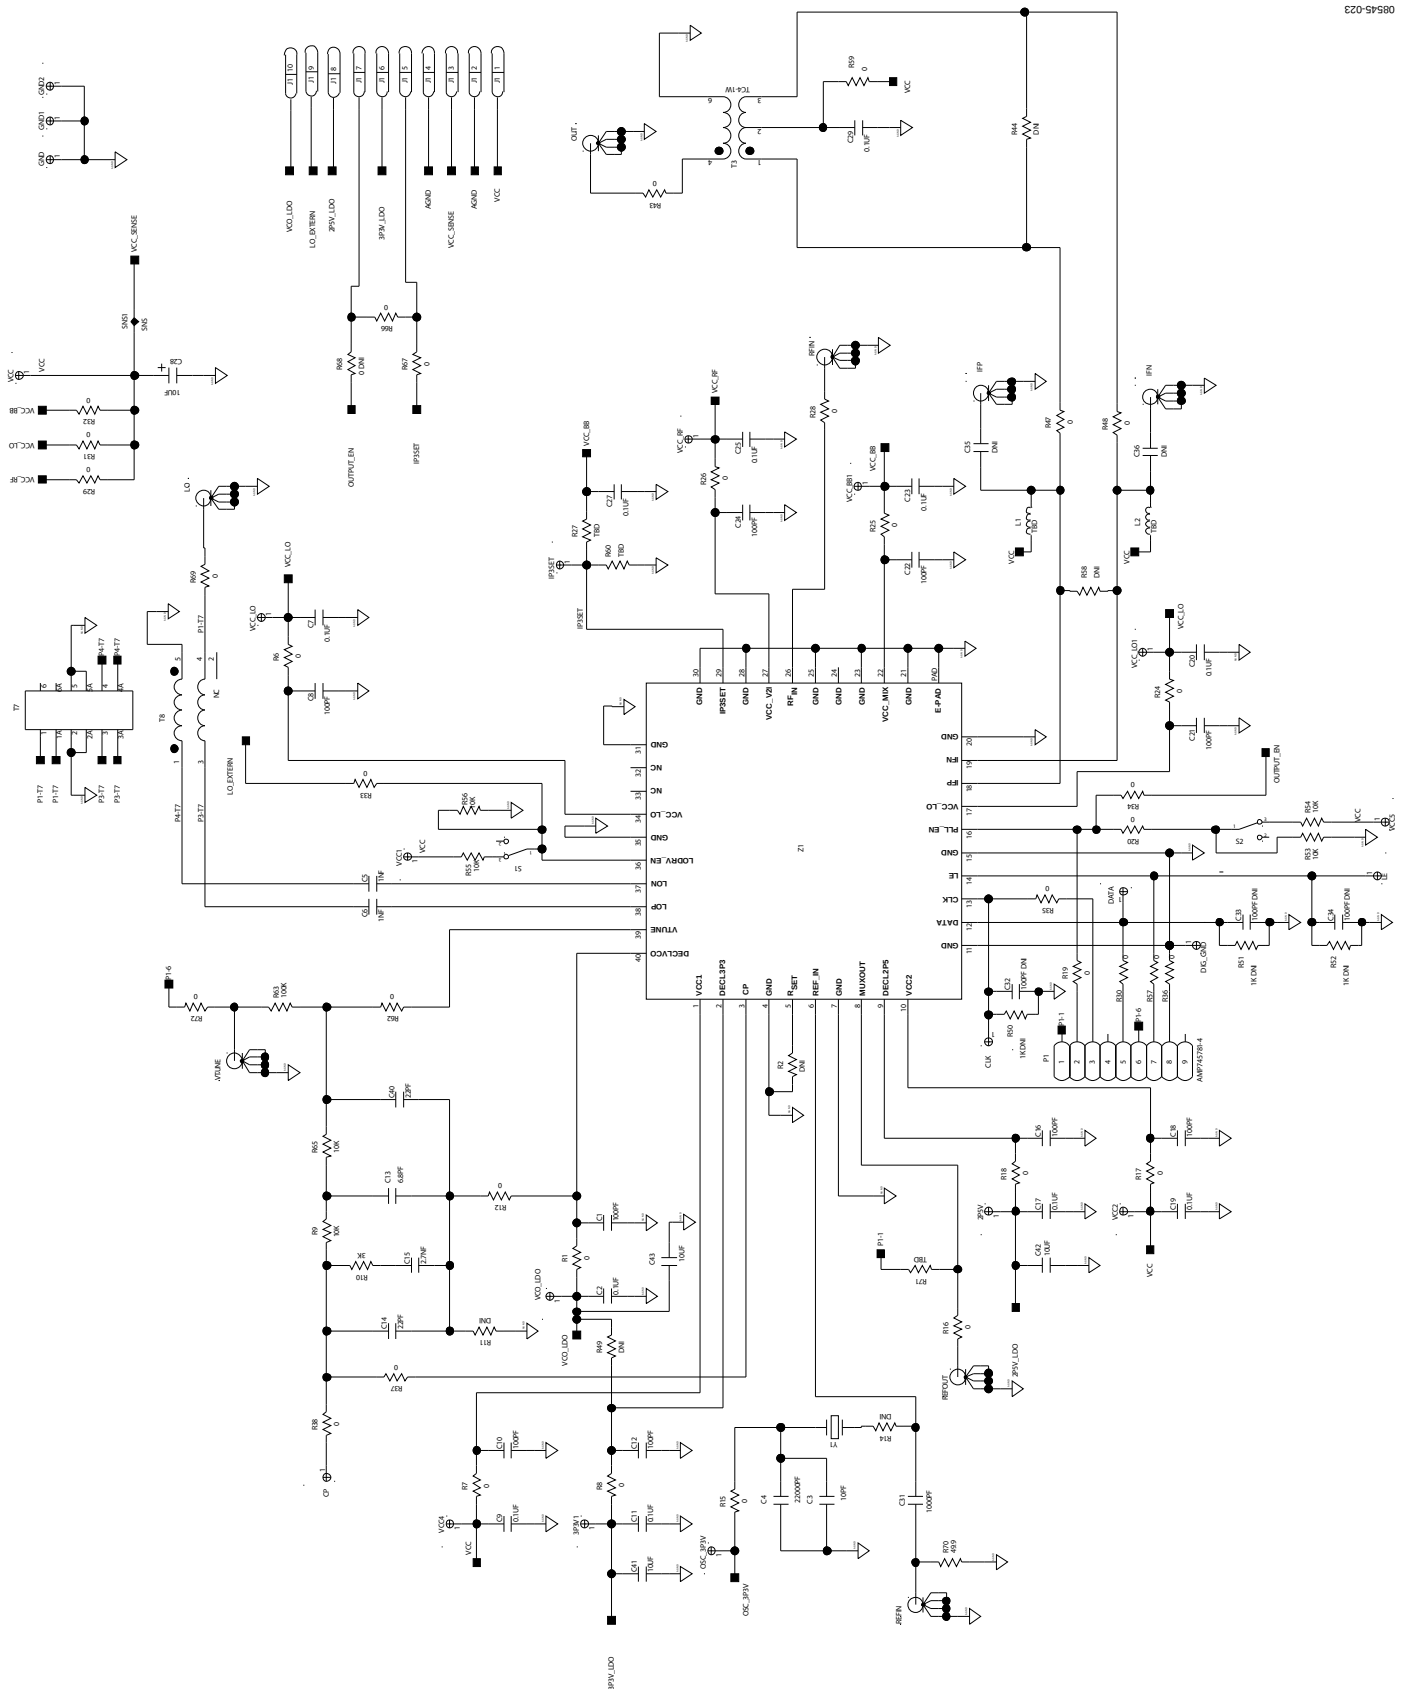


Figure 50. Evaluation Board Schematic

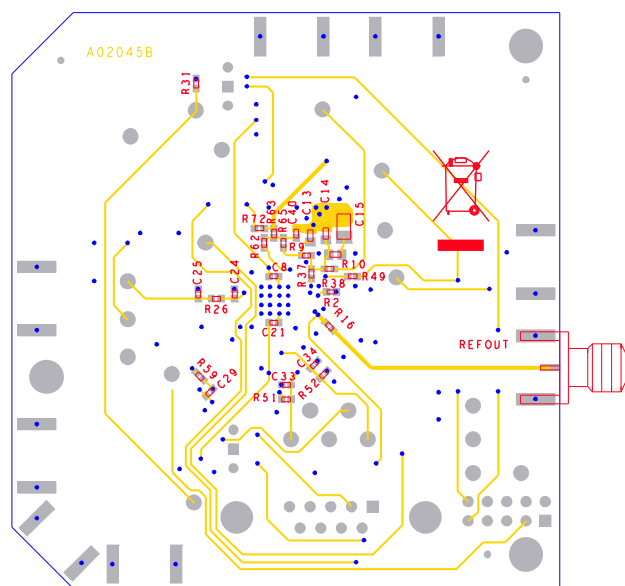


Figure 51. Evaluation Board Layout (Bottom)

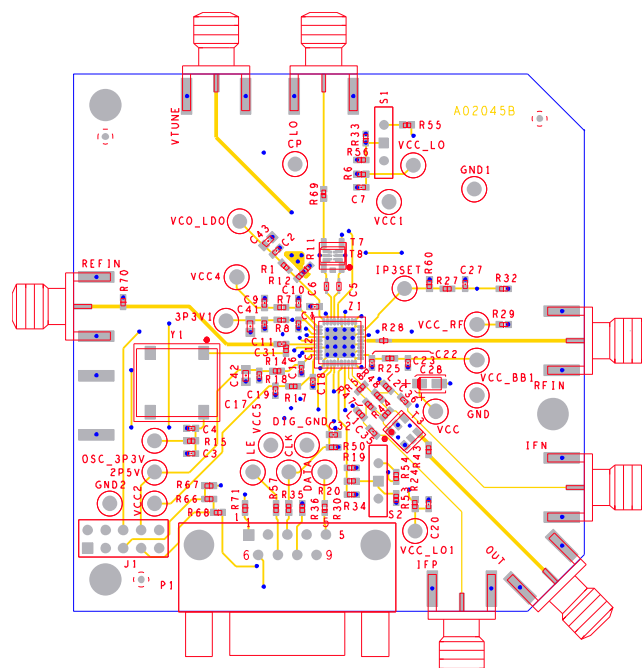



Figure 52. Evaluation Board Layout (Top)

## EVALUATION BOARD CONFIGURATION OPTIONS

Table 10.

| Component                                | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                  | Default Condition/<br>Option Settings                                          |
|------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------|
| S1, R55, R56, R33                        | LO select. Switch and resistors to ground the LODRV_EN pin. The LODRV_EN pin setting, in combination with internal register settings, determines whether the LOP and LON pins function as inputs or outputs (see the LO Selection Logic section for more information).                                                                                                                                                                                       | S1 = R55 = open (not installed),<br>R56 = R33 = 0 $\Omega$ ,<br>LODRV_EN = 0 V |
| LO IN/OUT<br>SMA Connector               | LO input/output. An external 1 $\times$ LO or 2 $\times$ LO can be applied to this single-ended input connector.                                                                                                                                                                                                                                                                                                                                             | LO input                                                                       |
| REFIN<br>SMA Connector                   | Reference input. The input reference frequency for the PLL is applied to this connector. Input impedance is 50 $\Omega$ .                                                                                                                                                                                                                                                                                                                                    |                                                                                |
| REFOUT<br>SMA Connector                  | Multiplexer output. The REFOUT connector connects directly to the MUXOUT pin. The on-board multiplexer can be programmed to bring out the following signals: REFIN, 2 $\times$ REFIN, REFIN/2, and REFIN/4; temperature sensor output voltage; and lock detect indicator.                                                                                                                                                                                    | Lock detect                                                                    |
| CP Test Point                            | Charge pump test point. The unfiltered charge pump signal can be probed at this test point. Note that the CP pin should not be probed during critical measurements such as phase noise.                                                                                                                                                                                                                                                                      |                                                                                |
| R37, C14, R9, R10,<br>C15, C13, R65, C40 | Loop filter. Loop filter components.                                                                                                                                                                                                                                                                                                                                                                                                                         |                                                                                |
| R11, R12                                 | Loop filter return. When the internal VCO is used, the loop filter components should be returned to Pin 40 (DECLVCO) by installing a 0 $\Omega$ resistor in R12. When an external VCO is used, the loop filter components can be returned to ground by installing a 0 $\Omega$ resistor in R11.                                                                                                                                                              | R12 = 0 $\Omega$ (0402),<br>R11 = open (0402)                                  |
| R62, R63, VTUNE<br>SMA Connector         | Internal vs. external VCO. When the internal VCO is enabled, the loop filter components are connected directly to the VTUNE pin (Pin 39) by installing a 0 $\Omega$ resistor in R62. To use an external VCO, R62 should be left open. A 0 $\Omega$ resistor should be installed in R63, and the voltage input of the VCO should be connected to the VTUNE SMA connector. The output of the VCO is brought back into the PLL via the LO IN/OUT SMA connector. | R62 = 0 $\Omega$ (0402),<br>R63 = open (0402)                                  |
| R2                                       | R <sub>SET</sub> pin. This pin is unused and should be left open.                                                                                                                                                                                                                                                                                                                                                                                            | R2 = open (0402)                                                               |
| RFIN SMA Connector                       | RF input. The RF input signal should be applied to the RFIN SMA connector. The RF input of the ADRF6602 is ac-coupled, so no bias is necessary.                                                                                                                                                                                                                                                                                                              | R3 = R23 = open (0402)                                                         |
| T3                                       | IF output. The differential IF output signals from the ADRF6602 (IFP and IFN) are converted to a single-ended signal by T3.                                                                                                                                                                                                                                                                                                                                  |                                                                                |

## OUTLINE DIMENSIONS

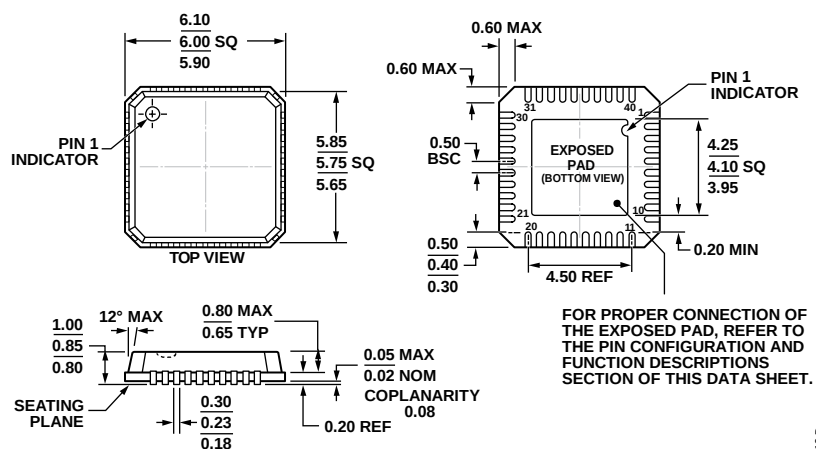

06-01-2012-D

## ORDERING GUIDE

| Model <sup>1</sup> | Temperature Range | Package Description                              | Package Option |
|--------------------|-------------------|--------------------------------------------------|----------------|
| ADRF6602ACPZ-R7    | −40°C to +85°C    | 40-Lead Lead Frame Chip Scale Package [LFCSP_VQ] | CP-40-1        |
| ADRF6602-EVALZ     |                   | Evaluation Board                                 |                |

<sup>1</sup> Z = RoHS Compliant Part.

**NOTES**

## NOTES

**NOTES**

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Analog Devices Inc.:](#)

[ADRF6602ACPZ-R7](#)