


Data Sheet

LL01ED-ASAxL06-P



Xlamp CXA 2011



■ Features& Typical Applications

- High efficiency
- Available in 2 beam Patterns
- Optimized for uniform effects
- Lens without Housing
- Decorative Light
- Architectural Lighting
- Down Light

■ Table of Contents


General Information & Product Nomenclature.....	P.2
Optical Specifications	P.3
Mechanical Specifications	P.4
Package Specifications	P.5

LL01ED-ASAxL06-P

General Information

- Lens Material Optical Grade PMMA
- Operating Temperature range -40°C~+70°C(upper limit +80°C)
- Storage Temperature range -40°C~+70°C(upper limit +80°C)
 - * Average transmittance in visible spectrum 400nm~700nm>90%
- Usage and Maintenance:
 1. If necessary, clean lenses with mild soap, water and soft cloth.
 2. Never use any commercial cleaning solvents on lenses, like alcohol.
 3. Please handle or install lenses with wearing gloves, skin oils may damage lens or its optical characteristic.

Product Nomenclature

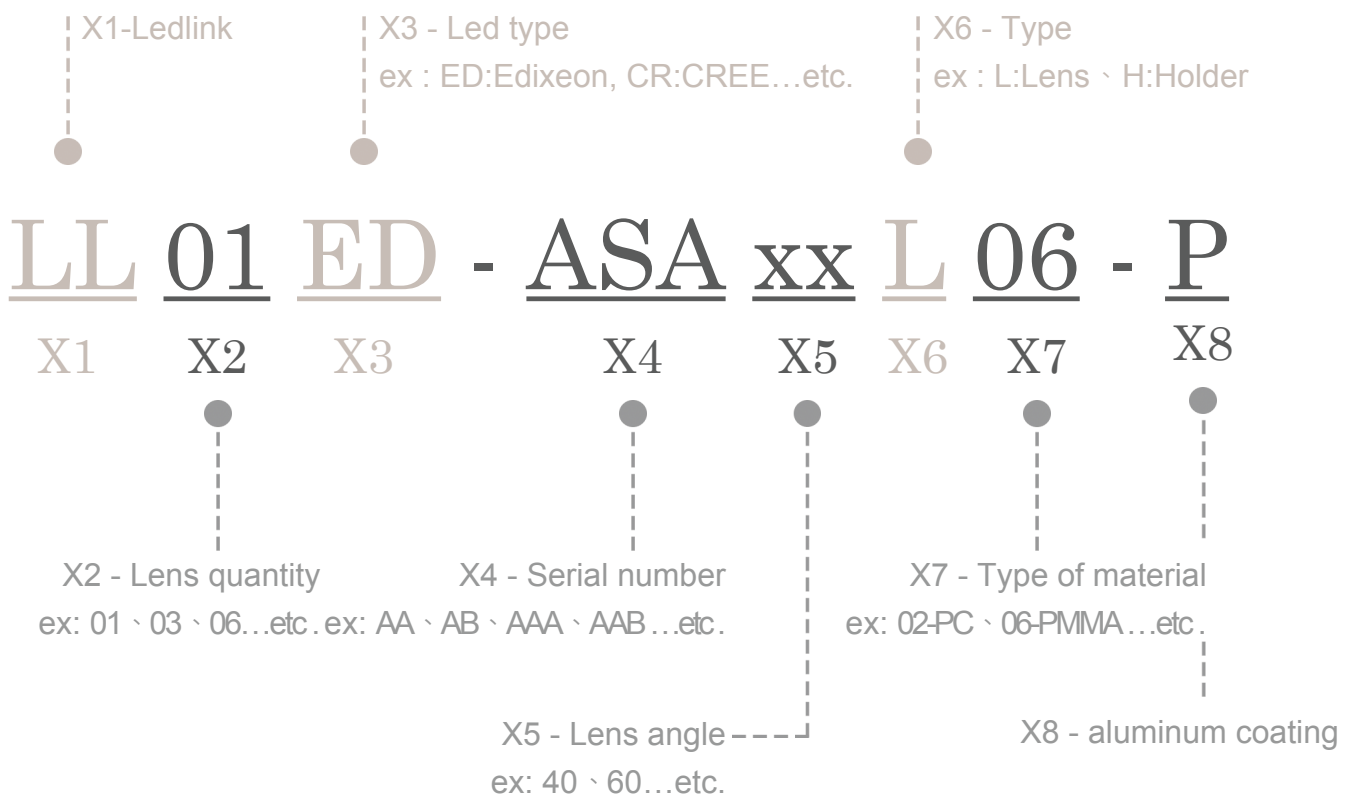

LL01ED-ASAxL06-P






Optical Specifications



Xlamp CXA 2011



Note: (1) degree: tolerance $\pm 2^\circ$
(2) optical value: tolerance $\pm 10\%$

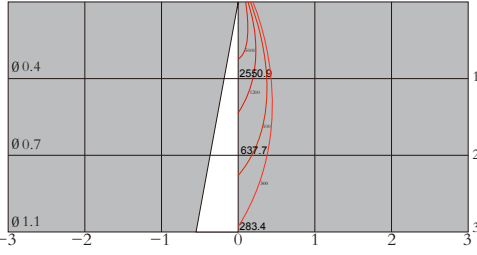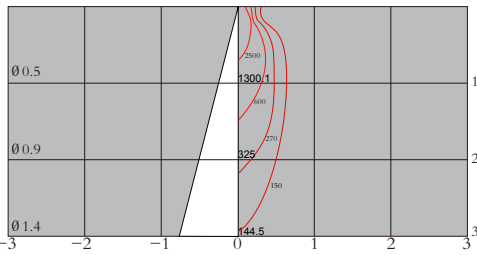Part Number	FWHM	Field Angle*	cd / lm	IES File
LL01ED-ASA24L06-P	23°	55°	3.4	Download
				
Beam Pattern	Light Distribution Curve		Illuminance Distribution	
Part Number	FWHM	Field Angle*	cd / lm	IES File
LL01ED-ASA38L06-P	36°	83°	1.6	Download
				
Beam Pattern	Light Distribution Curve		Illuminance Distribution	

*The Field Angle is the angle between the two directions opposed to each other over the beam axis for which the luminous intensity is 10% that of the maximum luminous intensity.
*This testing result is obtained through testing the popular rank LED samples which provided by the original manufacturer. Hence, the testing results would be varied as the users choose same LED model but different rank.

LL01ED-ASxxL06-P

Mechanical Specification

1. Fixing method

Note: All dimensions are in mm.

☐ Glue

☐ Screw


☐ Tape

☒ Fixing-ring

☒ Frame


2. Lens dimensions

3. Lens + Leds+MCPCB assembly instruction

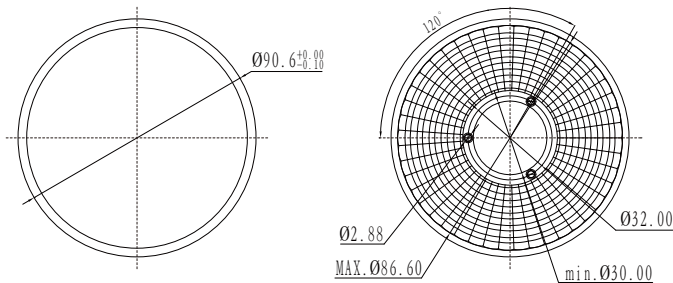

4. Lens assembly dimensions


5. View assembly lens with MCPCB:

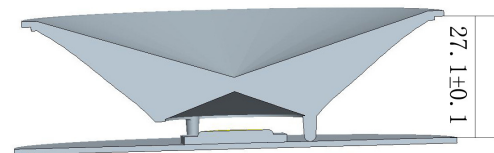



LL01ED-ASAxL06-P

Package Specifications

Item	Quantity	Total	Size(L*W*H)	G.W
Inner box		9 pcs	32.5*29.6*3.2 cm	65g
Outer box	54 pcs/Outer box	54pcs	35*31*21 cm	
Outer box				

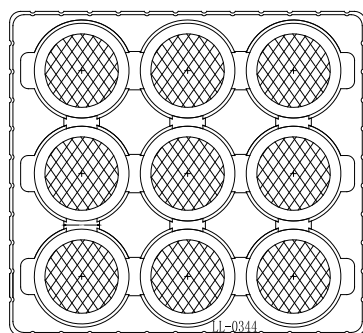

9pcs/inner box

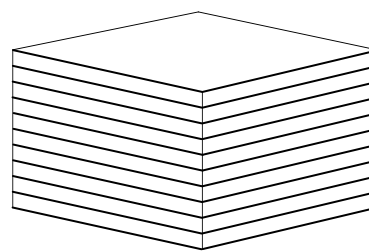

54pcs/Outer box



Note: