




KU-BAND MMIC VCO WITH DIVIDE-BY-8 13.2 - 13.5 GHz

Typical Applications

Low noise MMIC VCO w/Divide-by-8
for Ku-Band applications such as:

- Point-to-Point Radios
- Point-to-Multi-Point Radios / LMDS
- VSAT

Functional Diagram

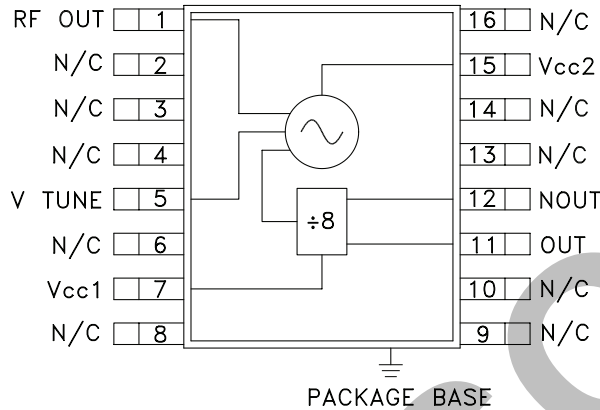

Features

Pout: -7 dBm

Phase Noise: -105 dBc/Hz @100 KHz Typ.

No External Resonator Needed

Single Supply: 5V @ 290 mA

QSOP16G SMT Package

General Description

The HMC401QS16G & HMC401QS16GE are GaAs InGaP Heterojunction Bipolar Transistor (HBT) MMIC VCOs. The HMC401QS16G & HMC401QS16GE integrate resonators, negative resistance devices, varactor diodes and divide-by-8 prescalers. The VCO's phase noise performance is excellent over temperature, shock, and process due to the oscillator's monolithic structure. Power output is -7 dBm typical from a 5V supply voltage. The voltage controlled oscillator is packaged in a low cost, surface mount 16 leaded QSOP package with an exposed base for improved RF and thermal performance.

Electrical Specifications, $T_A = +25^\circ\text{C}$, V_{cc1} , $V_{cc2} = +5\text{V}$

Parameter	Min.	Typ.	Max.	Units
Frequency Range		13.2 - 13.5		GHz
Power Output				
FR Output	-10	-7		dBm
Divided Output	-9	-6		dBm
SSB Phase Noise @ 100 kHz Offset, $V_{tune} = +5\text{V}$ @ RF Output		-105		dBc/Hz
Tune Voltage	0		10	V
Supply Current				
Icc1 (Digital)		65		mA
Icc2 (RF)		225		mA
Tune Port Leakage Current ($V_{tune} = 10\text{V}$)			10	μA
Output Return Loss		2		dB
Harmonics/Subharmonics				
1/2		-7		dBc
3/2		-28		dBc
2nd		-17		dBc
5/2		-40		dBc
Pulling (into a 2.0:1 VSWR)		0.6		MHz pp
Pushing @ $V_{tune} = 5\text{V}$		5		MHz/V
Frequency Drift Rate		1.5		MHz/ $^\circ\text{C}$


Information furnished by Analog Devices is believed to be accurate and reliable. However, no responsibility is assumed by Analog Devices for its use, nor for any infringements of patents or other rights of third parties that may result from its use. Specifications subject to change without notice. No license is granted by implication or otherwise under any patent or patent rights of Analog Devices. Trademarks and registered trademarks are the property of their respective owners.

For price, delivery, and to place orders: Analog Devices, Inc., One Technology Way, P.O. Box 9106, Norwood, MA 02062-9106
Phone: 781-329-4700 • Order online at www.analog.com
Application Support: Phone: 1-800-ANALOG-D




**KU-BAND MMIC VCO WITH DIVIDE-BY-8
13.2 - 13.5 GHz**


Frequency vs. Tuning Voltage, $T = 25^{\circ}\text{C}$

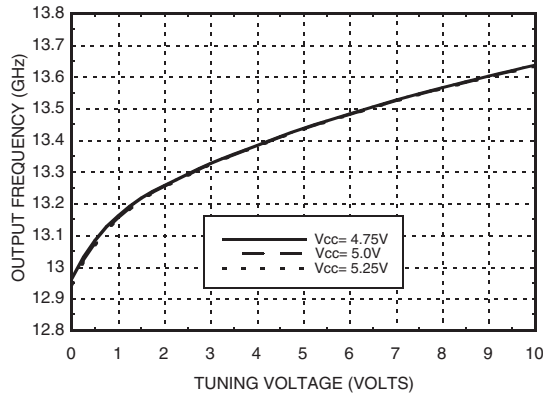


Frequency vs. Tuning Voltage, $V_{cc} = +5V$

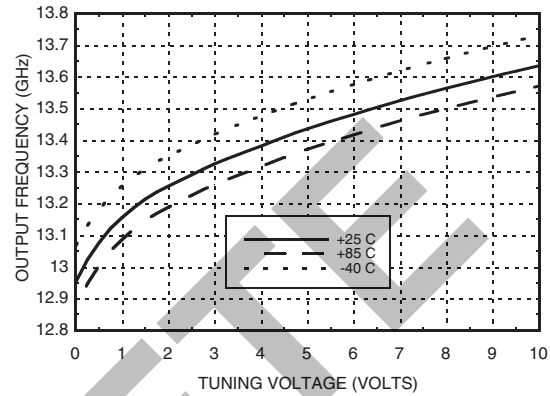


Sensitivity vs. Tuning Voltage, $V_{cc} = +5V$

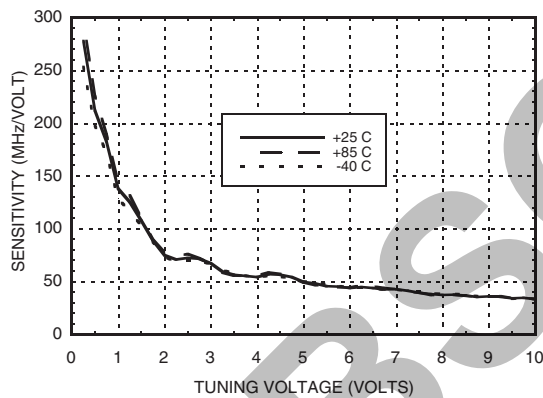


Output Power vs. Tuning Voltage, $V_{cc} = +5V$



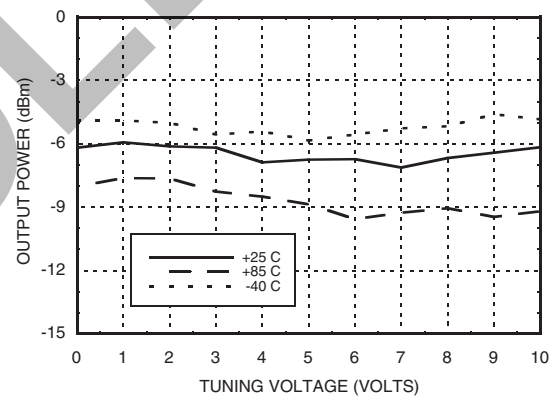


SSB Phase Noise vs. Tuning Voltage

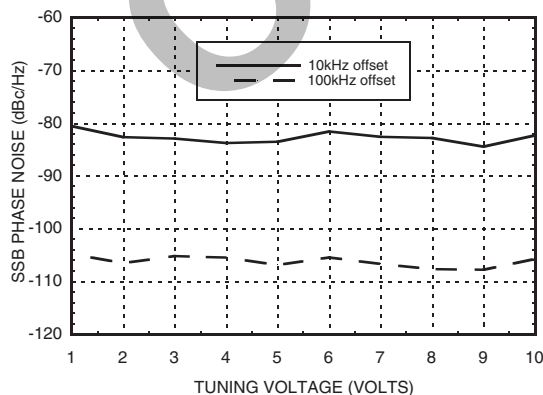

Phase Noise @ $V_{tune} = 5V$

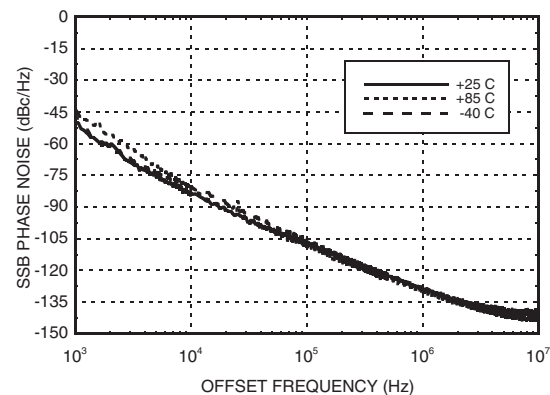

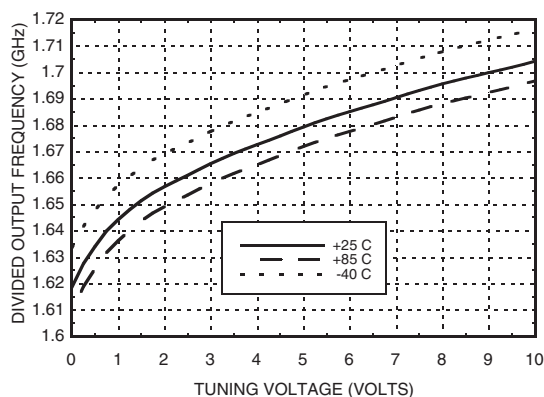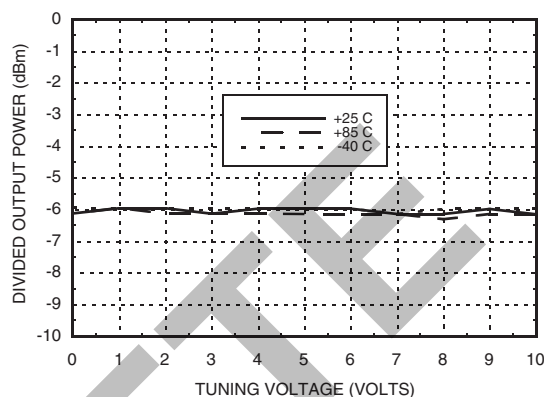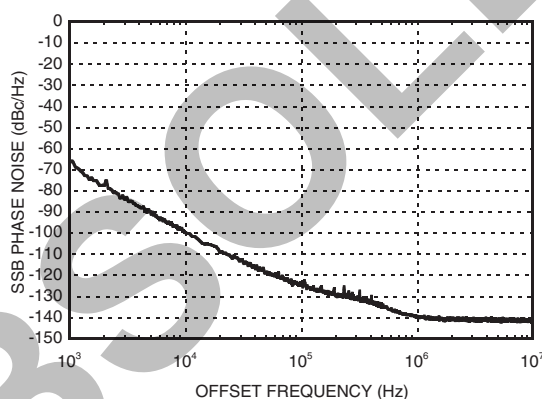
**KU-BAND MMIC VCO WITH DIVIDE-BY-8
13.2 - 13.5 GHz**
**Divided Frequency
vs. Tuning Voltage, $V_{cc} = +5V$**

**Divided Output
Power vs. Tuning Voltage, $V_{cc} = +5V$**

**Divided Output
SSB Phase Noise @ $V_{tune} = 5V$**

Absolute Maximum Ratings

V_{cc1}, V_{cc2}	5.5 V
Storage Temperature	-65 to +150 °C
Operating Temperature	-40 to +85 °C
V_{tune}	0 to 11V Max.
ESD Sensitivity (HBM)	Class 1A

Typical Supply Current vs. V_{cc}

V_{cc} (V)	I_{cc} (mA)
4.75	260
5.0	290
5.25	315

Note: VCO will operate over full voltage range shown above.







**ELECTROSTATIC SENSITIVE DEVICE
OBSERVE HANDLING PRECAUTIONS**




KU-BAND MMIC VCO WITH DIVIDE-BY-8 13.2 - 13.5 GHz


Pin Descriptions

Pin Number	Function	Description	Interface Schematic
7, 15	VCC1, VCC2	Supply Voltage, 5V	
11	OUT	Divided Output	
12	NOUT	Divided Output 180° output phase with pin 11.	
	GND	Package bottom has an exposed metal paddle that must be RF & DC grounded.	

Typical Application Circuit

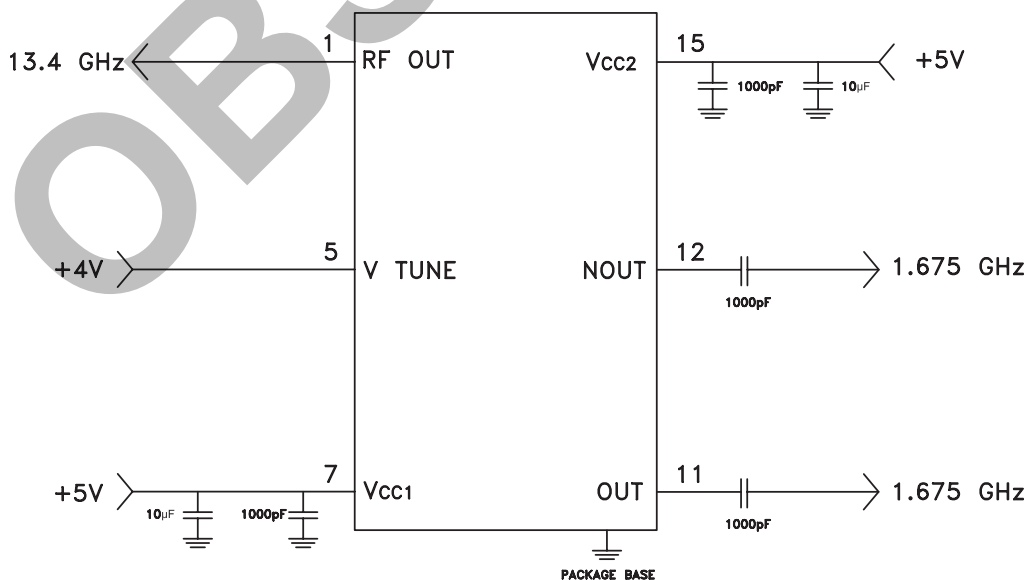

Evaluation PCB

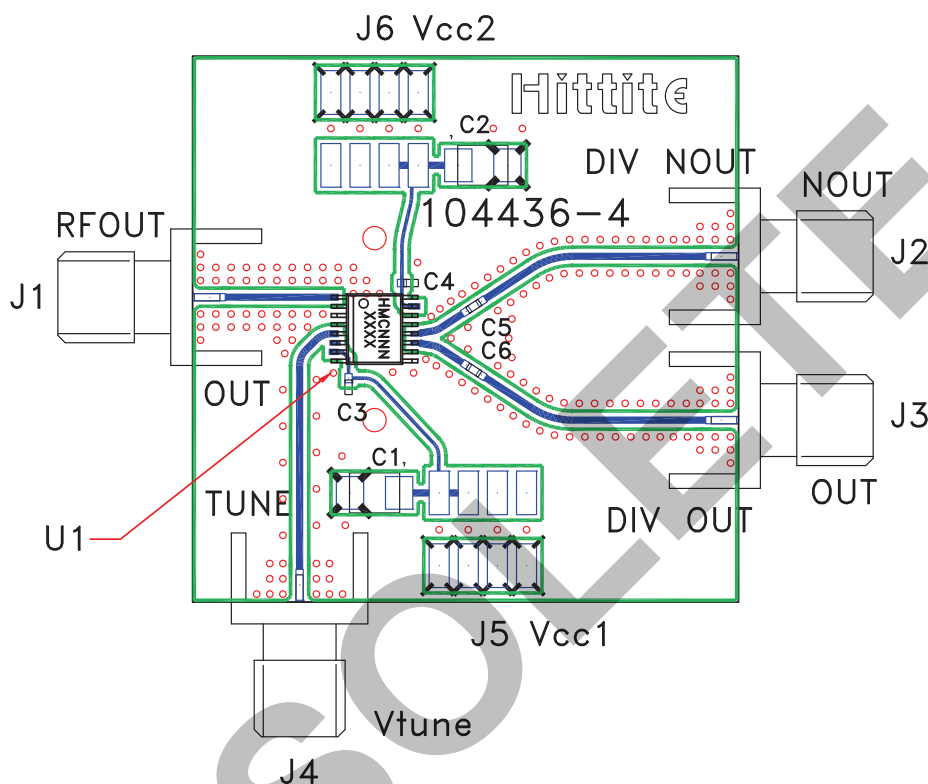

List of Materials for Evaluation PCB 104711 [1]

Item	Description
J1 - J4	PCB Mount SMA RF Connector
J5 - J6	2 mm DC Header
C1 - C2	10 μ F Tantalum Capacitor
C3 - C6	1,000 pF Capacitor, 0402 Pkg.
U1	HMC401QS16G / HMC401QS16GE VCO
PCB [2]	104436 Eval Board

[1] Reference this number when ordering complete evaluation PCB

[2] Circuit Board Material: Rogers 4350

The circuit board used in the application should use RF circuit design techniques. Signal lines should have 50 Ohm impedance while the package ground leads and backside ground slug should be connected directly to the ground plane similar to that shown. A sufficient number of via holes should be used to connect the top and bottom ground planes. The evaluation circuit board shown is available from Hittite upon request.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Analog Devices Inc.:](#)

[HMC401QS16GE](#) [HMC401QS16GETR](#)