



- Series 804 triple row .100" grid headers use MM #5016 pins. See page 182 for details.
- Series 805 triple row .100" grid sockets use MM #1303 pins. See page 150 for details.
- Series 805 triple row .100" grid sockets use Hi-Rel, 6-finger BeCu #47 contacts rated at 4.5 amps. See page 221 for details.
- Insulators are high temp. thermoplastic, suitable for all soldering operations.

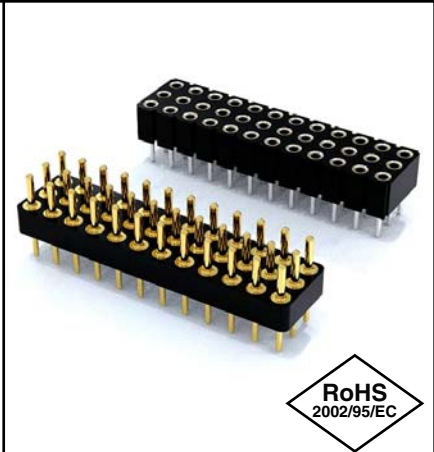

Ordering Information

Fig. 1	Series 804...002	Straight Pin Header
	804-10-0__-10-002000	Specify # of pins \rightarrow 09-96

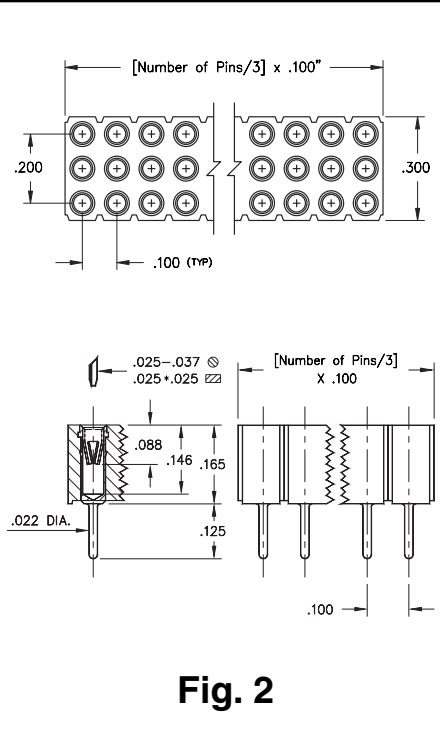

For Electrical, Mechanical & Environmental Data, See pg. 4
For RoHS compliance select \diamond plating code.

PLATING CODE	10 \diamond			
Pin Plating	10 μ " Au			

Fig. 2	Series 805...012	Straight Pin Socket
	805-43-0__-10-012000	Specify # of pins \rightarrow 09-96

For Electrical, Mechanical & Environmental Data, See pg. 4
For RoHS compliance select \diamond plating code.

PLATING CODE					43 \diamond
Sleeve (Pin)					200 μ " Sn
Contact (Clip)					30 μ " Au