



GaAs MMIC FUNDAMENTAL MIXER, 11 - 20 GHz

Typical Applications

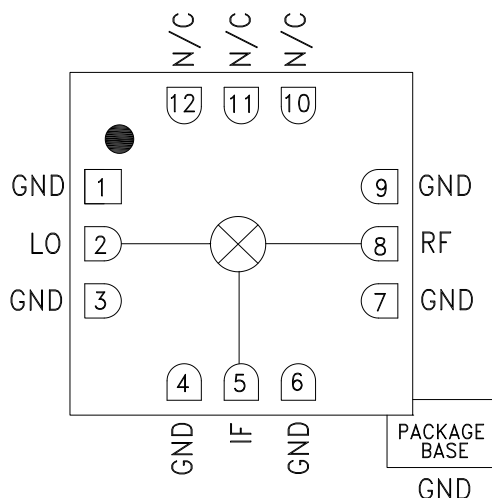
The HMC554LC3B is ideal for:

- Point-to-Point Radios
- Point-to-Multi-Point Radios & VSAT
- Test Equipment & Sensors
- Military End-Use

Features

- High LO/RF Isolation: 46 dB
- Passive Double Balanced Topology
- Low Conversion Loss: 7 dB
- Wide IF Bandwidth: DC - 6 GHz
- Robust 1,000V ESD, Class 1C
- 12 Lead Ceramic 3x3mm SMT Package: 9mm²

Functional Diagram



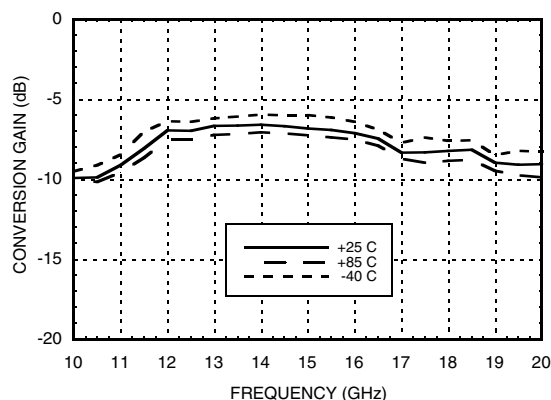
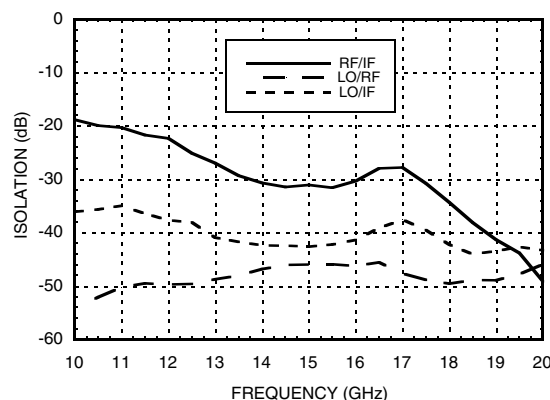
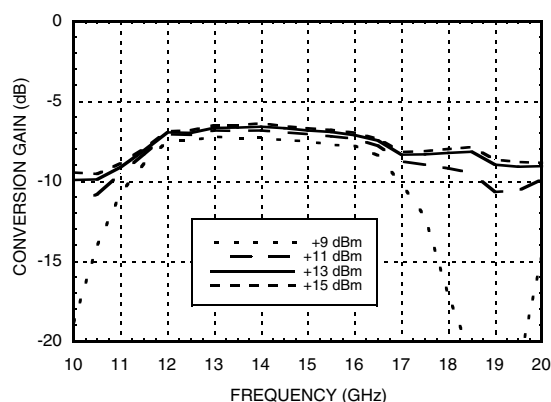
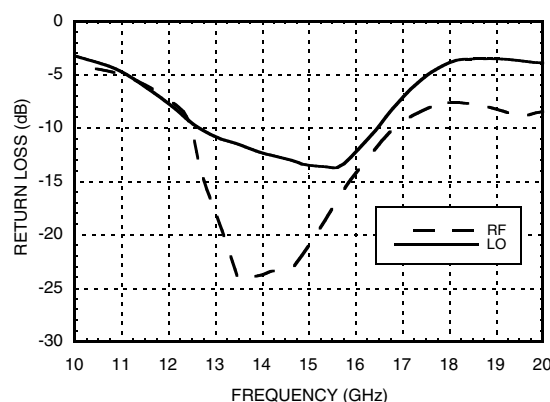
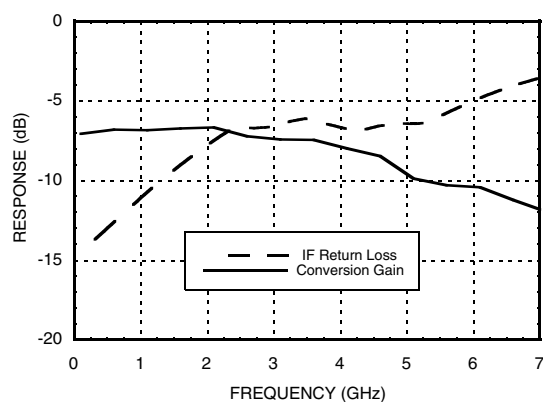
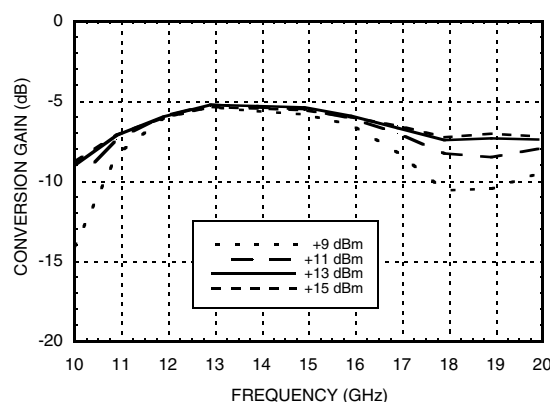
General Description

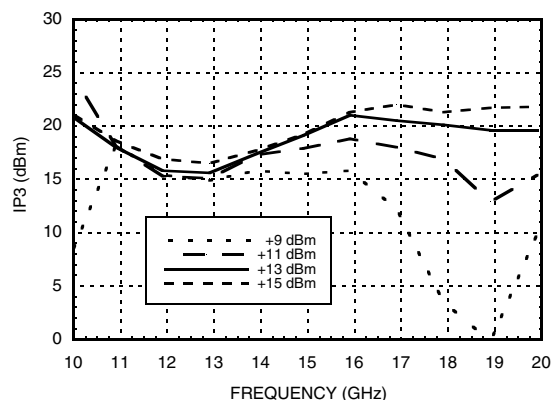
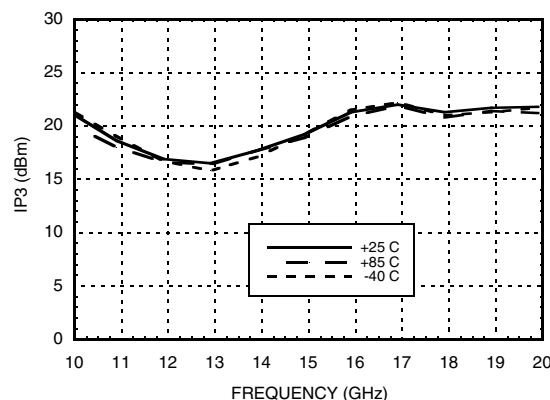
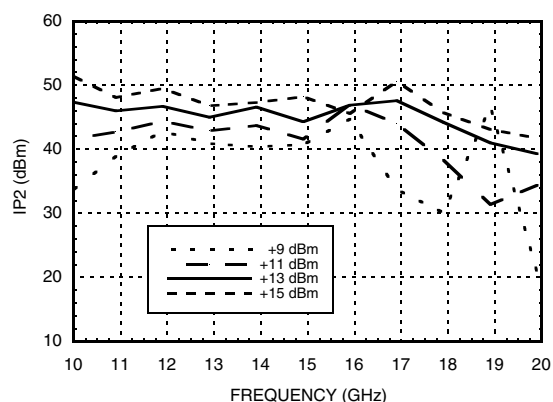
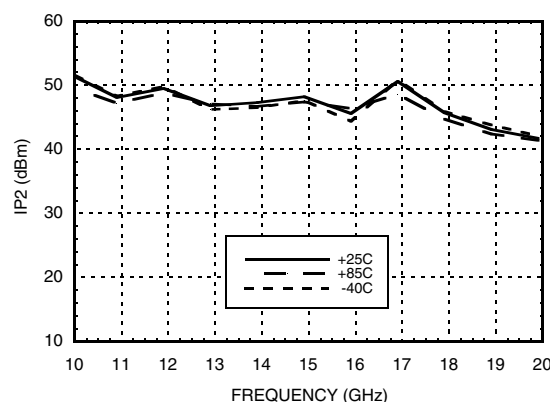
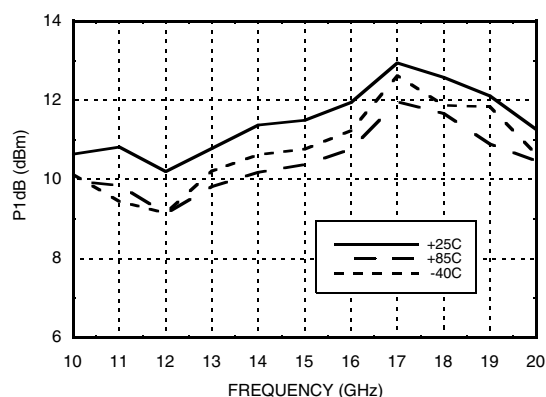
The HMC554LC3B is a general purpose double balanced mixer in a leadless RoHS compliant SMT package that can be used as an upconverter or downconverter between 11 and 20 GHz. This mixer is fabricated in a GaAs MESFET process, and requires no external components or matching circuitry. The HMC554LC3B provides excellent LO to RF and LO to IF isolation due to optimized balun structures. The RoHS compliant HMC554LC3B eliminates the need for wire bonding, and is compatible with high volume surface mount manufacturing techniques.

Electrical Specifications, $T_A = +25^\circ\text{C}$, $IF = 100\text{ MHz}$, $LO = +13\text{ dBm}^*$

| Parameter | Min. | Typ. | Max. | Min. | Typ. | Max. | Units |
|-------------------------------|------|---------|------|------|---------|------|-------|
| Frequency Range, RF & LO | | 12 - 16 | | | 11 - 20 | | GHz |
| Frequency Range, IF | | DC - 6 | | | DC - 6 | | GHz |
| Conversion Loss | | 7 | 9 | | 8 | 11 | dB |
| Noise Figure (SSB) | | 7 | 9 | | 8 | 11 | dB |
| LO to RF Isolation | 40 | 46 | | 40 | 46 | | dB |
| LO to IF Isolation | 34 | 40 | | 30 | 40 | | dB |
| RF to IF Isolation | 18 | 25 | | 15 | 25 | | dB |
| IP3 (Input) | | 18 | | | 18 | | dBm |
| IP2 (Input) | | 48 | | | 45 | | dBm |
| 1 dB Gain Compression (Input) | | 11 | | | 11 | | dBm |

*Unless otherwise noted, all measurements performed as downconverter, $IF = 100\text{ MHz}$.


**GaAs MMIC FUNDAMENTAL
MIXER, 11 - 20 GHz**
**Conversion Gain vs. Temperature
@ LO = +13 dBm**

Isolation @ LO = +13 dBm

Conversion Gain vs. LO Drive

Return Loss @ LO = +13 dBm

IF Bandwidth @ LO = +13 dBm

**Upconverter Performance
Conversion Gain vs. LO Drive**


**GaAs MMIC FUNDAMENTAL
MIXER, 11 - 20 GHz**
Input IP3 vs. LO Drive *

**Input IP3 vs. Temperature
@ LO = +13 dBm***

Input IP2 vs. LO Drive *

**Input IP2 vs. Temperature
@ LO = +13 dBm***

**Input P1dB vs. Temperature
@ LO = +13 dBm**

MxN Spurious Outputs

| | nLO | | | | |
|-----|-----|----|-----|----|-----|
| mRF | 0 | 1 | 2 | 3 | 4 |
| 0 | xx | 19 | 25 | xx | xx |
| 1 | 29 | 0 | 51 | 55 | xx |
| 2 | 81 | 85 | 60 | 88 | 104 |
| 3 | xx | 97 | 98 | 76 | 99 |
| 4 | xx | xx | 105 | 98 | 105 |

RF = 15.1 GHz @ -10 dBm
LO = 15.0 GHz @ +13 dBm
All values in dBc below the IF output power level.

* Two-tone input power = -10 dBm each tone, 1 MHz spacing.

Information furnished by Analog Devices is believed to be accurate and reliable. However, no responsibility is assumed by Analog Devices for its use, nor for any infringements of patents or other rights of third parties that may result from its use. Specifications subject to change without notice. No license is granted by implication or otherwise under any patent or patent rights of Analog Devices. Trademarks and registered trademarks are the property of their respective owners.

For price, delivery, and to place orders: Analog Devices, Inc., One Technology Way, P.O. Box 9106, Norwood, MA 02062-9106
Phone: 781-329-4700 • Order online at www.analog.com
Application Support: Phone: 1-800-ANALOG-D



GaAs MMIC FUNDAMENTAL MIXER, 11 - 20 GHz

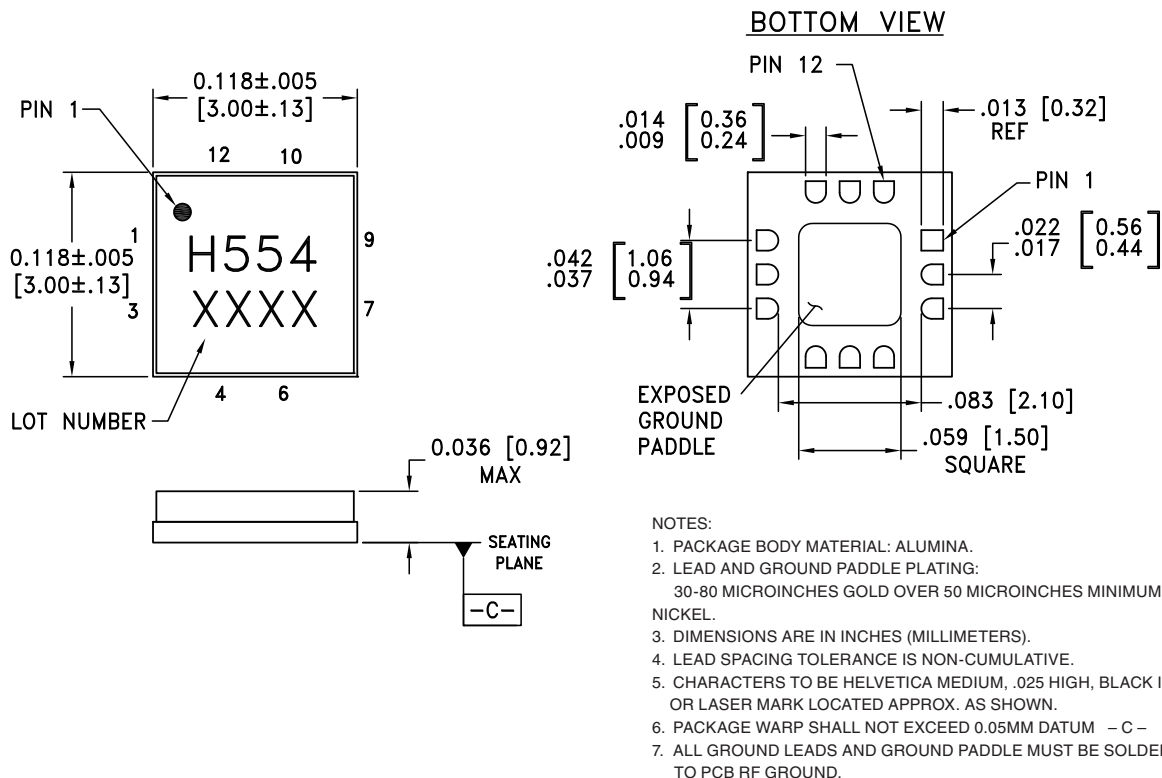
Absolute Maximum Ratings

| | |
|--|----------------|
| RF / IF Input | +25 dBm |
| LO Drive | +25 dBm |
| Channel Temperature | 150 °C |
| Continuous Pdiss (T= 85 °C) (derate 2.32 mW/°C above 85 °C) | 150 mW |
| Thermal Resistance (channel to ground paddle) | 431 °C/W |
| Storage Temperature | -65 to +150 °C |
| Operating Temperature | -40 to +85 °C |
| ESD Sensitivity (HBM) | Class 1C |



ELECTROSTATIC SENSITIVE DEVICE
OBSERVE HANDLING PRECAUTIONS

Outline Drawing







Package Information

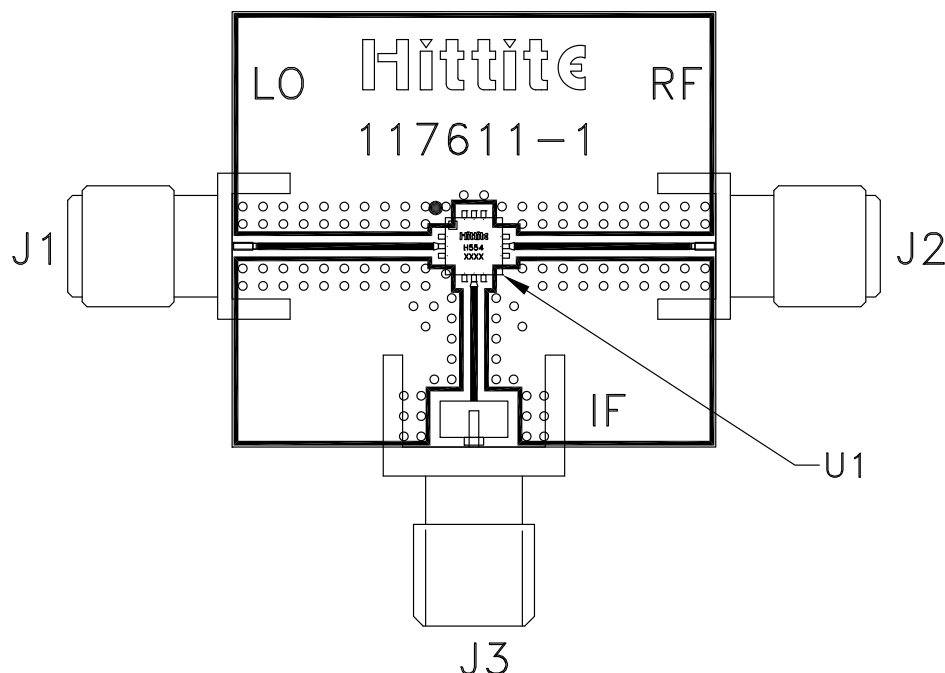
| Part Number | Package Body Material | Lead Finish | MSL Rating | Package Marking [2] |
|-------------|-----------------------|------------------|------------|---------------------|
| HMC554LC3B | Alumina, White | Gold over Nickel | MSL3 [1] | H554 XXXX |

[1] Max peak reflow temperature of 260 °C

[2] 4-Digit lot number XXXX


**GaAs MMIC FUNDAMENTAL
MIXER, 11 - 20 GHz**
Pin Descriptions

| Pin Number | Function | Description | Interface Schematic |
|------------------|----------|--|--|
| 1, 3, 4, 6, 7, 9 | GND | Package bottom must also be connected to RF/DC ground. |  |
| 2 | LO | This pin is DC coupled and matched to 50 Ohms. |  |
| 5 | IF | This pin is DC coupled. For applications not requiring operation to DC, this port should be DC blocked externally using a series capacitor whose value has been chosen to pass the necessary IF frequency range. For operation to DC, this pin must not source or sink more than 2 mA of current or part non-function and possible part failure will result. |  |
| 8 | RF | This pin is DC coupled and matched to 50 Ohms. |  |
| 10, 11, 12 | N/C | No connection required. These pins may be connected to RF/DC ground without affecting performance. | |

Evaluation PCB

List of Materials for Evaluation PCB 109952 ^[1]

| Item | Description |
|---------|-----------------------|
| J1 - J2 | SRI SMA Connector |
| J3 | Johnson SMA Connector |
| U1 | HMC554LC3B Mixer |
| PCB [2] | 117611 Evaluation PCB |

[1] Reference this number when ordering complete evaluation PCB

[2] Circuit Board Material: Arlon 25 FR

The circuit board used in this application should use RF circuit design techniques. Signal lines should have 50 Ohm impedance while the package ground leads and exposed paddle should be connected directly to the ground plane similar to that shown. A sufficient number of via holes should be used to connect the top and bottom ground planes. The evaluation circuit board shown is available from Hittite upon request.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Analog Devices Inc.:](#)

[HMC554](#) [109952-HMC554LC3B](#)