

SPECIFICATION

- Part No. : **MA750.A.ABICG.003**
- Product Name : Pantheon Antenna 5in1 MA.750
Screw-Mount (Permanent Mount)
2G/3G/4G MIMO/ GPS/GLONASS/ 2.4/5GHz MIMO
- Feature : **● 2 x cellular (2G/3G/4G) Antennas (MIMO)**
(698~960MHz, 1710~2170MHz, 2300~2700MHz, 2900-3500MHz)
- 1*MIMO main antenna
 - 1*MIMO diversity antenna
- 1 x GPS/GLONASS 1575.42/1602MHz Active Antenna**
- 2 x 2.4GHZ/ 5GHz Antennas (MIMO)**
- 1*MIMO main antenna
 - 1*MIMO diversity antenna
- IP67 Waterproof
Front End SAW Filter
High Efficiency / Peak Gain Outdoor Antenna
RoHS Compliant



1. Introduction

The MA.750 Pantheon antenna is an omni-directional heavy-duty, fully IP67 waterproof external M2M antenna for use in telematics, transportation and remote monitoring applications.

This unique antenna delivers powerful MIMO antenna technology for cellular/LTE and Wi-Fi 802.11n and emerging 802.11ac, plus GPS/GLONASS for next generation multiple wireless technology systems, such as telematics. The GPS/GLONASS antenna has a Front End SAW Filter.

Examples are new fleet management and real time video applications that demand high speed video uplink and downlink. High efficiency and high gain MIMO antennas are necessary to achieve the required signal to noise ratio and throughput required to solve these challenges.

Five (5) high performance antennas are integrated into an extremely robust IP67 direct/permanent mount antenna package with excellent isolation (20dB+).

The antenna has its own ground-plane and can radiate on any mounting environment like metal or plastic without affecting performance. The cables are low loss allowing for lengths of up to 10 meters (32' and 9.70 "), critical for buses, trains and other commercial transport applications.

Customized cables and connector version available.

2. Specification Table

2G/3G/4G MIMO					
Frequency	698~960	1710~2170	2300~2700	2900-3500	MHz
VSWR	3 Max				
Polarization	Vertical				
Impedance	50				Ω

2.4GHz/ 5GHz MIMO			
Frequency	2.4~2.5	4.5~5.85	GHz
VSWR	2 Max		
Polarization	Linear		
Impedance	50		Ohm

GPS/GLONASS		
Frequency	1575.42 $\pm$ 2 MHz / 1602 MHz	MHz
Bandwidth	10	MHz
LNA Gain	30	dB
Radiation Efficiency	50	%
VSWR	1.92 Max	
DC Power Input Range	3-5	V
Noise Figure	2	dB
Polarization	Linear	
Power Consumption	10	mA
Impedance	50	Ohm

MECHANICAL	
Antenna Dimensions	Height 85.7mm x Diameter 145.6mm
Casing	Wonderloy PC-540 PC/ABS Alloy
Waterproof	IP67
2G/3G/4G MIMO 1	3M CFD-200 SMA(M)
2G/3G/4G MIMO 2	3M CFD-200 SMA(M)
2.4/5GHz MIMO 1	3M CFD-200 RP-SMA(M)
2.4/5GHz MIMO 2	3M CFD-200 RP-SMA(M)
GPS	3M RG-174 SMA(M)


ENVIRONMENTAL	
ENVIRONMENTAL	
Operation Temperature	-40°C to 85°C
Storage Temperature	-40°C to 90°C
Humidity	Non-condensing 65°C 95% RH

* all measurements were conducted with 3m low loss CFD200 cable


3. LTE MIMO

3.1. LTE MIMO 1 and LTE MIMO 2 Specification


3.1.1. Return Loss

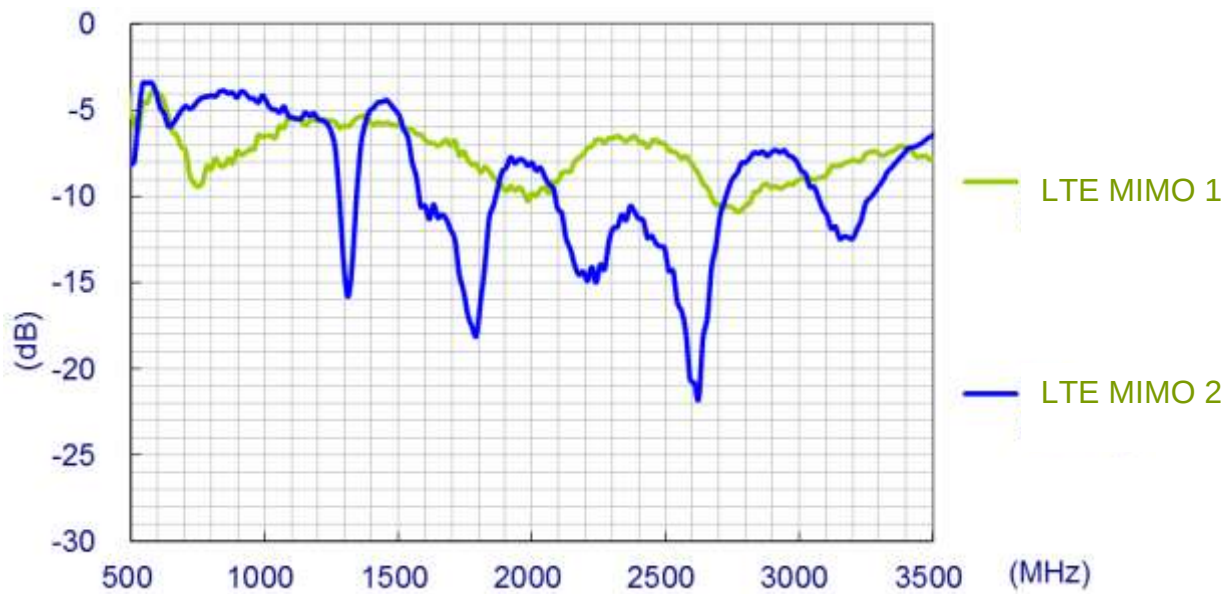


3.1.2. Maximum Gain

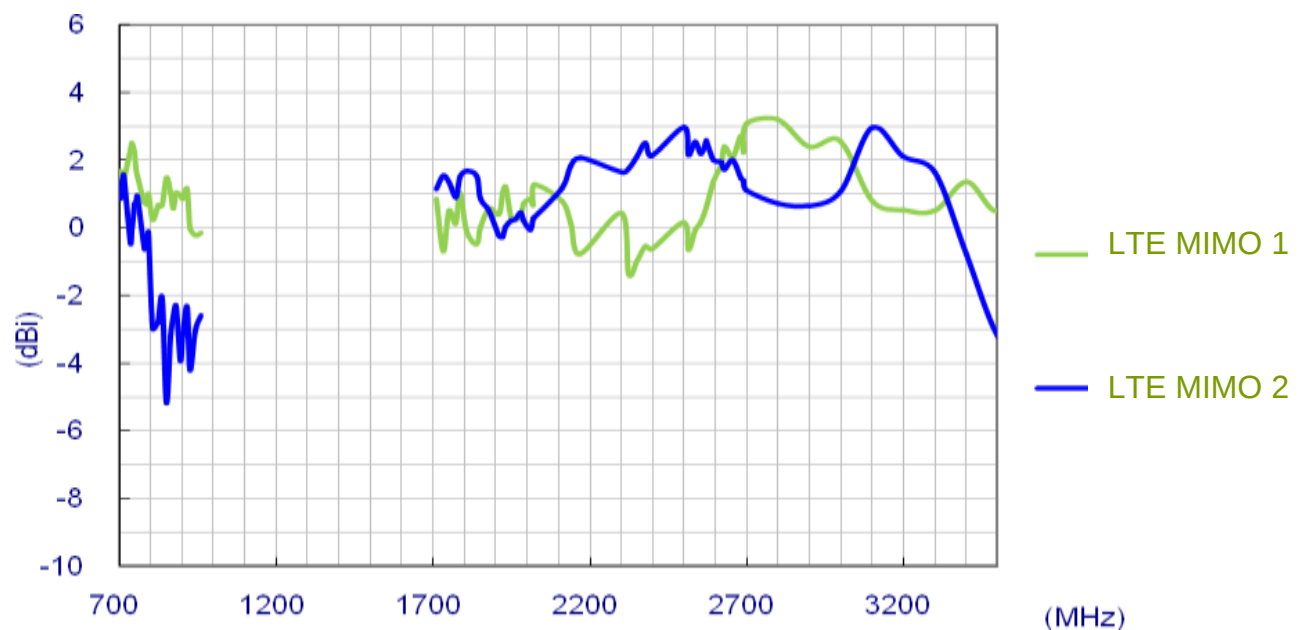

3.1.3. Average Gain

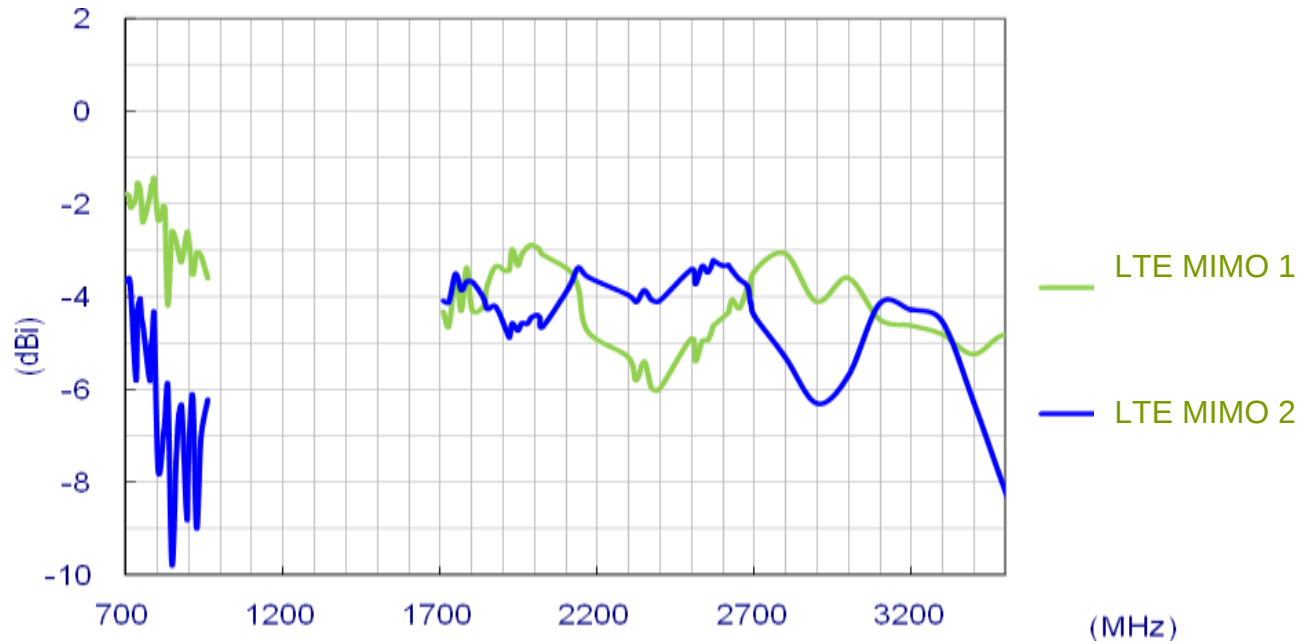

3.1.4. Efficiency


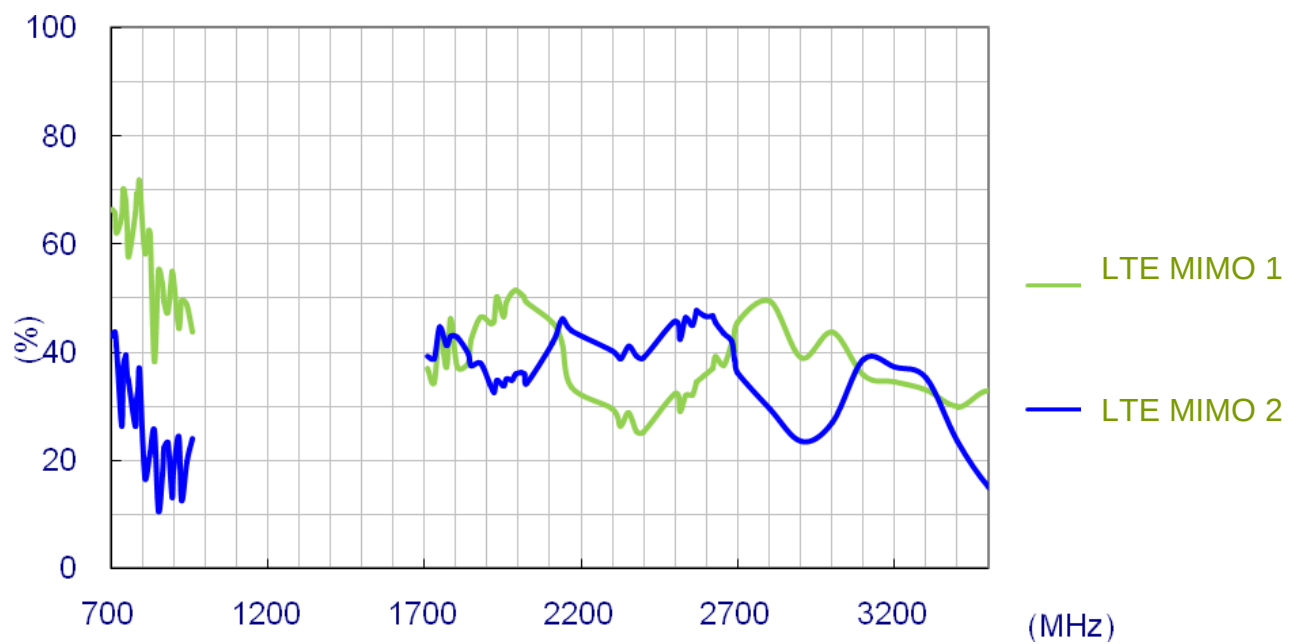




3.2 Radiation Patterns





3.2.1 LTE MIMO 1 Radiation Pattern



XY plane

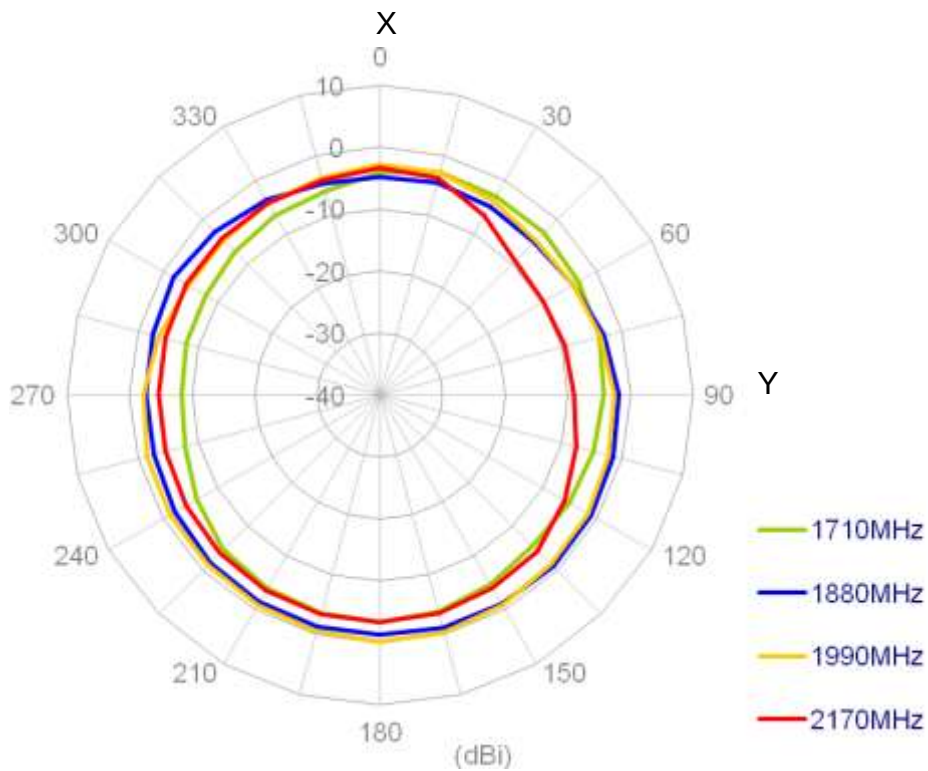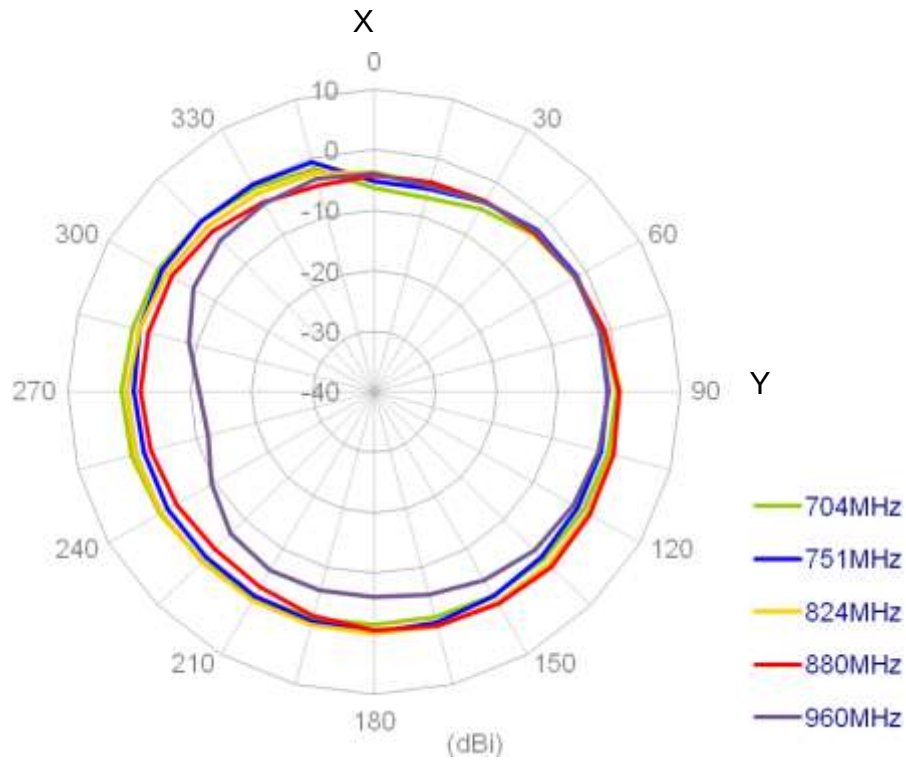

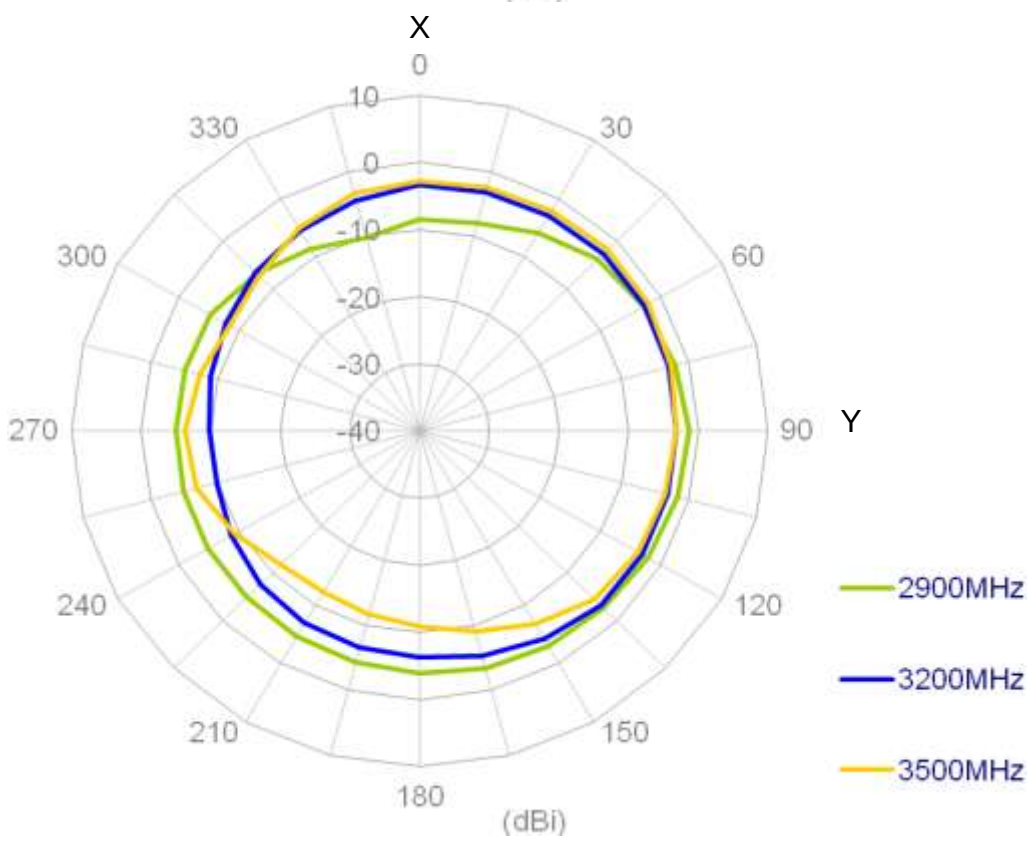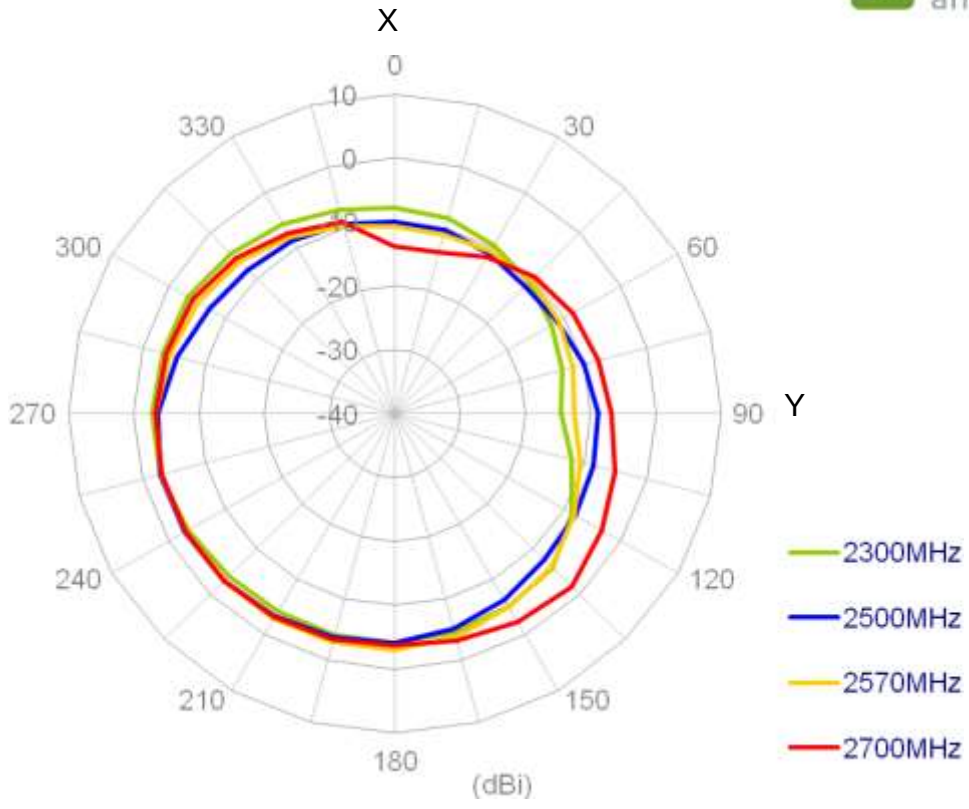


XZ plane

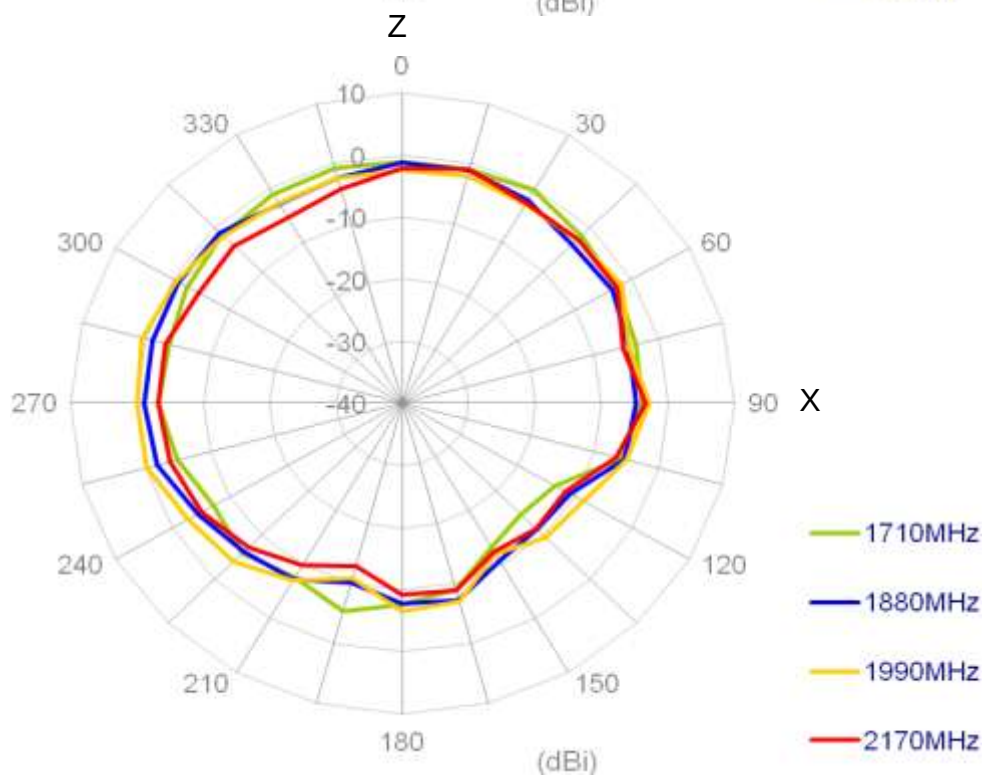
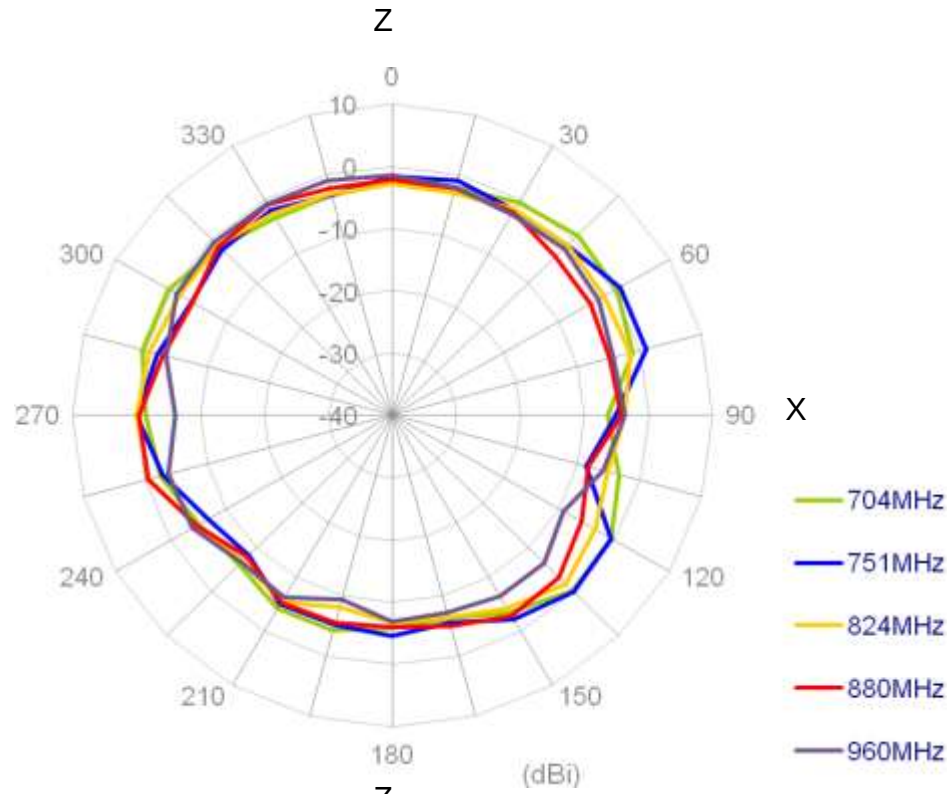


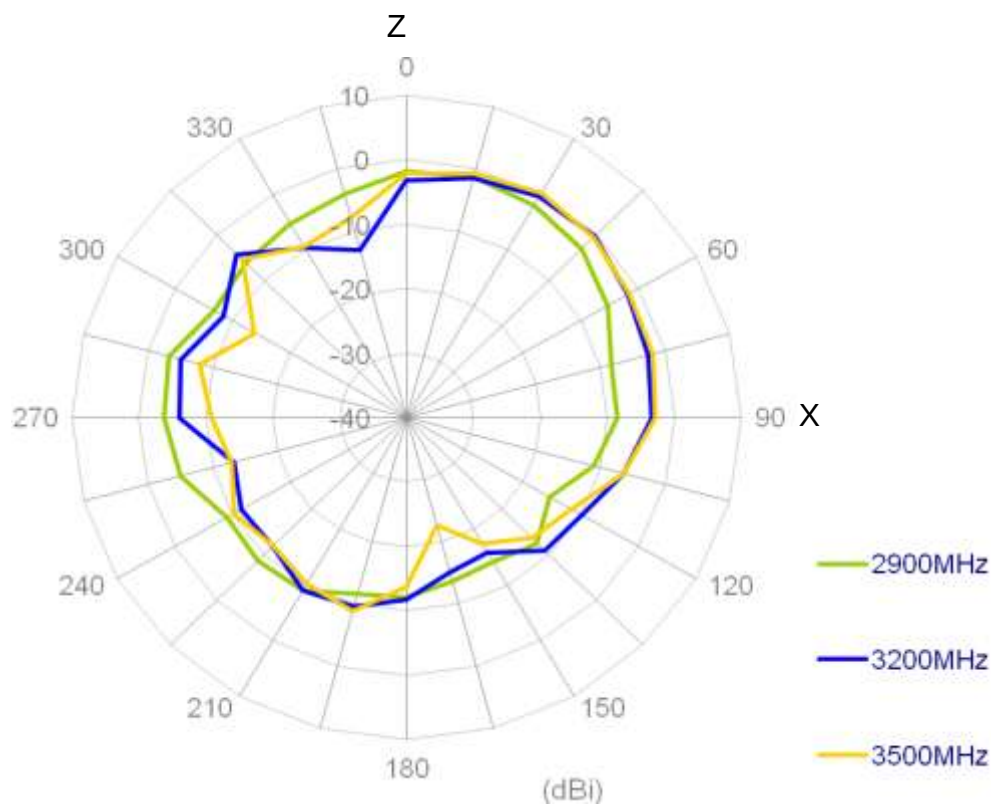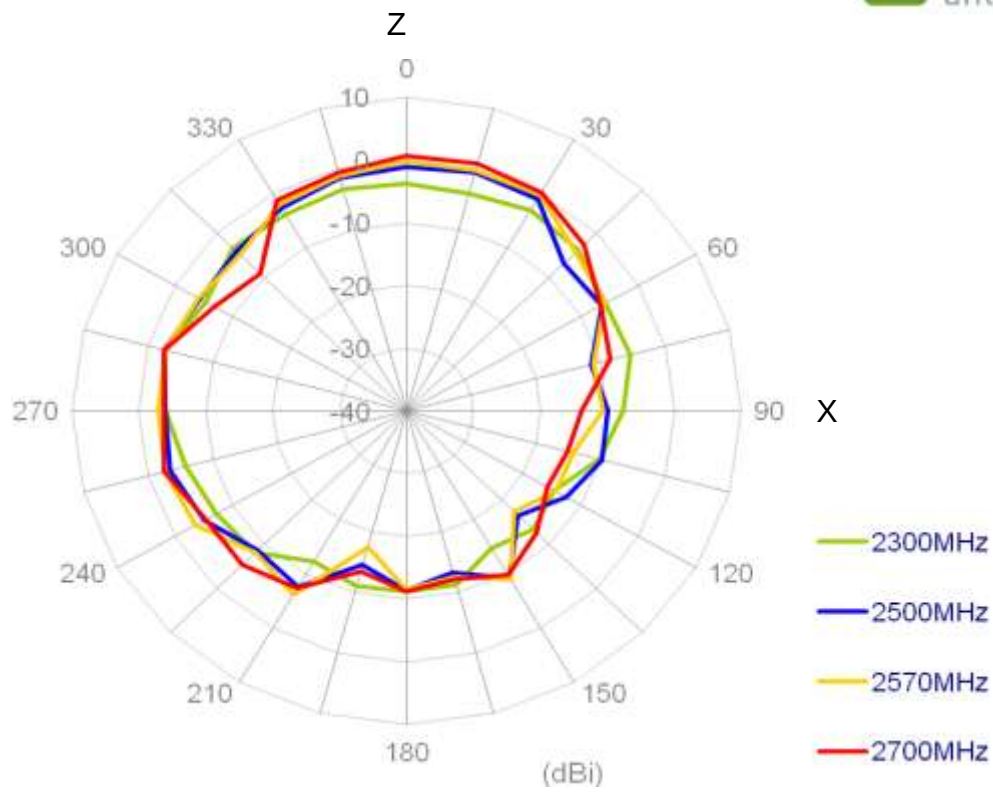



3.2.2 LTE MIMO 2 Radiation Pattern



XY plane

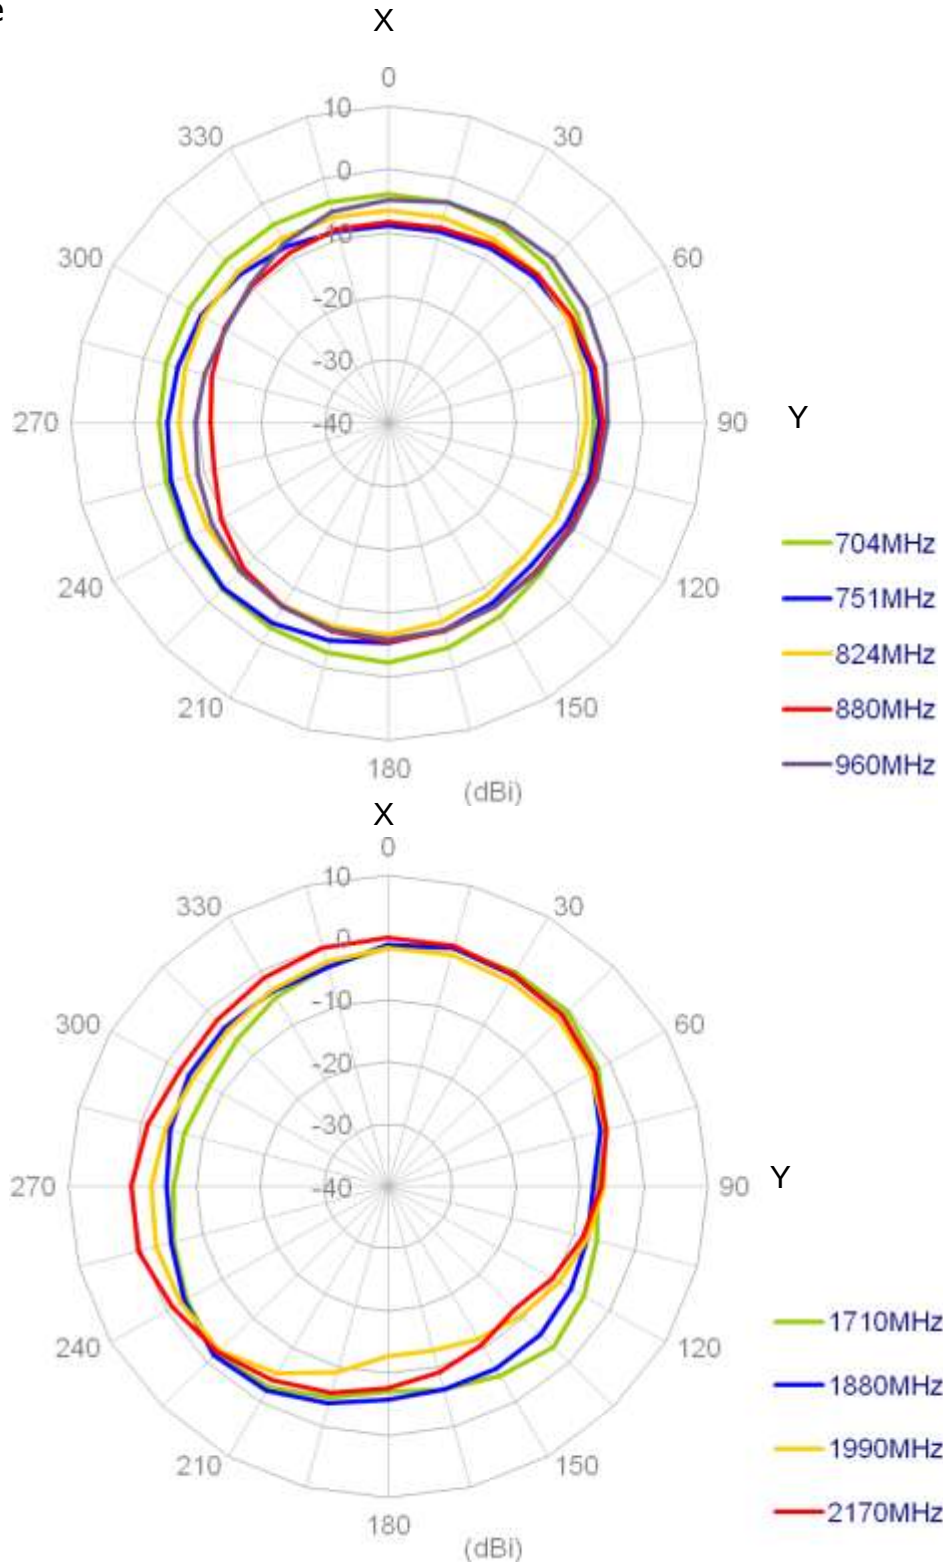

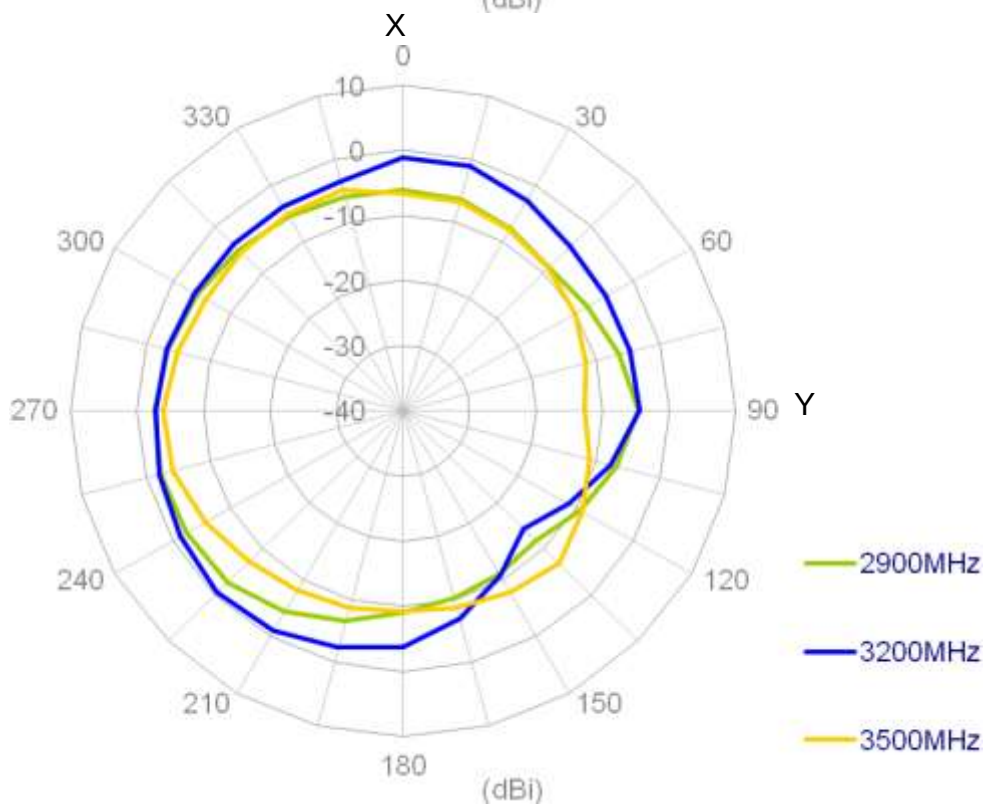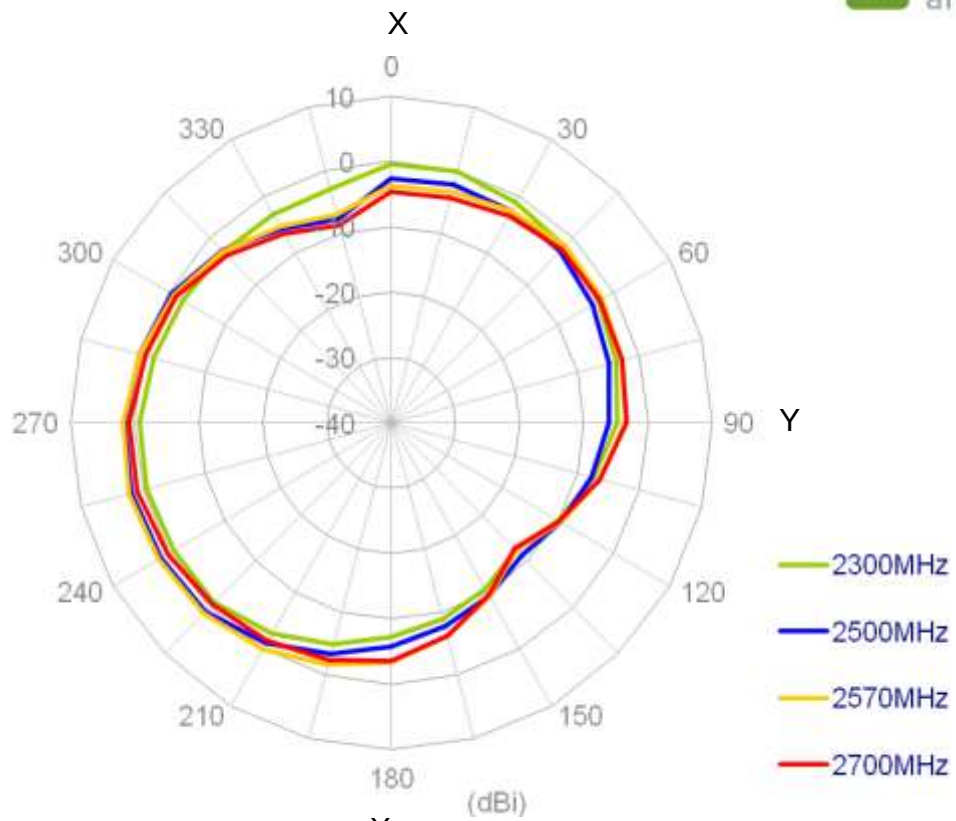

XZ plane

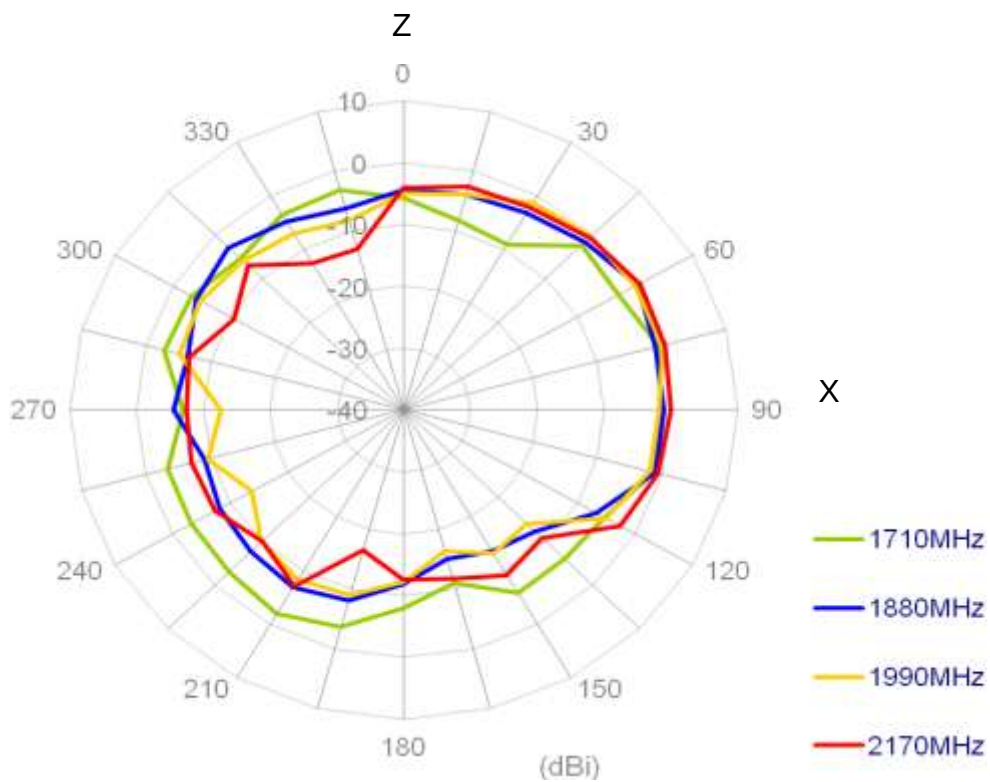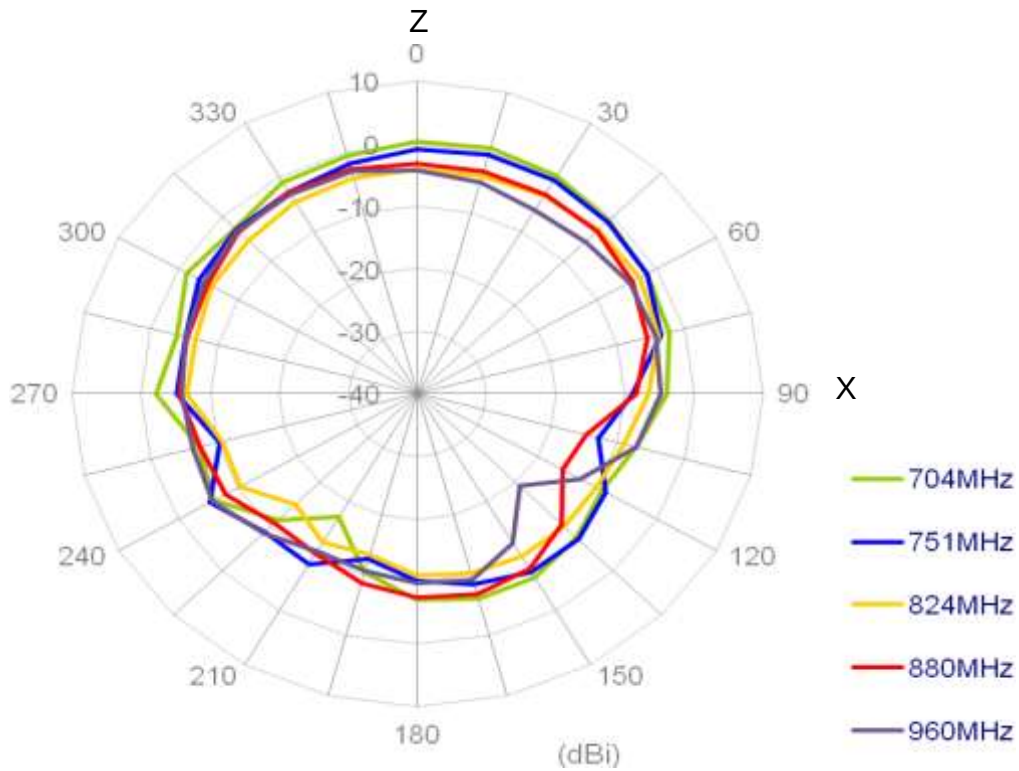


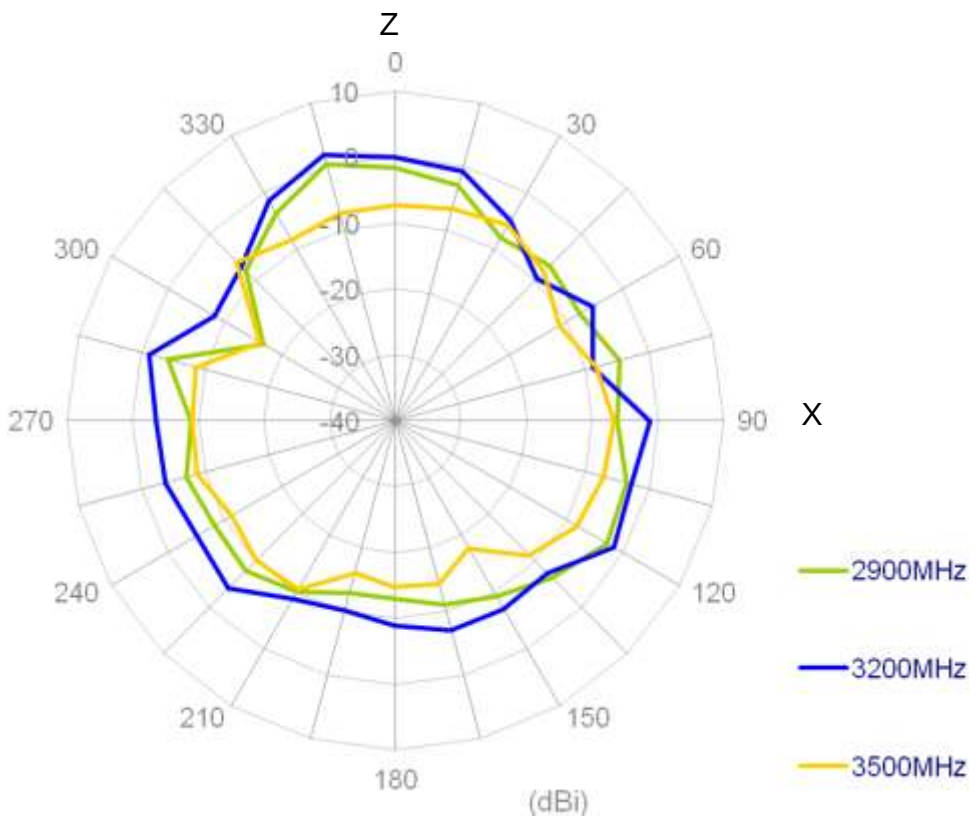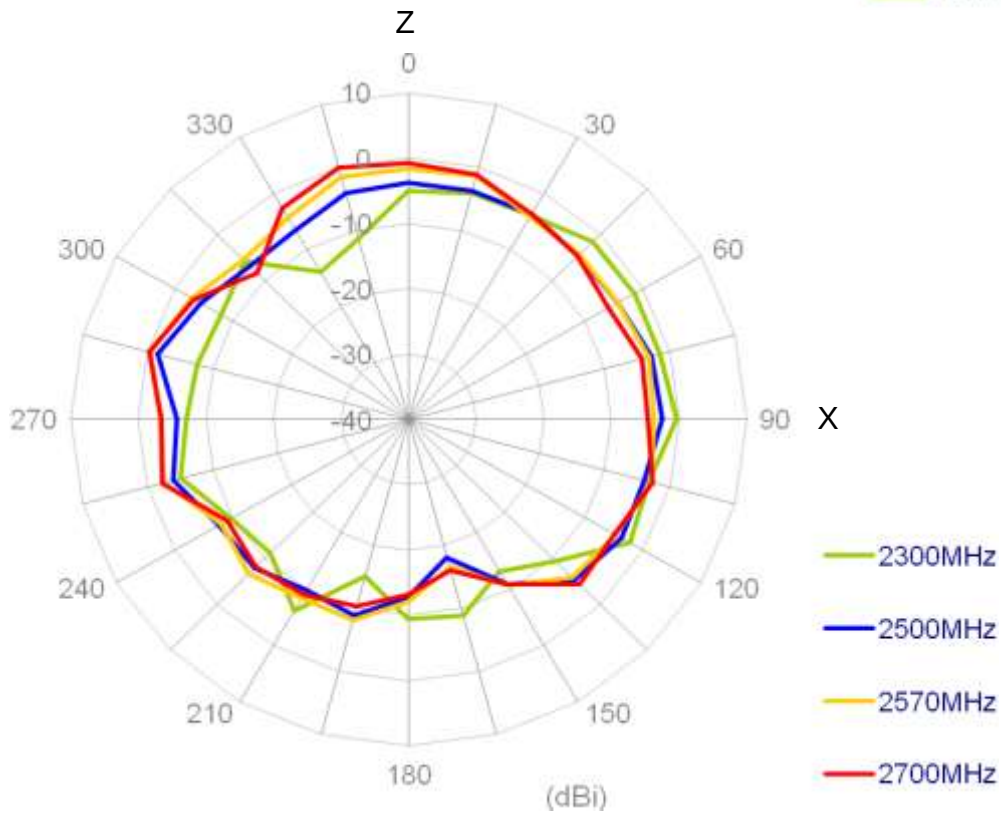


4.2.4/ 5GHz MIMO

4.1. 2.4/5 GHz MIMO 1 and MIMO 2 Specification


4.1.1. Return Loss

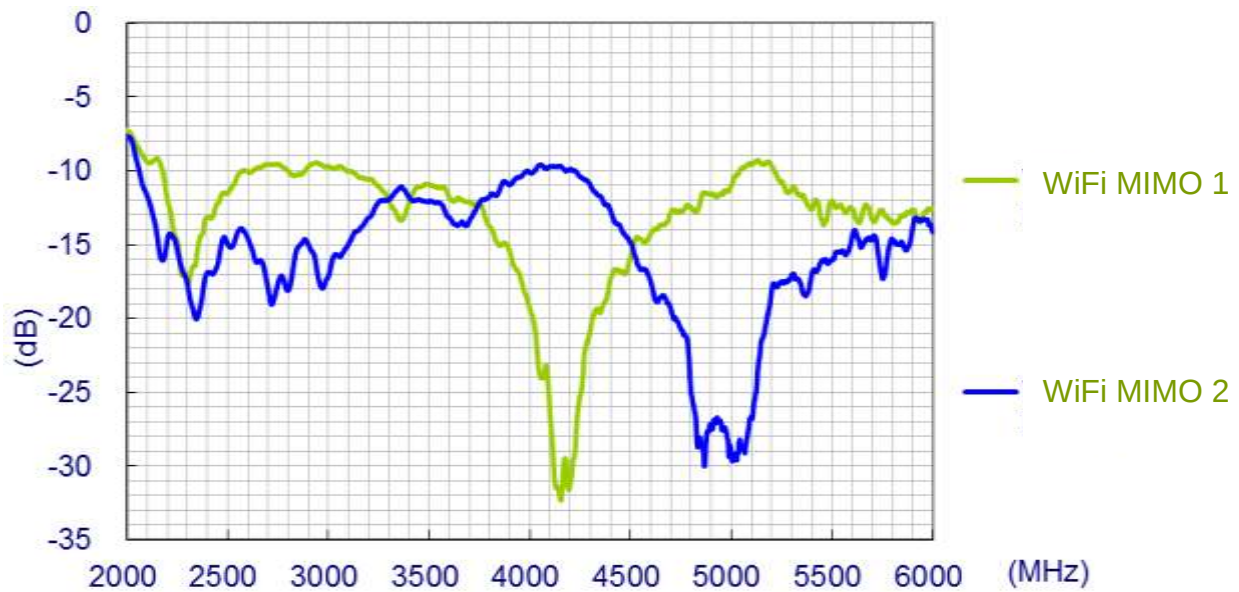


4.1.2. Maximum Gain

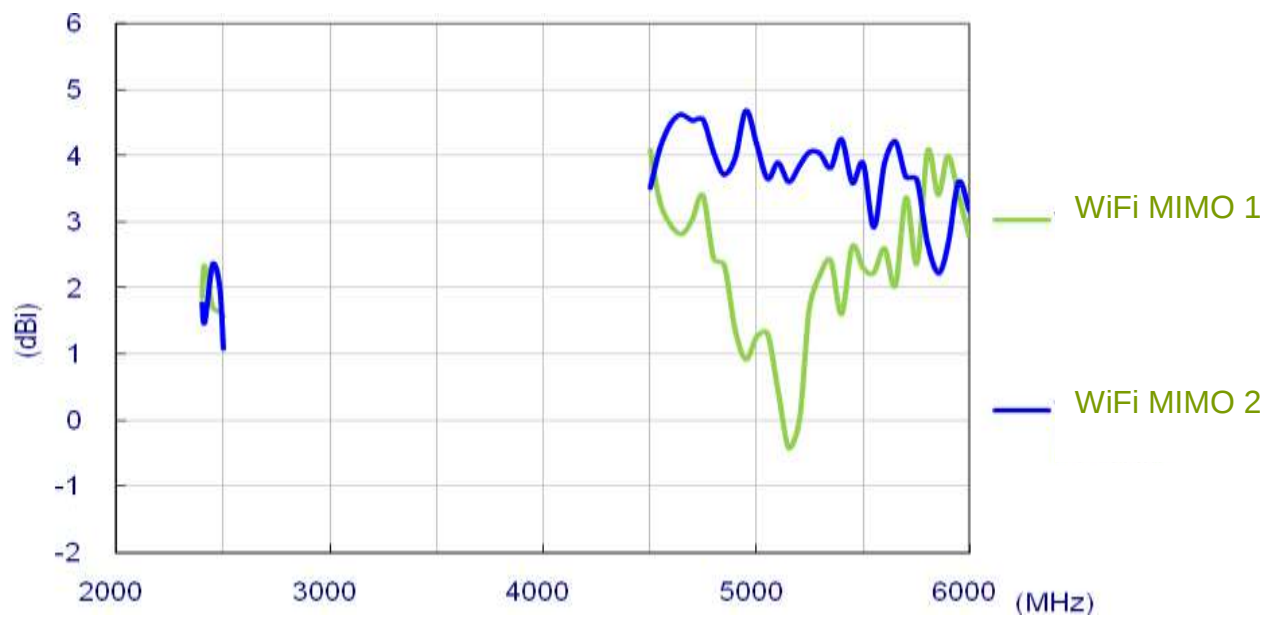

4.1.3. Average Gain

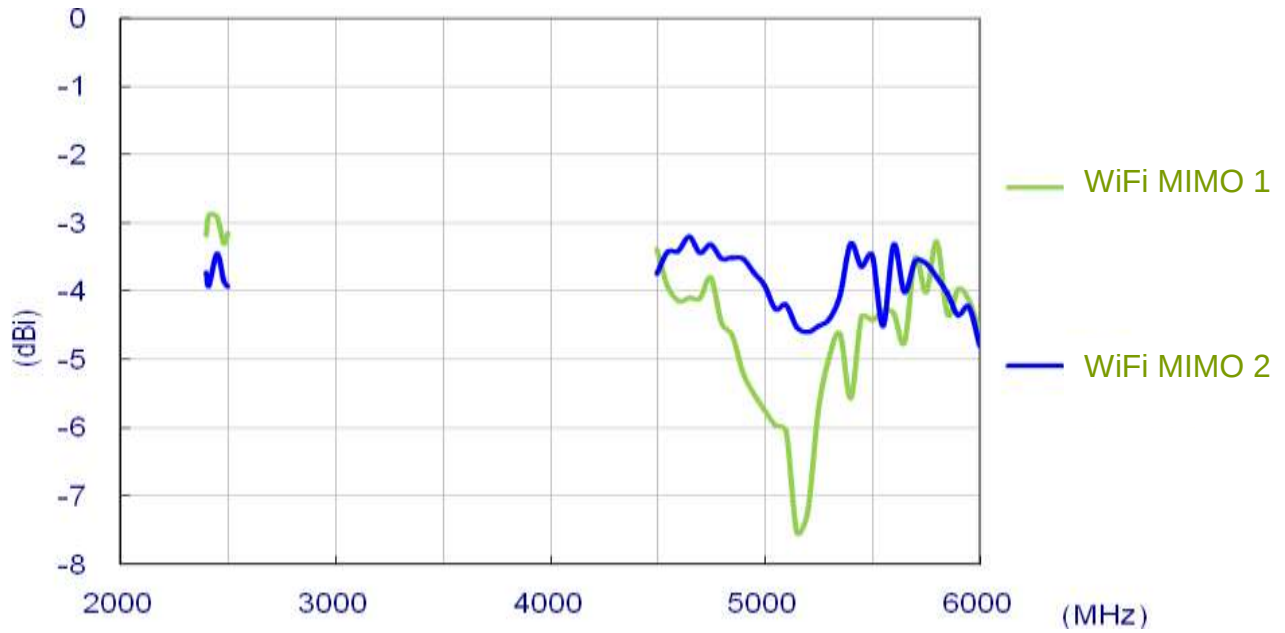

4.1.4. Efficiency

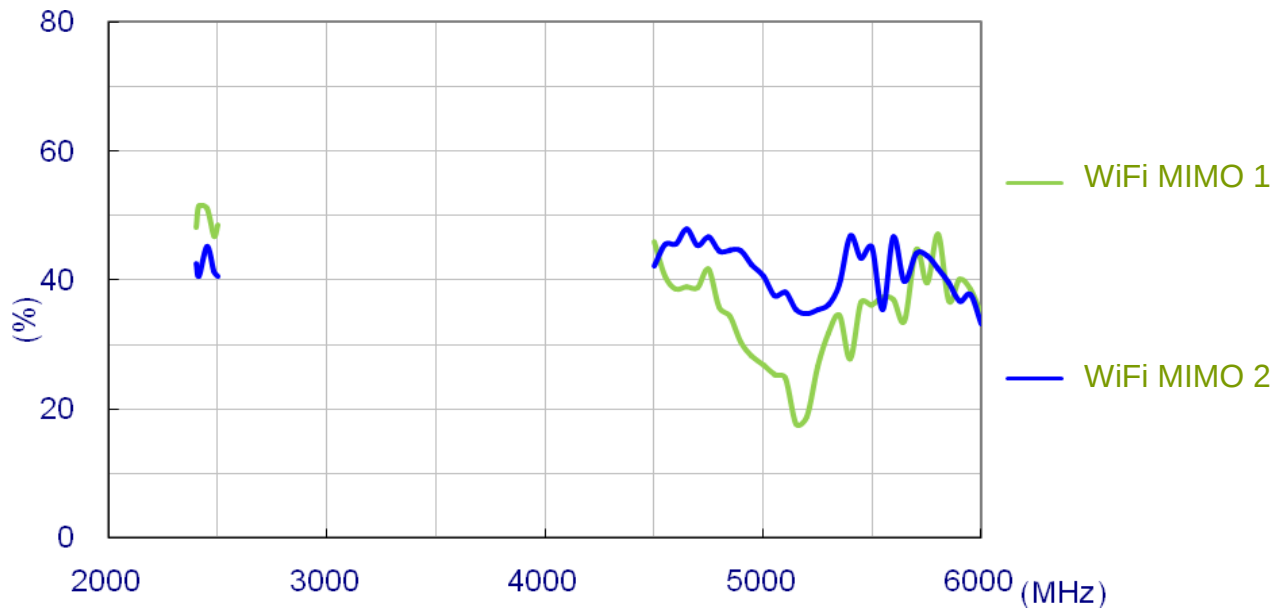



4.2 Radiation Patterns




4.2.1 2.4/5GHz MIMO 1



XY plane

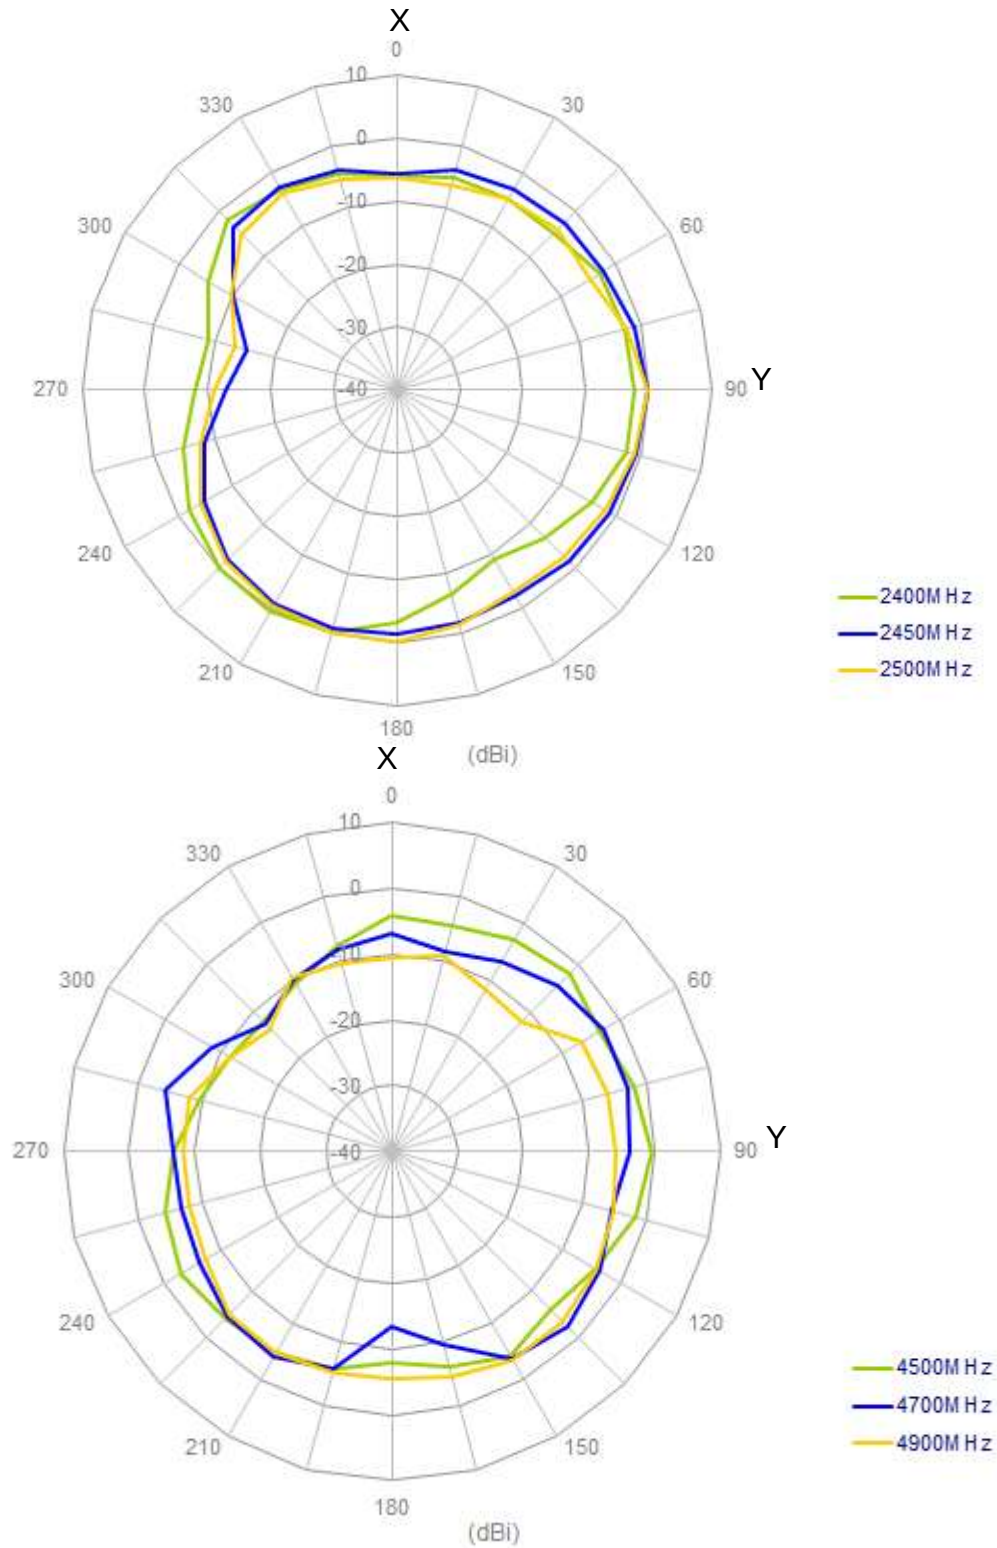

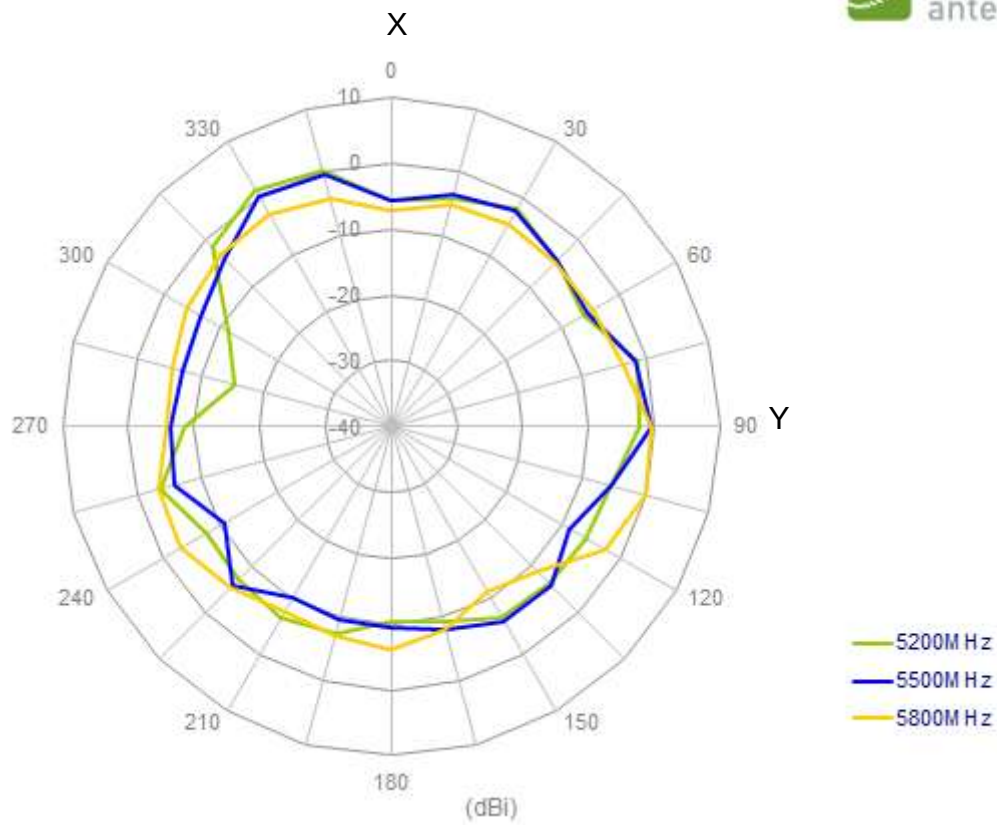



XZ plane

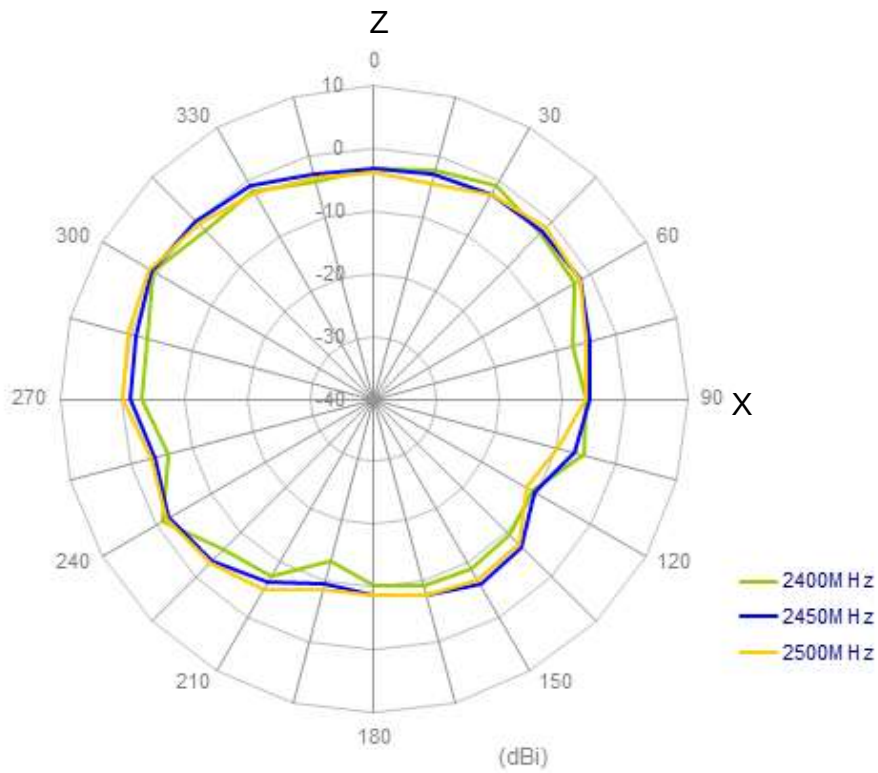


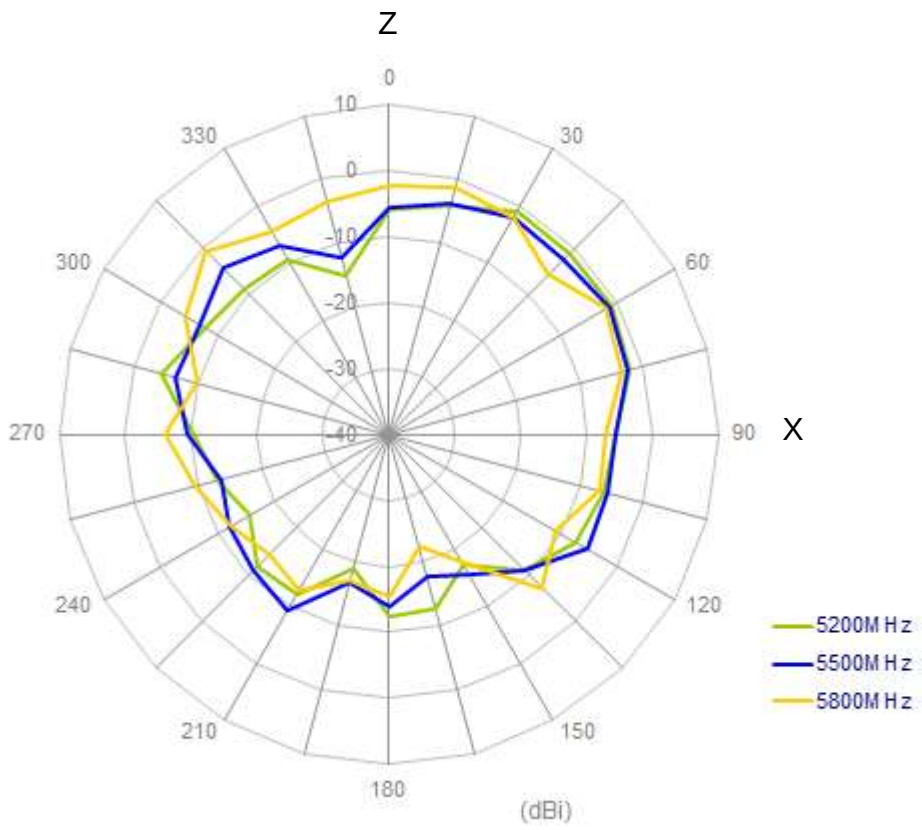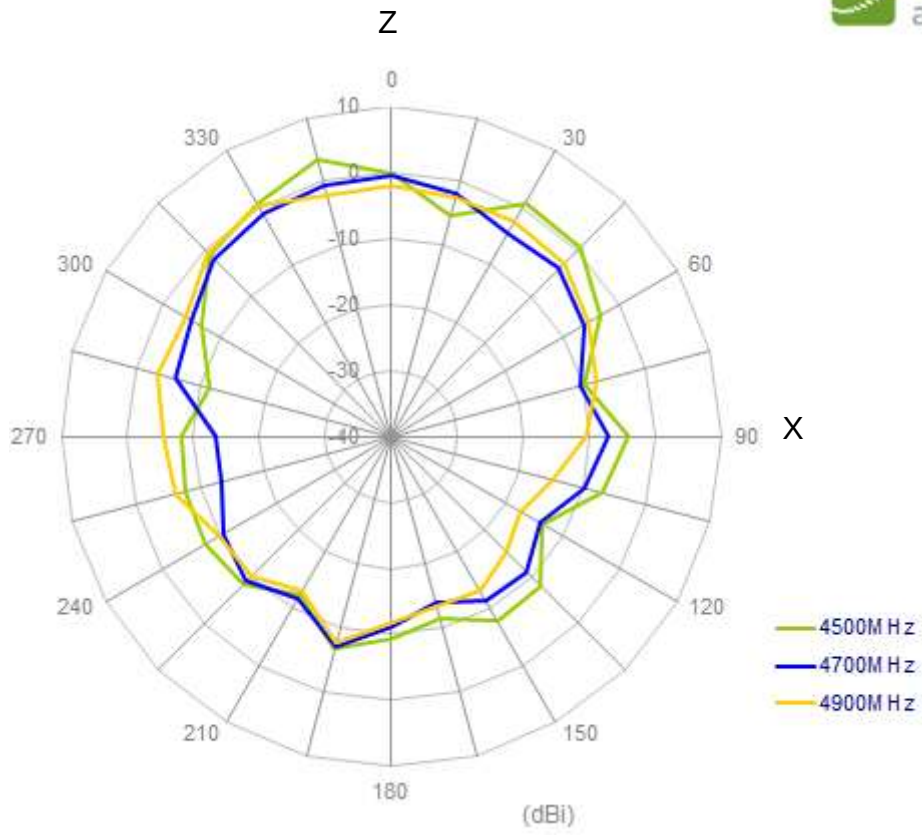


4.2.2 2.4/5GHz MIMO 2



XY plane

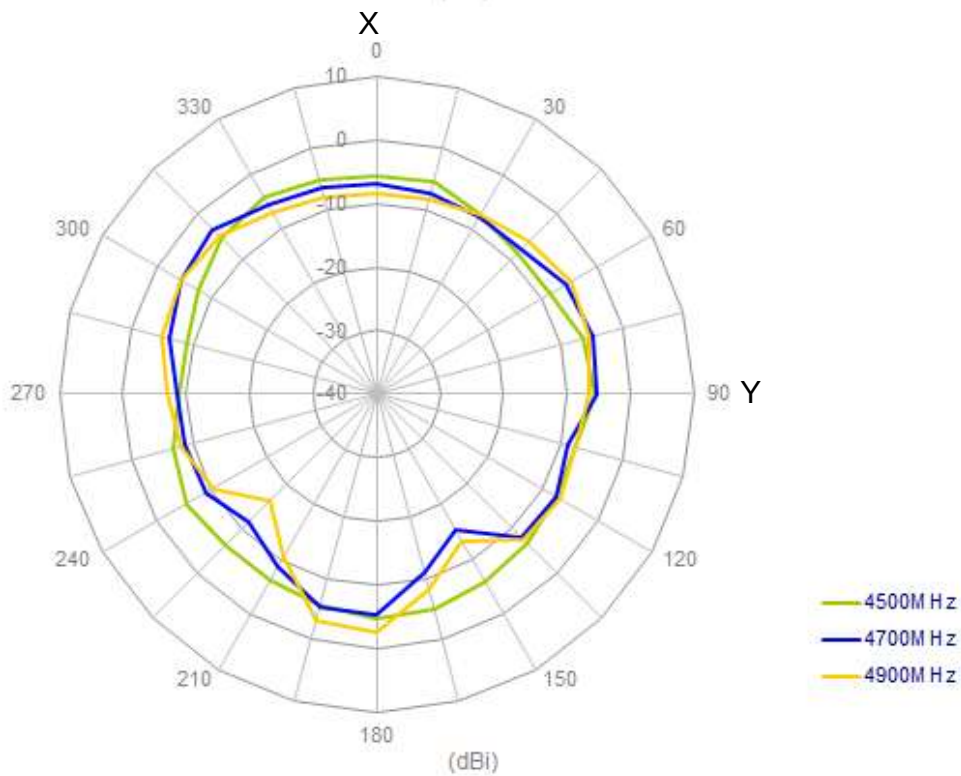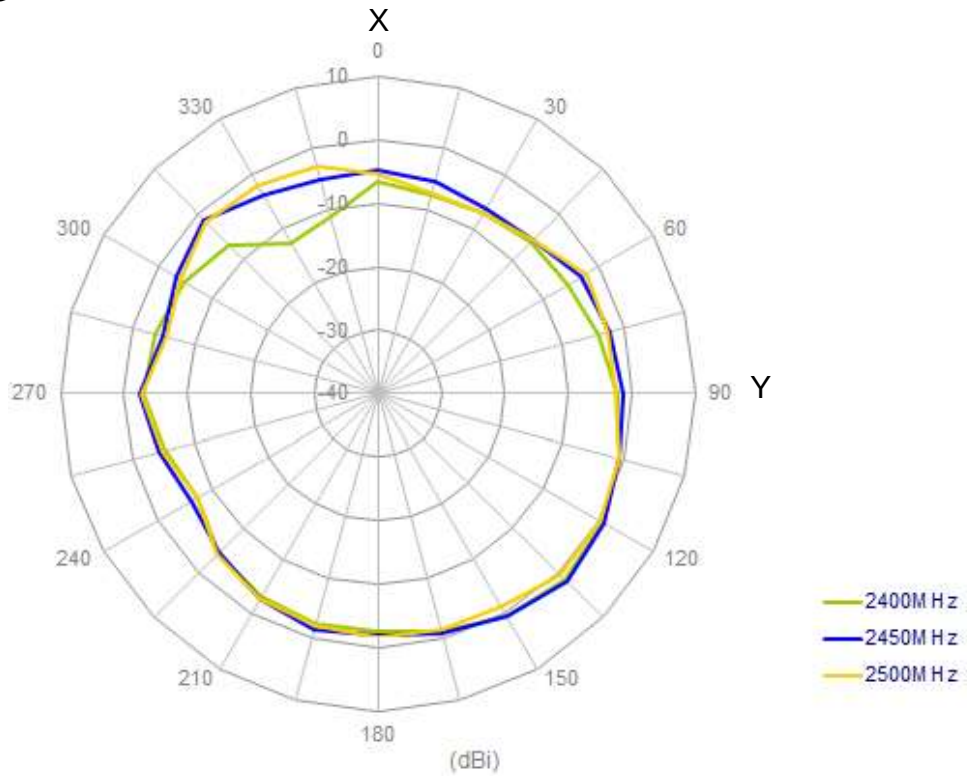

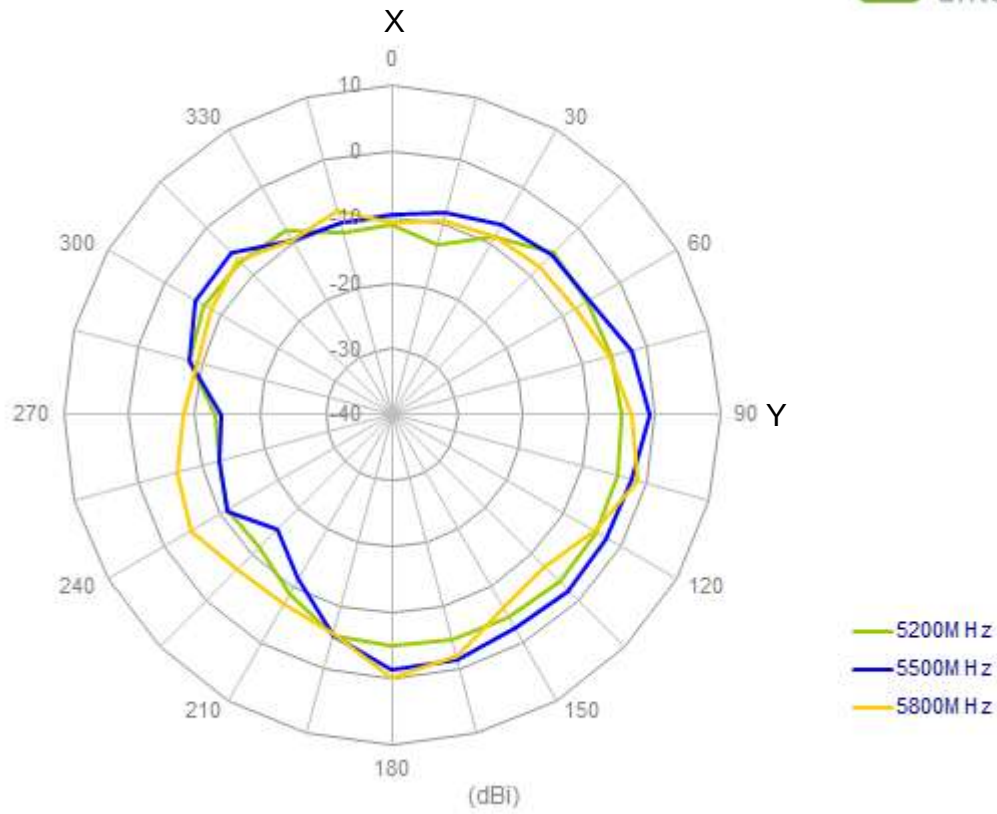


XZ plane

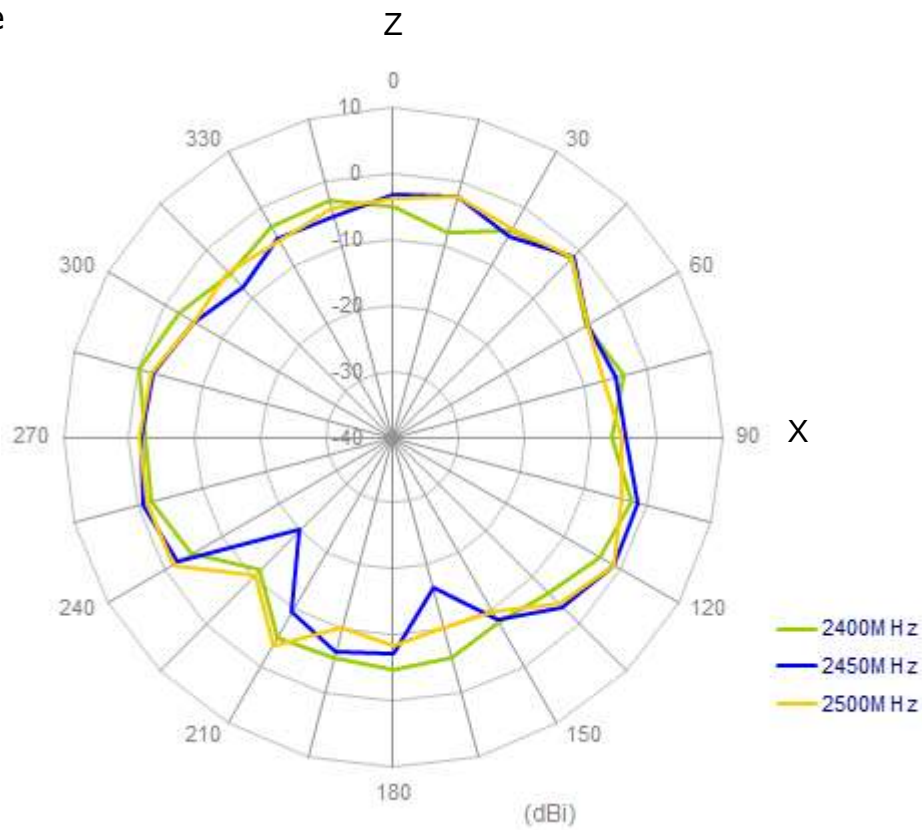

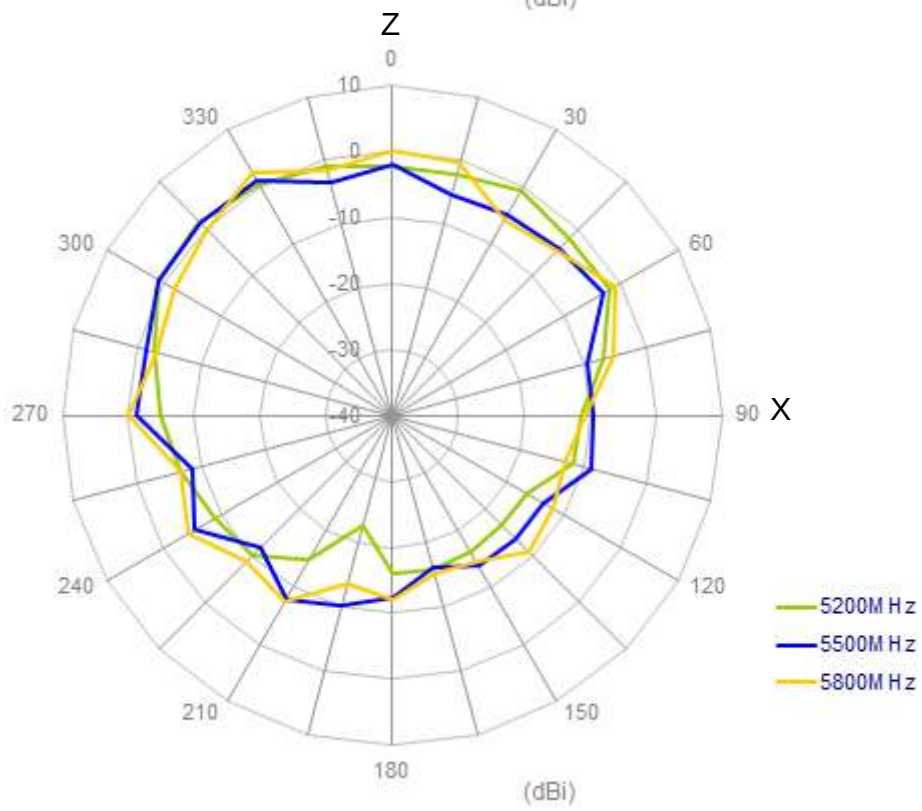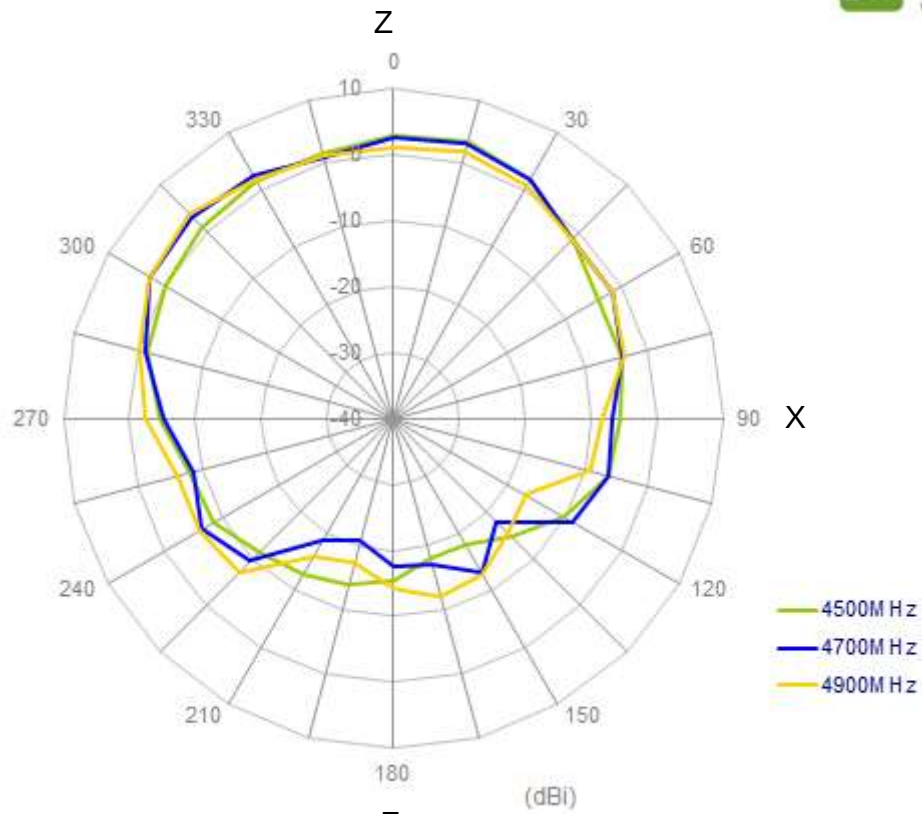


5. GPS/GLONASS


5.1. Block diagram

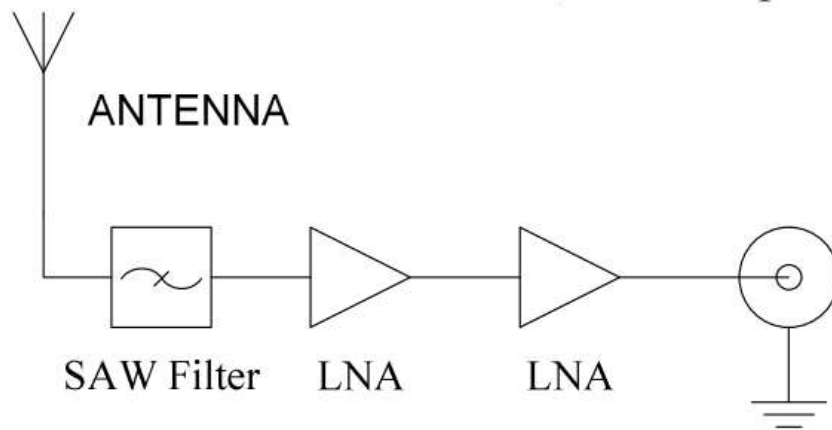


5.2. Return Loss

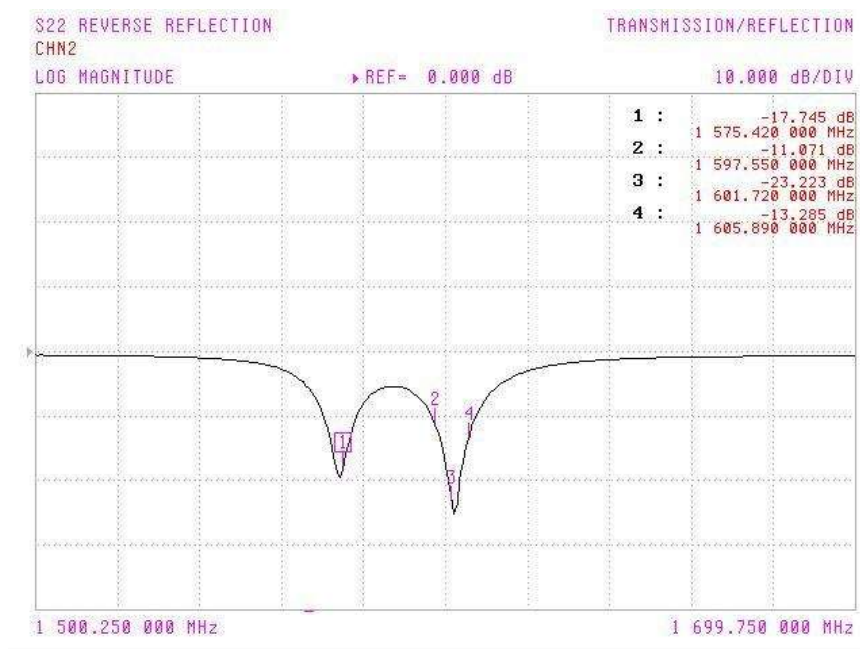


5.3. Radiation patterns




XZ-plane Free Space @1575.42MHz

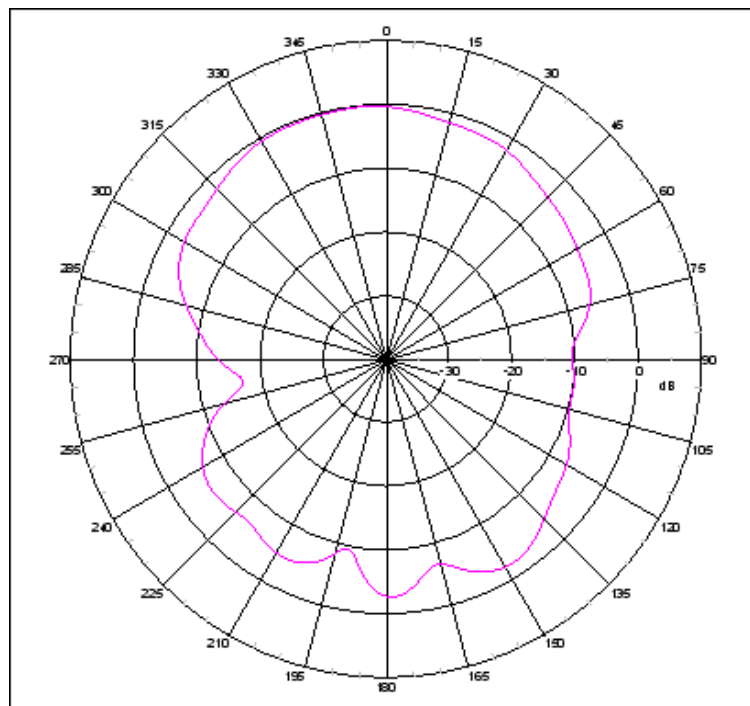


YZ-plane Free Space @1575.42MHz

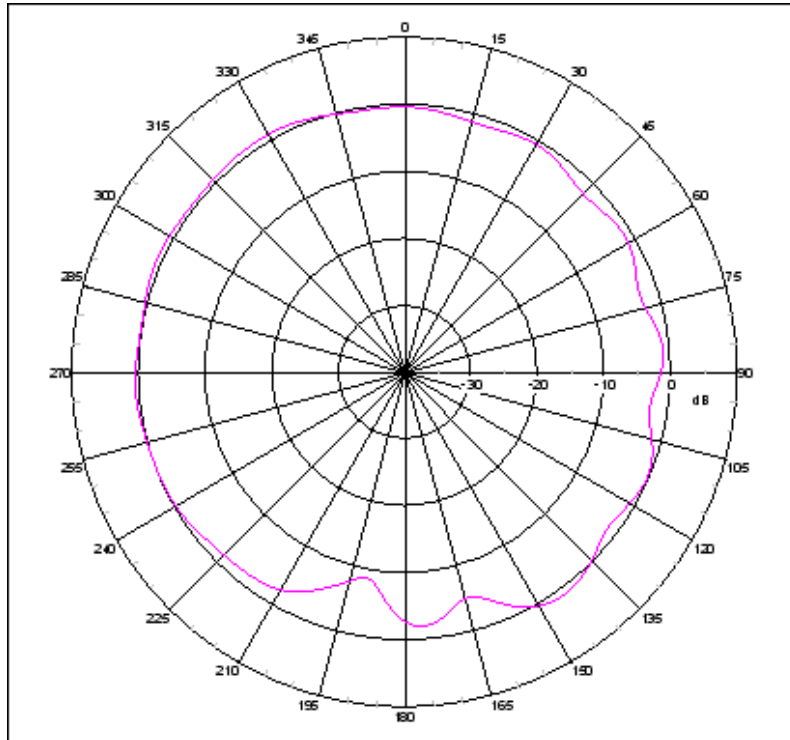



XZ-plane Free Space @1602MHz

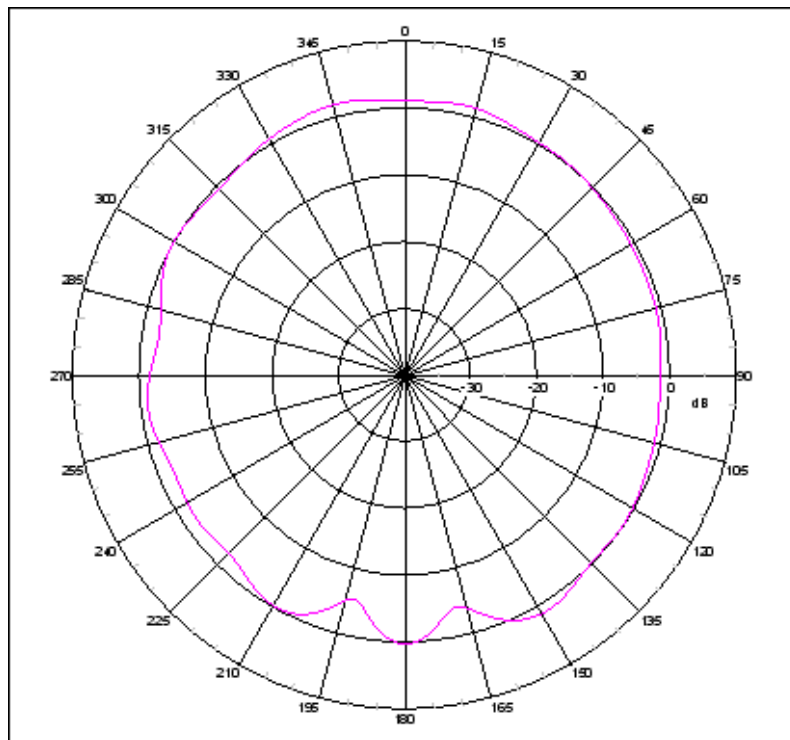


YZ-plane Free Space @1602MHz

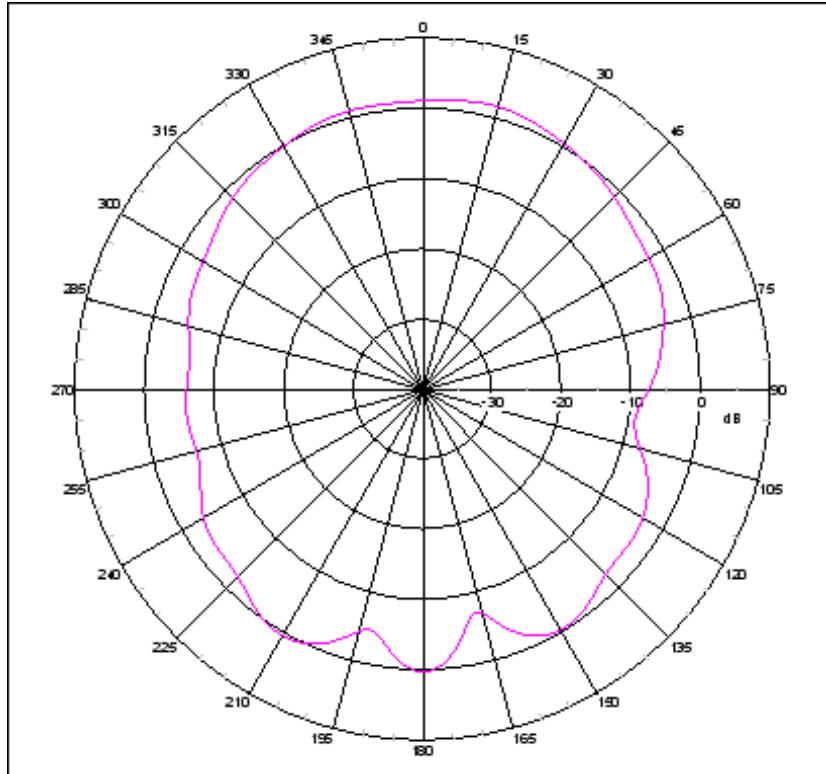


5.4 GPS/GLONASS LNA

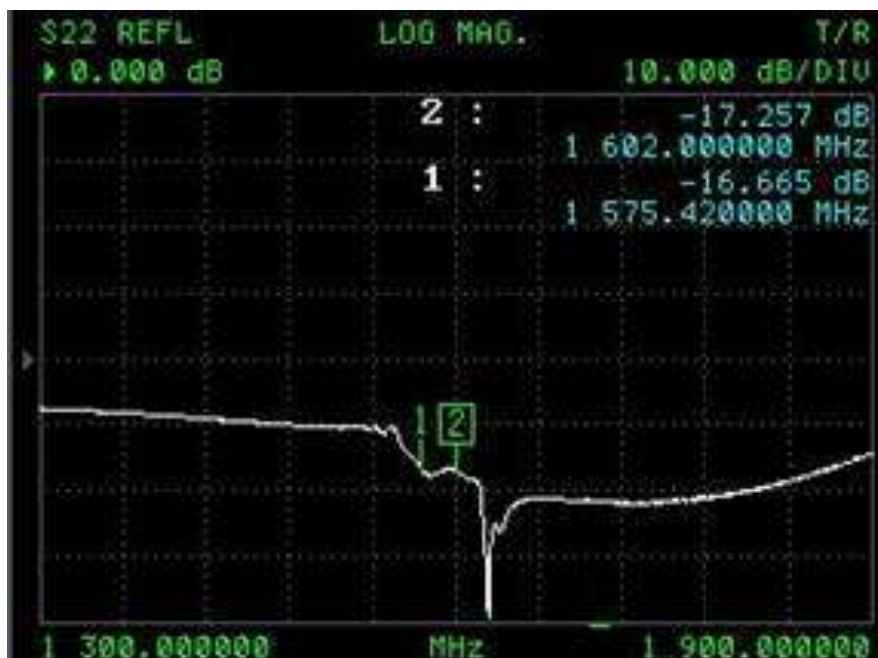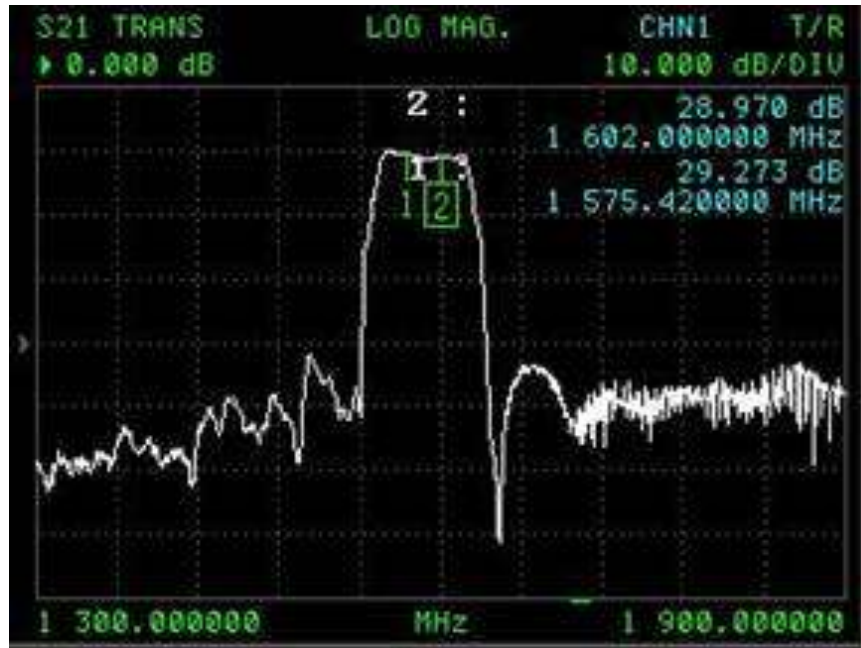


6. Drawing

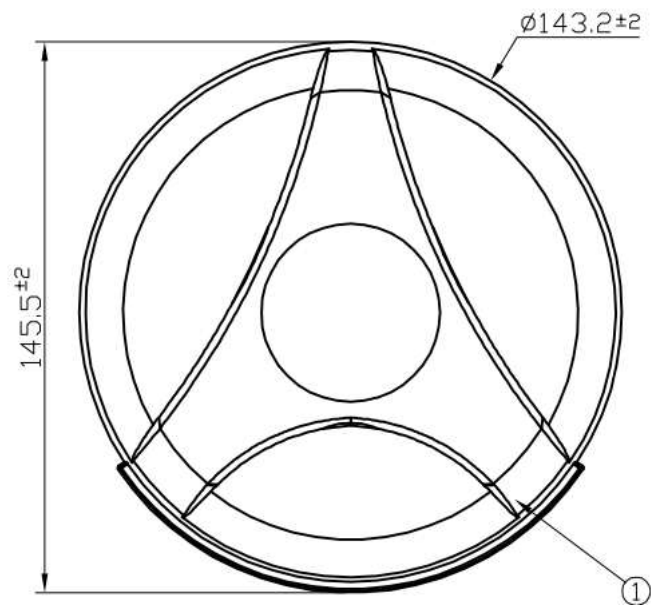

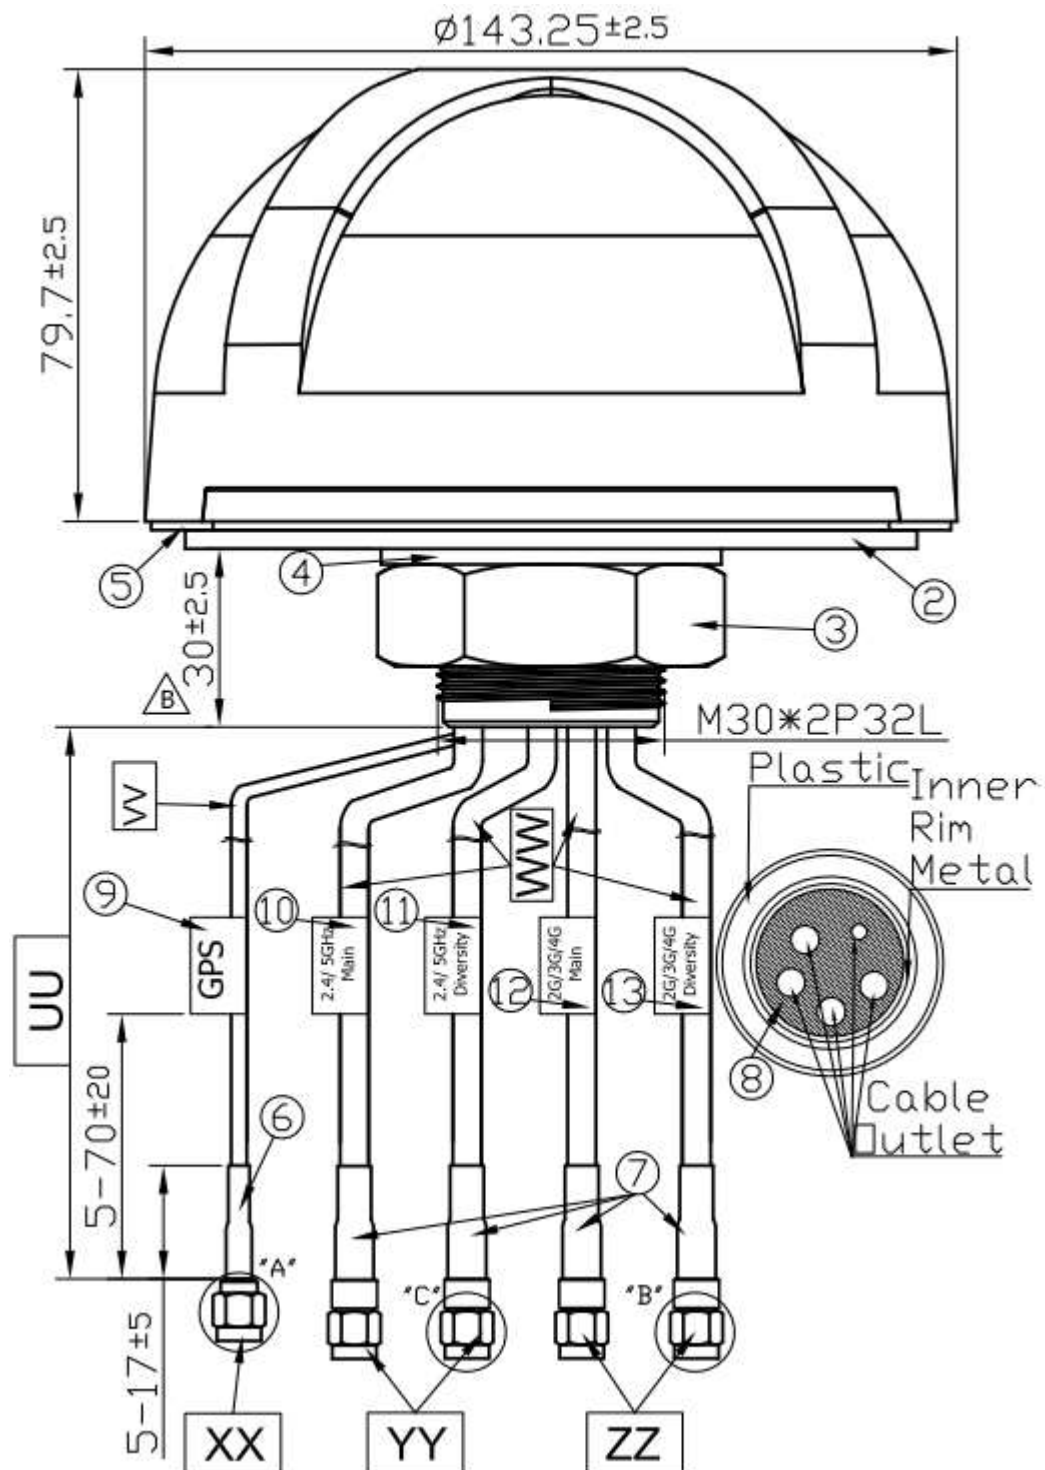

	Name	Material	Finish	QTY
1	Housing	PC 540	Black	1
2	Closed Cell Foam	CR 4305	Black	1
3	M30 Nut	Steel AISI 1215	Ni Plated	1
4	Washer	Steel AISI 1215	Ni Plated	1
5	Waterproof Gasket	Silicon Rubber	Black	1
6	Heat Shrink Tube	PE (RG174)	Black	1
7	Heat Shrink Tube	PE (CFD200)	Black	4
8	Rubber Stopper	Silicone Rubber	Black	1
9	GPS Label	Coated Paper	Orange	1
10	2.4/ 5GHz Main Label	Coated Paper	Green	1
11	2.4/ 5GHz Diversity Label	Coated Paper	Green	1
12	2G/3G/4G Main Label	Coated Paper	Gray	1
13	2G/3G/4G Diversity Label	Coated Paper	White	1

	Name	Spec	Finish	QTY
UU	Cable Length	3000±30mm		
VV	Cable Type	RG174	Black	1
WW	Cable Type	CFD200	Black	4
XX	Connector Type	SMA(M) ST	Gold	1
YY	Connector Type	RP-SMA(M) ST	Gold	2
ZZ	Connector Type	SMA(M) ST	Gold	2

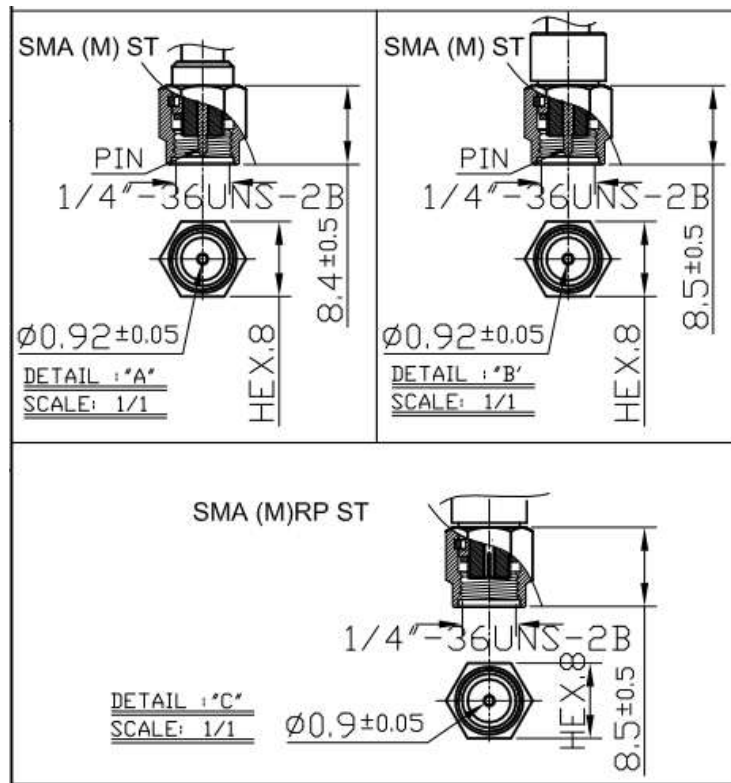

7. Packaging

