

Low ESR Solid Tantalum Chip Capacitors, TANTAMOUNT[®] Molded Case, Built-In-Fuse



FEATURES

- Terminations: 100 % matte tin, standard, tin/lead available
- Molded case available in three case codes
- Compatible with “High Volume” automatic pick and place equipment
- Mounting: Surface mount
- High ripple current carrying capability
- Low ESR
- Meets EIA 535BAAC
- 100 % surge current tested
- Compliant to RoHS Directive 2002/95/EC
- Moisture sensitivity level 1


RoHS*
COMPLIANT

Note

* Pb containing terminations are not RoHS compliant, exemptions may apply

PERFORMANCE/ELECTRICAL CHARACTERISTICS

www.vishay.com/doc?40088

Operating Temperature: - 55 °C to + 85 °C
(To + 125 °C with voltage derating)

Capacitance Range: 0.47 μF to 470 μF

Capacitance Tolerance: ± 10 %, ± 20 %

Voltage Rating: 4 V_{DC} to 50 V_{DC}

ORDERING INFORMATION						
TF3	E	477	M	004	E	0500
TYPE	CASE CODE	CAPACITANCE	CAPACITANCE TOLERANCE	DC VOLTAGE RATING AT + 85 °C	TERMINATION/PACKAGING	ESR
	See Ratings and Case Codes table	This is expressed in picofarads. The first two digits are the significant figures. The third is the number of zeros to follow	K = ± 10 % M = ± 20 %	This is expressed in V. To complete the three-digit block, zeros precede the voltage rating. A decimal point is indicated by an “R” (6R3 = 6.3 V)	C = Matte tin/7" (178 mm) reels D = Matte tin/13" (330 mm) E = Tin/lead/7" (178 mm) reels F = Tin/lead/13" (330 mm)	Maximum 100 kHz ESR in mΩ

Note

- We reserve the right to supply higher voltage ratings and tighter capacitance tolerance capacitors in the same case size. Voltage substitutions will be marked with the higher voltage rating.

DIMENSIONS in inches [millimeters]							
CASE CODE	EIA SIZE	L	W	H	P	T _W	T _H (MIN.)
C	6032-28	0.236 ± 0.012 [6.0 ± 0.30]	0.126 ± 0.012 [3.2 ± 0.30]	0.098 ± 0.012 [2.5 ± 0.30]	0.051 ± 0.012 [1.3 ± 0.30]	0.087 ± 0.004 [2.2 ± 0.10]	0.039 [1.0]
D	7343-31	0.287 ± 0.012 [7.3 ± 0.30]	0.169 ± 0.012 [4.3 ± 0.30]	0.110 ± 0.012 [2.8 ± 0.30]	0.051 ± 0.012 [1.3 ± 0.30]	0.094 ± 0.004 [2.4 ± 0.10]	0.039 [1.0]
E	7343-43	0.287 ± 0.012 [7.3 ± 0.30]	0.169 ± 0.012 [4.3 ± 0.30]	0.157 ± 0.012 [4.0 ± 0.30]	0.051 ± 0.012 [1.3 ± 0.30]	0.094 ± 0.004 [2.4 ± 0.10]	0.039 [1.0]

RATINGS AND CASE CODES								
μF	4 V	6.3 V	10 V	16 V	20 V	25 V	35 V	50 V
0.47								C
0.68								C
1.0								C
1.5							C	C
2.2						C	C	C/D
3.3						C	C	C/D
4.7					C	C	C/D	D/E
6.8				C	C	C	D	D/E
10			C	C	C	C/D	D/E	
15		C	C	C	C/D	D	D/E	
22		C	C	C/D	D	D/E	E	
33		C	C/D	C/D	D/E	E		
47		C/D	C/D	D/E	D/E			
68	C	C/D	D/E	D	E			
100	C	C/D/E	D/E	E				
150	C/D	D/E	D/E	E				
220	D	D/E	E					
330	D/E	E						
470	E							

CONSTRUCTION AND MARKING

C, D, E, Cases

Marking
 Capacitor marking includes an anode (+) polarity band, capacitance in microfarads and the voltage rating. The Vishay Sprague® trademark is included if space permits. Capacitors rated at 6.3 V are marked 6 V. A manufacturing date code is marked on all capacitors.



STANDARD RATINGS						
CAPACITANCE (μ F)	CASE CODE	PART NUMBER	MAX. DC LEAKAGE AT + 25 °C (μ A)	MAX. DF AT + 25 °C 120 Hz (%)	MAX. ESR AT + 25 °C 100 kHz (Ω)	MAX. RIPPLE 100 kHz I_{RMS} (A)
4 V_{DC} AT + 85 °C; 2.7 V_{DC} AT + 125 °C						
68	C	TF3C686(1)004(2)1600	2.7	6	1.600	0.26
68	C	TF3C686(1)004(2)1400	2.7	6	1.400	0.28
68	C	TF3C686(1)004(2)0400	2.7	6	0.400	0.52
100	C	TF3C107(1)004(2)1200	4.0	8	1.200	0.30
100	C	TF3C107(1)004(2)0800	4.0	8	0.800	0.37
100	C	TF3C107(1)004(2)0400	4.0	8	0.400	0.52
150	C	TF3C157(1)004(2)1200	6.0	8	1.200	0.30
150	C	TF3C157(1)004(2)0800	6.0	8	0.800	0.37
150	C	TF3C157(1)004(2)0400	6.0	8	0.400	0.52
150	D	TF3D157(1)004(2)0800	6.0	8	0.800	0.43
150	D	TF3D157(1)004(2)0600	6.0	8	0.600	0.50
150	D	TF3D157(1)004(2)0300	6.0	8	0.300	0.71
220	D	TF3D227(1)004(2)0700	8.8	8	0.700	0.46
220	D	TF3D227(1)004(2)0600	8.8	8	0.600	0.50
220	D	TF3D227(1)004(2)0400	8.8	8	0.400	0.61
220	D	TF3D227(1)004(2)0300	8.8	8	0.300	0.71
330	D	TF3D337(1)004(2)0700	13.2	15	0.700	0.46
330	D	TF3D337(1)004(2)0600	13.2	15	0.600	0.50
330	D	TF3D337(1)004(2)0400	13.2	15	0.400	0.61
330	D	TF3D337(1)004(2)0300	13.2	15	0.300	0.71
330	E	TF3E337(1)004(2)0700	13.2	8	0.700	0.49
330	E	TF3E337(1)004(2)0500	13.2	8	0.500	0.57
330	E ⁽¹⁾	TF3E337(1)004(2)0250	13.2	8	0.250	0.81
470	E	TF3E477(1)004(2)0500	18.8	8	0.500	0.57
470	E	TF3E477(1)004(2)0250	18.8	8	0.250	0.81
6.3 V_{DC} AT + 85 °C; 4 V_{DC} AT + 125 °C						
15	C	TF3C156(1)6R3(2)2000	0.9	6	2.000	0.23
15	C	TF3C156(1)6R3(2)1800	0.9	6	1.800	0.25
15	C	TF3C156(1)6R3(2)0600	0.9	6	0.600	0.43
22	C	TF3C226(1)6R3(2)2000	1.1	6	2.000	0.23
22	C	TF3C226(1)6R3(2)1800	1.1	6	1.800	0.25
22	C	TF3C226(1)6R3(2)0600	1.1	6	0.600	0.43
33	C	TF3C336(1)6R3(2)2000	1.6	6	2.000	0.23
33	C	TF3C336(1)6R3(2)1400	1.6	6	1.400	0.28
33	C	TF3C336(1)6R3(2)0600	1.6	6	0.600	0.43
47	C	TF3C476(1)6R3(2)1600	2.3	6	1.600	0.26
47	C	TF3C476(1)6R3(2)1300	2.3	6	1.300	0.29
47	C	TF3C476(1)6R3(2)0600	2.3	6	0.600	0.43
47	D	TF3D476(1)6R3(2)1000	2.3	6	1.000	0.39
47	D	TF3D476(1)6R3(2)0900	2.3	6	0.900	0.41
47	D	TF3D476(1)6R3(2)0450	2.3	6	0.450	0.58

Notes

- Part number definitions:
 - (1) Capacitance tolerance codes: K, M
 - (2) Terminations and packaging codes: C, D, E, F
- (1) Preliminary values, contact factory for availability



STANDARD RATINGS						
CAPACITANCE (μ F)	CASE CODE	PART NUMBER	MAX. DC LEAKAGE AT + 25 °C (μ A)	MAX. DF AT + 25 °C 120 Hz (%)	MAX. ESR AT + 25 °C 100 kHz (Ω)	MAX. RIPPLE 100 kHz I_{RMS} (A)
6.3 V_{DC} AT + 85 °C; 4 V_{DC} AT + 125 °C						
68	C	TF3C686(1)6R3(2)1200	3.3	6	1.200	0.30
68	C	TF3C686(1)6R3(2)0800	3.3	6	0.800	0.37
68	C ⁽¹⁾	TF3C686(1)6R3(2)0400	3.3	6	0.400	0.52
68	D	TF3D686(1)6R3(2)1000	3.3	6	1.000	0.39
68	D	TF3D686(1)6R3(2)0700	3.3	6	0.700	0.46
68	D	TF3D686(1)6R3(2)0350	3.3	6	0.350	0.65
100	C	TF3C107(1)6R3(2)0700	6.0	6	0.700	0.40
100	C	TF3C107(1)6R3(2)0400	6.0	6	0.400	0.52
100	C ⁽¹⁾	TF3C107(1)6R3(2)0350	6.0	6	0.350	0.56
100	D	TF3D107(1)6R3(2)0800	6.0	8	0.800	0.43
100	D	TF3D107(1)6R3(2)0700	6.0	8	0.700	0.46
100	D	TF3D107(1)6R3(2)0400	6.0	8	0.400	0.61
100	D	TF3D107(1)6R3(2)0350	6.0	8	0.350	0.65
100	E	TF3E107(1)6R3(2)0900	6.0	8	0.900	0.43
100	E	TF3E107(1)6R3(2)0700	6.0	8	0.700	0.49
100	E	TF3E107(1)6R3(2)0300	6.0	8	0.300	0.74
150	D	TF3D157(1)6R3(2)0700	9.0	8	0.700	0.46
150	D	TF3D157(1)6R3(2)0600	9.0	8	0.600	0.50
150	D	TF3D157(1)6R3(2)0300	9.0	8	0.300	0.71
150	E	TF3E157(1)6R3(2)0600	9.0	8	0.600	0.52
150	E	TF3E157(1)6R3(2)0300	9.0	8	0.300	0.74
220	D	TF3D227(1)6R3(2)0700	13.2	8	0.700	0.46
220	D	TF3D227(1)6R3(2)0600	13.2	8	0.600	0.50
220	D	TF3D227(1)6R3(2)0300	13.2	8	0.300	0.71
220	E	TF3E227(1)6R3(2)0700	13.2	8	0.700	0.49
220	E	TF3E227(1)6R3(2)0500	13.2	8	0.500	0.57
220	E	TF3E227(1)6R3(2)0300	13.2	8	0.300	0.74
220	E ⁽¹⁾	TF3E227(1)6R3(2)0250	13.2	8	0.250	0.81
330	E	TF3E337(1)6R3(2)0500	19.8	8	0.500	0.57
330	E	TF3E337(1)6R3(2)0300	19.8	8	0.300	0.74
10 V_{DC} AT + 85 °C; 7 V_{DC} AT + 125 °C						
10	C	TF3C106(1)010(2)2000	1.0	6	2.000	0.23
10	C	TF3C106(1)010(2)1800	1.0	6	1.800	0.25
10	C ⁽¹⁾	TF3C106(1)010(2)0600	1.0	6	0.600	0.43
15	C	TF3C156(1)010(2)2000	1.5	6	2.000	0.23
15	C	TF3C156(1)010(2)1800	1.5	6	1.800	0.25
15	C	TF3C156(1)010(2)0600	1.5	6	0.600	0.43
22	C	TF3C226(1)010(2)2000	2.2	6	2.000	0.23
22	C	TF3C226(1)010(2)1400	2.2	6	1.400	0.28
22	C	TF3C226(1)010(2)0500	2.2	6	0.500	0.47
33	C	TF3C336(1)010(2)1600	3.3	6	1.600	0.26

Notes

- Part number definitions:
 - (1) Capacitance tolerance codes: K, M
 - (2) Terminations and packaging codes: C, D, E, F
- ⁽¹⁾ Preliminary values, contact factory for availability



STANDARD RATINGS						
CAPACITANCE (μ F)	CASE CODE	PART NUMBER	MAX. DC LEAKAGE AT + 25 °C (μ A)	MAX. DF AT + 25 °C 120 Hz (%)	MAX. ESR AT + 25 °C 100 kHz (Ω)	MAX. RIPPLE 100 kHz I_{RMS} (A)
10 V_{DC} AT + 85 °C; 7 V_{DC} AT + 125 °C						
33	C	TF3C336(1)010(2)1300	3.3	6	1.300	0.29
33	C	TF3C336(1)010(2)0400	3.3	6	0.400	0.52
33	D	TF3D336(1)010(2)1000	3.3	6	1.000	0.39
33	D	TF3D336(1)010(2)0900	3.3	6	0.900	0.41
33	D	TF3D336(1)010(2)0400	3.3	6	0.400	0.61
47	C	TF3C476(1)010(2)1200	4.7	6	1.200	0.30
47	C	TF3C476(1)010(2)1000	4.7	6	1.000	0.33
47	C ⁽¹⁾	TF3C476(1)010(2)0400	4.7	6	0.400	0.52
47	D	TF3D476(1)010(2)1000	4.7	6	1.000	0.39
47	D	TF3D476(1)010(2)0700	4.7	6	0.700	0.46
47	D	TF3D476(1)010(2)0400	4.7	6	0.400	0.61
47	D ⁽¹⁾	TF3D476(1)010(2)0350	4.7	6	0.350	0.65
68	D	TF3D686(1)010(2)0800	6.8	6	0.800	0.43
68	D	TF3D686(1)010(2)0700	6.8	6	0.700	0.46
68	D	TF3D686(1)010(2)0400	6.8	6	0.400	0.61
68	D	TF3D686(1)010(2)0350	6.8	6	0.350	0.65
68	E	TF3E686(1)010(2)0900	6.8	6	0.900	0.43
68	E	TF3E686(1)010(2)0700	6.8	6	0.700	0.49
68	E	TF3E686(1)010(2)0350	6.8	6	0.350	0.69
100	D	TF3D107(1)010(2)0700	10.0	8	0.700	0.46
100	D	TF3D107(1)010(2)0600	10.0	8	0.600	0.50
100	D	TF3D107(1)010(2)0400	10.0	8	0.400	0.61
100	D	TF3D107(1)010(2)0300	10.0	8	0.300	0.71
100	E	TF3E107(1)010(2)0600	10.0	8	0.600	0.52
100	E	TF3E107(1)010(2)0400	10.0	8	0.400	0.64
100	E	TF3E107(1)010(2)0300	10.0	8	0.300	0.74
150	D	TF3D157(1)010(2)0700	15.0	8	0.700	0.46
150	D	TF3D157(1)010(2)0600	15.0	8	0.600	0.50
150	D	TF3D157(1)010(2)0400	15.0	8	0.400	0.61
150	D	TF3D157(1)010(2)0300	15.0	8	0.300	0.71
150	E	TF3E157(1)010(2)0700	15.0	8	0.700	0.49
150	E	TF3E157(1)010(2)0500	15.0	8	0.500	0.57
150	E	TF3E157(1)010(2)0400	15.0	8	0.400	0.64
150	E	TF3E157(1)010(2)0250	15.0	8	0.250	0.81
220	E	TF3E227(1)010(2)0500	22.0	8	0.500	0.57
220	E	TF3E227(1)010(2)0300	22.0	8	0.300	0.74
220	E ⁽¹⁾	TF3E227(1)010(2)0250	22.0	8	0.250	0.81

Notes

- Part number definitions:
 - (1) Capacitance tolerance codes: K, M
 - (2) Terminations and packaging codes: C, D, E, F
- (1) Preliminary values, contact factory for availability



STANDARD RATINGS						
CAPACITANCE (μ F)	CASE CODE	PART NUMBER	MAX. DC LEAKAGE AT + 25 °C (μ A)	MAX. DF AT + 25 °C 120 Hz (%)	MAX. ESR AT + 25 °C 100 kHz (Ω)	MAX. RIPPLE 100 kHz I_{RMS} (A)
16 V_{DC} AT + 85 °C; 10 V_{DC} AT + 125 °C						
6.8	C	TF3C685(1)016(2)2000	1.1	6	2.000	0.23
6.8	C	TF3C685(1)016(2)0600	1.1	6	0.600	0.43
10	C	TF3C106(1)016(2)2000	1.6	6	2.000	0.23
10	C	TF3C106(1)016(2)1800	1.6	6	1.800	0.25
10	C	TF3C106(1)016(2)0700	1.6	6	0.700	0.40
10	C	TF3C106(1)016(2)0600	1.6	6	0.600	0.43
15	C	TF3C156(1)016(2)2000	2.4	6	2.000	0.23
15	C	TF3C156(1)016(2)1400	2.4	6	1.400	0.28
15	C ⁽¹⁾	TF3C156(1)016(2)0600	2.4	6	0.600	0.43
22	C	TF3C226(1)016(2)1600	3.5	6	1.600	0.26
22	C	TF3C226(1)016(2)1300	3.5	6	1.300	0.29
22	C	TF3C226(1)016(2)1000	3.5	6	1.000	0.33
22	C	TF3C226(1)016(2)0700	3.5	6	0.700	0.40
22	D	TF3D226(1)016(2)1000	3.5	6	1.000	0.39
22	D	TF3D226(1)016(2)0900	3.5	6	0.900	0.41
22	D	TF3D226(1)016(2)0500	3.5	6	0.500	0.55
22	D	TF3D226(1)016(2)0450	3.5	6	0.450	0.58
33	C	TF3C336(1)016(2)1000	5.3	6	1.000	0.33
33	C	TF3C336(1)016(2)0500	5.3	6	0.500	0.47
33	D	TF3D336(1)016(2)1000	5.3	6	1.000	0.39
33	D	TF3D336(1)016(2)0700	5.3	6	0.700	0.46
33	D	TF3D336(1)016(2)0400	5.3	6	0.400	0.61
33	D	TF3D336(1)016(2)0350	5.3	6	0.350	0.65
47	D	TF3D476(1)016(2)0800	7.5	6	0.800	0.43
47	D	TF3D476(1)016(2)0700	7.5	6	0.700	0.46
47	D	TF3D476(1)016(2)0400	7.5	6	0.400	0.61
47	D	TF3D476(1)016(2)0350	7.5	6	0.350	0.65
47	E	TF3E476(1)016(2)0900	7.5	6	0.900	0.43
47	E	TF3E476(1)016(2)0700	7.5	6	0.700	0.49
47	E	TF3E476(1)016(2)0400	7.5	6	0.400	0.64
47	E	TF3E476(1)016(2)0350	7.5	6	0.350	0.69
68	D	TF3D686(1)016(2)0600	10.9	6	0.600	0.50
68	D	TF3D686(1)016(2)0300	10.9	6	0.300	0.71
100	E	TF3E107(1)016(2)0700	16.0	8	0.700	0.49
100	E	TF3E107(1)016(2)0600	16.0	8	0.600	0.52
100	E	TF3E107(1)016(2)0300	16.0	8	0.300	0.74
150	E	TF3E157(1)016(2)0400	16.0	8	0.400	0.64

Notes

- Part number definitions:
 - (1) Capacitance tolerance codes: K, M
 - (2) Terminations and packaging codes: C, D, E, F
- (1) Preliminary values, contact factory for availability



STANDARD RATINGS						
CAPACITANCE (μ F)	CASE CODE	PART NUMBER	MAX. DC LEAKAGE AT + 25 °C (μ A)	MAX. DF AT + 25 °C 120 Hz (%)	MAX. ESR AT + 25 °C 100 kHz (Ω)	MAX. RIPPLE 100 kHz I_{RMS} (A)
20 V_{DC} AT + 85 °C; 13 V_{DC} AT + 125 °C						
4.7	C	TF3C475(1)020(2)2000	0.9	6	2.000	0.23
4.7	C	TF3C475(1)020(2)1000	0.9	6	1.000	0.33
6.8	C	TF3C685(1)020(2)2000	1.1	6	2.000	0.23
6.8	C	TF3C685(1)020(2)1900	1.1	6	1.900	0.24
6.8	C	TF3C685(1)020(2)0600	1.1	6	0.600	0.43
10	C	TF3C106(1)020(2)2000	2.0	6	2.000	0.23
10	C	TF3C106(1)020(2)1600	2.0	6	1.600	0.26
10	C	TF3C106(1)020(2)0800	2.0	6	0.800	0.37
15	C	TF3C156(1)020(2)1400	3.0	6	1.400	0.28
15	C ⁽¹⁾	TF3C156(1)020(2)0500	3.0	6	0.500	0.47
15	D	TF3D156(1)020(2)1000	3.0	6	1.000	0.39
15	D	TF3D156(1)020(2)0900	3.0	6	0.900	0.41
15	D	TF3D156(1)020(2)0500	3.0	6	0.500	0.55
15	D	TF3D156(1)020(2)0450	3.0	6	0.450	0.58
22	D	TF3D226(1)020(2)1000	4.4	6	1.000	0.39
22	D	TF3D226(1)020(2)0700	4.4	6	0.700	0.46
22	D	TF3D226(1)020(2)0500	4.4	6	0.500	0.55
22	D	TF3D226(1)020(2)0350	4.4	6	0.350	0.65
33	D	TF3D336(1)020(2)0700	6.6	6	0.700	0.46
33	D	TF3D336(1)020(2)0400	6.6	6	0.400	0.61
33	D	TF3D336(1)020(2)0350	6.6	6	0.350	0.65
33	E	TF3E336(1)020(2)0900	6.6	6	0.900	0.43
33	E	TF3E336(1)020(2)0700	6.6	6	0.700	0.49
33	E	TF3E336(1)020(2)0400	6.6	6	0.400	0.64
33	E	TF3E336(1)020(2)0350	6.6	6	0.350	0.69
47	D	TF3D476(1)020(2)0600	9.4	6	0.600	0.50
47	D	TF3D476(1)020(2)0300	9.4	6	0.300	0.71
47	E	TF3E476(1)020(2)0600	9.4	6	0.600	0.52
47	E	TF3E476(1)020(2)0300	9.4	6	0.300	0.74
68	E	TF3E686(1)020(2)0600	13.6	6	0.600	0.52
68	E	TF3E686(1)020(2)0300	13.6	6	0.300	0.74
25 V_{DC} AT + 85 °C; 17 V_{DC} AT + 125 °C						
2.2	C	TF3C225(1)025(2)3500	0.9	6	3.500	0.18
2.2	C	TF3C225(1)025(2)2800	0.9	6	2.800	0.20
3.3	C	TF3C335(1)025(2)2500	0.9	6	2.500	0.21
3.3	C	TF3C335(1)025(2)2300	0.9	6	2.300	0.22
3.3	C	TF3C335(1)025(2)2100	0.9	6	2.100	0.23
3.3	C ⁽¹⁾	TF3C335(1)025(2)1200	0.9	6	1.200	0.30
4.7	C	TF3C475(1)025(2)2500	1.2	6	2.500	0.21
4.7	C	TF3C475(1)025(2)1900	1.2	6	1.900	0.24
4.7	C	TF3C475(1)025(2)1300	1.2	6	1.300	0.29

Notes

- Part number definitions:
 - (1) Capacitance tolerance codes: K, M
 - (2) Terminations and packaging codes: C, D, E, F
- (1) Preliminary values, contact factory for availability



STANDARD RATINGS						
CAPACITANCE (μ F)	CASE CODE	PART NUMBER	MAX. DC LEAKAGE AT + 25 °C (μ A)	MAX. DF AT + 25 °C 120 Hz (%)	MAX. ESR AT + 25 °C 100 kHz (Ω)	MAX. RIPPLE 100 kHz I_{RMS} (A)
25 V_{DC} AT + 85 °C; 17 V_{DC} AT + 125 °C						
4.7	C	TF3C475(1)025(2)1000	1.2	6	1.000	0.33
6.8	C	TF3C685(1)025(2)2000	1.7	6	2.000	0.23
6.8	C	TF3C685(1)025(2)1600	1.7	6	1.600	0.26
6.8	C	TF3C685(1)025(2)0600	1.7	6	0.600	0.43
10	C	TF3C106(1)025(2)1400	2.5	6	1.400	0.28
10	C	TF3C106(1)025(2)0600	2.5	6	0.600	0.43
10	D	TF3D106(1)025(2)1200	2.5	6	1.200	0.35
10	D	TF3D106(1)025(2)1000	2.5	6	1.000	0.39
10	D	TF3D106(1)025(2)0600	2.5	6	0.600	0.50
10	D	TF3D106(1)025(2)0500	2.5	6	0.500	0.55
15	D	TF3D156(1)025(2)1000	3.8	6	1.000	0.39
15	D	TF3D156(1)025(2)0800	3.8	6	0.800	0.43
15	D	TF3D156(1)025(2)0500	3.8	6	0.500	0.55
15	D	TF3D156(1)025(2)0400	3.8	6	0.400	0.61
22	D	TF3D226(1)025(2)0800	5.5	6	0.800	0.43
22	D	TF3D226(1)025(2)0700	5.5	6	0.700	0.46
22	D	TF3D226(1)025(2)0400	5.5	6	0.400	0.61
22	D	TF3D226(1)025(2)0350	5.5	6	0.350	0.65
22	E	TF3E226(1)025(2)0900	5.5	6	0.900	0.43
22	E	TF3E226(1)025(2)0700	5.5	6	0.700	0.49
22	E	TF3E226(1)025(2)0400	5.5	6	0.400	0.64
22	E	TF3E226(1)025(2)0350	5.5	6	0.350	0.69
33	E	TF3E336(1)025(2)0600	8.3	6	0.600	0.52
33	E	TF3E336(1)025(2)0300	8.3	6	0.300	0.74
35 V_{DC} AT + 85 °C; 23 V_{DC} AT + 125 °C						
1.5	C	TF3C155(1)035(2)4500	0.5	6	4.500	0.16
1.5	C	TF3C155(1)035(2)3800	0.5	6	3.800	0.17
1.5	C	TF3C155(1)035(2)2600	0.5	6	2.600	0.21
1.5	C ⁽¹⁾	TF3C155(1)035(2)1900	0.5	6	1.900	0.24
2.2	C	TF3C225(1)035(2)3500	0.8	6	3.500	0.18
2.2	C	TF3C225(1)035(2)2900	0.8	6	2.900	0.19
3.3	C	TF3C335(1)035(2)2500	1.2	6	2.500	0.21
3.3	C	TF3C335(1)035(2)2000	1.2	6	2.000	0.23
3.3	C ⁽¹⁾	TF3C335(1)035(2)0900	1.2	6	0.900	0.35
4.7	C	TF3C475(1)035(2)1800	1.6	6	1.800	0.25
4.7	C ⁽¹⁾	TF3C475(1)035(2)0900	1.6	6	0.900	0.35
4.7	D	TF3D475(1)035(2)1500	1.6	6	1.500	0.32
4.7	D	TF3D475(1)035(2)1200	1.6	6	1.200	0.35
4.7	D	TF3D475(1)035(2)0700	1.6	6	0.700	0.46
4.7	D	TF3D475(1)035(2)0600	1.6	6	0.600	0.50
6.8	D	TF3D685(1)035(2)1300	2.4	6	1.300	0.34

Notes

- Part number definitions:
 - (1) Capacitance tolerance codes: K, M
 - (2) Terminations and packaging codes: C, D, E, F
- (1) Preliminary values, contact factory for availability



STANDARD RATINGS						
CAPACITANCE (μ F)	CASE CODE	PART NUMBER	MAX. DC LEAKAGE AT + 25 °C (μ A)	MAX. DF AT + 25 °C 120 Hz (%)	MAX. ESR AT + 25 °C 100 kHz (Ω)	MAX. RIPPLE 100 kHz I_{RMS} (A)
35 V_{DC} AT + 85 °C; 23 V_{DC} AT + 125 °C						
6.8	D	TF3D685(1)035(2)1000	2.4	6	1.000	0.39
6.8	D	TF3D685(1)035(2)0750	2.4	6	0.750	0.45
6.8	D	TF3D685(1)035(2)0500	2.4	6	0.500	0.55
10	D	TF3D106(1)035(2)0800	3.5	6	0.800	0.43
10	D	TF3D106(1)035(2)0500	3.5	6	0.500	0.55
10	D ⁽¹⁾	TF3D106(1)035(2)0400	3.5	6	0.400	0.61
10	E	TF3E106(1)035(2)1000	3.5	6	1.000	0.41
10	E	TF3E106(1)035(2)0800	3.5	6	0.800	0.45
10	E	TF3E106(1)035(2)0500	3.5	6	0.500	0.57
10	E ⁽¹⁾	TF3E106(1)035(2)0400	3.5	6	0.400	0.64
15	D	TF3D156(1)035(2)0800	5.3	6	0.800	0.43
15	D	TF3D156(1)035(2)0500	5.3	6	0.500	0.55
15	D ⁽¹⁾	TF3D156(1)035(2)0400	5.3	6	0.400	0.61
15	E	TF3E156(1)035(2)0900	5.3	6	0.900	0.43
15	E	TF3E156(1)035(2)0700	5.3	6	0.700	0.49
15	E	TF3E156(1)035(2)0500	5.3	6	0.500	0.57
22	E	TF3E226(1)035(2)0600	7.7	6	0.600	0.52
22	E ⁽¹⁾	TF3E226(1)035(2)0300	7.7	6	0.300	0.74
50 V_{DC} AT + 85 °C; 33 V_{DC} AT + 125 °C						
0.47	C	TF3C474(1)050(2)8000	0.5	4	8.000	0.12
0.47	C	TF3C474(1)050(2)6700	0.5	4	6.700	0.13
0.47	C ⁽¹⁾	TF3C474(1)050(2)1900	0.5	4	1.900	0.24
0.68	C	TF3C684(1)050(2)7000	0.5	4	7.000	0.13
0.68	C	TF3C684(1)050(2)5900	0.5	4	5.900	0.14
0.68	C ⁽¹⁾	TF3C684(1)050(2)1700	0.5	4	1.700	0.25
1.0	C	TF3C105(1)050(2)5500	0.5	4	5.500	0.14
1.0	C	TF3C105(1)050(2)4400	0.5	4	4.400	0.16
1.0	C	TF3C105(1)050(2)2700	0.5	4	2.700	0.20
1.0	C ⁽¹⁾	TF3C105(1)050(2)2200	0.5	4	2.200	0.22
1.5	C	TF3C155(1)050(2)5000	0.8	6	5.000	0.15
1.5	C	TF3C155(1)050(2)3200	0.8	6	3.200	0.19
1.5	C ⁽¹⁾	TF3C155(1)050(2)2000	0.8	6	2.000	0.23
1.5	C ⁽¹⁾	TF3C155(1)050(2)1600	0.8	6	1.600	0.26
2.2	C	TF3C225(1)050(2)2800	1.1	6	2.800	0.20
2.2	C ⁽¹⁾	TF3C225(1)050(2)1400	1.1	6	1.400	0.28
2.2	D	TF3D225(1)050(2)2500	1.1	6	2.500	0.24
2.2	D	TF3D225(1)050(2)2100	1.1	6	2.100	0.27
2.2	D	TF3D225(1)050(2)0900	1.1	6	0.900	0.41
3.3	C	TF3C335(1)050(2)2400	1.7	6	2.400	0.21
3.3	C	TF3C335(1)050(2)1600	1.7	6	1.600	0.26
3.3	C ⁽¹⁾	TF3C335(1)050(2)1200	1.7	6	1.200	0.30

Notes

- Part number definitions:
 - (1) Capacitance tolerance codes: K, M
 - (2) Terminations and packaging codes: C, D, E, F
- (1) Preliminary values, contact factory for availability



STANDARD RATINGS						
CAPACITANCE (μF)	CASE CODE	PART NUMBER	MAX. DC LEAKAGE AT + 25 °C (μA)	MAX. DF AT + 25 °C 120 Hz (%)	MAX. ESR AT + 25 °C 100 kHz (Ω)	MAX. RIPPLE 100 kHz I_{RMS} (A)
50 V_{DC} AT + 85 °C, 33 V_{DC} AT + 125 °C						
3.3	D	TF3D335(1)050(2)2000	1.7	6	2.000	0.27
3.3	D	TF3D335(1)050(2)1600	1.7	6	1.600	0.31
4.7	D	TF3D475(1)050(2)1100	2.4	6	1.100	0.37
4.7	E	TF3E475(1)050(2)1500	1.9	4	1.500	0.33
4.7	E	TF3E475(1)050(2)1100	1.9	4	1.100	0.39
6.8	D	TF3D685(1)050(2)0900	3.4	6	0.900	0.41
6.8	D ⁽¹⁾	TF3D685(1)050(2)0450	3.4	6	0.450	0.58
6.8	E	TF3E685(1)050(2)0900	3.4	6	0.900	0.43
6.8	E ⁽¹⁾	TF3E685(1)050(2)0450	3.4	6	0.450	0.61


Notes

- Part number definitions:
 - (1) Capacitance tolerance codes: K, M
 - (2) Terminations and packaging codes: C, D, E, F
- ⁽¹⁾ Preliminary values, contact factory for availability

RECOMMENDED VOLTAGE DERATING GUIDELINES (for temperatures below + 85 °C)	
STANDARD CONDITIONS. FOR EXAMPLE: OUTPUT FILTERS	
Capacitor Voltage Rating	Operating Voltage
4.0	2.5
6.3	3.6
10	6.0
16	10
20	12
25	15
35	24
50	28
SEVERE CONDITIONS. FOR EXAMPLE: INPUT FILTERS	
Capacitor Voltage Rating	Operating Voltage
4.0	2.5
6.3	3.3
10	5.0
16	8.0
20	10
25	12
35	15
50	24



TYPICAL CURVES AT + 25 °C, IMPEDANCE AND ESR VS. FREQUENCY

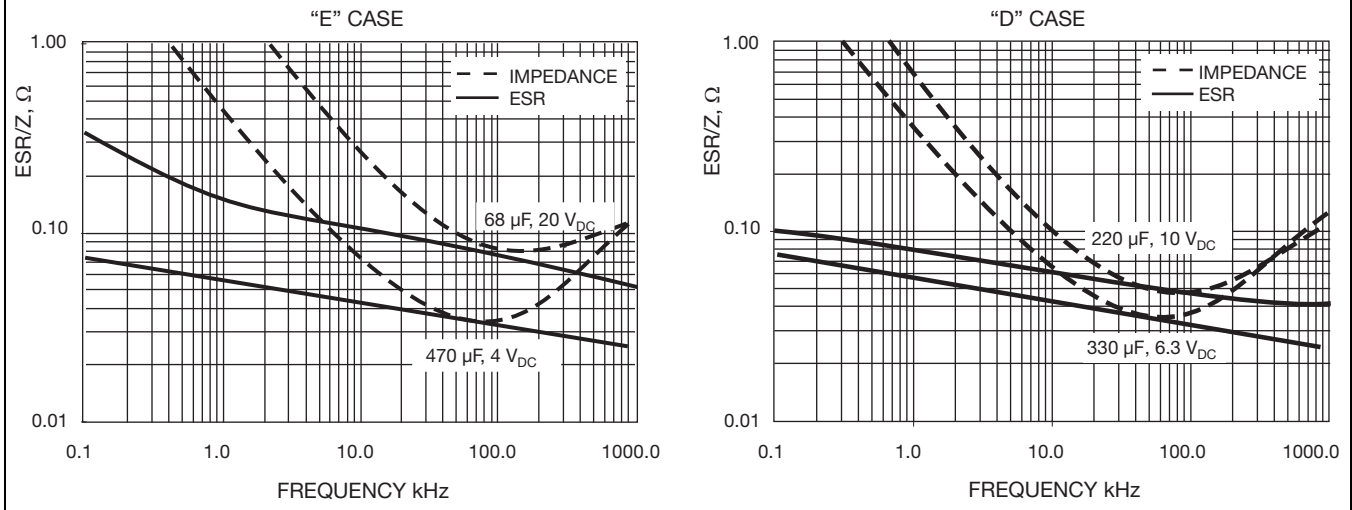

POWER DISSIPATION

CASE CODE	MAXIMUM PERMISSIBLE POWER DISSIPATION AT + 25 °C (W) IN FREE AIR
C	0.110
D	0.150
E	0.165

STANDARD PACKAGING QUANTITY

CASE CODE	UNITS PER REEL	
	7" REEL	13" REEL
C	500	3000
D	500	2500
E	400	1500

PRODUCT INFORMATION

Guide for Molded Tantalum Capacitors	www.vishay.com/doc?40074
Pad Dimensions	
Package Dimensions	
Moisture Sensitivity	www.vishay.com/doc?40135
SELECTOR GUIDES	
Solid Tantalum Selector Guide	www.vishay.com/doc?49053
Solid Tantalum Chip Capacitors	www.vishay.com/doc?40091
FAQ	
Frequently Asked Questions	www.vishay.com/doc?40110



Disclaimer

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Vishay makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, Vishay disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on Vishay's knowledge of typical requirements that are often placed on Vishay products in generic applications. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and/or specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein.

Except as expressly indicated in writing, Vishay products are not designed for use in medical, life-saving, or life-sustaining applications or for any other application in which the failure of the Vishay product could result in personal injury or death. Customers using or selling Vishay products not expressly indicated for use in such applications do so at their own risk and agree to fully indemnify and hold Vishay and its distributors harmless from and against any and all claims, liabilities, expenses and damages arising or resulting in connection with such use or sale, including attorneys fees, even if such claim alleges that Vishay or its distributor was negligent regarding the design or manufacture of the part. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay. Product names and markings noted herein may be trademarks of their respective owners.