

0RQB-C0U Series

Isolated DC-DC Converter

The 0RQB-C0U Series are isolated DC/DC converters that operate from a nominal 48 VDC source. These units will provide up to 100 W of output power from a nominal 48 VDC input. These units are designed to be highly efficient and low cost. Typical efficiency of 12 VDC output at 48 VDC input at full load is 91%.

Features include remote on/off, over current protection and under-voltage lockout. These converters are provided in an industry standard quarter brick package.



Key Features & Benefits

- 48 VDC Input
- 12 VDC/8.35 A, 5 VDC/20 A, 3.3 VDC/25 A, 1.2-2.5 VDC/30 A Outputs
- Isolated
- High Efficiency
- High Power Density
- Low Cost
- Input Over / Under Voltage Lockout
- Fixed Frequency (285 kHz)
- Active Low/High (Option)
- Output Over Voltage Shutdown
- OCP/SCP
- Over Temperature Protection
- Remote On/Off
- Output Voltage Trim
- Positive/Negative Remote Sense
- Basic Isolation

Applications

- Networking
- Computers and Peripherals
- Telecommunications



bel POWER
SOLUTIONS &
PROTECTION

a bel group

belfuse.com/power-solutions

1. MODEL SELECTION

OUTPUT VOLTAGE	INPUT VOLTAGE	MAX. OUTPUT CURRENT	MAX. OUTPUT POWER	TYPICAL EFFICIENCY	MODEL NUMBER ACTIVE HIGH	MODEL NUMBER ACTIVE LOW
12 VDC	18 V - 75 V	8.35 A	100 W	91%	0RQB-C0U120	0RQB-C0U12L
5.0 VDC	18 V - 75 V	20 A	100 W	90%	0RQB-C0U050	0RQB-C0U05L
3.3 VDC	18 V - 75 V	25 A	82.5 W	90%	0RQB-C0U033	0RQB-C0U03L
2.5 VDC	18 V - 75 V	30 A	75 W	89.5%	0RQB-C0U025	0RQB-C0U02L
1.8 VDC	18 V - 75 V	30 A	54 W	85%	0RQB-C0UV80	0RQB-C0UV8L
1.5 VDC	18 V - 75 V	30 A	45 W	83%	0RQB-C0UV50	0RQB-C0UV5L
1.2 VDC	18 V - 75 V	30 A	36 W	80%	0RQB-C0UV20	0RQB-C0UV2L

NOTE: Add "G" suffix at the end of the model numbers listed above to indicate "Tray Packaging".
All part numbers above indicate RoHS 6.

2. ABSOLUTE MAXIMUM RATINGS

PARAMETER	DESCRIPTION	MIN	TYP	MAX	UNITS
Input Voltage (Continuous)	Non-Operating Operating	-0.3 -	- -	80 75	V
Remote On/Off		-0.3	-	18	V
I/O Isolation Voltage		-	-	2000	V
Ambient Temperature		-40	-	85	°C
Storage Temperature		-55	-	125	°C

NOTE: All specifications are typical at nominal input, full load at 25 °C unless noted.

3. INPUT SPECIFICATIONS

PARAMETER	DESCRIPTION	MIN	TYP	MAX	UNIT
Input Voltage		18	48	75	V
Input Current (full load)	V _O = 12 V	-	-	7.0	A
	V _O = 5.0 V	-	-	7.0	
	V _O = 3.3 V	-	-	6.0	
	V _O = 2.5 V	-	-	5.5	
	V _O = 1.8 V	-	-	4.0	
	V _O = 1.5 V	-	-	3.5	
	V _O = 1.2 V	-	-	3.0	
Input Current (no load)		-	100	180	mA
Remote Off Input Current			10	15	mA
Input Reflected Ripple Current (pk-pk)	Tested with simulated source impedance of 10 µH, 5 Hz to 20 MHz BW; use a 0.47 µF/100 V ceramic cap and a 100 µF /100 V electrolytic cap with ESR = 1 ohm max. at 200 kHz at 25 °C.	-	20	40	mA
Input Reflected Ripple Current (rms)		-	5	10	mA
I ² t Inrush Current Transient		-	0.05	0.1	A ² s
Turn-on Voltage Threshold		16.5	17.0	17.5	V
Turn-off Voltage Threshold		15.5	16.0	16.5	V
Input Over Voltage Lockout		76	78	80	V

NOTE: All specifications are typical at nominal input, full load at 25 °C unless noted.

4. OUTPUT SPECIFICATIONS

PARAMETER	DESCRIPTION		MIN	TYP	MAX	UNIT	
Output Voltage Set Point	Vin = 48 V, Io = 50% full load	Vo = 12 V	11.820	12.00	12.180	V	
		Vo = 5.0 V	4.925	5.00	5.075		
		Vo = 3.3 V	3.251	3.30	3.360		
		Vo = 2.5 V	2.455	2.50	2.545		
		Vo = 1.8 V	1.773	1.80	1.827		
		Vo = 1.5 V	1.448	1.50	1.523		
		Vo = 1.2 V	1.182	1.20	1.218		
Line Regulation		Vo = 12 V	-	±24	±120	mV	
		Vo = 5.0 V	-	±5	±25		
		Vo = 3.3 V	-	±4	±15		
		Vo = 2.5 V	-	±4	±10		
		Vo = 1.8 V - 1.2 V	-	±3	±6		
Load Regulation		Vo = 12 V	-	±30	±80	mV	
		Vo = 5.0 V	-	±10	±25		
		Vo = 3.3 V - 2.5 V	-	±8	±15		
		Vo = 1.8 V - 1.2 V	-	±5	±10		
Regulation Over Temperature (-40 °C to +85 °C)		Vo = 12 V	-	±60	±100	mV	
		Vo = 5.0 V	-	±40	±65		
		Vo = 3.3 V	-	±30	±50		
		Vo = 2.5 V	-	±20	±50		
		Vo = 1.8 V - 1.2 V	-	±15	±30		
Output Current Range		Vo = 12 V	0	-	8.35	A	
		Vo = 5.0 V	0	-	20		
		Vo = 3.3 V	0	-	25		
		Vo = 2.5 - 1.2 V	0	-	30		
Current Limit Threshold		Vo = 12 V	9.2	10.5	13	A	
		Vo = 5.0 V	24	26	30		
		Vo = 3.3 V	27	32	35		
		Vo = 2.5 V	35	40	45		
		Vo = 1.8 V - 1.2 V	-	36	-		
Short Circuit Surge Transient			-	3	5	A²s	
Ripple and Noise* (rms)	Vin = 48 V	Vo = 12 V	-	30	50	mV	
		Vo = 5.0 V	-	25	40		
		Vo = 3.3 V - 2.5 V	-	20	40		
		Vo = 1.8 V - 1.2 V	-	15	30		
	Vin = 24 V	Vo = 12 V	-	25	40	mV	
		Vo = 5.0 V	-	20	30		
		Vo = 3.3 V	-	15	25		
Ripple and Noise* (pk-pk)	Vin = 48 V	Vo = 2.5 V - 1.2 V	-	10	20	mV	
		Vo = 12 V	-	100	150		
		Vo = 5.0 V	-	75	120		
		Vo = 3.3 V - 2.5 V	-	50	100		
	Vin = 24 V	Vo = 1.8 V - 1.2 V	-	40	80	mV	
		Vo = 12 V	-	75	120		
		Vo = 5.0 V	-	50	100		
Vo = 3.3 V		-	35	70			
Output Capacitance		Vo = 2.5 V	-	30	60	µF	
		Vo = 1.8 V - 1.2 V	-	25	50		
		Turn on Time	10	-	100		ms
		Overshoot at Turn on	-	0	5		%
Output Capacitance		Vo = 12 V	0	-	1200	µF	
		Vo = 5.0 V	0	-	6800		
		Vo = 3.3 V	0	-	15000		
		Vo = 2.5 V - 1.2 V	0	-	20000		

TRANSIENT RESPONSE							
50% ~ 75% Max Load	Overshoot Settling Time		V _O = 12.0 V	-	360	480	mV
				-	100	250	μs
75% ~ 50% Max Load	Overshoot Settling Time			-	360	480	mV
				-	150	250	μs
50% ~ 75% Max Load	Overshoot Settling Time		V _O = 5.0 V	-	200	300	mV
				-	100	150	μs
75% ~ 50% Max Load	Overshoot Settling Time			-	200	300	mV
				-	100	150	μs
50% ~ 75% Max Load	Overshoot Settling Time	Test conditions: di/dt = 0.1 A/ μs, Vin=48 V, with a 1 μF ceramic capacitor and a 10 μF Tantalum capacitor at the output.	V _O = 3.3 V	-	150	200	mV
				-	100	100	μs
75% ~ 50% Max Load	Overshoot Settling Time			-	150	200	mV
				-	100	100	μs
50% ~ 75% Max Load	Overshoot Settling Time		V _O = 2.5 V	-	150	200	mV
				-	85	100	μs
75% ~ 50% Max Load	Overshoot Settling Time			-	150	200	mV
				-	85	100	μs
50% ~ 75% Max Load	Overshoot Settling Time		V _O = 1.8 V – 1.2 V	-	50	80	mV
				-	100	150	μs
75% ~ 50% Max Load	Overshoot Settling Time			-	50	80	mV
				-	100	150	μs

Test conditions: $di/dt = 0.1\text{ A}/\mu\text{s}$, $V_{in}=48\text{ V}$, with a $1\text{ }\mu\text{F}$ ceramic capacitor and a $10\text{ }\mu\text{F}$ Tantalum capacitor at the output.

NOTE: All specifications are typical at nominal input, full load at $25\text{ }^\circ\text{C}$ unless noted.

5. GENERAL SPECIFICATIONS

PARAMETER	DESCRIPTION	MIN	TYP	MAX	UNIT	
Efficiency	Vin = 48 V, full load, Ta = 25 °C	Vo = 12 V	88	91	-	%
		Vo = 5.0 V	88	90	-	
		Vo = 3.3 V	88	90	-	
		Vo = 2.5 V	88	89.5	-	
		Vo = 1.8 V	-	85	-	
		Vo = 1.5 V	-	83	-	
		Vo = 1.2 V	-	80	-	
Efficiency	Vin = 24 V, full load, Ta = 25 °C	Vo = 12 V	-	92	-	%
		Vo = 5.0 V	-	91	-	
		Vo = 3.3 V	89	91	-	
		Vo = 2.5 V	-	87	-	
		Vo = 1.8 V	-	85	-	
		Vo = 1.5 V	-	83	-	
		Vo = 1.2 V	-	80	-	
Switching Frequency		240	285	320	kHz	
Isolation Capacitance		-	1500	-	pF	
Input to Output Isolation Voltage		-	-	2000	V	
Remote Sense Compensation	The total voltage increased by trim and remote sense should not exceed 10% Vo.	-	-	10	% Vo	
Output Voltage Trim Range		80	-	110	% Vo	
Over Temperature Protection		-	-	125	°C	
Over Voltage Protection	Vin = 48 V, full load, Hiccup mode	-	130	-	% Vo	
MTBF	Calculated Per Bell Core SR-332 (Io = Nominal; Ta = 25 °C)	TBD				
Weight		-	40	-	g	
Dimensions (L × W × H)		2.30 x 1.45 x 0.395 58.42 x 36.83 x 10.03			inch mm	

NOTE: All specifications are typical at nominal input, full load at $25\text{ }^\circ\text{C}$ unless noted.

6. CONTROL SPECIFICATIONS

PARAMETER		DESCRIPTION	MIN	TYP	MAX	UNIT
REMOTE ON/OFF						
Signal Low (Unit On)	Active Low	0RQB-C0UxxL. The remote on/off pin open, Unit off.	-0.3	-	0.8	V
Signal High (Unit Off)			2.4	-	18	
Signal Low (Unit Off)	Active High	0RQB-C0Uxx0. The remote on/off pin open, Unit on.	-0.3	-	0.8	V
Signal High (Unit On)			2.4	-	18	
Current Sink			0	-	0.75	mA


7. OUTPUT TRIM EQUATIONS

Equations for calculating the trim resistor are shown below (Unit: kΩ). The Trim Down resistor should be connected between the Trim pin and Ground pin. The Trim Up resistor should be connected between the Trim pin and the Vout. Only one of the resistors should be used for any given application.

For $V_o = 1.5\text{ V} - 12\text{ V}$:

$$R_{trimdown} = \frac{511}{|\delta|} - 10.22$$


$$R_{trimup} = \frac{(100 + \delta) \cdot V_o \cdot 5.11 - 626}{1.225 \cdot \delta} - 10.22$$

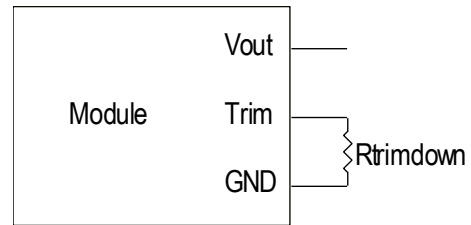

For $V_o = 1.2\text{ V}$:

$$R_{trimdown} = \frac{511}{|\delta|} - 10.22$$

$$R_{trimup} = \frac{(100 + \delta) \cdot V_o \cdot 5.11 - 313}{0.6125 \cdot \delta} - 10.22$$

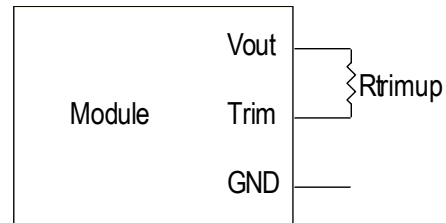

NOTES:

$$\delta = \frac{(V_{o_req} - V_o)}{V_o} \times 100[\%]$$

V_{o_req} = Desired (trimmed) output voltage [V]; V_o = output voltage

8. EFFICIENCY DATA

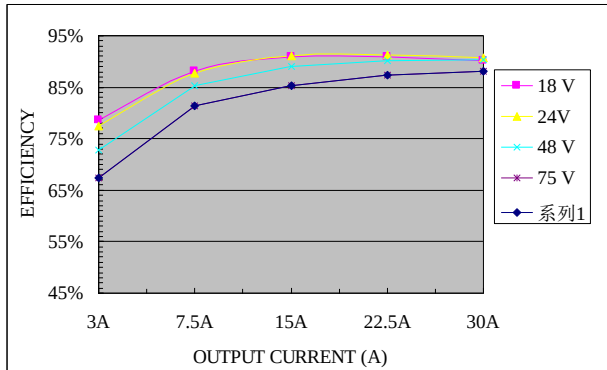


Figure 1. $V_o = 2.5\text{ V}$

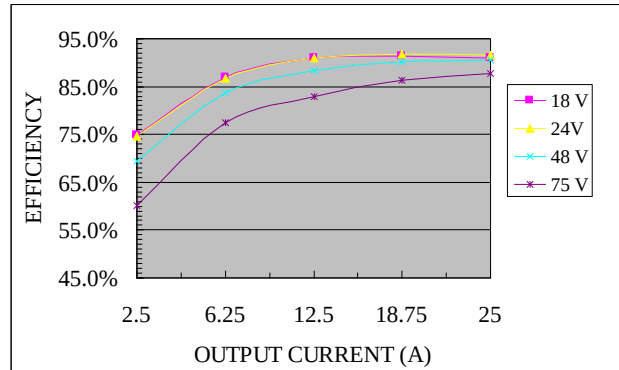


Figure 2. $V_o = 3.3\text{ V}$

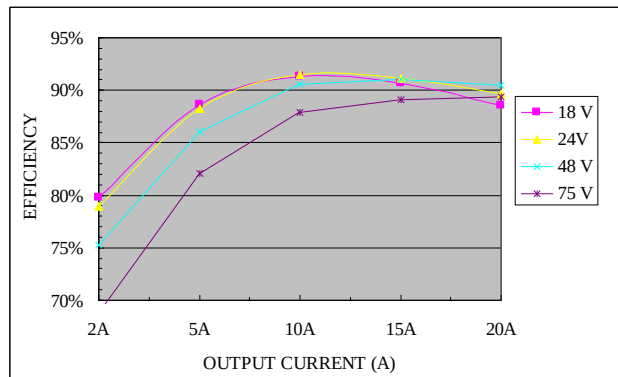


Figure 3. $V_o = 5\text{ V}$

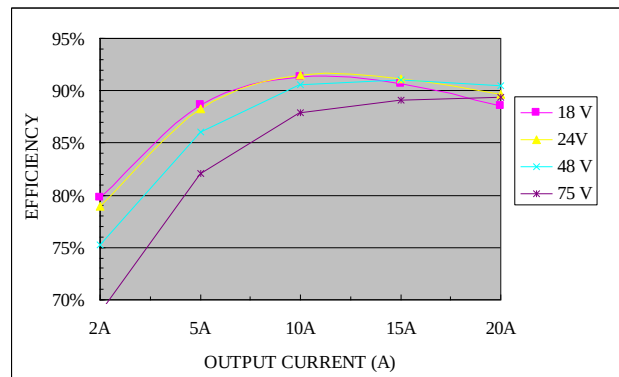


Figure 4. $V_o = 12\text{ V}$

9. THERMAL DERATING CURVES

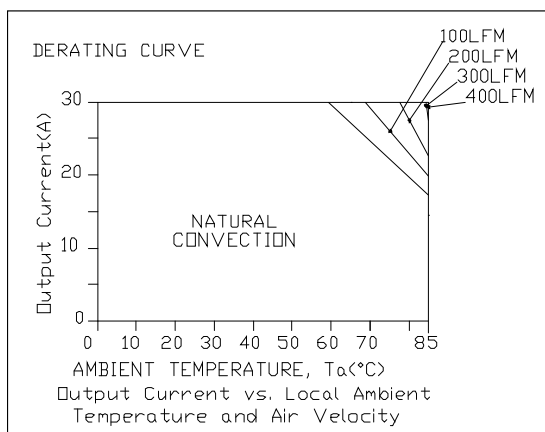


Figure 5. $V_o = 2.5\text{ V}$, $V_{in} = 48\text{ V}$

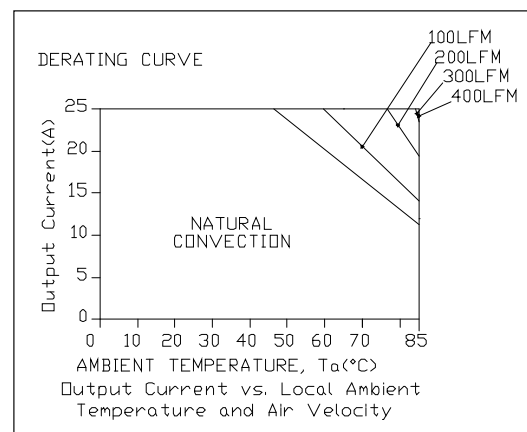


Figure 6. $V_o = 3.3\text{ V}$, $V_{in} = 48\text{ V}$

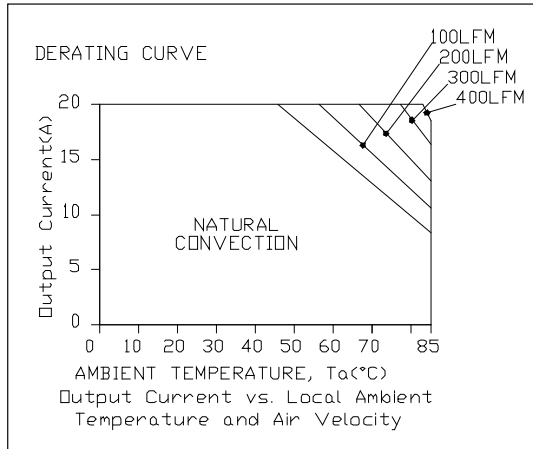


Figure 7. $V_o = 5.0\text{ V}$, $V_{in} = 48\text{ V}$

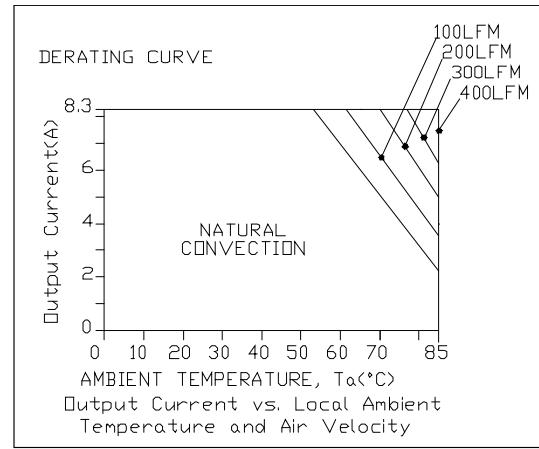


Figure 8. $V_o = 12\text{ V}$, $V_{in} = 48\text{ V}$

10. RIPPLE AND NOISE WAVEFORMS

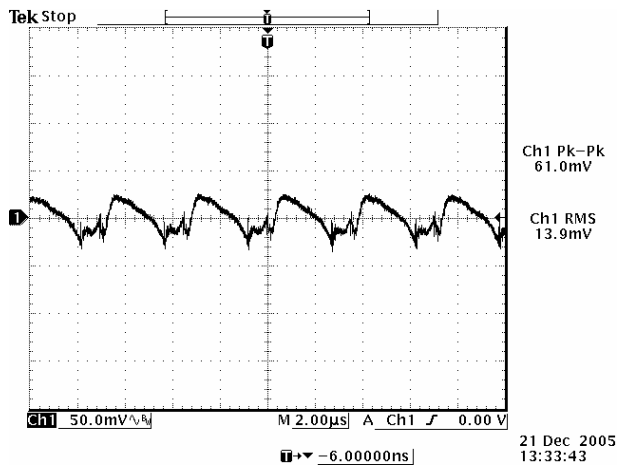


Figure 9. 2.5 V/30 A output

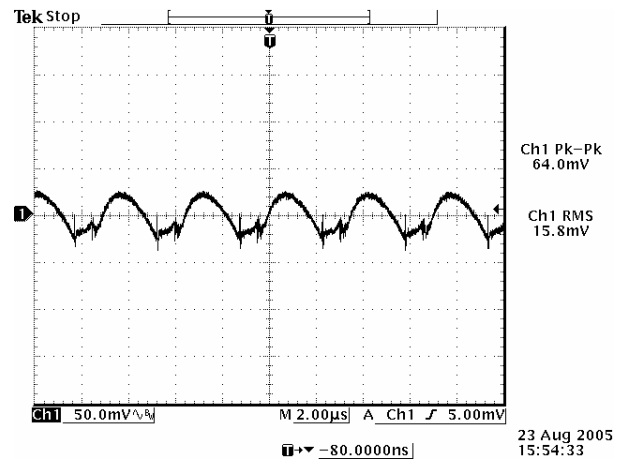


Figure 10. 3.3 V/25 A output

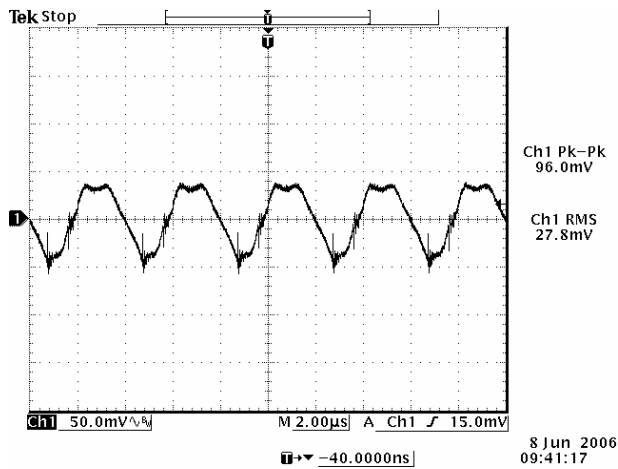


Figure 11. 5.0 V/20 A output

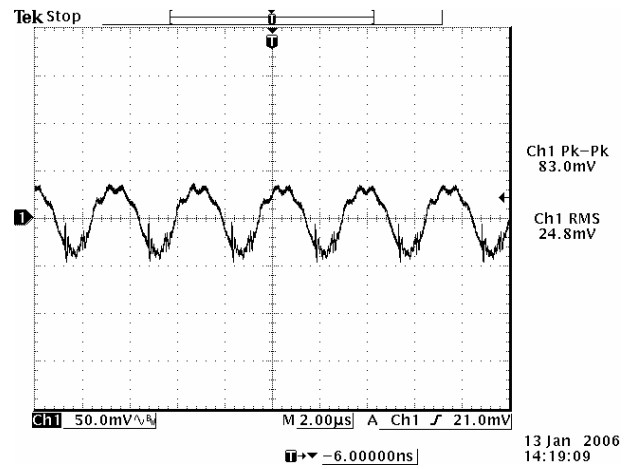
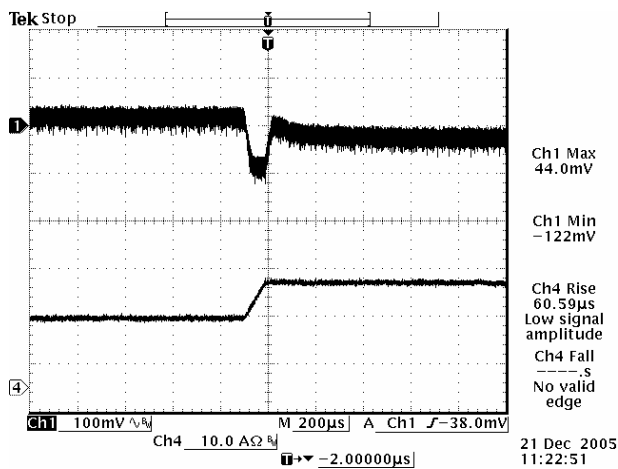
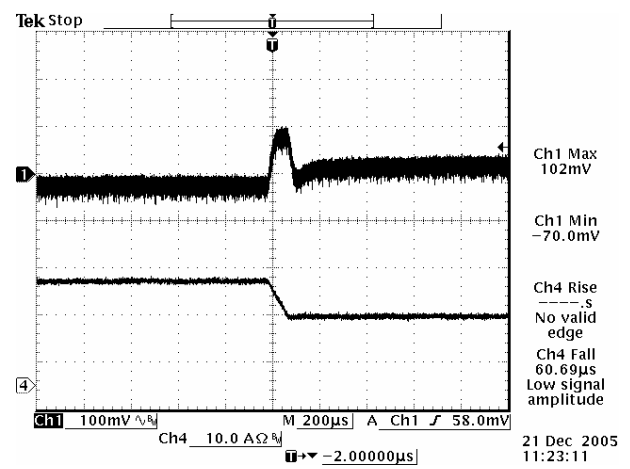


Figure 12. 12 V/8.35 A output

NOTE: Ripple & noise at full load, 48 V input, with a 1 μ F ceramic capacitor and a 10 μ F tantalum capacitor at the output, and $T_a=25^\circ\text{C}$.

11. TRANSIENT RESPONSE WAVEFORMS

Figure 13. $V_{out} = 2.5\text{ V}$ 50%-75% Load Transients at $V_{in}=48\text{ V}$ Figure 14. $V_{out} = 2.5\text{ V}$ 75%-50% Load Transients at $V_{in}=48\text{ V}$

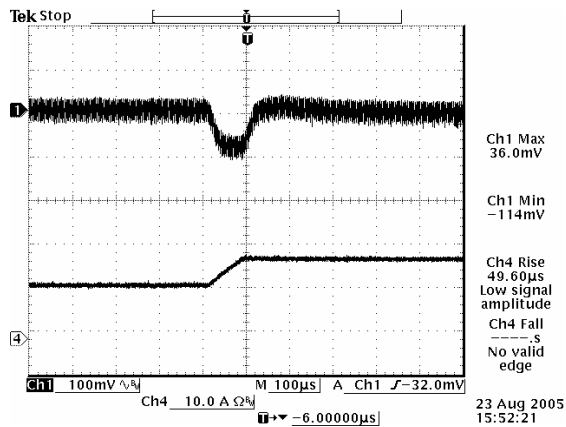


Figure 15. $V_{out} = 3.3\text{ V}$ 50%-75% Load Transients at $V_{in}=48\text{ V}$

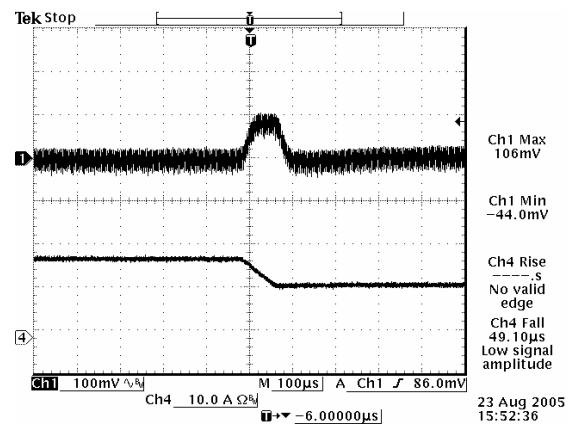


Figure 16. $V_{out} = 3.3\text{ V}$ 75%-50% Load Transients at $V_{in}=48\text{ V}$

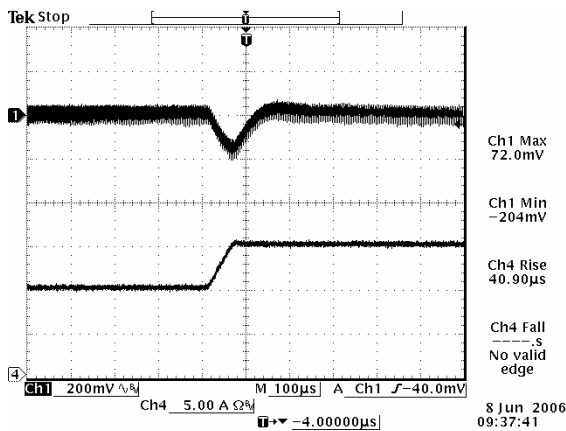


Figure 17. $V_{out} = 5.0\text{ V}$ 50%-75% Load Transients at $V_{in}=48\text{ V}$

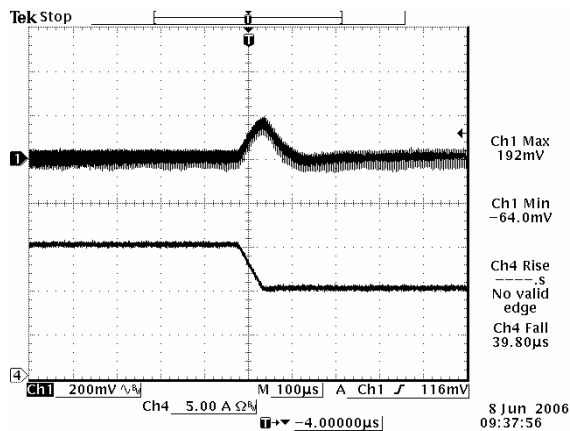


Figure 18. $V_{out} = 5.0\text{ V}$ 75%-50% Load Transients at $V_{in}=48\text{ V}$

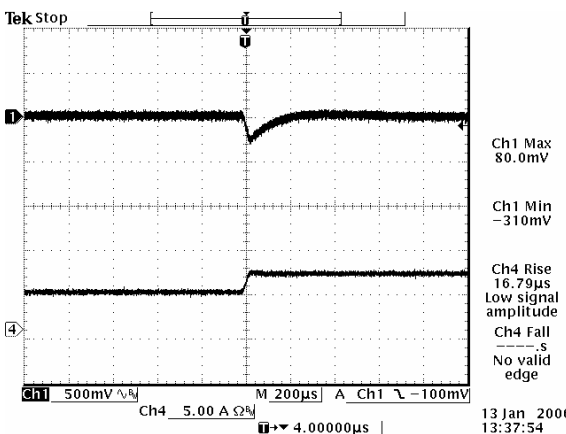


Figure 19. $V_{out} = 12\text{ V}$ 50%-75% Load Transients at $V_{in}=48\text{ V}$

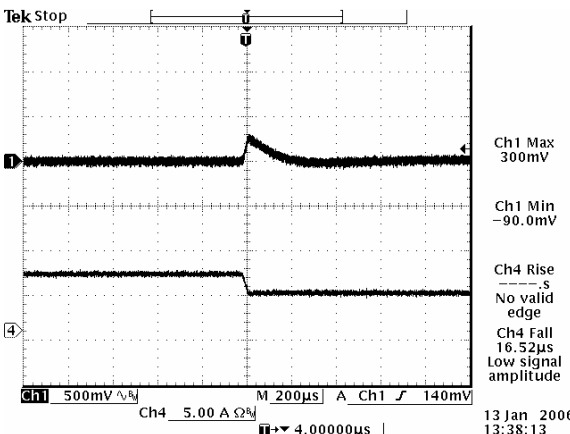


Figure 20. $V_{out} = 12\text{ V}$ 75%-50% Load Transients at $V_{in}=48\text{ V}$

NOTE: Transients at $di/dt = 0.1\text{ A/uS}$, $V_{in}=48\text{ V}$, with a 1 μF ceramic capacitor and a 10 μF Tantalum capacitor at the output, $T_a=25^\circ\text{C}$

13. REVERSION HISTORY

DATE	REVISION	CHANGES DETAIL	APPROVAL
2013-06-17	PA	First release	XF Jiang

For more information on these products consult: tech.support@psbel.com

NUCLEAR AND MEDICAL APPLICATIONS - Products are not designed or intended for use as critical components in life support systems, equipment used in hazardous environments, or nuclear control systems.

TECHNICAL REVISIONS - The appearance of products, including safety agency certifications pictured on labels, may change depending on the date manufactured. Specifications are subject to change without notice.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Bel Power Solutions:

[0RQB-C0U05LG](#) [0RQB-C0U050G](#) [0RQB-C0U12LG](#) [0RQB-C0U120G](#)