



Carling Technologies®  
/// NOW PART OF




Littelfuse®

# P26-Series

Pushbutton Switches

**PRODUCT WEBPAGE**

*request sample, configure part*

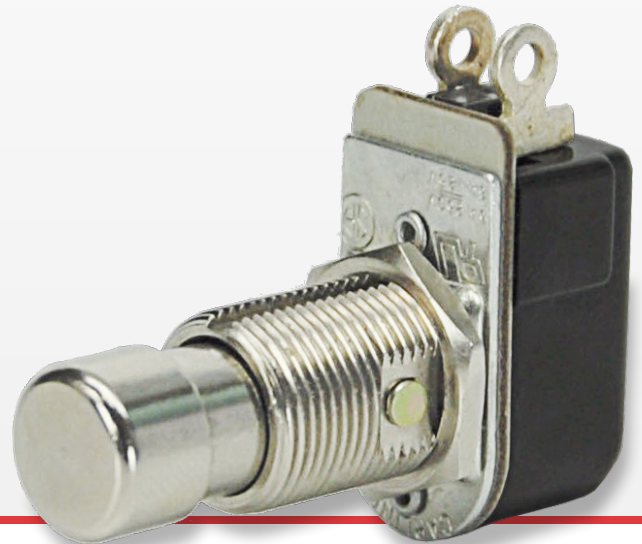

The P26-Series pushbutton switches are single pole, AC rated for 6 amps at 125 VAC and suitable for shallow back panel applications. These switches are momentary action with a medium actuation force (13 oz. typical). The P26-Series switch is equipped with a slow-make, slow-break contact mechanism.

**1**

Pole

**3-6**

Amps

**125-277**

VAC

**125**

VDC

## Typical Applications

- Intercoms
- Security System
- Electronic Signs
- Marine
- Lighting

# Tech Specs

## Dielectric Strength

UL/CSA: 1000V - live to dead  
metal parts

## Electrical Life

25,000 cycles

## Operating Temperature

32°F to 185°F (0°C to 85°C)

# Ordering Scheme

Sample  
Part Number **P26L - 1D - BL**

Selection                      1                      2                      3

### 1. SERIES

|                                          |              |              |              |
|------------------------------------------|--------------|--------------|--------------|
| <b>Single Pole</b>                       | Solder Lug   | .250 Tab     | Wire Leads   |
| <b>3A 250VAC, 6A 125 VAC, 3/4A 125V</b>  |              |              |              |
| Off - (On)                               | <b>P26A</b>  | <b>P26B</b>  | <b>P26F</b>  |
| On - (Off)                               | <b>P26L</b>  | -            | <b>P26T</b>  |
| <b>3A 277VAC, 6A 125 VAC<sup>1</sup></b> |              |              |              |
| Off - (On)                               | <b>P267A</b> | <b>P267B</b> | <b>P267F</b> |
| On - (Off)                               | <b>P267L</b> | -            | <b>P267T</b> |

Notes:

1 Additional ratings available. Consult factory for details

2 Only available with 1D bushing in .562 length

3 Length is .562 for RND MTL and CON MTL bottoms

( ) Indicates momentary function.

### 2. BUSHING STYLE

|                       | length | diameter |
|-----------------------|--------|----------|
| <b>1A</b>             | .406   | .375     |
| <b>1B</b>             | .406   | .468     |
| <b>1C</b>             | .465   | .375     |
| <b>1D<sup>3</sup></b> | .465   | .468     |

### 3. BUTTON STYLE / COLOR


|           |             |                            |               |
|-----------|-------------|----------------------------|---------------|
| <b>BL</b> | Black Nylon | <b>RND MTL<sup>2</sup></b> | Round Metal   |
| <b>RD</b> | Red Nylon   | <b>CON MTL<sup>2</sup></b> | Concave Metal |

[Configure Complete Part Number >](#)

[Browse Standard Parts >](#)

# Dimensional Specs

inches [millimeters]

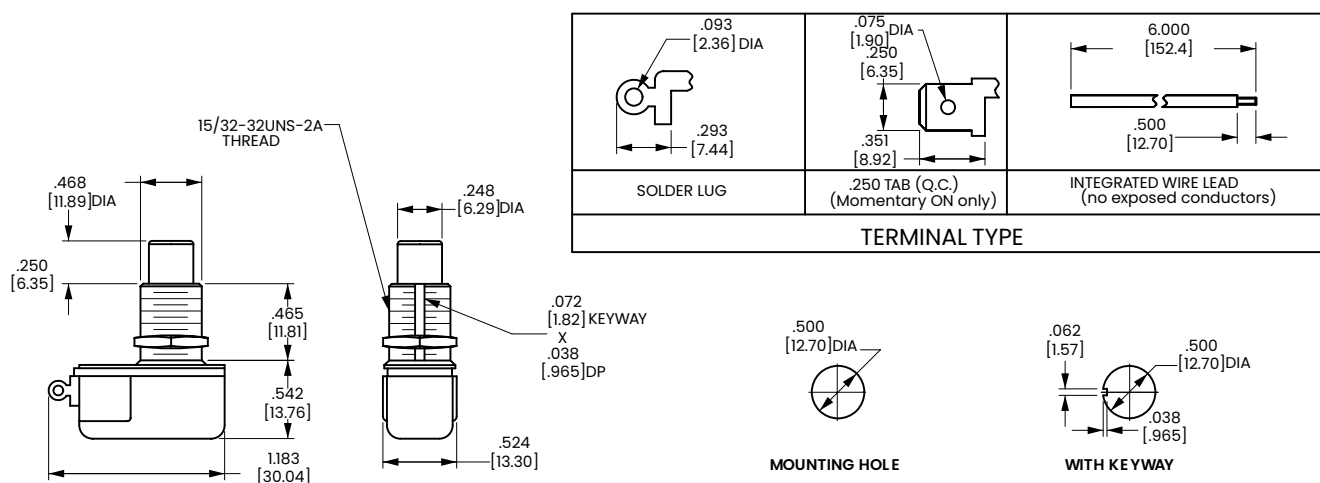

## Authorized Sales Representatives and Distributors

Click on a region of the map below to find your local representatives and distributors or visit [www.carlingtech.com/findarep](http://www.carlingtech.com/findarep).



## About Carling

Founded in 1920, Carling Technologies is a leading manufacturer of electrical and electronic switches and assemblies, circuit breakers, electronic controls, power distribution units, and multiplexed power distribution systems. With six ISO9001 and IATF16949 registered manufacturing facilities and technical sales offices worldwide, Carling Technologies Sales, Service and Engineering teams do much more than manufacture electrical components, they engineer powerful solutions! To learn more about Carling please visit [www.carlingtech.com/company-profile](http://www.carlingtech.com/company-profile).

To view all of Carling's environmental, quality, health & safety certifications please visit [www.carlingtech.com/environmental-certifications](http://www.carlingtech.com/environmental-certifications).

© Carling Technologies, Inc.

3. Carling is a registered trademark of Carling Technologies, Inc. in the U.S. and other countries.

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

## Carling Technologies:

[P26A-1D-RND-MTL](#) [P26L-1D-RND-MTL](#) [P26B-1D-CON MTL](#) [P26F-1D-RND MTL](#) [P26T-1D-RND MTL](#) [P267T-1A-B-XAB1](#) [P267T-1D-RD](#) [P26F-1D-RD](#) [P267T-1D-BL-XBO1](#) [P267F-1D-RND MTL](#) [P26A-1D-RND-MTL/HDW BULK](#) [P267T-1D-RND MTL](#) [P26B-1D-RND MTL](#) [P26F-1D-XGR1](#) [P26T-1A-BL](#) [P26T-1D-CON MTL-XKL1](#) [P26T-1D-RD](#) [P28T-1D-RD-XAU1](#) [P267F-1B-RD](#) [P267T-1B-BL-XNUT1](#) [P26A-1D-CON MTL-XRL1](#) [P26B-1D-CON MTL-XBM1](#) [P26F-1D-RND MTL/POLY](#) [P26A-1D-RND MTL/2 HEX-XLD1](#) [P267F-1D-RD](#) [P267T-1D-BL/2 HEX](#) [P26F-1D-CON MTL](#) [P26F-1C-RD](#) [P267T-1C-BL](#) [P26T-1C-BL](#) [P267L-1B-RD](#) [P267T-1A-BL-XLI2](#) [P26F-1D-BL-XMR1](#) [P267T-1A-RD](#) [P265A-1D-RND MTL](#) [P267T-1D-CON MTL](#) [P28T-1D-RND MTL](#) [P26T-1D-CON MTL](#) [P265A-1D-CON MTL](#) [P28F-1B-BL-XWL1](#) [P267T-1A-BL-XAB1](#) [P28F-1A-BL](#) [P26B-1D-X-MTL-XDU1](#) [P26L-1D-CON MTL-XPB1](#) [P267B-1D-RND MTL](#) [P28B-1D-RND MTL](#) [P26A-1DXHD4](#) [P267F-1A-RD](#) [P26B-1B-RD](#) [P267F-1C-BL](#) [P26T-1D-XBR4](#) [P267T-1B-RD/728-15907](#) [P26A-1B-RD](#) [P26B-1B-BL](#) [P26T-1D-BL-XYL1](#) [P267T-1B-RD](#) [P26L-1D-CON MTL](#) [P26F-1A-BL-XHE2](#) [P26A-1A-RD](#) [P26F-1B-BL](#) [P26T-1D-BL-XFA1](#) [P265B-1D-RND MTL](#) [P28B-1B-BL](#) [P26A-1D-BL-XWP1](#) [P26F-1D-BL-XAC1](#) [P26T-1B-BL](#) [P28F-1A-BL/2 HEX](#) [P26F-1A-BL](#) [P26T-1C-RD](#) [P28B-1D-CON MTL](#) [P267T-1D-BL-XBJ1](#) [P26L-1D-BL-XPB1](#) [P267F-1C-RD](#) [P28A-1D-CON MTL](#) [P26B-1A-RD](#) [P28A-1D-BL](#) [P26B-1C-BL/DOWN TABS/2 HEX](#) [P265L-1D-CON MTL](#) [P267L-1A-BL-XRO1](#) [P26L-1A-RD](#) [P26F-1C-BL](#) [P26L-1D-RD](#) [P267T-1A-BL/NO HDW](#) [P267F-1A-BL](#) [P26T-1D-BL/2 HEX](#) [P267T-1A-BL-XBD1](#) [P26B-1C-RD](#) [P28F-1D-RND MTL](#) [P26A1DRNDMTLHDWBULK](#) [P28F-1B-BL](#) [P26B-1C-BL](#) [P26F-1A-RD](#)