


nanoWatt XLP eXtreme Low Power PIC® MCUs

Looking Beyond Low Power MCUs

As more electronic applications require low power or battery power, energy conservation becomes paramount. Today's applications must consume little power, and in extreme cases, last for up to 15-20 years, while running from a single battery. To enable applications like these, products with Microchip's nanoWatt XLP Technology offer the industry's lowest currents for Run and Sleep, where extreme low power applications spend 90%-99% of their time.

Benefits of nanoWatt XLP Technology:

- Sleep currents below 20 nA
- Brown-out Reset down to 45 nA
- Watch-dog Timer down to 220 nA
- Real-time Clock/Calendar down to 470 nA
- Run currents down to 50 μ A/MHz
- Full analog and self-write capability down to 1.8V

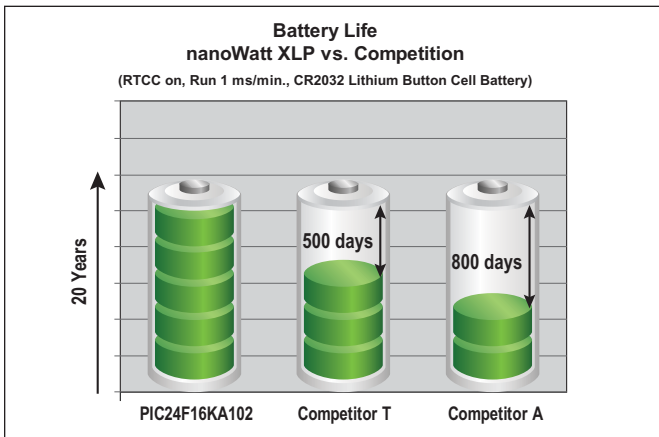

Example Applications

Battery

- Utility Metering
- Asset Tracking
- Electronic Locks
- Portable Medical
- Smoke/CO2 Detectors
- Irrigation Systems
- Security Systems/Sensors
- Remote Keyless Entry
- Consumer

Green Initiatives

- Compliance with Regulations
- Appliances
- Home Electronics

Energy Harvesting

- Wireless Switches
- Battery-free Sensors
- Wireless Sensor Networks
- RF Powered Sensors

Low Power Peripheral Integration

Many of today's low power products need advanced peripherals. Microchip offers low power devices with peripherals like USB, LCD, RTCC and mTouch™ capacitive sensing. This eliminates the need for additional parts in the application, saving cost, current and complexity.



Low Power Safety

Products with nanoWatt XLP have system supervisory circuits specially designed for battery powered products.

- The Low Power Brown-out Reset protects applications when batteries are depleted or changed, yet consumes a tiny 45 nA of current
- The Real-time Clock Calendar is a fully independent module that is unaffected by device resets
- Using a dedicated on-chip oscillator, the WDT provides protection against system failure for around 300 nA with programmable time-outs lasting up to 25 days

XLP Battery Life Estimator (Free Download)

The XLP Battery Life Estimator is free PC software to aid in developing eXtreme Low Power applications with Microchip's PIC MCUs featuring XLP technology. The utility allows users to select the target MCU and battery type, as well as input the current generated by the rest of the application. It models the active current, sleep current, and the time spent in each mode to provide an estimate of battery life.

- Easy to Use
 - Select your PIC MCU with XLP Technology
 - Select your battery type
 - Enter application Run and Sleep times
 - Select peripherals and input application currents
 - View battery life, average and maximum current estimates
- Flexible
 - Customizable to allow new device profiles and battery specifications to be added
 - Save profiles and compare results



MICROCHIP

Microchip Technology Incorporated

nanoWatt XLP MCU Portfolio

With many pin, memory and peripheral combinations available, Microchip's nanoWatt XLP products have the right combination of features for your low power application.

Example XLP PIC® MCUs

Device	Flash Memory (KB)	Pins	Sleep (nA)	WDT* (nA)	RTC* (nA)	1 MHz Run (µA)
PIC16LF182X <small>CAP SENSE</small>	3.5-7	8-28	20	300	600	50
PIC16LF72X <small>CAP SENSE</small>	3.5-14	28/44	20	500	600	110
PIC16LF193X <small>CAP SENSE LCD</small>	7-28	28/44	60	500	600	150
PIC18LF1XK50 <small>CAP SENSE USB</small>	8-16	20	24	450	790	170
PIC18LF14K22 <small>CAP SENSE</small>	8-16	20	34	460	650	150
PIC18LF4XK22 <small>CAP SENSE</small>	8-64	28/44	50	600	500	250
PIC18F46J11 <small>CAP SENSE</small>	16-64	28/44	13	813	813	272
PIC18F46J50 <small>CAP SENSE USB</small>	16-64	28/44	13	813	813	272
PIC18F87K90 <small>CAP SENSE LCD</small>	32-128	64/80	25	350	720	181
PIC24F04KA201 <small>CAP SENSE</small>	4	14/20	20	370	470	195
PIC24F16KA102 <small>CAP SENSE</small>	8-16	20/28	20	420	520	195
PIC24FJ64GB004 <small>CAP SENSE USB</small>	32-64	28/44	20	220	520	250

*Base sleep current included in WDT and/or RTC numbers. Typical I/O pin leakage current ± 5 nA. All numbers are typical values at minimum V_{DD}, taken from the data sheet.



XLP 16-bit Development Board (DM240311)

Designed with eXtreme Low Power in mind, this board enables development with the PIC24F family of 16-bit PIC XLP MCUs.

- Supports 20-/28-pin devices
- Flexible power options
 - CR2032 coin cell
 - 2x AAA lithium* or alkaline cells
 - Energy harvesting: solar, vibration, RF, etc.
 - External/USB
- Easy Prototyping:
 - PICTail™ connector supports RF Modules, SD/MMC storage, speech playback modules and more
 - LEDs, capacitive and mechanical buttons, resistive pot, temperature sensor and EEPROM
 - Generic prototyping area
 - USB communication to PC

* Microchip recommends Energizer® Ultimate Lithium AAA Batteries for the XLP 16-bit Development Board.

Visit the XLP design center at www.microchip.com/XLP for:

- More XLP development tools
- Low power app notes, case studies, tips & tricks and webinars
- Complete list of XLP MCUs and datasheets
- Videos showing XLP performance



MICROCHIP
www.microchip.com/XLP

Visit our web site for additional product information and to locate your local sales office.

Microchip Technology Inc. • 2355 W. Chandler Blvd. • Chandler, AZ 85224-6199

Microcontrollers • Digital Signal Controllers • Analog • Serial EEPROMs

Information subject to change. The Microchip name and logo, the Microchip logo, MPLAB and PIC are registered trademarks of Microchip Technology Incorporated in the U.S.A. and other countries. HI-TECH C is a registered trademark of Microchip Technology Incorporated in the U.S.A. MPASM, MPLIB, MPLINK, mTouch, PICkit and REAL ICE are trademarks of Microchip Technology Incorporated in the U.S.A. and other countries. © 2010 Energizer. Energizer and other marks are trademarks owned by Energizer. All other trademarks mentioned herein are property of their respective companies. © 2010, Microchip Technology Incorporated. All Rights Reserved. Printed in the U.S.A. 4/10

DS39941D

