

L6 (Oversize) Series — Miniature Switches and Pilot Devices

Key features:

- 5/8" (16mm) mounting holes
- Locking lever removable contact blocks
- Solder terminal or PCB terminal options
- Available assembled or as sub-components
- Worldwide approvals
- Incandescent or LED illumination
- Snap action contacts



UL Recognized
File No. E55996



CSA Certified
File No. LR21451



Registration No. R9551089 (E-stops)
Registration No. J9551458 (all other switches)
Registration No. R95650511 (Pilot Lights)



Contact Ratings	Conforming to Standards	EN60947-1, EN60947-5-1, VDE0660-200, UL508, CSA C22-2 NO.14							
	Operating Temperature	Operation: −25 to +55°C (without freezing), 45 to 85% RH Storage: -30 to +80°C (without freezing)							
	Vibration Resistance	5 to 55Hz, 1.0 peak-peak amplitude max							
	Shock Resistance	Operating limit: 100 m/sec ² (approximately 10G) Damage limit: 1000 m/sec ² (approximately 100G)							
	Mechanical Life	Momentary pushbuttons 2,000,000 operations minimum All others: 250,000 operations minimum							
	Degree of Protection	IP65 (conforming to IEC 60529)							
	Dielectric Strength	Switch unit: between live and ground: 2500 volt AC, 1 minute 							

Switches & Pilot Devices

Signaling Lights

Relays & Sockets




Timers

Contactors

Terminal Blocks

Circuit Breakers

Built-in LED Lamp Ratings

Model		LFTD-5②	LFTD-1②	LFTD-2②	LFTD-H2②
Lamp Base		SX6S/8x5.4			
Rated Voltage		5V DC	12V AC/DC	24V AC/DC	120V AC
Operating Voltage		5V DC ±5%	12V AC/DC ±10%	24V AC/DC ±10%	120V AC ±5%
Current Draw	AC	—	9mA	9mA	8mA
	DC	8mA	8mA	8mA	—
Color Code ②		Specify a color code in place of ② in the Part No: A (amber), G (green), R (red), S (blue), W (white), Y (yellow)			
Lamp Base Color		Same as illumination color			
Voltage Marking		Stamped on the lamp base			
Life (reference value)		Approx. 50,000 hours			
Internal Circuit	A, R, W, Y		A, R, W, Y		
					
	G, S		G, S		
					

Non-Illuminated Pushbuttons (Assembled)

Non-Illuminated Pushbuttons

Style	Operation	Contact	Terminal Style	
			Solder Tab	PCB
	Momentary	SPDT	HA1B-M2C5-①	HA1B-M2C1V-①
		DPDT	HA1B-M2C6-①	HA1B-M2C2V-①
	Maintained	SPDT	HA1B-A2C5-①	HA1B-A2C1V-①
		DPDT	HA1B-A2C6-①	HA1B-A2C2V-①
	Momentary	SPDT	HA2B-M1C5-①	HA2B-M1C1V-①
		DPDT	HA2B-M1C6-①	HA2B-M1C2V-①
	Maintained	SPDT	HA2B-A1C5-①	HA2B-A1C1V-①
		DPDT	HA2B-A1C6-①	HA2B-A1C2V-①
	Momentary	SPDT	HA2B-M2C5-①	HA2B-M2C1V-①
		DPDT	HA2B-M2C6-①	HA2B-M2C2V-①
	Maintained	SPDT	HA2B-A2C5-①	HA2B-A2C1V-①
		DPDT	HA2B-A2C6-①	HA2B-A2C2V-①
	Momentary	SPDT	HA1B-M3C5-①	HA1B-M3C1V-①
		DPDT	HA1B-M3C6-①	HA1B-M3C2V-①
	Maintained	SPDT	HA1B-A3C5-①	HA1B-A3C1V-①
		DPDT	HA1B-A3C6-①	HA1B-A3C2V-①

① Button Color Codes

Color	Code	Color	Code
Black	B	Blue	S
Green	G	White	W
Red	R	Yellow	Y

1. In place of ① specify Button Color Code from table.
2. Illuminated (translucent) style lenses also available, specify as such: instead of LA1B-M1C5-① use LA1B-M1C5L-② in place of ② (specify Lens Color Code from next page.)
3. PCB terminal models also available with silver contacts (change “1” or “2” to “5” or “6” respectively, ie LA1B-M1C1V-① becomes LA1B-M1C5V-①).

Non-Illuminated Pushbuttons (Sub-Assembled)

Contact

+

Safety Lever Lock

+

Operator

+

Button

=

Complete Part



Operators

Style	Momentary	Maintained
Oversize Round	HA1B-M0	HA1B-A0
Oversize Square	HA2B-M0	HA2B-A0
Mushroom	HA1B-M0L	HA1B-A0L



1. In place of ① specify Button Color Code from table on right.
2. In place of ② specify Lens Color Code from table on right.
3. *requires HA1L-M0 or HA1L-A0 operator instead of HA1B-M0 or HA1B-A0.
4. **requires HA2L-M0 or HA2L-A0 instead of HA2B-M0 or HA2B-A0.

Buttons/Lenses

Style	Button	Lens
Oversize Round Flush	HA1A-B1-①	HA1A-L1-②*
Oversize Round Extended	HA1A-B2-①	—
Oversize Square Flush	HA2A-B1-①	HA2A-L1-②**
Oversize Square Extended	HA2A-B2-①	—
Mushroom	HA1A-B3-①	HA1A-L3-②

Contacts

Style	Contacts	Terminal Style	
		Solder Tab	PCB
	Gold SPDT DPDT	HA-C1 HA-C2	HA-C1V HA-C2V
	Silver SPDT DPDT	HA-C5 HA-C6	HA-C5V HA-C6V

Safety Lever Lock

Style	Part Number
	HA9Z-LS

① Button Color Code

Color	Code
Black	B
Green	G
Red	R
Blue	S
White	W
Yellow	Y

② Lens Color Code

Color	Code
Amber	A
Green	G
Red	R
Blue	S
Yellow	Y
White	W

HA1B/HA1E Stop Switch

Key features:

- PCB or Solder Terminals
- Locking Lever Removable Contact Blocks
- Positive Action Contacts
- 1 or 2 form B (SPST-NC) Contacts
- IP65 Protection
- 16mm Mounting Hole
- Tamper Proof Construction



File No. DK95-00138



CSA
File No. LR21451



UL Recognized
File No. E55996



Direct
Opening
Action

Specifications

Contact Form		1 or 2 form B (SPST-NC)
Termination		PCB or Solder Terminal
Contact Material		Silver
Applicable Standards		EN60947-5-1, UL508, CSA 22.2. No. 14
Rated Insulation Voltage		250V AC/DC
Degree of Protection		IP65
Conditional Short-Circuit Current and Short-Circuit Protective Device		50 A (at 250V) 10A 250V Fuse, operation class M according to IEC269-1 and IEC269-2
Positive Opening Operation	Positive opening travel	3.4mm
	Minimum force required to achieve positive opening operation of all break contacts.	10.3 N (2 form B contacts)
	Maximum travel including travel beyond the minimum travel position	5.5mm
	Maximum frequency of actuation	1,200 operations/hour
Pollution Degree		3

Nameplates

HAAV–Yellow Plastic	
Marking	Part Number
Blank	HAAV-0

Positive Action Stop Switch

Style	Operation	Contact	Terminal Style	
			Solder Tab	PCB
	Pushlock/ Turn Reset	DPST(NC) (2 form B)	HA1B-V2E2R	HA1B-V2E2VR
		Short Body SPST-NC (1 form B) DPST-NC (2 form B)	HA1E-V2S1R HA1E-V2S2R	—

Accessories: Shroud

Style	Part Number	Applicable Standards
	XA9Z-KG1	SEMI S2 Compliant (Approved by TUV)

1. Button is non-removable, available in red and as complete assembled unit only.
2. Stop Switch does not come with safety lever lock.

Buzzers (IP40)

Style	Operating Voltage	Terminal Style	
		Solder/Tab	PCB
	6V AC/DC ± 10%	LA3Z-1X2	LA3Z-1X2V
	12V to 24 AC/DC ± 10%	LA3Z-1X4	LA3Z-1X4V

Buzzer Ratings

Frequency	2 khz ± 500 HZ
Amplitude	80db @ 0.1m (at rated voltage)
Operating Voltage	6V AC/DC or 12 - 24V AC/DC ± 10%
Adjustable Cycle	55 to 600 cycles per minute
Current Draw	DC: 7mA AC: 20mA
Life	1000 hrs. minimum
Insulation Voltage	60V AC/DC
Operating Temperature	-20 to 55°C (no freezing), 45 to 85% RH
Degree of Protection	IP40

Pilot Lights (Assembled)

Pilot Lights

Style	Terminal Style	
	Solder Tab	PCB
Oversize Round 	HA1P-1C0③-②	HA1P-1C0③V-②
Oversize Square 	HA2P-1C0③-②	HA2P-1C0③V-②
Oversize Round Unibody 	HA1P-1③-②	—
Oversize Square Unibody 	HA2P-1③-②	—



1. In place of ② specify Lens/LED Color Code from table.
2. In place of ③ specify Voltage Code from table.

② Lens/LED Color Codes

Color	Code
Amber	A
Green	G
Red	R
Blue	S
White	W
Yellow	Y

③ Voltage/Lamp Code

Voltage	Code
5V DC LED	1
6V AC/DC LED	2
12V AC/DC LED	3
24V AC/DC LED	4
120V AC LED	8
6V AC/DC Incandescent	5
12V AC/DC Incandescent	6
24V AC/DC Incandescent	7

Pilot Lights (Sub-Assembled)

Terminals	+	Safety Lever Lock	+	Lamp Holder	+	Lamp	+	Operator	+	Lens	=	Completed Unit
												

Operators

Style	Part Number
Oversize Round	HA1P-0
Oversize Square	HA2P-0
Oversize Round Unibody	HA1P-00
Oversize Square Unibody	HA2P-00

Lenses

Style	Part Number
Oversize Round	HA1A-P1-②
Oversize Square	HA2A-P1-②

 In place of ② specify lens color code.

Lamps

Style	Voltage	Part Number
LED	5V DC 6V AC/DC 12V AC/DC 24V AC/DC 120 V AC	LFTD-5② LFTD-6② LFTD-1② LFTD-2② LFTD-H2②
Incandescent	6V AC/DC 12V AC/DC 24V AC/DC	LH-06 LH-14 LH-28

 In place of ② specify LED color code from table below.

Terminals

Style	Solder Tab	PCB
	HA-C00	HA-C00V

 Not required for unibody operators.

Lamp Holder

Style	Part Number
	HA9Z-AH

Safety Lever Lock

Style	Part Number
	HA9Z-LS

② Lens/LED Color Codes

Color	Code
Amber	A
Green	G
Red	R
Blue	S
Yellow	Y
White	W

Illuminated Pushbuttons (Assembled)

Illuminated Pushbuttons

Style	Operation	Contact	Terminal Style	
			Solder Tab	PCB
Oversize Round 	Momentary	SPDT DPDT	HA1L-M1C5③-② HA1L-M1C6③-②	HA1L-M1C1③V-② HA1L-M1C2③V-②
	Maintained	SPDT DPDT	HA1L-A1C5③-② HA1L-A1C6③-②	HA1L-A1C1③V-② HA1L-A1C2③V-②
Oversize Square 	Momentary	SPDT DPDT	HA2L-M1C5③-② HA2L-M1C6③-②	HA2L-M1C1③V-② HA2L-M1C2③V-②
	Maintained	SPDT DPDT	HA2L-A1C5③-② HA2L-A1C6③-②	HA2L-A1C1③V-② HA2L-A1C2③V-②
Mushroom 	Momentary	SPDT DPDT	HA1L-M3C5③-② HA1L-M3C6③-②	HA1L-M3C1③V-② HA1L-M3C2③V-②
	Maintained	SPDT DPDT	HA1L-A3C5③-② HA1L-A3C6③-②	HA1L-A3C1③V-② HA1L-A3C2③V-②



1. In place of ② specify Lens Color Code from table.
2. In place of ③ specify Voltage Code from table.
3. PCB terminal models also available with silver contacts change "1" or "2" to "5" or "6" respectively, (ie LA1L-M1C14V-① becomes LA1L-M1C54V-①).
4. Light independent of switch position.

② Lens Color Codes

Color	Code
Amber	A
Green	G
Red	R
Blue	S
Yellow	Y
White	W

③ Voltage/Lamp Code

Voltage	Code
5V DC LED	1
6V AC/DC LED	2
12V AC/DC LED	3
24V AC/DC LED	4
120 V AC LED	8
6V AC/DC Incandescent	5
12V AC/DC Incandescent	6
24V AC/DC Incandescent	7

Illuminated Pushbuttons (Sub-Assembled)

Terminals	+	Safety Lever Lock	+	Lamp Holder	+	Lamp	+	Operator	+	Lens	=	Completed Unit
-----------	---	-------------------	---	-------------	---	------	---	----------	---	------	---	----------------



Operators

Style	Momentary	Maintained
Override Round 	HA1L-MO	HA1L-AO
Override Square 	HA2L-MO	HA2L-AO
Mushroom 	HA1B-MOL	HA1B-AOL

Lenses

Style	Part Number
Override Round 	HA1A-L1-②
Override Square 	HA2A-L1-②
Mushroom 	HA1A-L3-②



In place of ② specify lens color code.

② Lens/LED Color Codes

Color	Code
Amber	A
Green	G
Red	R
Blue	S
Yellow	Y
White	W

Lamps

Style	Voltage	Part Number
LED	5V DC 6V AC/DC 12V AC/DC 24V AC/DC 120 V AC	LFTD-5② LFTD-6② LFTD-1② LFTD-2② LFTD-H2②
Incandescent	6V AC/DC 12V AC/DC 24V AC/DC	LH-06 LH-14 LH-28

Contacts

Style	Contacts	Terminal Style	
		Solder Tab	PCB
 Gold	SPDT DPDT	HA-C10 HA-C20	HA-C10V HA-C20V
 Silver	SPDT DPDT	HA-C50 HA-C60	HA-C50V HA-C60V

Lamp Holder

Style	Part Number
	HA9Z-AH

Safety Lever Lock

Style	Part Number
	HA9Z-LS

Selector Switches (Assembled)

Selector Switches

Style		Position		Contact	Terminal Style	
					Solder Tab	PCB
 Oversize Round	90° 2-Position	Maintained		DPDT	HA1S-2C6	HA1S-2C2V
		Spring return from right		DPDT	HA1S-21C6	HA1S-21C2V
	45° 3-Position	Maintained		DPDT	HA1S-3C6	HA1S-3C2V
		Spring return from right		DPDT	HA1S-31C6	HA1S-31C2V
		Spring return from left		DPDT	HA1S-32C6	HA1S-32C2V
		2-Way spring return		DPDT	HA1S-33C6	HA1S-33C2V



1. All assembled selector switches use DPDT contacts.
2. For SPDT contacts see sub-components on next page.
3. PCB terminal models also available with silver contacts change "1" or "2" to "5" or "6" respectively, (ie LA1S-21C2V becomes LA1S-21C6V).

Contact Operations

(for all selectors)

Contacts	Operator Position and Contact Operation	
2-pos. (DPDT)	Left	
	Right	
3-pos. (DPDT)	Left	
	Center	
	Right	



As viewed from front of switch.

Selector Switches (Sub-Assembled)

Contact	+	Safety Lever Lock	+	Operator	=	Complete Part
---------	---	-------------------	---	----------	---	---------------



Operators

Style	Position	Function	Part Number
 Oversize Round	2	Maintained Spring from right	HA1S-2Y HA1S-21Y
	3	Maintained Spring from right Spring from left Spring from both	HA1S-3Y HA1S-31Y HA1S-32Y HA1S-33Y

Safety Lever Lock

Style	Part Number
	HA9Z-LS

Contacts

Style	Contacts	Terminal Style	
		Solder Tab	PCB
	Gold	SPDT DPDT	HA-C1 HA-C2V
	Silver	SPDT DPDT	HA-C5 HA-C6V

-
1. All assembled switches listed on previous page use DPDT contacts.

2. SPDT Contacts for use on 2 position selector switch only

Key Switches (Assembled)

Key Switches






Style		Position		Contact	Terminal Style	
					Solder Tab	PCB
 Oversize Round	90° 2-Position	Maintained		DPDT	HA1K-2C6③	HA1K-2C2V③
		Spring return from right		DPDT	HA1K-21C6B	HA1K-21C2VB
	45° 3-Position	Maintained		DPDT	HA1K-3C6③	HA1K-3C2V③
		Spring return from right		DPDT	HA1K-31C6③	HA1K-31C2V③
		Spring return from left		DPDT	HA1K-32C6③	HA1K-32C2V③
		2-Way spring return		DPDT	HA1K-33C6D	HA1K-33C2VD



1. In place of ③ specify Key Retention Code from next page.
2. All assembled key switches have DPDT contacts. For SPDT see sub-assembled on next page.
3. PCB terminal models also available with silver contacts change "1" or "2" to "5" or "6" respectively, (ie LA1K-2C2V③ becomes LA1K-2C6V③).

Contact Operations

(for all selectors)

Contacts	Operator Position and Contact Operation	
2-pos. (DPDT)	Left	
	Right	
3-pos. (DPDT)	Left	
	Center	
	Right	



As viewed from front of switch.

③ Key Retention Option Codes

Code	Description
A	Key not retained in any position (removable in all positions)
B	Key retained in right position only
C	Key retained in left position only
D	Key retained in left and right (3 position only)
E	Key retained in center only (3 position only)
G	Key retained right and center (3 position only)
H	Key retained left and center (3 position only)



Key cannot be removed from a spring-return position.

Selector Switches (Sub-Assembled)

Contact	+	Safety Lever Lock	+	Operator	=	Complete Part
---------	---	-------------------	---	----------	---	---------------



Operators

Style	Position	Function	Part Number
Oversize Round	2	Maintained Spring from right	HA1K-2③ HA1K-21B
	3	Maintained Spring from right Spring from left Spring from both	HA1K-3③ HA1K-31③ HA1K-32③ HA1K-33D



1. In place of ③ specify key removable code from table on right.
2. Operator includes two keys.

Contacts

Style	Contacts	Terminal Style	
		Solder Tab	PCB
	Gold SPDT DPDT	HA-C1 HA-C2	HA-C1V HA-C2V
		HA-C5 HA-C6	HA-C5V HA-C6V



1. All assembled switches listed on previous page use DPDT contacts.
2. SPDT Contacts for use on 2 position selector switch only

Safety Lever Lock

Style	Part Number
	HA9Z-LS

③ Key Retention Option Codes

Code	Description
A	Key not retained in any position (removable in all positions)
B	Key retained in right position only
C	Key retained in left position only
D	Key retained in left and right (3 position only)
E	Key retained in center only (3 position only)
G	Key retained right and center (3 position only)
H	Key retained left and center (3 position only)

- Key cannot be removed from a spring-return position.






Illuminated Selector Switches (Assembled)

Illuminated Selector Switches

Style	Position	Contact	Terminal Style	
			Solder Tab	PCB
Round 	90° 2-Position	Maintained 	DPDT	LA1F-2C6③-② LA1F-2C2③V-②
		Spring return from right 	DPDT	LA1F-21C6③-② LA1F-21C2③V-②
	45° 3-Position	Maintained 	DPDT	LA1F-3C6③-② LA1F-3C2③V-②
		Spring return from right 	DPDT	LA1F-31C6③-② LA1F-31C2③V-②
		Spring return from left 	DPDT	LA1F-32C6③-② LA1F-32C2③V-②
		2-Way spring return 	DPDT	LA1F-33C6③-② LA1F-33C2③V-②
Square 	90° 2-Position	Maintained 	DPDT	LA2F-2C6③-② LA2F-2C2③V-②
		Spring return from right 	DPDT	LA2F-21C6③-② LA2F-21C2③V-②
	45° 3-Position	Maintained 	DPDT	LA2F-3C6③-② LA2F-3C2③V-②
		Spring return from right 	DPDT	LA2F-31C6③-② LA2F-31C2③V-②
		Spring return from left 	DPDT	LA2F-32C6③-② LA2F-32C2③V-②
		2-Way spring return 	DPDT	LA2F-33C6③-② LA2F-33C2③V-②
Rectangular 	90° 2-Position	Maintained 	DPDT	LA3F-2C6③-② LA3F-2C2③V-②
		Spring return from right 	DPDT	LA3F-21C6③-② LA3F-21C2③V-②
	45° 3-Position	Maintained 	DPDT	LA3F-3C6③-② LA3F-3C2③V-②
		Spring return from right 	DPDT	LA3F-31C6③-② LA3F-31C2③V-②
		Spring return from left 	DPDT	LA3F-32C6③-② LA3F-32C2③V-②
		2-Way spring return 	DPDT	LA3F-33C6③-② LA3F-33C2③V-②
Oversize Round 	90° 2-Position	Maintained 	DPDT	HA1F-2C6③-② HA1F-2C2③V-②
		Spring return from right 	DPDT	HA1F-21C6③-② HA1F-21C2③V-②
	45° 3-Position	Maintained 	DPDT	HA1F-3C6③-② HA1F-3C2③V-②
		Spring return from right 	DPDT	HA1F-31C6③-② HA1F-31C2③V-②
		Spring return from left 	DPDT	HA1F-32C6③-② HA1F-32C2③V-②
		2-Way spring return 	DPDT	HA1F-33C6③-② HA1F-33C2③V-②

Contact Operations

(for all selectors)

Contacts	Operator Position and Contact Operation	
2-pos. (DPDT)	Left	
	Right	
3-pos. (DPDT)	Left	
	Center	
3-pos. (DPDT)	Right	



As viewed from front of switch.

② Lens/LED Color Codes

Color	Code	Color	Code
Amber	A	Blue	S
Green	G	Yellow	Y
Red	R	White	W

③ Voltage/Lamp Code

Voltage	Code
5V DC LED	1
6V AC/DC LED	2
12V AC/DC LED	3
24V AC/DC LED	4
120V AC LED	8
6V AC/DC Incandescent	5
12V AC/DC Incandescent	6
24V AC/DC Incandescent	7



- In place of ② specify Lens/LED Color Code from table above.
- In place of ③ specify Voltage Code from table above.
- All switches listed have DPDT contacts. For SPDT see sub-assembled on next page.
- PCB terminal models also available with silver contacts change "1" or "2" to "5" or "6" respectively, (ie LA1F-2C24V-② becomes LA1F-2C64V-②).
- Light independent of switch position.

Illuminated Selector Switches (Sub-Assembled)

Contacts	+	Safety Lever Lock	+	Lamp Holder	+	Lamp	+	Operator	+	Lens/Handle	=	Completed Unit
----------	---	-------------------	---	-------------	---	------	---	----------	---	-------------	---	----------------



Operators

Style	Position	Function	Part Number
Round	2	Maintained	LA1F-20
		Spring from right	LA1F-210
	3	Maintained	LA1F-30
		Spring from right Spring from left Spring from both	LA1F-310 LA1F-320 LA1F-330
Square	2	Maintained	LA2F-20
		Spring from right	LA2F-210
	3	Maintained	LA2F-30
		Spring from right Spring from left Spring from both	LA2F-310 LA2F-320 LA2F-330
Rectangular	2	Maintained	LA3F-20
		Spring from right	LA3F-210
	3	Maintained	LA3F-30
		Spring from right Spring from left Spring from both	LA3F-310 LA3F-320 LA3F-330
Oversize Round	2	Maintained	HA1F-20
		Spring from right	HA1F-210
	3	Maintained	HA1F-30
		Spring from right Spring from left Spring from both	HA1F-310 HA1F-320 HA1F-330

Safety Lever Lock

Style	Part Number
	HA9Z-LS

Lamp Holder

Style	Part Number
	HA9Z-AH

Lamps

Style	Voltage	Part Number
LED	5V DC	LFTD-5②
	6V AC/DC	LFTD-6②
	12V AC/DC	LFTD-1②
	24V AC/DC	LFTD-2②
	120V AC	LFTD-H2②
Incandescent	6V AC/DC	LH-06
	12V AC/DC	LH-14
	24V AC/DC	LH-28



In place of ② specify LED color code from table below.

Contacts

Style	Contacts	Terminal Style	
		Solder Tab	PCB
	Gold	SPDT	HA-C10
	DPDT	HA-C20	HA-C10V HA-C20V
	Silver	SPDT	HA-C50
	DPDT	HA-C60	HA-C50V HA-C60V

Lenses/Handles

Style	Part Number
Standard	LA1A-F-②
	
Oversize	HA1A-F-②
	

② Lens/LED Color Codes

Color	Code
Amber	A
Green	G
Red	R
Blue	S
Yellow	Y
White	W



All assembled selectors on previous pages use DPDT contacts. SPDT contacts are for use only on two position selectors.



In place of ② specify lens color code from table.

Pushbutton Selectors (Assembled)

Pushbutton Selectors










Style		Terminal Style	
		Solder Tab	PCB
	2 Position	HA1R-2C6-①	HA1R-2C2V-①
	3 Position	HA1R-3C6-①	HA1R-3C2V-①

① Button Color Codes




Color	Code	Color	Code
Amber	A	Blue	S
Green	G	Yellow	Y
Red	R	White	W

-  1. In place of ① specify Button Color Code.
 2. PCB terminal models also available with silver contacts (change "1" or "2" to "5" or "6" respectively, ie HA1R-2C2V-① becomes HA1R-2C6V-①).
 3. Pushed position, momentary only.

Contact Operation

Style	Operator Position					
	Left		Center		Right	
	Normal	Pushed	Normal	Pushed	Normal	Pushed
2 Position			—	—		
3 Position				Blocked		

Contact Operation

Contacts	Operator Position and Contact Information	Down			Center			Up		
		Left	Right		Left	Right		Left	Right	
2-pos. (DPDT)	Maintained Spring from Top									
2-pos. (DPDT)	Spring Return from Bottom									
3-pos. (DPDT)	All models									

 As viewed from front of switch.

Lever Switches

Style		Operation	Contacts	Terminal Type	
				Solder Tab	PCB
	2-Position	Maintained 	DPDT	LA1T-2C6	LA1T-2C2V
		Spring return from top 	DPDT	LA1T-21C6	LA1T-21C2V
		Spring return from bottom 	DPDT	LA1T-22C6	LA1T-22C2V
	3-Position	Maintained 	DPDT	LA1T-3C6	LA1T-3C2V
		Spring return from top 	DPDT	LA1T-31C6	LA1T-31C2V
		Spring return from bottom 	DPDT	LA1T-32C6	LA1T-32C2V
		Spring return from both 	DPDT	LA1T-33C6	LA1T-33C2V

-  1. PCB terminal models also available with silver contacts (change "1" or "2" to "5" or "6" respectively, ie LA1T-2C2V becomes LA1T-2C6V).
 2. Terminology: U = up, D = down, C = center.

Switch Engraving Order Form – L6 Series

Copy this order form and use it to specify Letter Height, Maximum Number of Lines and Text to be engraved.
To insure engraving accuracy, fax it to your IDEC representative or Distributor.

Your Company: _____
Name: _____
Address: _____
PO: _____

Telephone: _____
Fax: _____
Email: _____
Part Number to be Engraved: _____

Please check one of the boxes below to indicate your choice of engraving options:

Rectangular
Switch

Square
Switch

Round
Switch

	# of Lines	Letter Height	Max. Characters Per Line
☐	1	5/32	6
☐	2	5/32	6
☐		1/8	6
☐	3	1/8	6
☐	4	N/A	

	# of Lines	Letter Height	Max. Characters Per Line
☐	1	5/32	5
☐	2	5/32	5
☐		1/8	6
☐	3	1/8	6
☐	4	N/A	

	# of Lines	Letter Height	Max. Characters Per Line
☐	1	5/32	3
☐		1/8	3
☐	2	Custom*	
☐	3	Custom*	
☐	4	N/A	

*Engraving is possible, but character size will be smaller than standard sizes.



- 1. Above mentioned specifications hold true for standard size pushbuttons (round, square and rectangular).
- 2. Oversize pushbuttons and pilot lights allow you to engrave 1 additional character.
- 3. Engraving is done on the button itself for non-illuminated push buttons and on marking plate for illuminated pushbuttons and pilot lights.
- 4. Please enter text exactly how you want it engraved, take care to emphasize capital or small letters.

Enter text to be engraved:

Line 1: _____
Line 2: _____
Line 3: _____
Line 4: _____

Sample Letter Sizes

1/8 Letters: OPEN
5/32 Letters: OPEN

For IDEC Internal Use Only:



Work Order #: _____

Accessories



Item	Appearance	Specifications		Part Number	Notes
Ring Wrench		Made of metal		MT-001	Used for tightening the plastic locking ring when installing the L6 series unit on a panel. Tightening torque should not exceed 9kgf cm when tightening the locking ring.
Lamp Holder Tool (Made of Rubber)		Made of rubber. Used for removing and replacing LED and incandescent lamps in illuminated units.		OR-44	Rubber tool used for replacing LED and incandescent lamps.
Lens Removal Tool		For illuminated pushbuttons and pilot lights.		MT-101	Used for removing the lens or button from the housing.
LED Lamp		5V DC 6V AC/DC 12V AC/DC 24V AC/DC 120V AC		LFTD-5Ⓢ LFTD-6Ⓢ LFTD-1Ⓢ LFTD-2Ⓢ LFTD-H2Ⓢ	T 1-3/4 miniature flange base. In place of Ⓢ specify LED Color Code (A, G, R, S, W, Y).
Incandescent Lamp		6V AC/DC 12V AC/DC 24V AC/DC		LH-06 LH-14 LH-28	0.5W, T 1-3/4 miniature flange base
Switch Guard		180 degrees opening, spring return	Oversize Round/Sq	HA9Z-K1	Prevents inadvertent switch operation. IP65 oiltight rated.
Terminal Cover		Made of white nylon	All removable contacts	H6-VL2	Covers terminals to prevent possible electric shock.
			Unibody Pilot Lights	H6-PVL	
Mounting Hole Plug		Rubber		AL-B6	Fills unused panel cutouts. Made of nitrile rubber. Push-in installation from front of panel. IP65 (oiltight) rated.
		Aluminum		AL-BM6	Fills unused panel cutouts. Made of aluminum. Screw-on locking ring from inside of panel. IP65 (oiltight) rated.
Replacement Keys		for HA1K (#231) – oversize		KG9Z-SK	Pair of keys.
Replacement Engraving Inserts			Oversize Round Oversize Square Mushroom	HA9Z-P1-W HA9Z-P2-W HA9Z-P13-W	
Replacement Locking Ring		All models		HA9Z-LN	
Replacement Anti-Rotation Ring			L6 oversize	HA9Z-LP	Prevents rotation of switches in panel. (included with all assembled switches)
Replacement Selector Inserts				HA9Z-HC1-Ⓢ	Applicable to round oversize selectors only Ⓢ = (G, R, S, W, Y)
Replacement Safety Lever Lock				HA9Z-LS	

 Flush bezels not applicable for oversize units.

Buzzer (LA3Z)

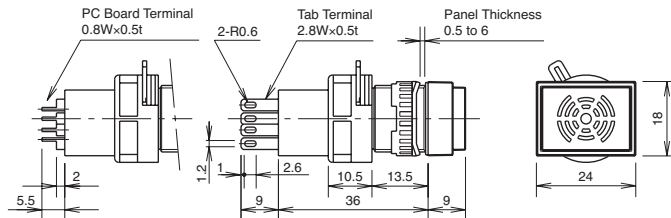

Technical drawing of the front view of the 1000 Series 1/2. The drawing shows a circular device with a central rectangular area divided into two sections, each labeled 'NC'. The overall diameter is $\phi 0.83"$ (21mm). The central rectangular area has a width of $\phi 0.70"$ (17.8mm). The distance from the center to the top and bottom edges of the central area is $0.62"$ (15.8mm). A locking mechanism is shown on the right side, with a curved arrow indicating the 'LOCK' position. The locking mechanism has a width of $0.61"$ (15.5mm).

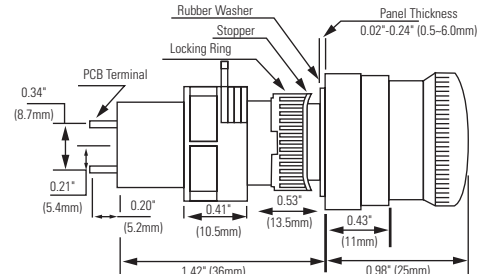


Technical drawing of the 24-pin connector showing three views: front, side, and top.

Front View (Left): Shows the circular connector face with dimensions: 15.8 (height), 12.8 (width), 17.8 (width), 8.9 (height), and 3.1 (height). A "LOCK" arrow points to the top edge.




Side View (Middle): Shows the side profile with dimensions: 8.7 (height), 5.4 (height), 5.7 (height), 16.1 (width), 30 (width), 11 (width), and 25 (width). Labels include "SOLDER / TAB TERMINAL 2.8x0.5t" and "LEVER STOPPER".

Top View (Right): Shows the top of the connector with a diameter dimension of $\varnothing 24.9$.


Illuminated Selector Switches (LA*F)

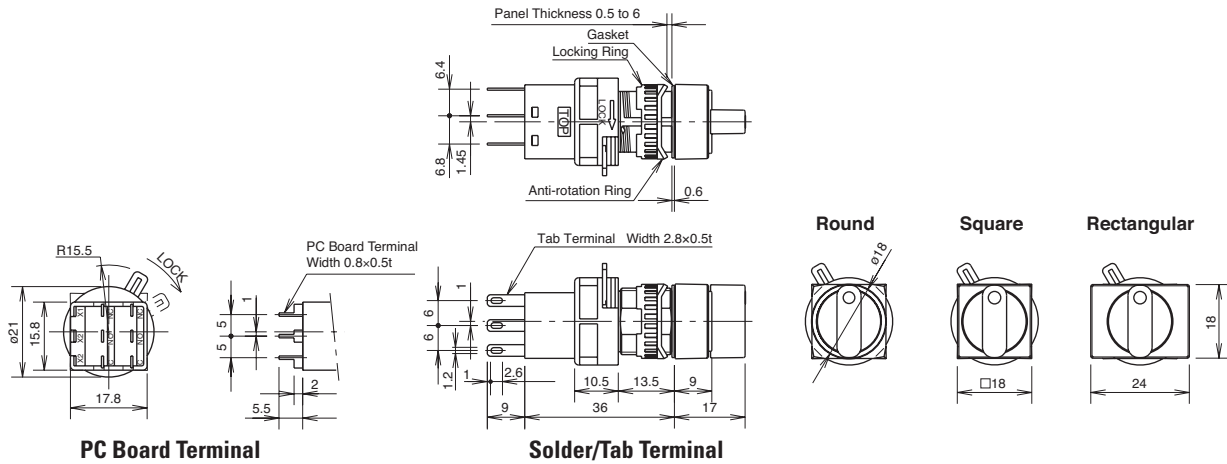

PC Board Drilling Layout (Bottom View)


Illuminated Pushbuttons,
Illuminated Selector SwitchesPilot Lights, Selector Switches,
Key Selector Switches

Pushbutton Lever Switches




HA1B E-Stop

PCB Mounting Pattern



Oversize Flush Pushbutton and Pilot Lights

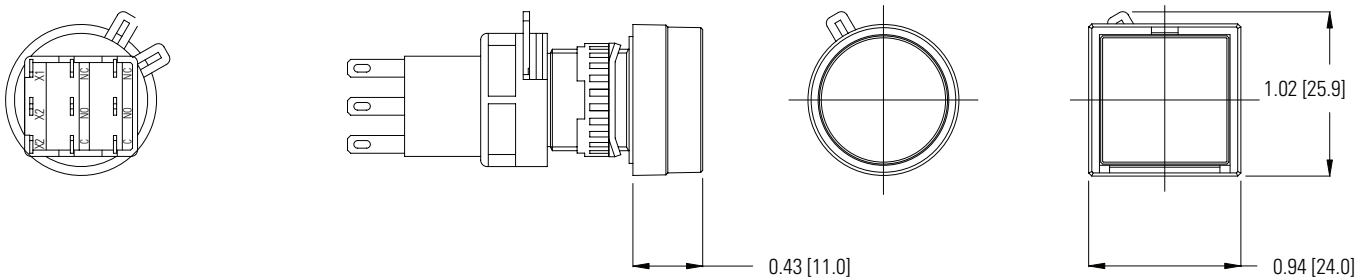

Switches & Pilot Devices

Signaling Lights

Relays & Sockets


Timers

Contactors


Terminal Blocks

Circuit Breakers


Enlarge Extended Non-Illuminated Pushbutton

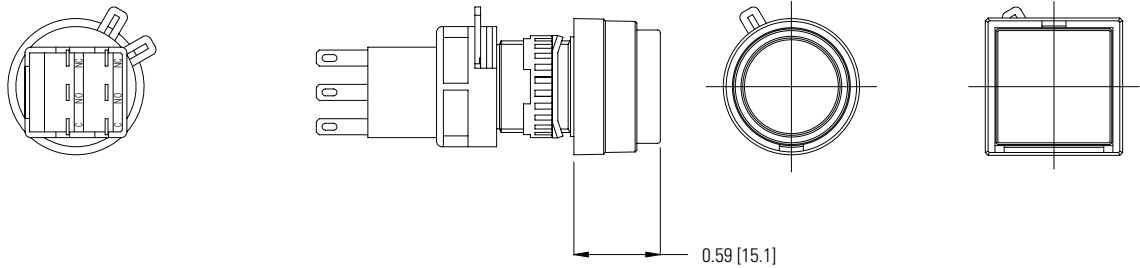


Enlarge Unibody Pilot Lights

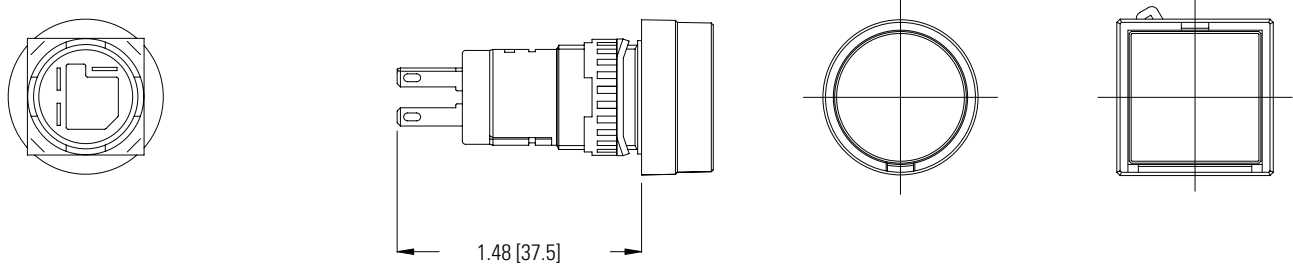




Mushroom Pushbuttons

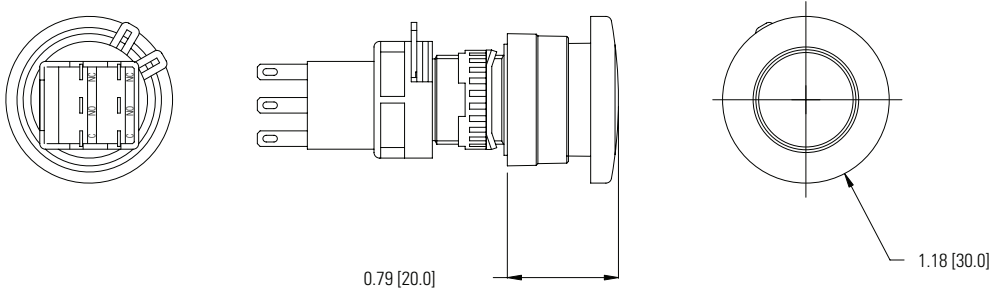




Enlarge Selector Switch

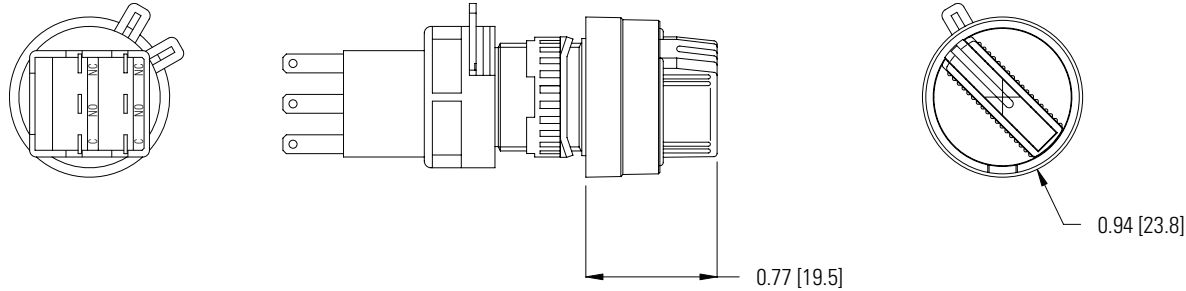


Oversize Key Switch

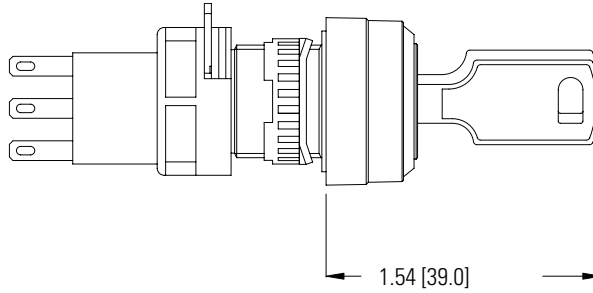



Lever Switch

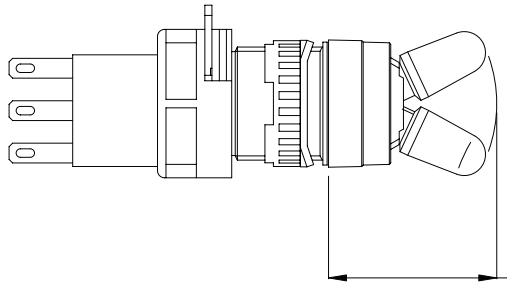

Flush Bezel

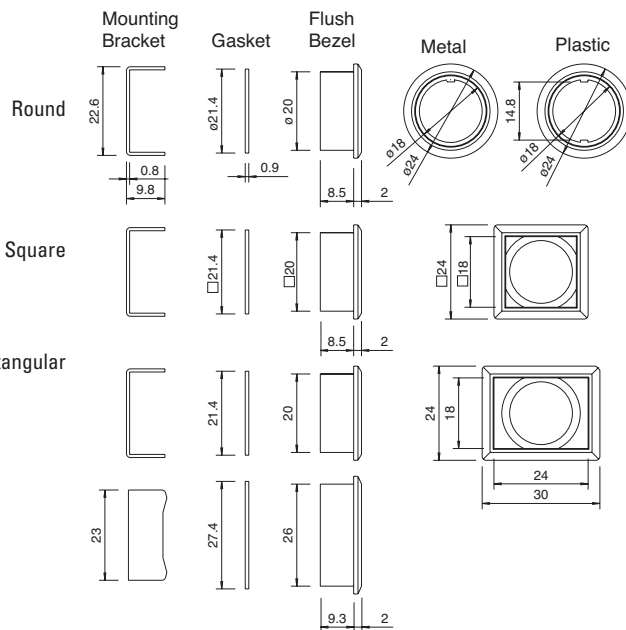


Selector Switches




Flush Bezel Mounting Hole Layout


Round



Square




Rectangular



Terminal Configurations


Non Illuminated Pushbutton

TOP



Pilot Lights


TOP




AL-K6SP

Illuminated Pushbuttons


TOP




Buzzer

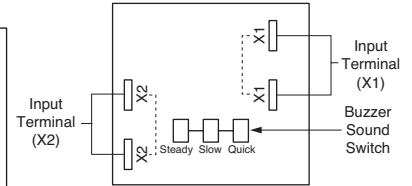


H6-VL2




TOP




AL-B6





AL-BM6



LFTD




LED Lamp Internal Circuit

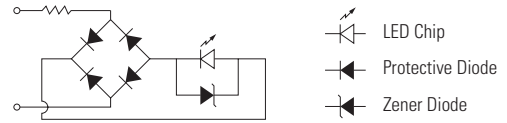

- LED Chip
- Protective Diode
- Zener Diode

AL-B6




General Instructions

Pushbutton Assembly

Lamp Installation


Lamps can be replaced in two ways:

1. If contacts are accessible (or pushbutton not installed in a panel) then it is easiest to first remove the contacts from the operator. This will allow easy access to the lamp/lamp-holder assembly. Grab lamp, depress slightly, and turn counter clockwise. Lamp can then be removed by pushing it back through the lamp holder.
2. If contacts are not accessible, then the lamp can be replaced by first removing the lens from the operator. Just pull lens straight out either with a fingernail or optional lens removal tool (MT-101). Lamp/lamp-holder assembly can then be removed with lamp removal tool (OR-44). Insert lamp removal tool through operator, depress slightly, turn counter clockwise, then pull lamp/lamp-holder assembly out. Lamp can then be removed by pushing it back through the lamp holder.

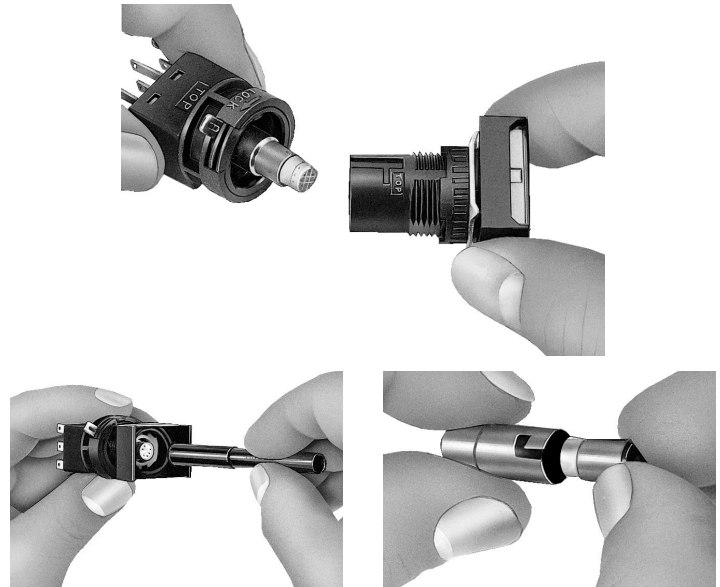

Engraving Lenses

All buttons and lenses can be engraved directly on the outside surface. Illuminated lenses also allow for engraving on a plate that is underneath the colored section of the lens. Remove the colored section of the lens by pulling on the edge while simultaneously unhooking it from the latches on the lens holder. The marking plate will then be accessible. It can then be engraved or a thin marked insert (such as mylar or paper) can be sandwiched between the marking plate and colored section of the lens.

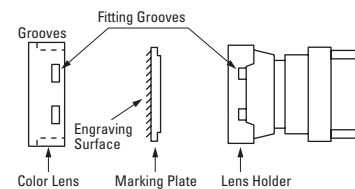


Panel Mounting

Before any unit can be mounted into a panel, the contact block must be removed. Slide metal locking lever and pull contact off. Loosen and remove the locking ring and square anti-rotation ring from the operator and insert operator through panel cutout from the front of the panel. Slide on anti-rotation ring and tighten locking ring, using locking ring wrench (MT-001). Slide contact block onto operator, observing TOP marking on both parts. Slide metal locking lever in direction indicated by LOCK. The yellow plastic safety lever lock can then be snapped onto the locking lever; this will prevent vibration or maintenance actions from releasing the contact from the operator.

PCB Mounting

Being able to separate the contacts from the operator allows for assembly of the front panel components (operator and lens) to be performed in tandem with the PC board assembly and soldering. For applications where multiple rows of push-buttons are mounted closely together, or where other components may obstruct access to the contact locking lever, be sure to include access holes in the PC board (refer to PC board layout dimensions for location). Also be sure to allow for space above and to the side of contact to ensure that no components block the contact block locking lever. PC board pins are designed to rest on the PCB, take this into consideration to ensure that pins do not short closely spaced traces.

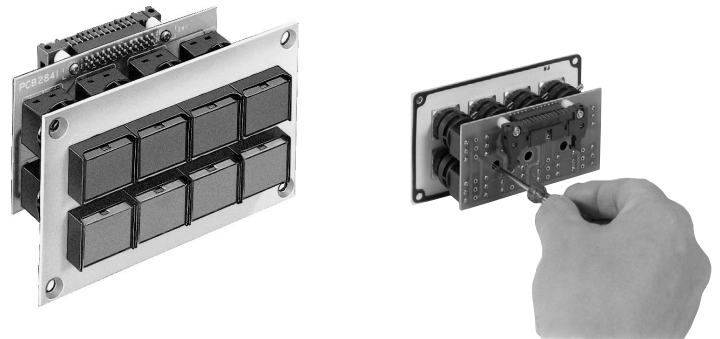

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[IDEC:](#)

[LFTD-1A](#) [LFTD-1G](#) [LFTD-1R](#) [LFTD-1S](#) [LFTD-1W](#) [LFTD-1Y](#) [LFTD-5A](#) [LFTD-5G](#) [LFTD-5R](#) [LFTD-5S](#) [LFTD-6R](#)
[LFTD-6S](#) [LFTD-6W](#) [LFTD-H2A](#) [LFTD-H2G](#) [LFTD-H2R](#) [LFTD-H2S](#) [LFTD-H2W](#) [LFTD-5W](#) [LFTD-5Y](#) [LFTD-6A](#)
[LFTD-6G](#) [LFTD-1PW](#) [LFTD-5PW](#) [LFTD-6PW](#) [LFTD-2A](#) [LFTD-2W](#) [LFTD-2Y](#) [LFTD-6Y](#) [LFTD-H2Y](#) [MT-101](#) [HA-C2](#)
[LA9Z-DS8](#) [LA9Z-SK-0H](#) [HA1K-3C2VB](#) [HA-C1](#) [HA1K-32C2VC](#) [HA1K-3C6G](#) [HA2P-0](#) [HA1K-31C2VG](#) [HA1K-21B](#)
[HA1F-330](#) [HA-C00](#) [HA1B-M0L](#) [LA3L-M0](#) [HA1K-32C6C](#) [HA1K-31C6B](#) [HA-C6](#) [HA1P-00](#) [HA-C6V](#) [HA1S-33Y](#)
[HA1K-3C6B](#) [HA-C1V](#) [HA1K-2B](#) [HA1S-3Y](#) [HA1K-2C2VA](#) [HA1K-31C6G](#) [HA-C50](#) [HA-C2V](#) [HA1P-0](#) [HA1K-33C2VD](#)
[HA1K-32C2VH](#) [HA1K-32C2VD](#) [HA-C60](#) [HA1B-A0L](#) [HA1K-2A](#) [HA-C60V](#) [HA1K-2C6C](#) [HA1K-3C6H](#) [HA1K-2C6B](#)
[HA1S-21Y](#) [HA1K-2C6A](#) [HA1K-3C6D](#) [HA1K-33C6D](#) [HA1S-31Y](#) [HA1K-3C2VC](#) [HA1K-3C6C](#) [HA1K-3C2VE](#) [HA-C5V](#)
[HA1K-31C2VD](#) [HA1K-3C2VH](#) [HA1S-2Y](#) [HA1K-21C2VB](#) [HA1K-3C2VD](#) [HA1K-2C2VB](#) [HA1S-32Y](#) [HA-C20V](#) [HA1F-](#)
[310](#) [HA1K-3C6A](#) [HA1K-2C2VC](#) [HA1K-31C2VB](#) [HA-C10V](#) [HA1K-32C6D](#) [HA-C50V](#) [HA1L-A0](#) [HA1K-31C6D](#) [HA1K-](#)
[21C6B](#) [LA3L-A0](#) [HA-C5](#) [HA1K-3C2VG](#)