



Actual Size:
4.6 x 2.4 x 0.5in
(116,8 x 61,0 x 12,7mm)



Battery Charger Current Source Modules

Features & Benefits

- RoHS compliant (VE versions)
- Programmable output current
- Booster versions available
- Size: 4.6" x 2.4" x 0.5"
(116,8 x 61,0 x 12,7mm)
- UL, CSA, TÜV
- Compatible with all major battery types
- Inputs: 48, 150, 300V_{DC}
- Outputs: 12, 24, 48V_{DC} Nominal
- Analog current monitor
- Analog overvoltage adjust
- CE Marked

Product Highlights

The BatMod combines Vicor's industry standard package with the flexibility of a power converter whose output voltage and output current may be independently set. BatMod's allow the user to independently program a constant output current and a maximum float voltage. The float voltage is the point at which the BatMod transitions from constant current to constant voltage. These features make the BatMod an ideal candidate for battery charging and other applications which require a controlled current source.

The BatMod is also available in booster versions that enable the designer to create systems capable of multiple kilowatts of output power.

With its wide range of input options, the BatMod is compatible with all major battery types. This new current output module finds application in systems where easily programmable current is of primary importance.

Consult factory for availability of input/output voltage ranges not shown.

Packaging Options

SlimMods™, high power density, flangeless packages and FinMods™, featuring integral finned heatsinks.

SlimMod: Option suffix: - S

Example:

VX - XXX - XU - BM - S

FinMod: Option suffix:

- F1, - F2, - F3 and - F4

Examples:

VX - XXX - XU -BM -F1, 0.25"H longitudinal fin

VX - XXX - XU -BM -F2, 0.5"H longitudinal fin

VX - XXX - XU -BM -F3, 0.25"H transverse fin

VX - XXX - XU -BM -F4, 0.5"H transverse fin

Specifications

(Typical T_{BP} = 25°C, nominal line, 75% load, unless otherwise specified)

Parameter	Rating	Notes
Nominal input voltage	48V _{DC} , 150V _{DC} , 300V _{DC}	42 – 60V, 100 – 200V, 200 – 400V
	0 – 14.5A	12V battery system
Output current (Refer to safe operating curves on page 2)	0 – 7.25A	24V battery system
	0 – 3.6A	48V battery system
Current control input	1 – 5V	Zero to max. current
Current monitor output	1 – 5V	Zero to full load
Voltage control input	0 – 2.5V	Zero to FS output
Output voltage setpoint Trimable +10%, -25%	15V, 30V, 60V ±1%	12V, 24V, 48V Output Respectively
	Dynamic characteristics	V-Mode: 300µsec typ. I-Mode: 250µsec typ.
Dielectric withstand	Input to output	3,000V _{RMS}
	Output to baseplate	500V _{RMS}
	Input to baseplate	1,500 V _{RMS}

Part Numbering

(Typical model: input 300V_{DC}, output 12V_{DC} at 200W)

V I* - 2 6 1 - E U - B M

* E = RoHS

Module
2=Driver
B=Booster

Input Voltage
Nominal Range
3 = 48V 42 – 60V
5 = 150V 100 – 200V
6 = 300V 200 – 400V

Output Voltage
Nominal Range
1 = 12V 11.25 – 16.5V
3 = 24V^[1] 22.5 – 33.0V
4 = 48V 45.0 – 66.0V


^[1]Available in 300V input only

Product Grade Temperatures (°C)
Grade Operating Storage
E = -10 to +85 -20 to +100
C = -25 to +85 -40 to +100
I = -40 to +85 -55 to +100
M = -55 to +85 -65 to +100


Storage

Vicor products, when not installed in customer units, should be stored in ESD safe packaging in accordance with ANSI/ESD S20.20, "Protection of Electrical and Electronic Parts, Assemblies and Equipment" and should be maintained in a temperature controlled factory/warehouse environment not exposed to outside elements controlled between the temperature ranges of 15°C and 38°C. Humidity shall not be condensing, no minimum humidity when stored in an ESD compliant package.

Mechanical Diagram

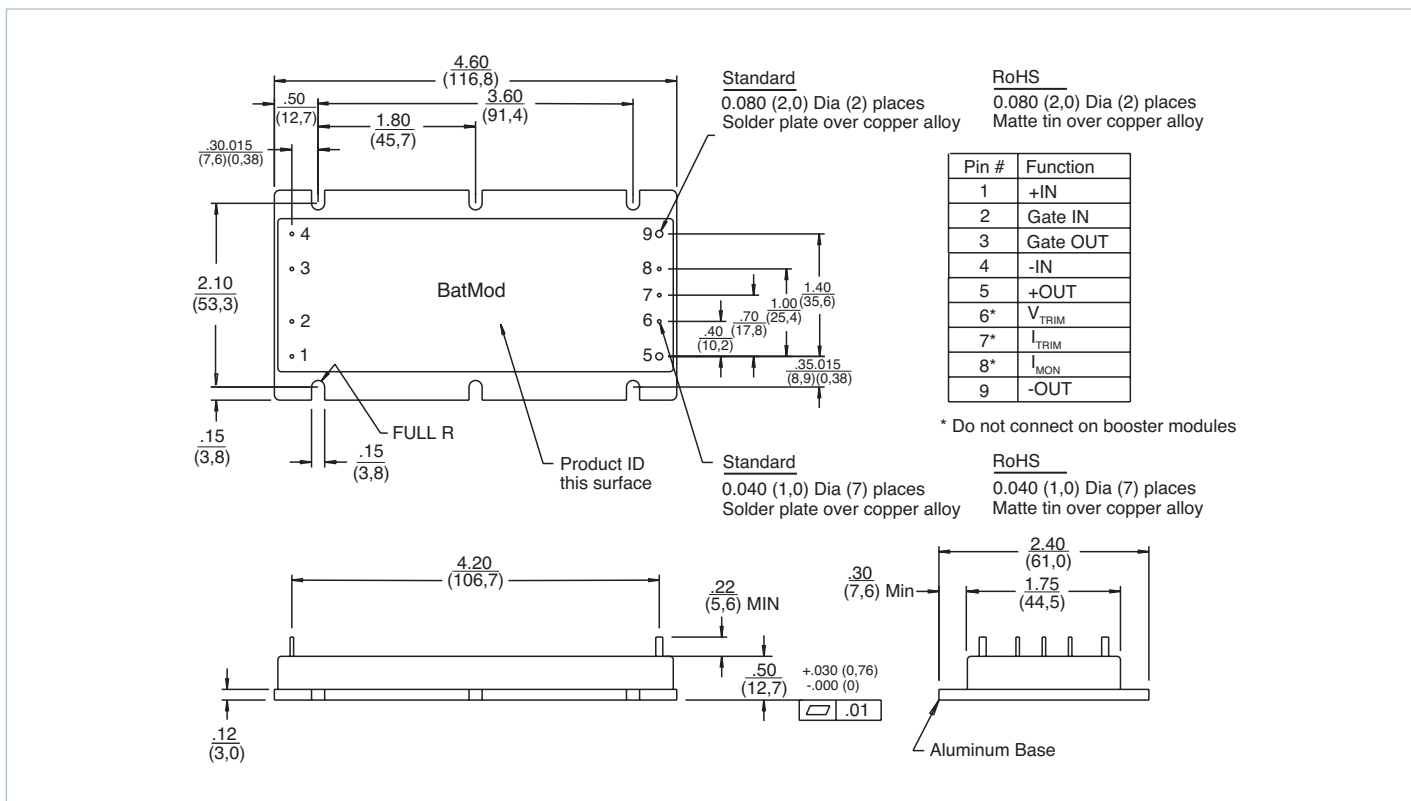

Safe Operating Conditions

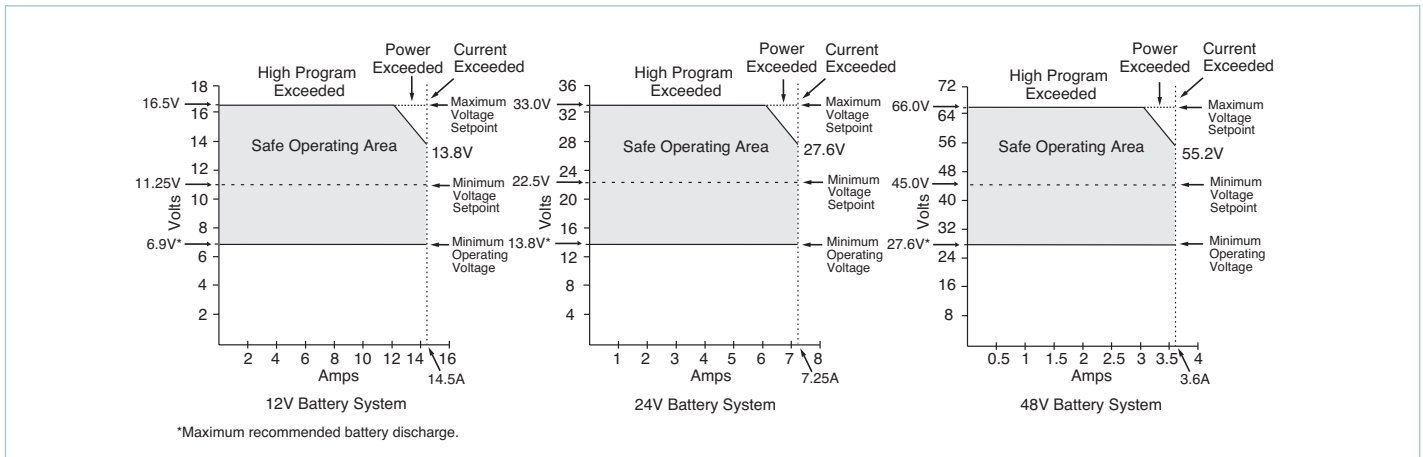

Typical Applications

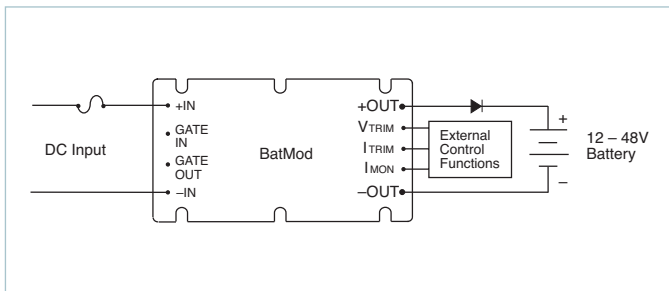


Figure 1 — DC Input Battery Charger

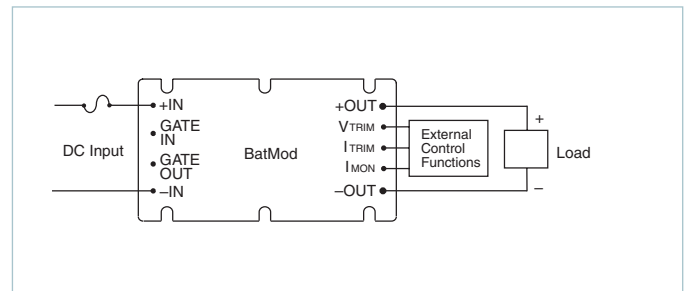


Figure 2 — DC Input Programmable Current Source

Vicor's comprehensive line of power solutions includes high density AC-DC and DC-DC modules and accessory components, fully configurable AC-DC and DC-DC power supplies, and complete custom power systems.

Information furnished by Vicor is believed to be accurate and reliable. However, no responsibility is assumed by Vicor for its use. Vicor makes no representations or warranties with respect to the accuracy or completeness of the contents of this publication. Vicor reserves the right to make changes to any products, specifications, and product descriptions at any time without notice. Information published by Vicor has been checked and is believed to be accurate at the time it was printed; however, Vicor assumes no responsibility for inaccuracies. Testing and other quality controls are used to the extent Vicor deems necessary to support Vicor's product warranty. Except where mandated by government requirements, testing of all parameters of each product is not necessarily performed.

Specifications are subject to change without notice.

Visit <http://www.vicorpower.com/batmod> for the latest product information.

Vicor's Standard Terms and Conditions and Product Warranty

All sales are subject to Vicor's Standard Terms and Conditions of Sale, and Product Warranty which are available on Vicor's webpage (<http://www.vicorpower.com/termsconditionswarranty>) or upon request.

Life Support Policy

VICOR'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS PRIOR WRITTEN APPROVAL OF THE CHIEF EXECUTIVE OFFICER AND GENERAL COUNSEL OF VICOR CORPORATION. As used herein, life support devices or systems are devices which (a) are intended for surgical implant into the body, or (b) support or sustain life and whose failure to perform when properly used in accordance with instructions for use provided in the labeling can be reasonably expected to result in a significant injury to the user. A critical component is any component in a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system or to affect its safety or effectiveness. Per Vicor Terms and Conditions of Sale, the user of Vicor products and components in life support applications assumes all risks of such use and indemnifies Vicor against all liability and damages.

Intellectual Property Notice

Vicor and its subsidiaries own Intellectual Property (including issued U.S. and Foreign Patents and pending patent applications) relating to the products described in this data sheet. No license, whether express, implied, or arising by estoppel or otherwise, to any intellectual property rights is granted by this document. Interested parties should contact Vicor's Intellectual Property Department.

Vicor Corporation

25 Frontage Road
Andover, MA, USA 01810
Tel: 800-735-6200
Fax: 978-475-6715

email

Customer Service: custserv@vicorpower.com
Technical Support: apps@vicorpower.com

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Vicor:

[VI-MU4-1Q](#) [30507](#)