

# HA1630D04/05/06 Series

## Ultra-Small Low Voltage Operation CMOS Dual Operational Amplifier

R03DS0111EJ0100

Rev.1.00

Nov. 30, 2017

### Description

The HA1630D04/05/06 are high slew rate dual CMOS Operational Amplifiers realizing low voltage operation, low input offset voltage and low supply current. In addition to a low operating voltage from 1.8V, these device output can achieve full swing output voltage capability extending to either supply. Available in an ultra-small TSSOP-8 and MMPAK-8 package that occupy more small area against the SOP-8.


### Features

- Low power and single supply operation  $V_{DD} = 1.8$  to  $5.5$  V
- Low input offset voltage  $V_{IO} = 4.0$  mV Max
- Low supply current (per channel)  $I_{DD} = 200$   $\mu$ A Typ (HA1630D04)  
 $I_{DD} = 400$   $\mu$ A Typ (HA1630D05)  
 $I_{DD} = 800$   $\mu$ A Typ (HA1630D06)
- High slew rate  $SR = 2$  V/ $\mu$ s Typ (HA1630D04)  
 $SR = 4$  V/ $\mu$ s Typ (HA1630D05)  
 $SR = 8$  V/ $\mu$ s Typ (HA1630D06)
- Maximum output voltage  $V_{OH} = 2.9$  V Min (at  $V_{DD} = 3.0$  V)
- Low input bias current  $I_{IB} = 1$  pA Typ


### Ordering Information

| Type No.    | Package Name | Package Code |
|-------------|--------------|--------------|
| HA1630D04T  | TTP-8DA      | PTSP0008JC-B |
| HA1630D05T  |              |              |
| HA1630D06T  |              |              |
| HA1630D04MM | MMPAK-8      | PLSP0008JC-A |
| HA1630D05MM |              |              |
| HA1630D06MM |              |              |

## Pin Arrangement

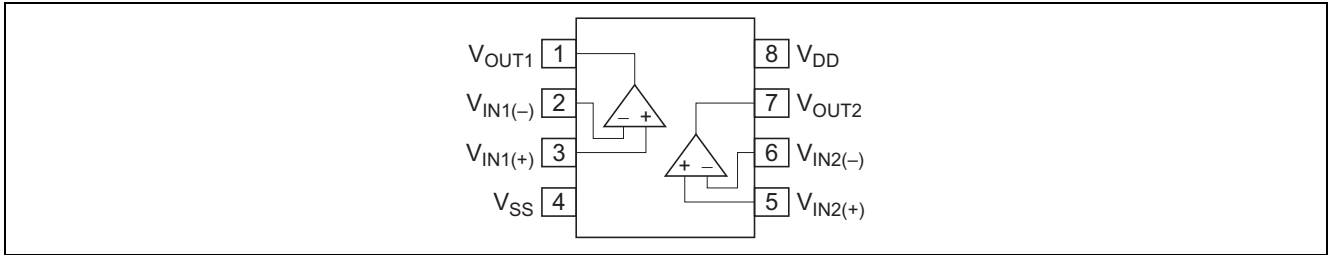

## Equivalent Circuit (per one channel)

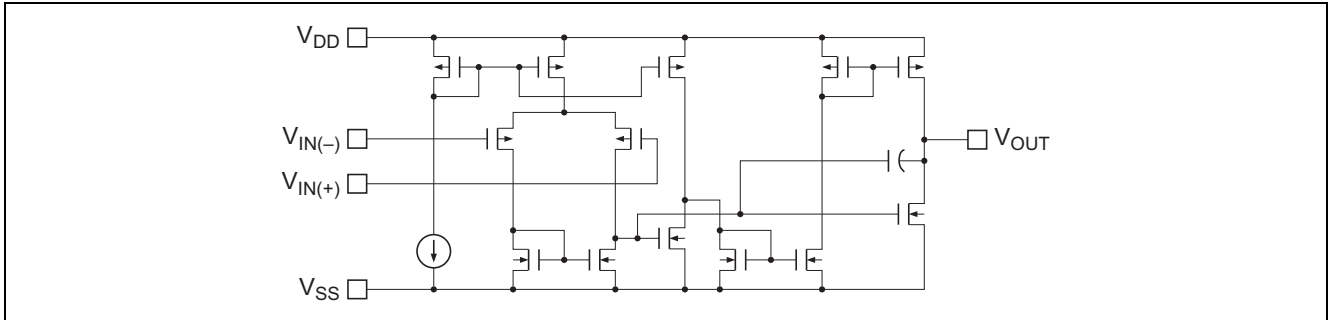

## Absolute Maximum Ratings

(Ta = 25°C)

| Items                      | Symbol                | Ratings                              | Unit | Note               |
|----------------------------|-----------------------|--------------------------------------|------|--------------------|
| Supply voltage             | V <sub>DD</sub>       | 7                                    | V    |                    |
| Differential input voltage | V <sub>IN(diff)</sub> | −V <sub>DD</sub> to +V <sub>DD</sub> | V    |                    |
| Input voltage              | V <sub>IN</sub>       | −0.3 to +V <sub>DD</sub>             | V    | *1                 |
| Power dissipation          | P <sub>T</sub>        | 240/145                              | mW   | TTP-8DA/MMPAK-8 *2 |
| Operating temp. Range      | Topr                  | −40 to +85                           | °C   |                    |
| Storage temp. Range        | Tstg                  | −55 to +125                          | °C   |                    |

Notes: 1. Do not apply Input Voltage exceeding V<sub>DD</sub> or 7 V.2. The value of PTSP0008JC-B (TTP-8DAV) / PLSP0008JC-A (MMPAK-8). It computes from heat resistance  $\theta_{ja} = 520^{\circ}\text{C/W}$ , and  $690^{\circ}\text{C/W}$  each other.

## Electrical Characteristics

(V<sub>DD</sub> = 3.0 V, Ta = 25°C)

| Items                           | Symbol                | Min          | Typ    | Max  | Unit             | Test Condition                        |
|---------------------------------|-----------------------|--------------|--------|------|------------------|---------------------------------------|
| Input offset voltage            | V <sub>IO</sub>       | —            | —      | 4.0  | mV               | V <sub>IN</sub> = 1.5 V               |
| Input offset current            | I <sub>IO</sub>       | —            | (1.0)  | —    | pA               | V <sub>IN</sub> = 1.5 V               |
| Input bias current              | I <sub>IB</sub>       | —            | (1.0)  | —    | pA               | V <sub>IN</sub> = 1.5 V               |
| Output high voltage             | V <sub>OH</sub>       | 2.9          | —      | —    | V                | R <sub>L</sub> = 100 k $\Omega$       |
| Output source current           | I <sub>O SOURCE</sub> | 100          | 200    | —    | $\mu\text{A}$    | V <sub>OH</sub> = 2.5 V (HA1630D04)   |
|                                 |                       | 200          | 400    | —    |                  | V <sub>OH</sub> = 2.5 V (HA1630D05)   |
|                                 |                       | 400          | 800    | —    |                  | V <sub>OH</sub> = 2.5 V (HA1630D06)   |
| Output low voltage              | V <sub>OL</sub>       | —            | —      | 0.1  | V                | R <sub>L</sub> = 100 k $\Omega$       |
| Output sink current             | I <sub>O SINK</sub>   | —            | (5.0)  | —    | mA               | V <sub>OL</sub> = 0.5 V (HA1630D04)   |
|                                 |                       | —            | (6.0)  | —    |                  | V <sub>OL</sub> = 0.5 V (HA1630D05)   |
|                                 |                       | —            | (6.5)  | —    |                  | V <sub>OL</sub> = 0.5 V (HA1630D06)   |
| Common mode input voltage range | V <sub>CM</sub>       | −0.05 to 2.1 | —      | —    | V                | (HA1630D04, HA1630D05)                |
|                                 |                       | 0 to 1.9     | —      | —    |                  | (HA1630D06)                           |
| Slew rate                       | SR                    | —            | (2.0)  | —    | V/ $\mu\text{s}$ | C <sub>L</sub> = 20 pF (HA1630D04)    |
|                                 |                       | —            | (4.0)  | —    |                  | C <sub>L</sub> = 20 pF (HA1630D05)    |
|                                 |                       | —            | (8.0)  | —    |                  | C <sub>L</sub> = 20 pF (HA1630D06)    |
| Voltage gain                    | A <sub>V</sub>        | 60           | 90     | —    | dB               |                                       |
| Gain bandwidth product          | BW                    | —            | (2100) | —    | kHz              | C <sub>L</sub> = 20 pF (HA1630D04)    |
|                                 |                       | —            | (3300) | —    |                  | C <sub>L</sub> = 20 pF (HA1630D05)    |
|                                 |                       | —            | (3600) | —    |                  | C <sub>L</sub> = 20 pF (HA1630D06)    |
| Power supply rejection ratio    | PSRR                  | 50           | 70     | —    | dB               |                                       |
| Common mode rejection ratio     | CMRR                  | 50           | 70     | —    | dB               |                                       |
| Supply current                  | I <sub>DD</sub>       | —            | 400    | 800  | $\mu\text{A}$    | R <sub>L</sub> = $\infty$ (HA1630D04) |
|                                 |                       | —            | 800    | 1600 |                  | R <sub>L</sub> = $\infty$ (HA1630D05) |
|                                 |                       | —            | 1600   | 3400 |                  | R <sub>L</sub> = $\infty$ (HA1630D06) |






Notes: 1. In the case of continuous current flow, use a sink current of under 4 mA.

2. ( ) : Design specification

Table of Graphs

| Electrical Characteristics        |                 |                                 | HA1630D04<br>Figure | HA1630D05<br>Figure | HA1630D06<br>Figure | Test<br>Circuit |
|-----------------------------------|-----------------|---------------------------------|---------------------|---------------------|---------------------|-----------------|
| Supply current                    | $I_{DD}$        | vs Supply voltage               | 1-1                 | 2-1                 | 3-1                 | 2               |
|                                   |                 | vs Ambient temperature          | 1-2                 | 2-2                 | 3-2                 |                 |
| Output high voltage               | $V_{OH}$        | vs Output source current        | 1-3                 | 2-3                 | 3-3                 | 4               |
|                                   |                 | vs Supply voltage               | 1-4                 | 2-4                 | 3-4                 |                 |
| Output source current             | $I_{O\ SOURCE}$ | vs Ambient temperature          | 1-5                 | 2-5                 | 3-5                 | 6               |
| Output low voltage                | $V_{OL}$        | vs Output sink current          | 1-6                 | 2-6                 | 3-6                 | 5               |
| Output sink current               | $I_{O\ SINK}$   | vs Ambient temperature          | 1-7                 | 2-7                 | 3-7                 | 6               |
| Input offset voltage              | $V_{IO}$        | Distribution                    | 1-8                 | 2-8                 | 3-8                 | 1               |
|                                   |                 | vs Supply voltage               | 1-9                 | 2-9                 | 3-9                 |                 |
|                                   |                 | vs Ambient temperature          | 1-10                | 2-10                | 3-10                |                 |
| Common mode input voltage range   | $V_{CM}$        | vs Ambient temperature          | 1-11                | 2-11                | 3-11                | 7               |
| Power supply rejection ratio      | PSRR            | vs Frequency                    | 1-12                | 2-12                | 3-12                | 1               |
| Common mode rejection ratio       | CMRR            | vs Frequency                    | 1-13                | 2-13                | 3-13                | 7               |
| Voltage gain & phase angle        | $A_v$           | vs Frequency                    | 1-14                | 2-14                | 3-14                | 10              |
| Input bias current                | $I_{IB}$        | vs Ambient temperature          | 1-15                | 2-15                | 3-15                | 3               |
|                                   |                 | vs Input voltage                | 1-16                | 2-16                | 3-16                |                 |
| Slew Rate (rising)                | SRr             | vs Ambient temperature          | 1-17                | 2-17                | 3-17                | 9               |
| Slew Rate (falling)               | SRf             | vs Ambient temperature          | 1-18                | 2-18                | 3-18                |                 |
| Slew rate                         |                 | Large signal transient response | 1-19                | 2-19                | 3-19                |                 |
|                                   |                 | Small signal transient response | 1-20                | 2-20                | 3-20                |                 |
| Total harmonic distortion + noise | (0 dB)          | vs. Output voltage p-p          | 1-21                | 2-21                | 3-21                | 8               |
|                                   | (40 dB)         | vs. Output voltage p-p          | 1-22                | 2-22                | 3-22                |                 |
| Maximum p-p output voltage        |                 | vs Frequency                    | 1-23                | 2-23                | 3-23                |                 |
| Voltage noise density             |                 | vs Frequency                    | 1-24                | 2-24                | 3-24                |                 |
| Channel separation                |                 | vs Frequency                    | 1-25                | 2-25                | 3-25                |                 |

## Main Characteristics (HA1630D04)

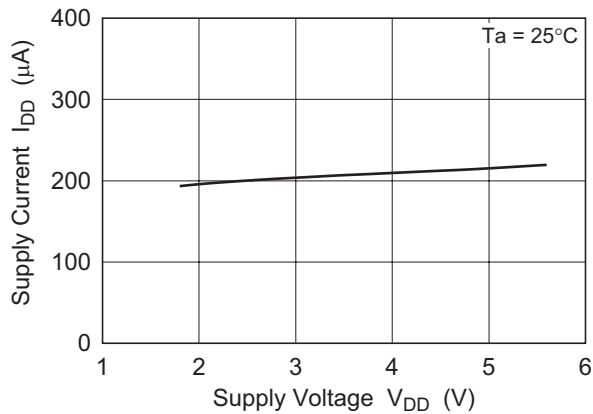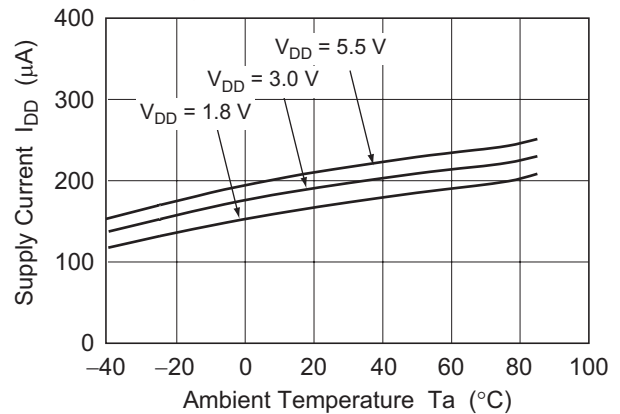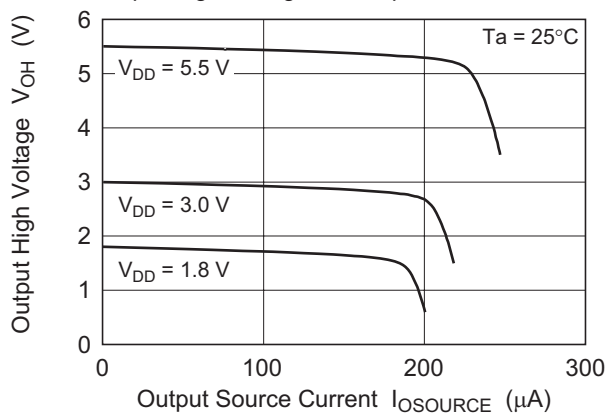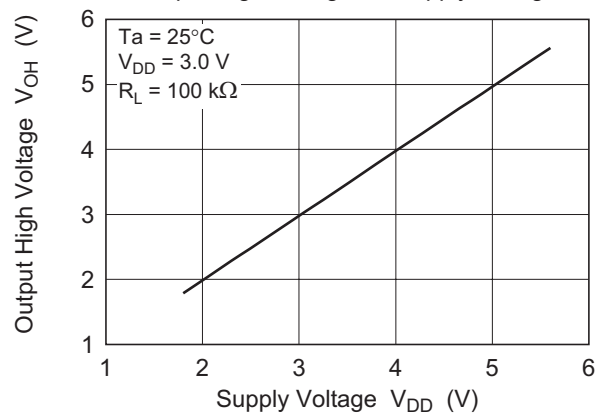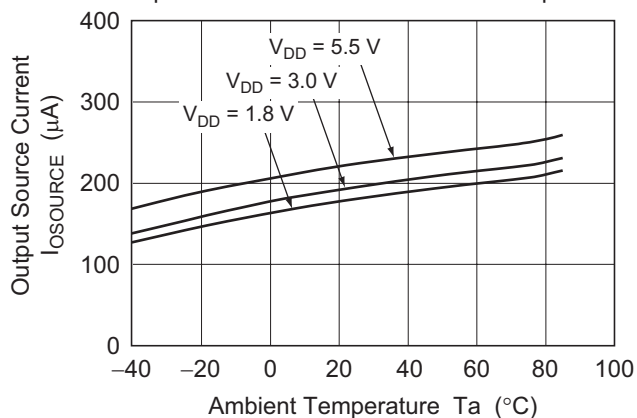Figure 1-1. HA1630D04  
Supply Current vs. Supply VoltageFigure 1-2. HA1630D04  
Supply Current vs. Ambient TemperatureFigure 1-3. HA1630D04  
Output High Voltage vs. Output Source CurrentFigure 1-4. HA1630D04  
Output High Voltage vs. Supply VoltageFigure 1-5. HA1630D04  
Output Source Current vs. Ambient Temperature

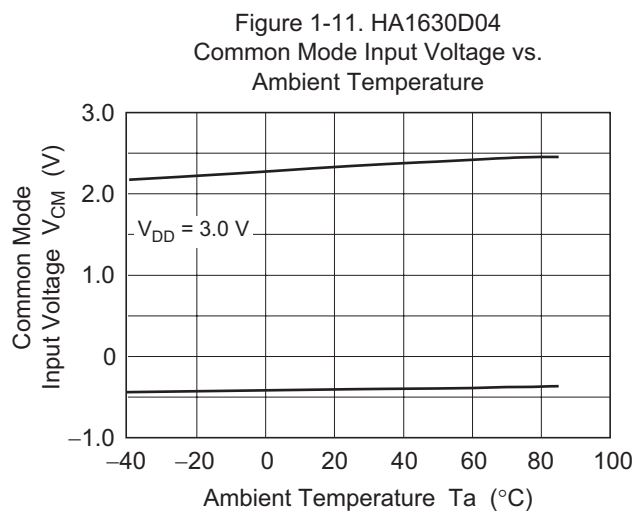
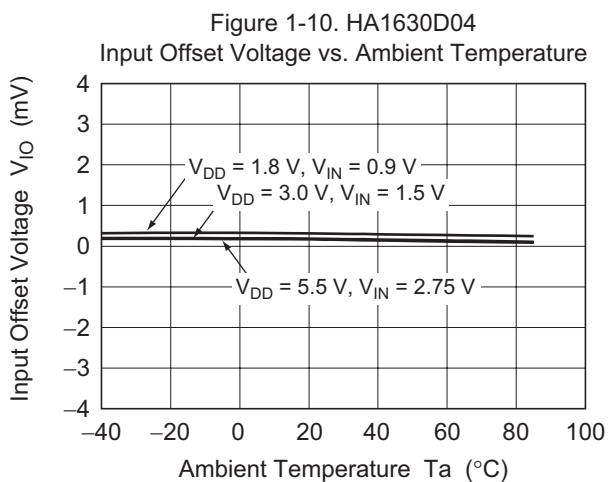
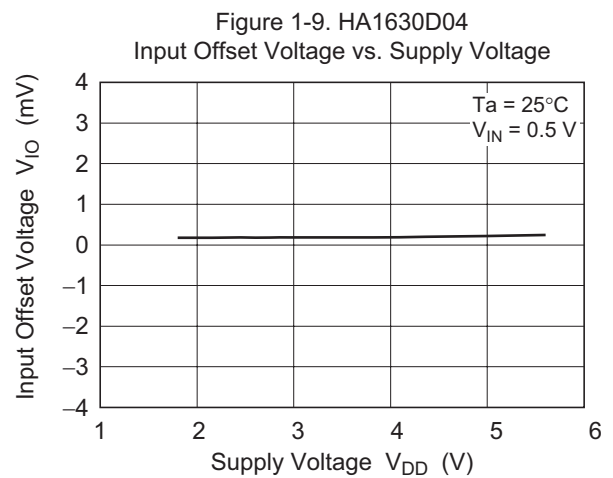
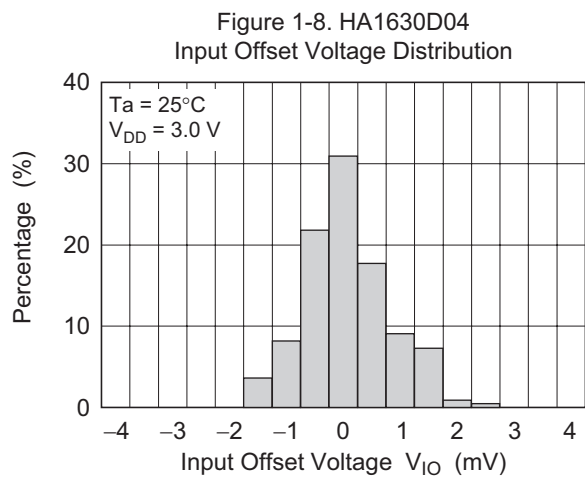
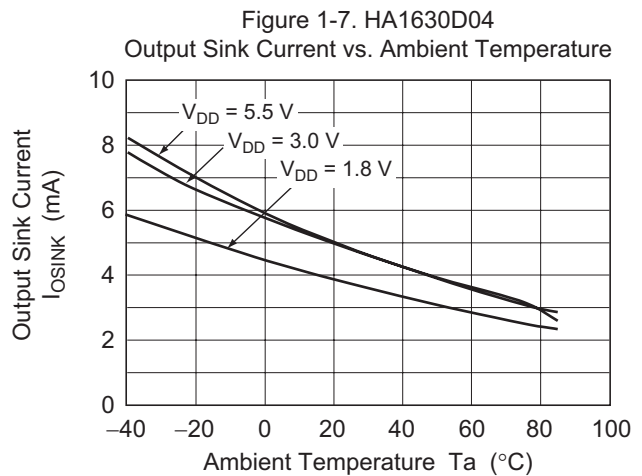
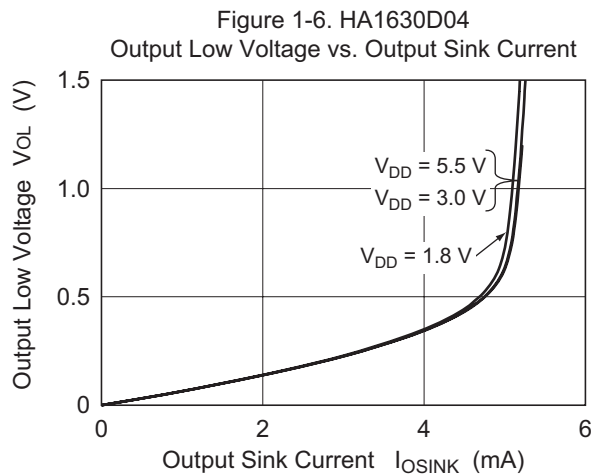


Figure 1-12. HA1630D04  
Power Supply Rejection Ratio vs. Frequency

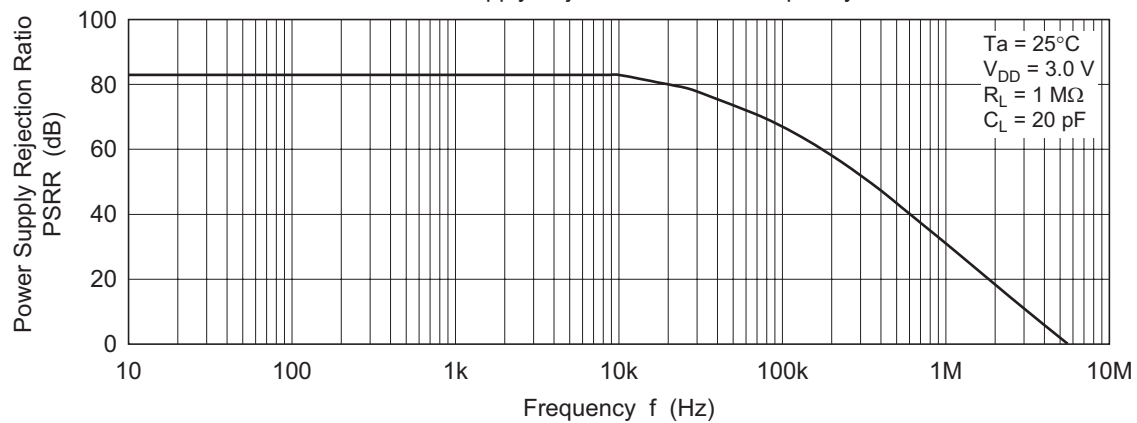


Figure 1-13. HA1630D04  
Common Mode Rejection Ratio vs. Frequency

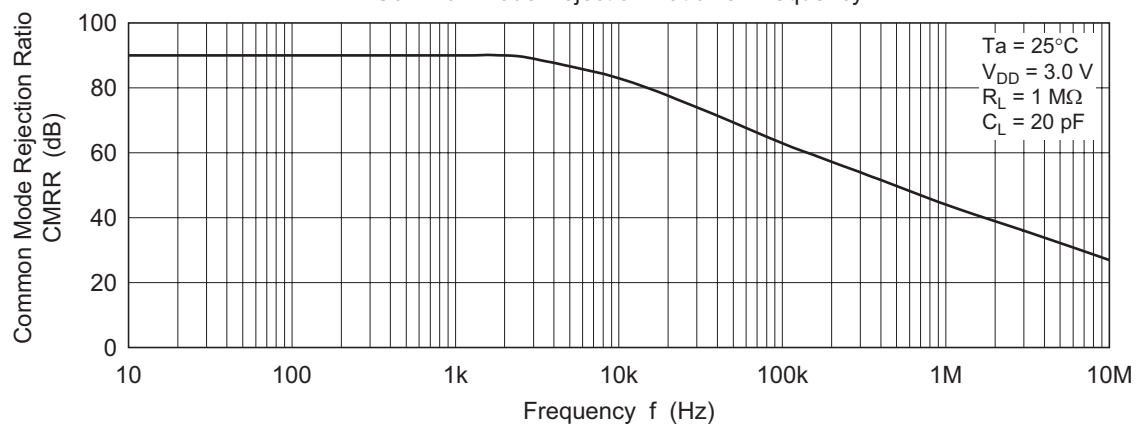
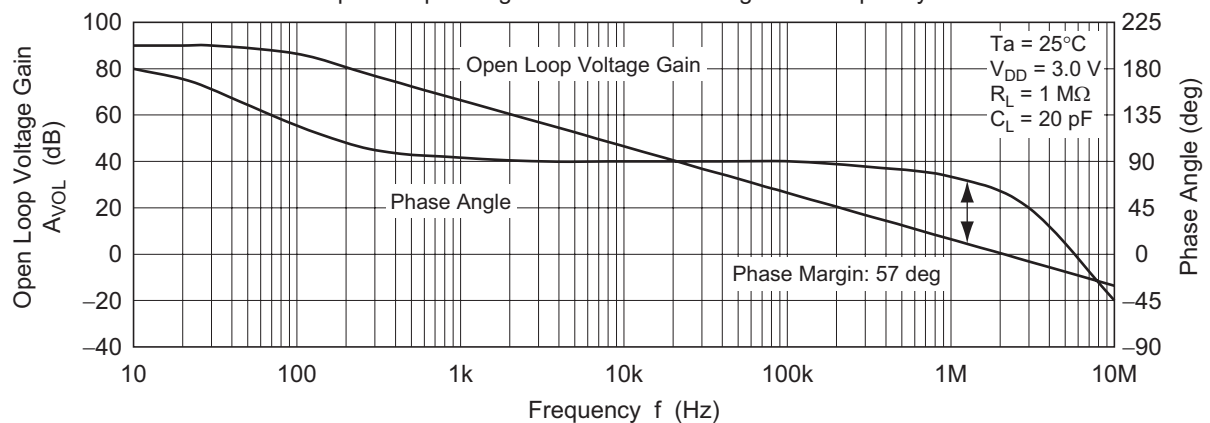


Figure 1-14. HA1630D04  
Open Loop Voltage Gain and Phase Angle vs. Frequency



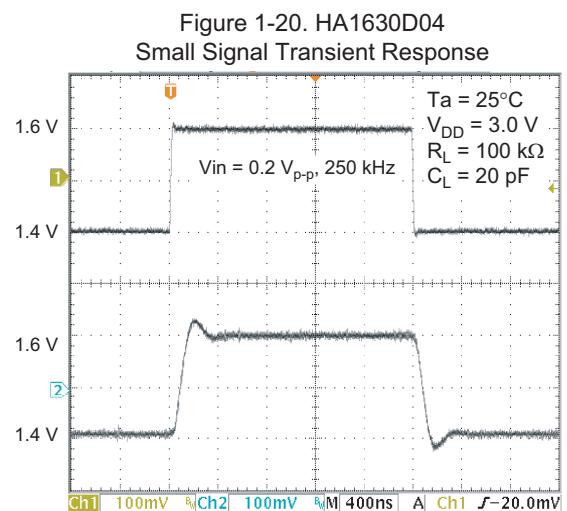
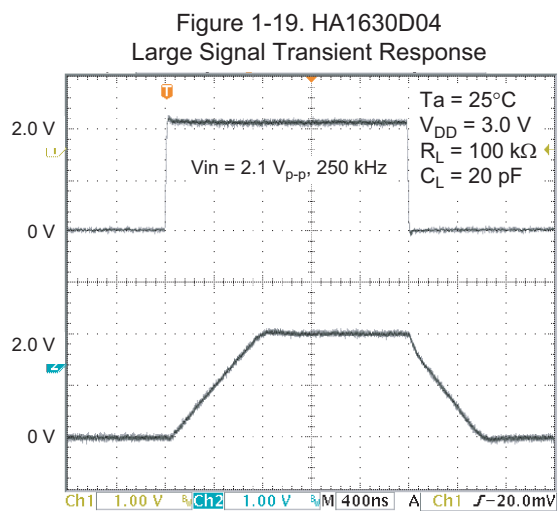
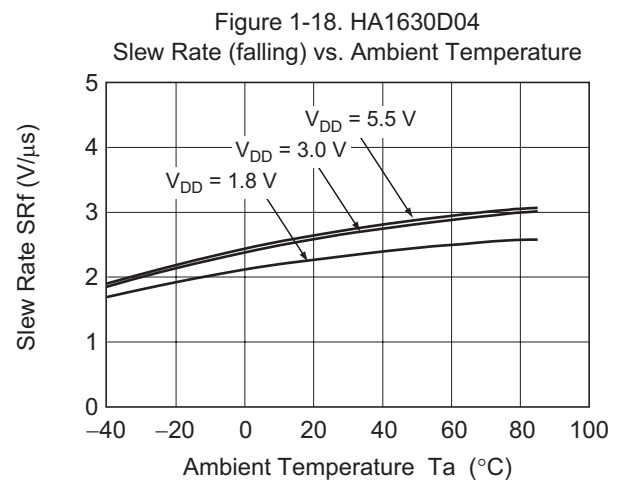
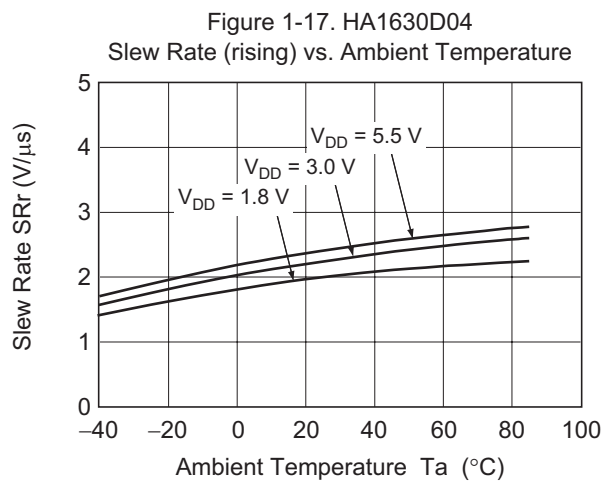
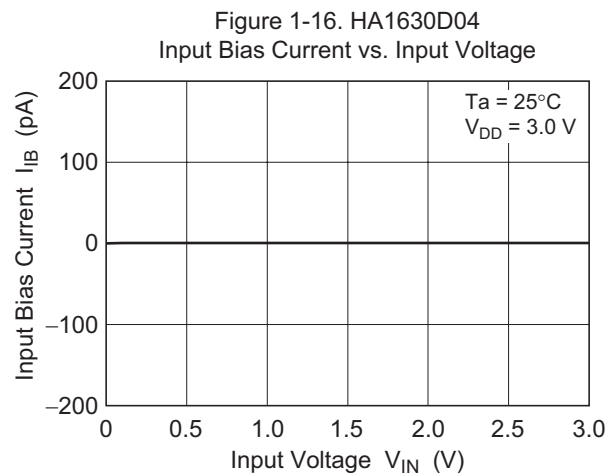
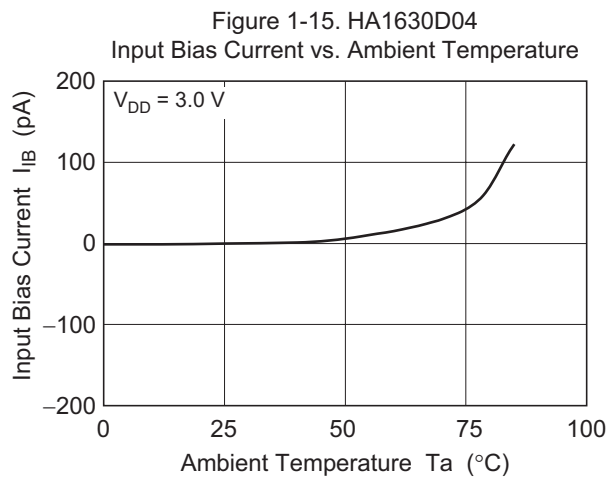




Figure 1-21. HA1630D04  
Total Harmonic Distortion + Noise vs.  
Output Voltage p-p

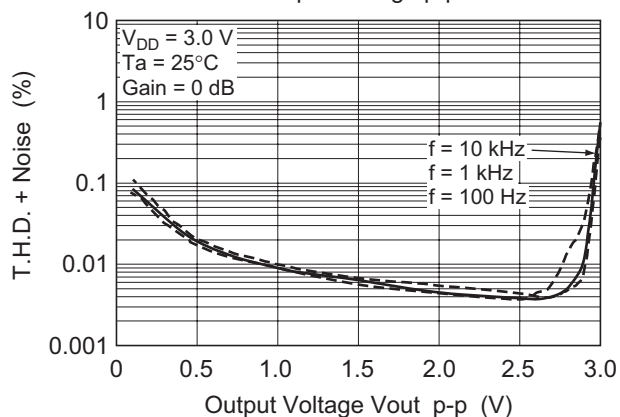


Figure 1-22. HA1630D04  
Total Harmonic Distortion + Noise vs.  
Output Voltage p-p

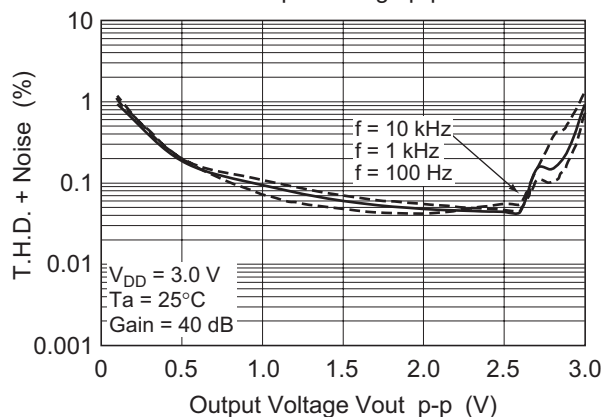


Figure 1-23. HA1630D04  
Voltage Output p-p vs. Frequency

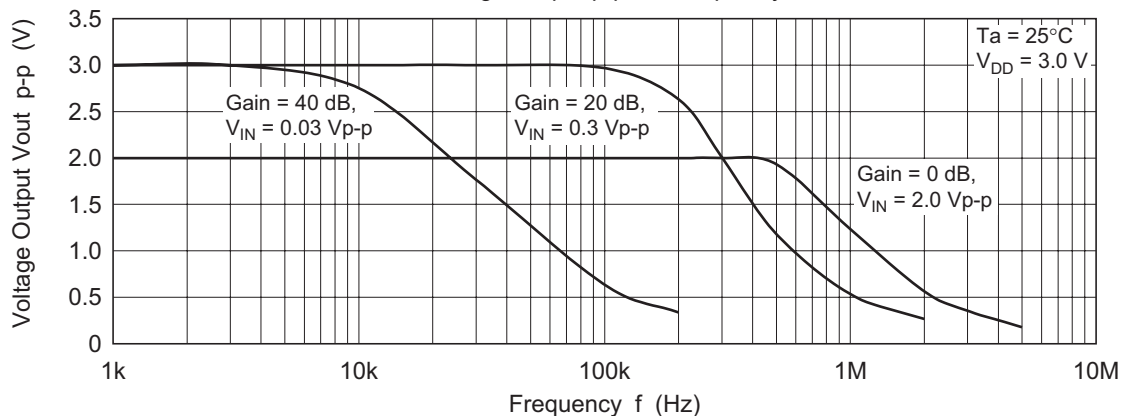


Figure 1-24. HA1630D04  
Voltage Noise Density vs. Frequency







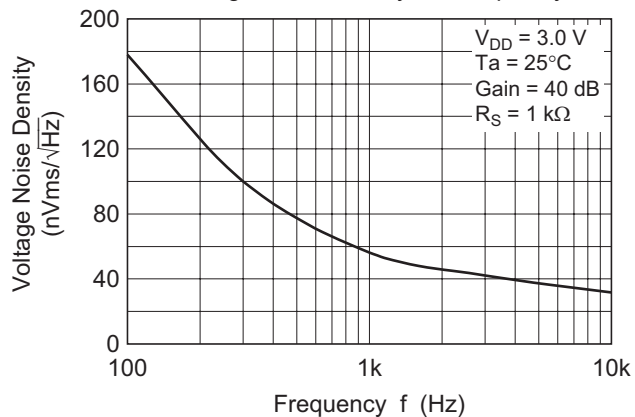


Figure 1-25. HA1630D04  
Channel Separation vs. Frequency

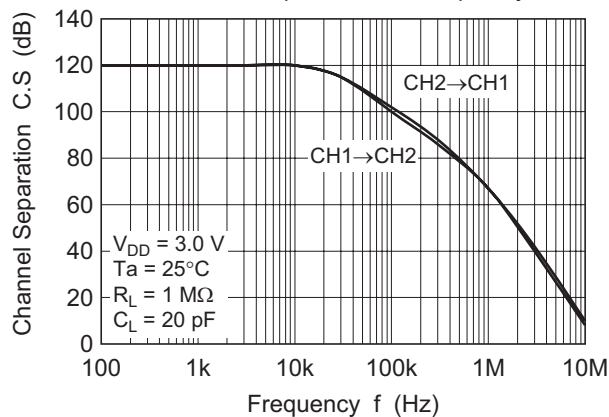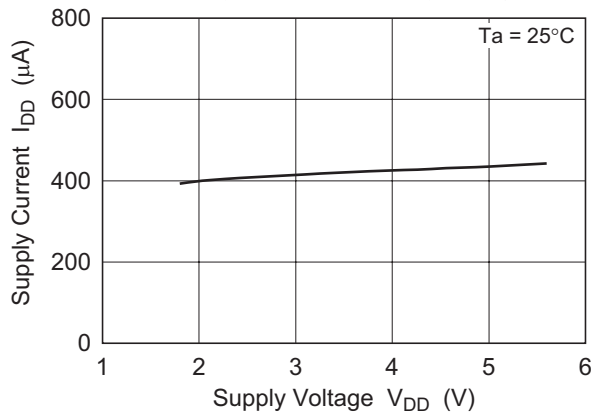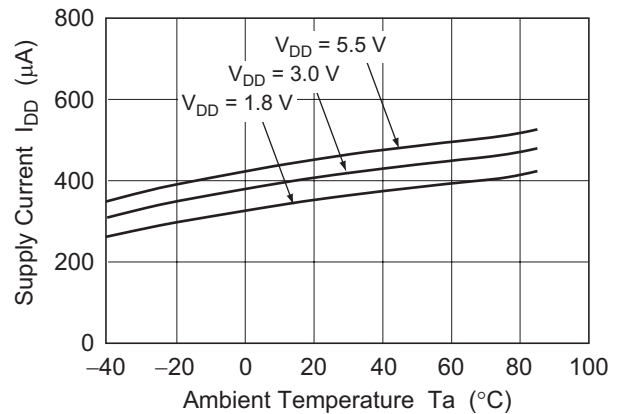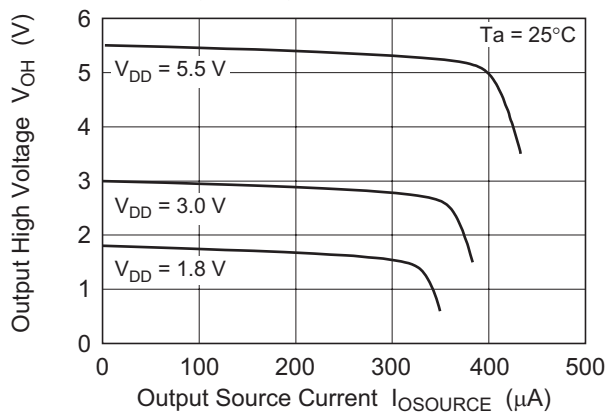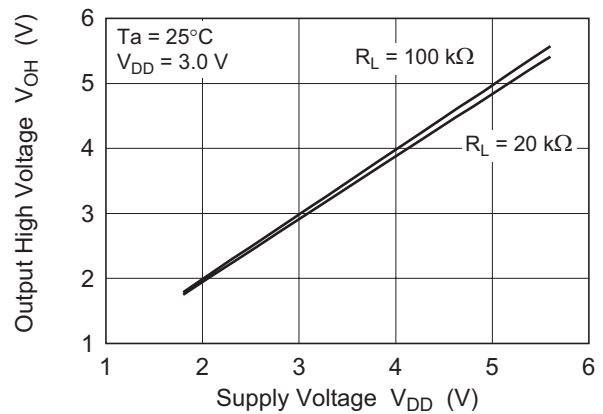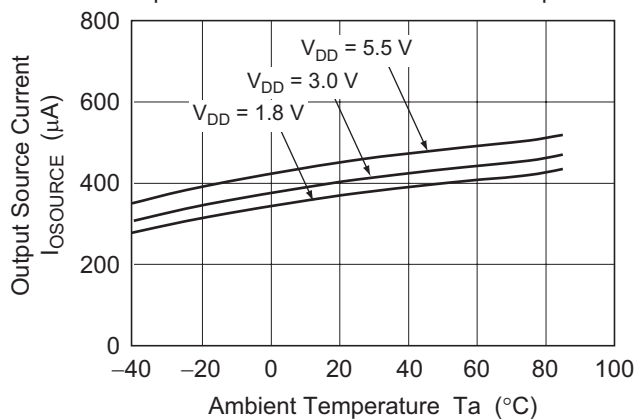

## Main Characteristics (HA1630D05)

Figure 2-1. HA1630D05  
Supply Current vs. Supply VoltageFigure 2-2. HA1630D05  
Supply Current vs. Ambient TemperatureFigure 2-3. HA1630D05  
Output High Voltage vs. Output Source CurrentFigure 2-4. HA1630D05  
Output High Voltage vs. Supply VoltageFigure 2-5. HA1630D05  
Output Source Current vs. Ambient Temperature

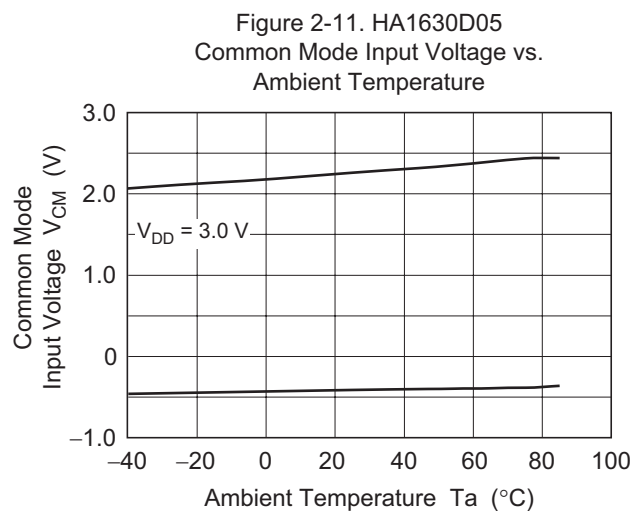
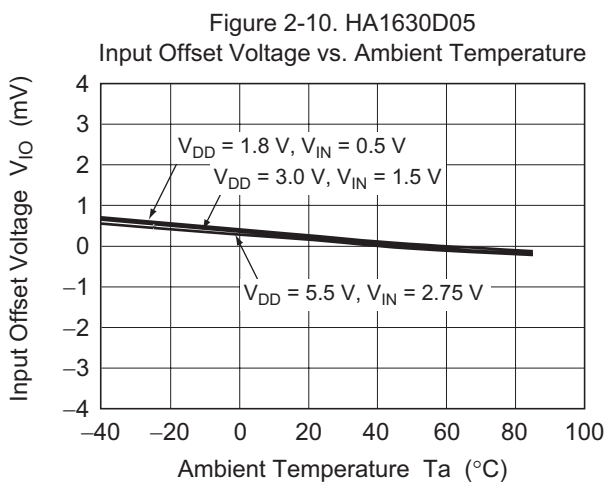
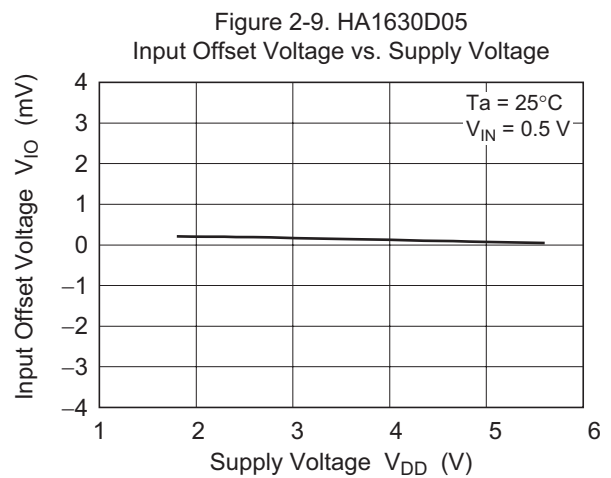
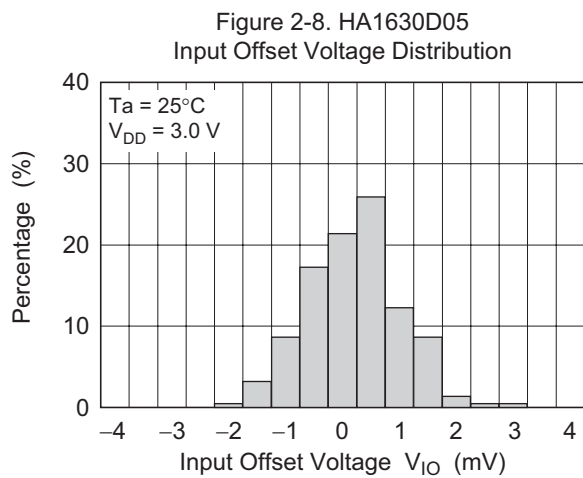
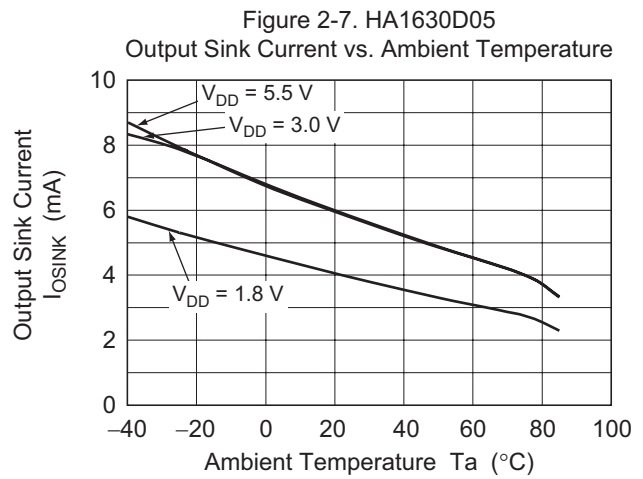
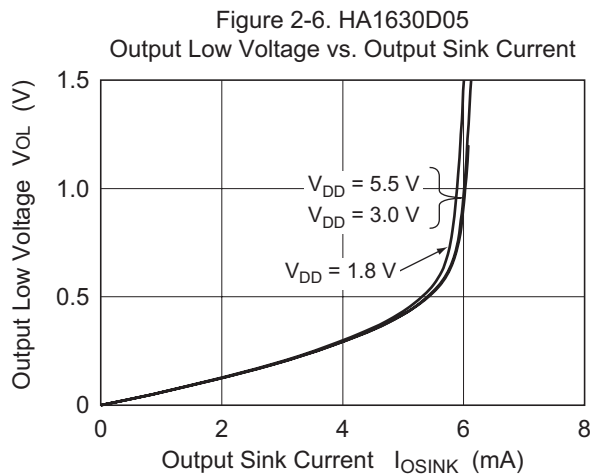


Figure 2-12. HA1630D05  
Power Supply Rejection Ratio vs. Frequency

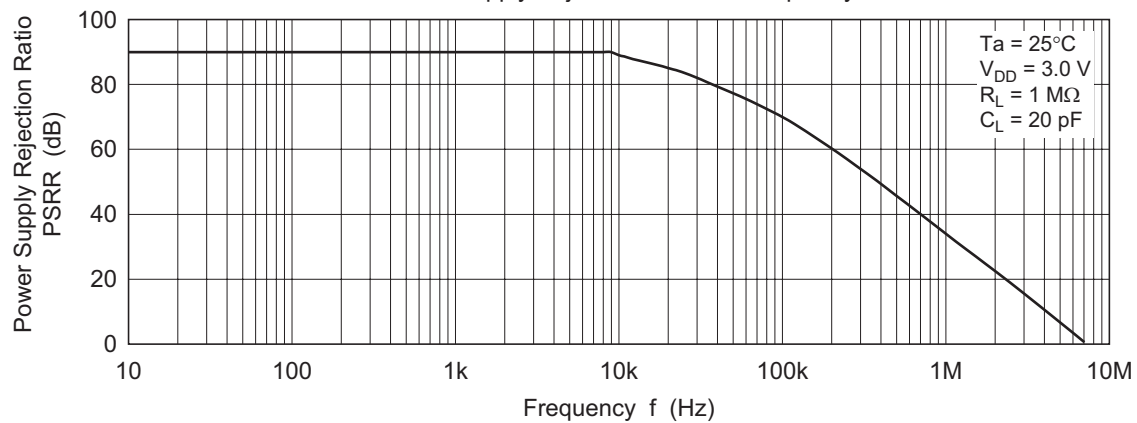


Figure 2-13. HA1630D05  
Common Mode Rejection Ratio vs. Frequency

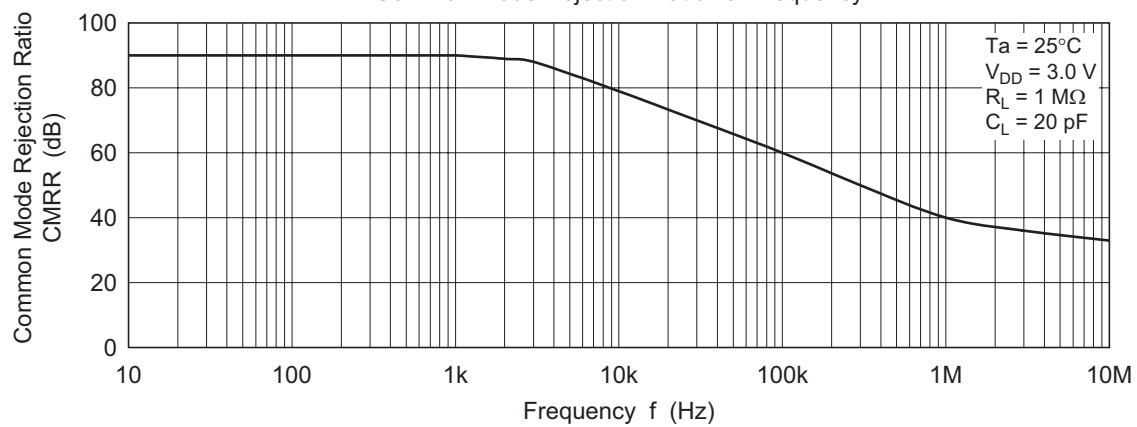
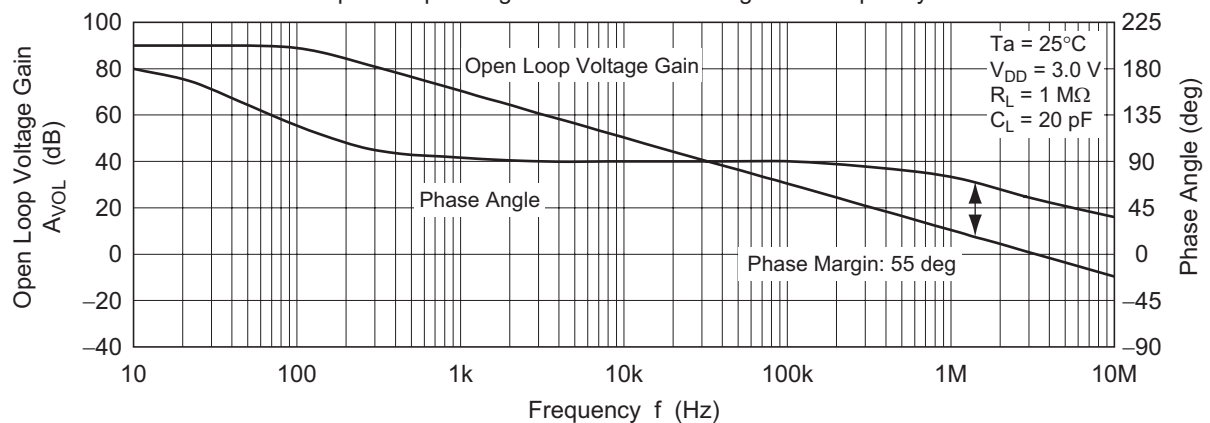


Figure 2-14. HA1630D05  
Open Loop Voltage Gain and Phase Angle vs. Frequency



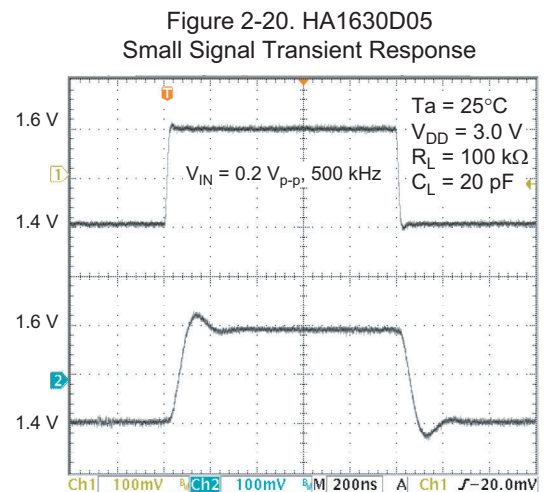
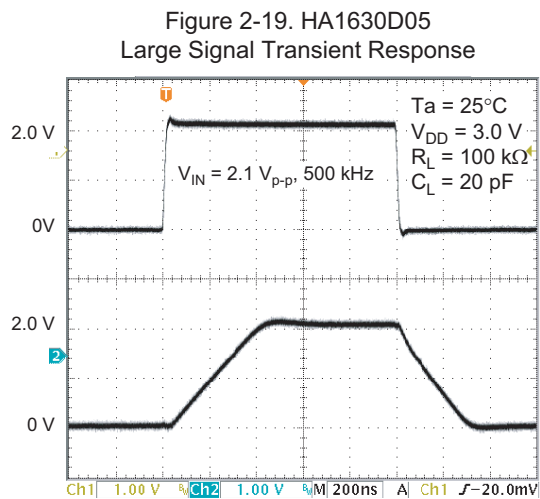
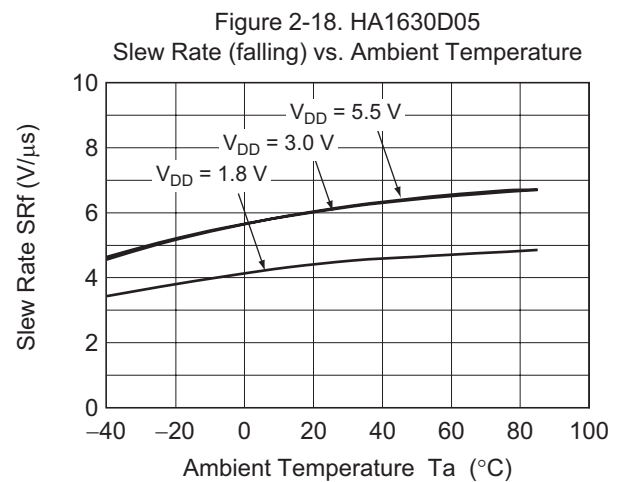
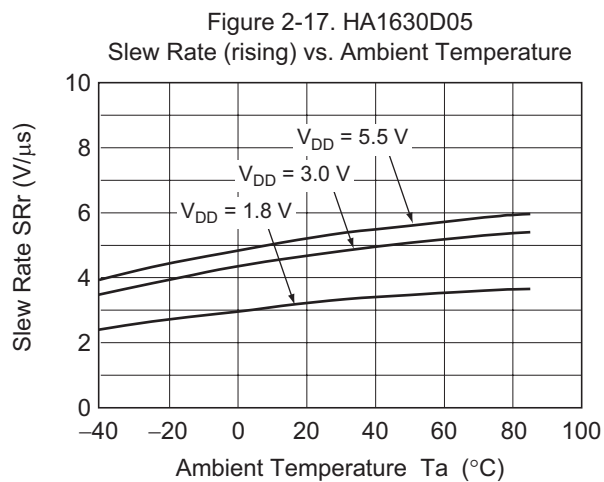
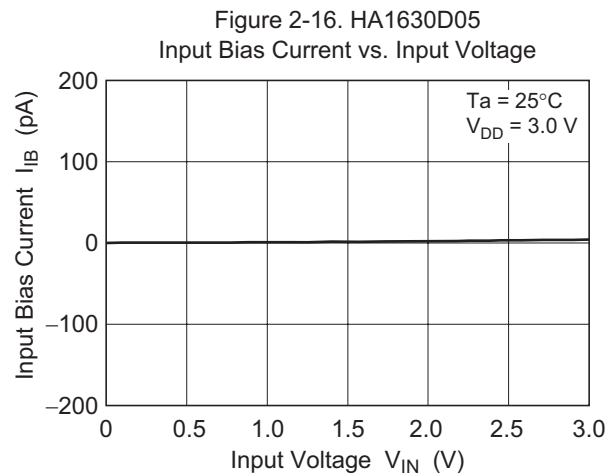
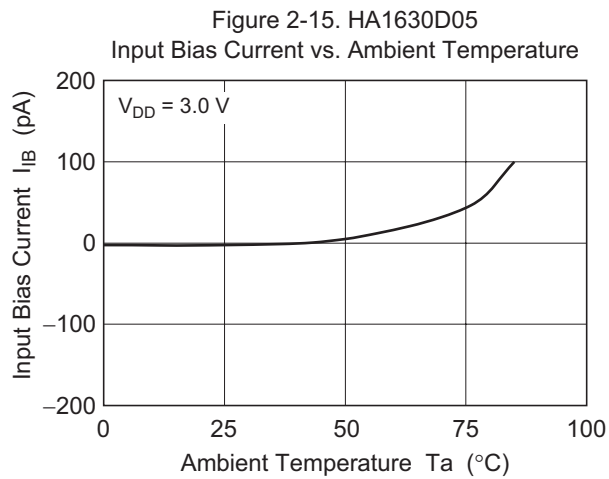


Figure 2-21. HA1630D05  
Total Harmonic Distortion + Noise vs.  
Output Voltage p-p

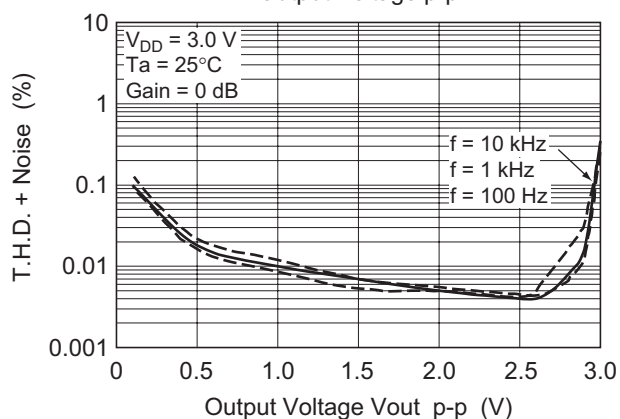


Figure 2-22. HA1630D05  
Total Harmonic Distortion + Noise vs.  
Output Voltage p-p

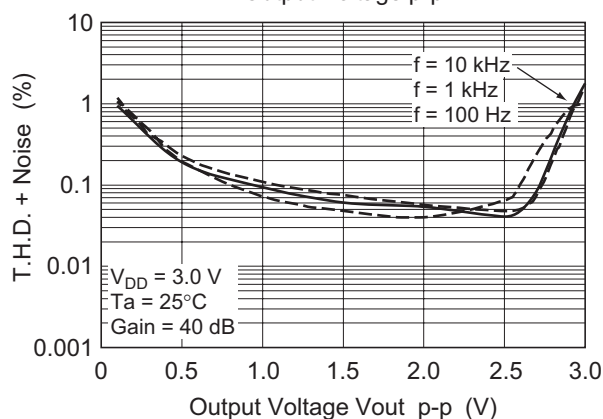


Figure 2-23. HA1630D05  
Voltage Output p-p vs. Frequency

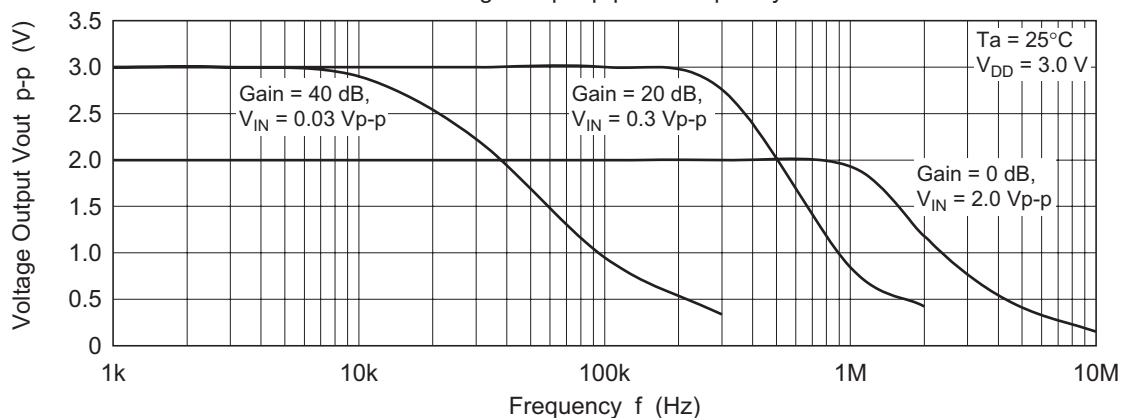


Figure 2-24. HA1630D05  
Voltage Noise Density vs. Frequency







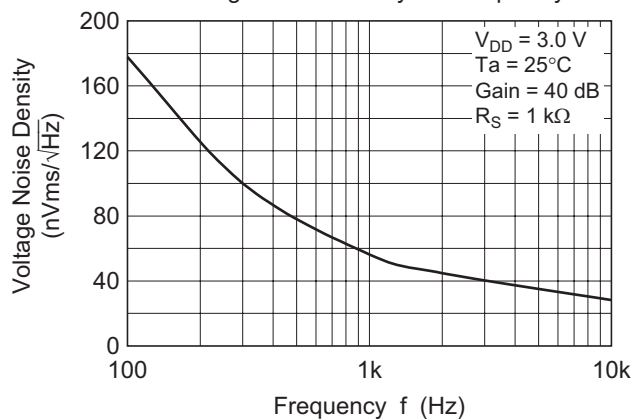


Figure 2-25. HA1630D05  
Channel Separation vs. Frequency

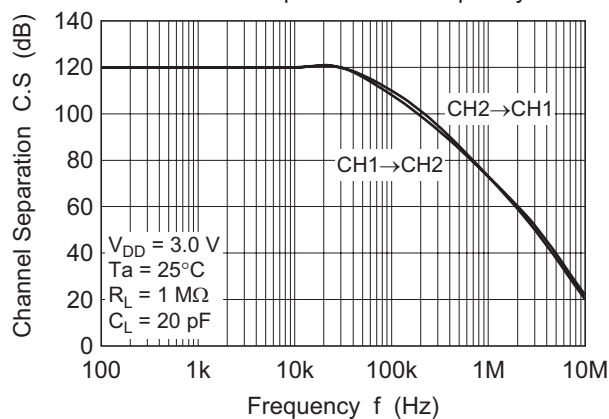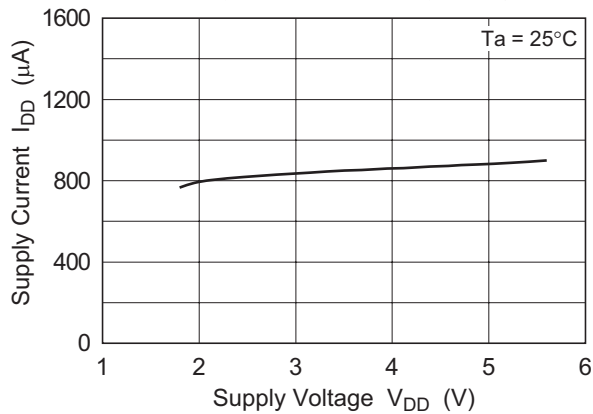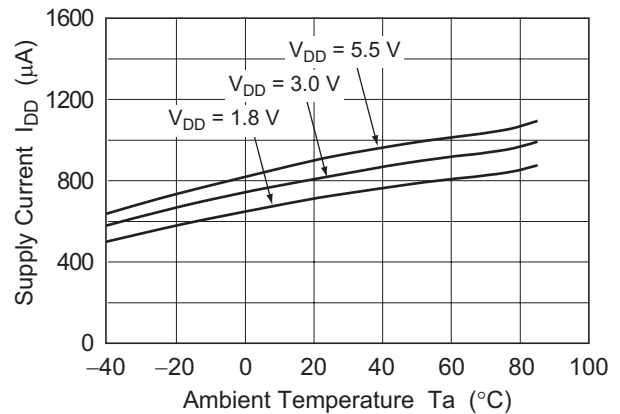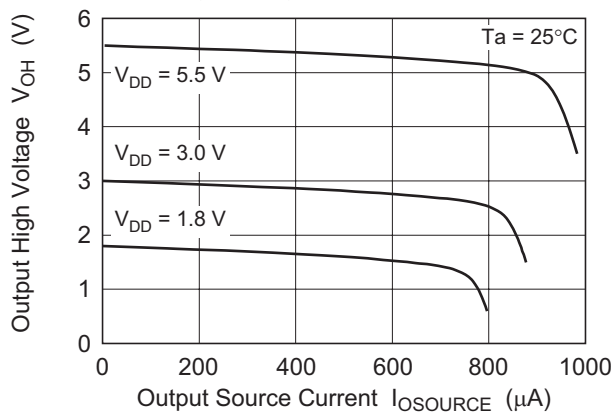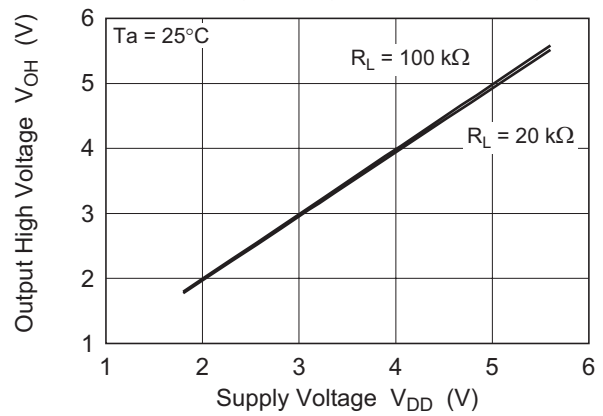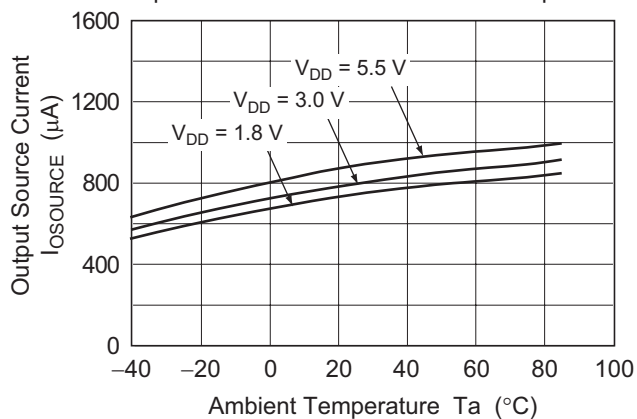

## Main Characteristics (HA1630D06)

Figure 3-1. HA1630D06  
Supply Current vs. Supply VoltageFigure 3-2. HA1630D06  
Supply Current vs. Ambient TemperatureFigure 3-3. HA1630D06  
Output High Voltage vs. Output Source CurrentFigure 3-4. HA1630D06  
Output High Voltage vs. Supply VoltageFigure 3-5. HA1630D06  
Output Source Current vs. Ambient Temperature

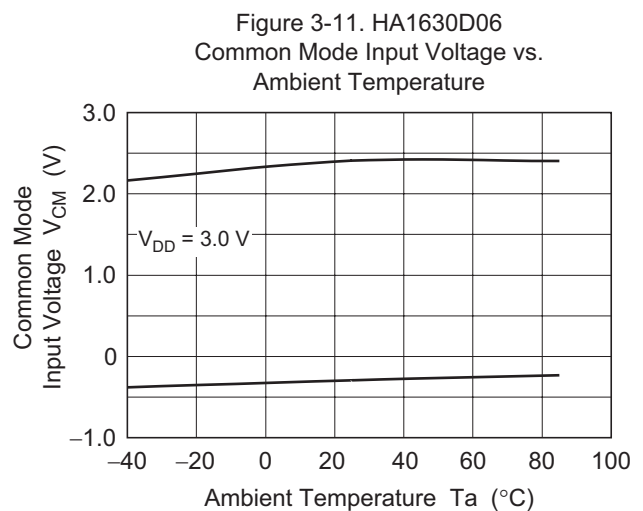
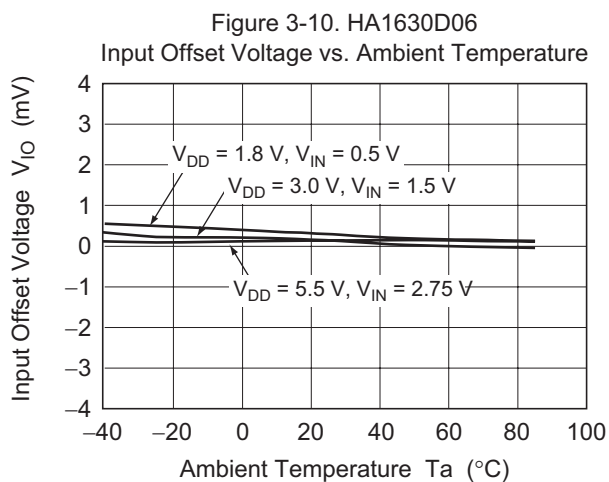
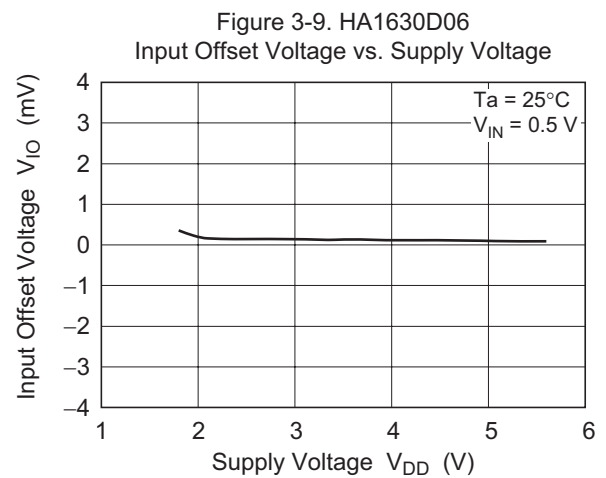
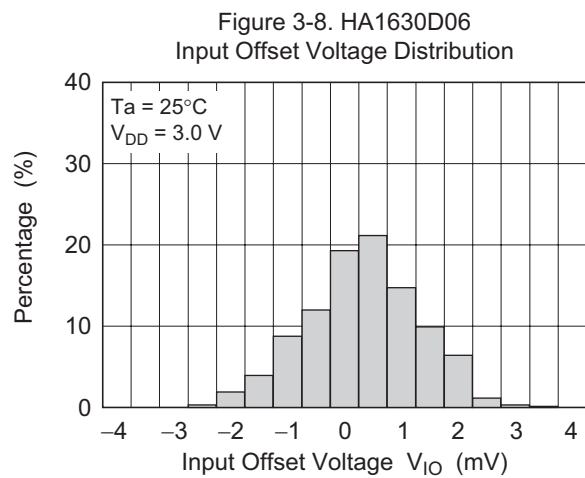
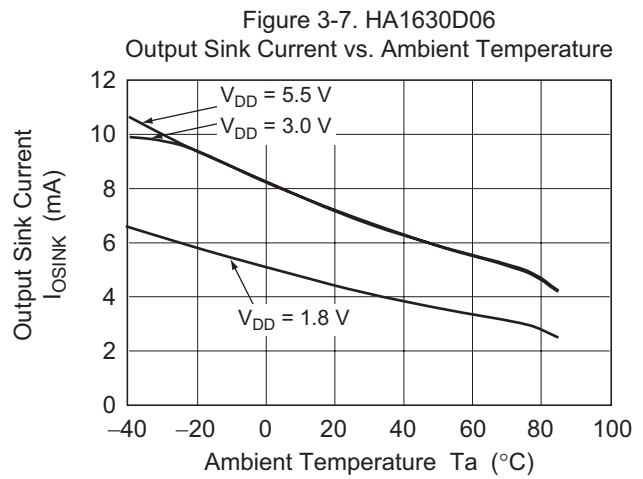
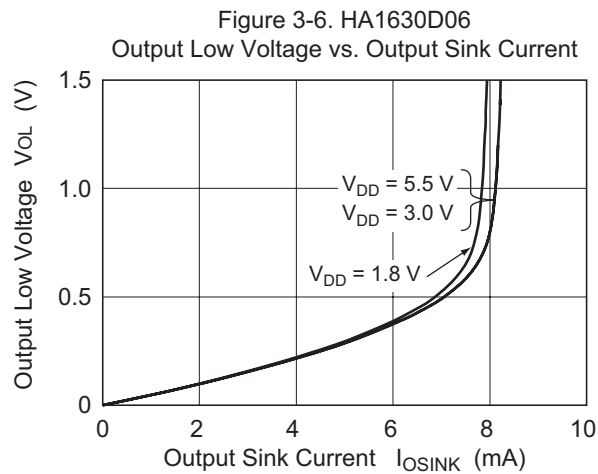




Figure 3-12. HA1630D06  
Power Supply Rejection Ratio vs. Frequency

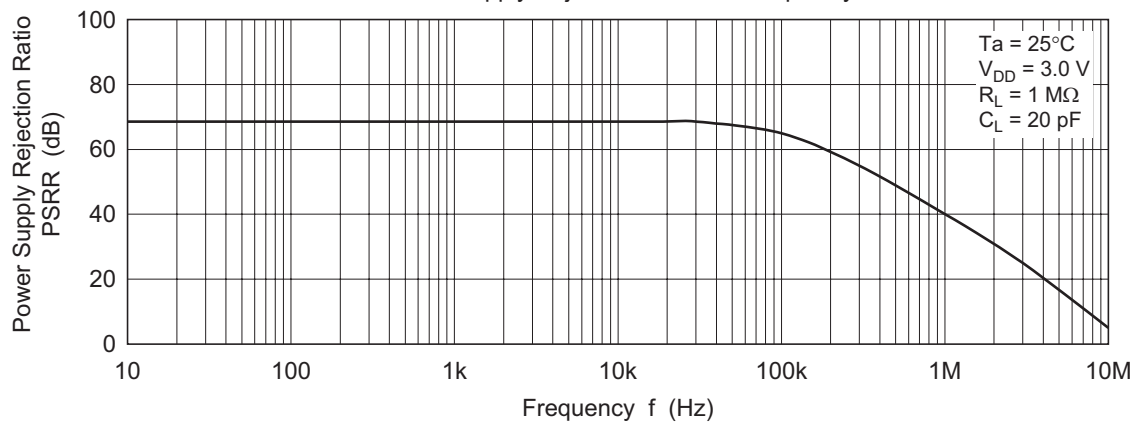


Figure 3-13. HA1630D06  
Common Mode Rejection Ratio vs. Frequency

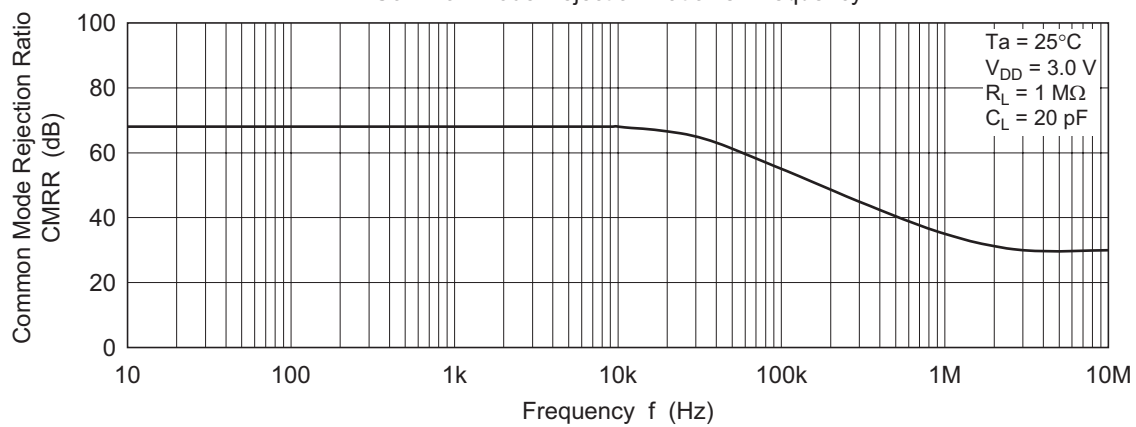
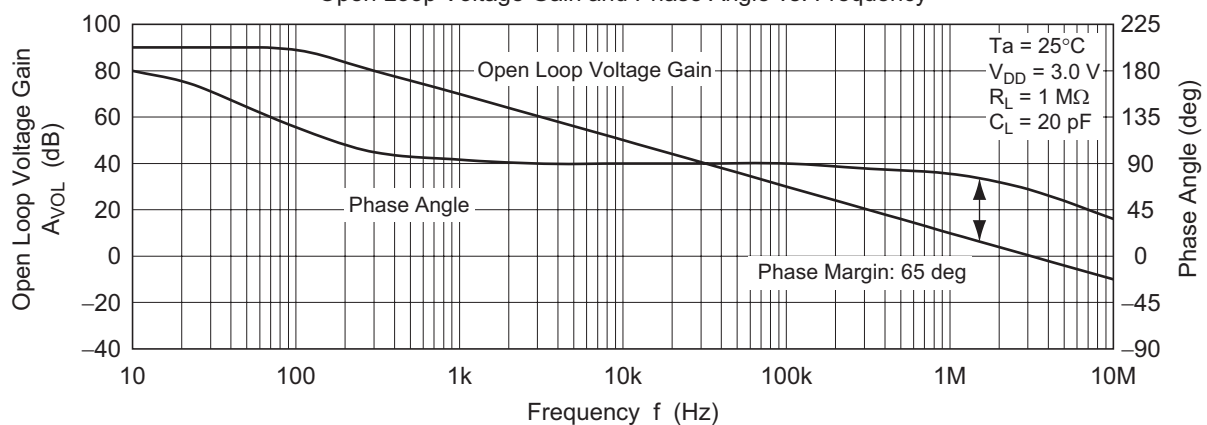


Figure 3-14. HA1630D06  
Open Loop Voltage Gain and Phase Angle vs. Frequency



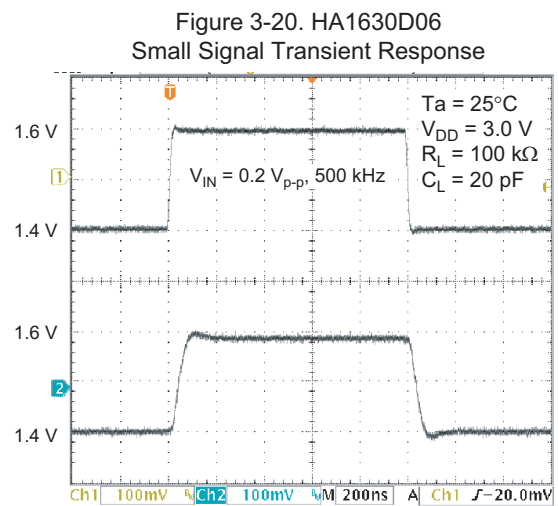
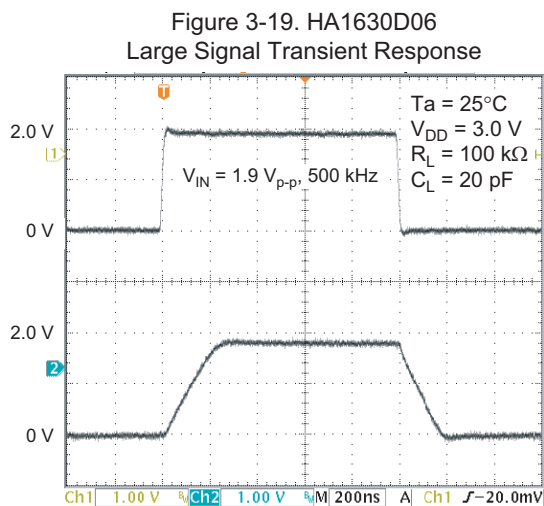
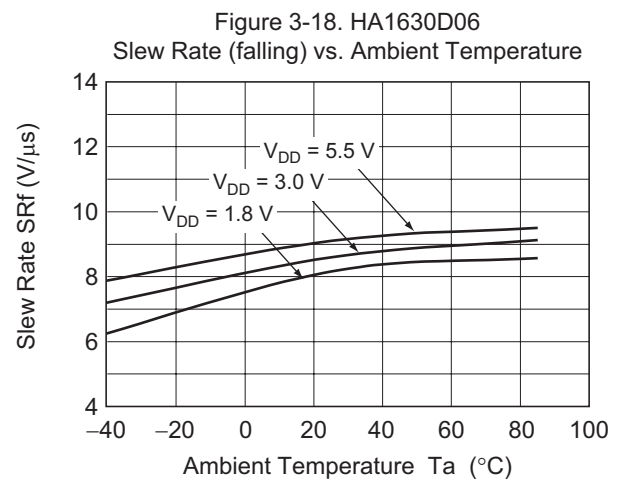
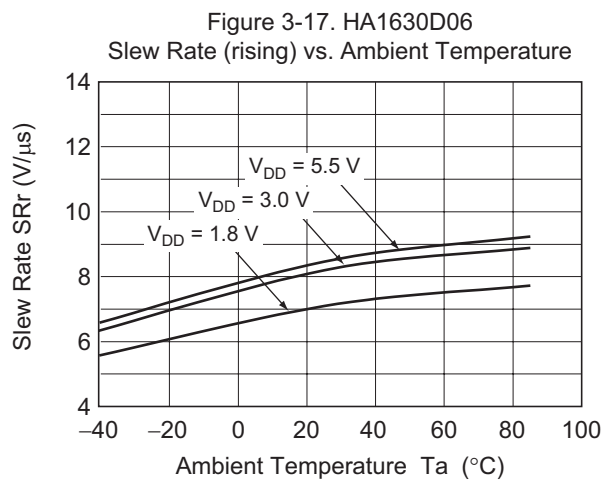
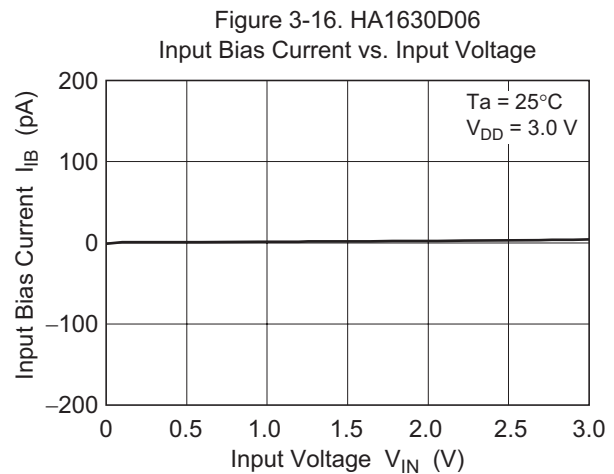
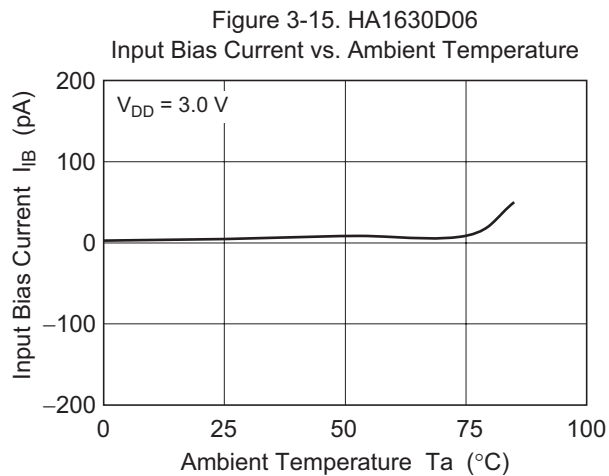


Figure 3-21. HA1630D06  
Total Harmonic Distortion + Noise vs.  
Output Voltage p-p

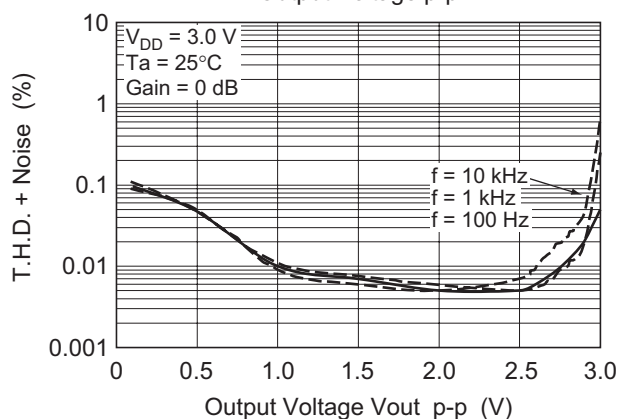


Figure 3-22. HA1630D06  
Total Harmonic Distortion + Noise vs.  
Output Voltage p-p

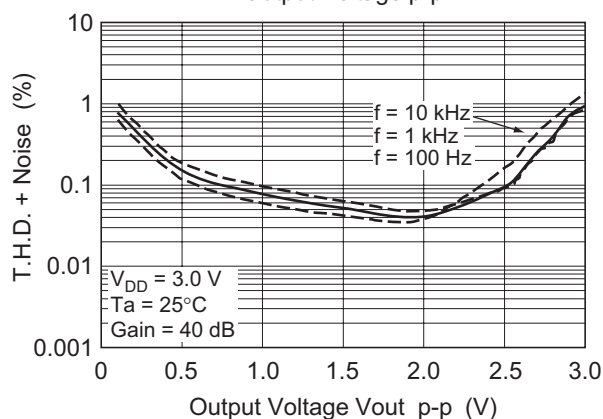


Figure 3-23. HA1630D06  
Voltage Output p-p vs. Frequency

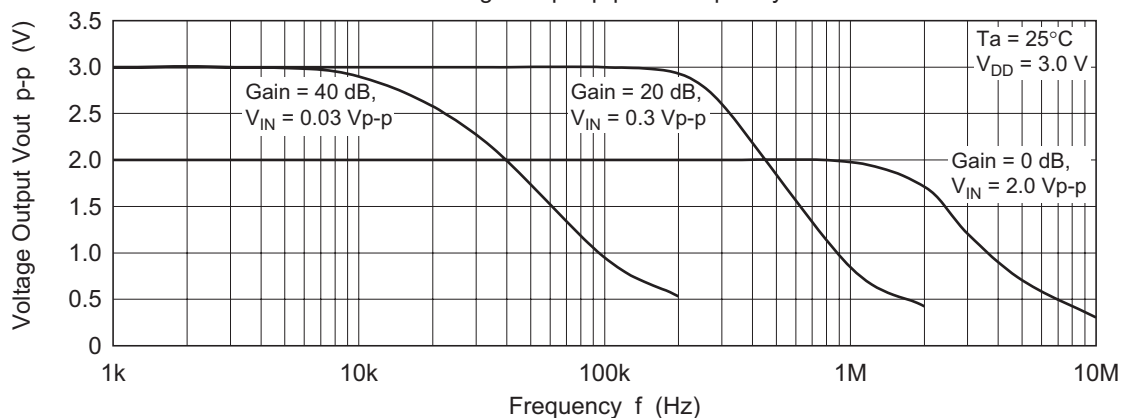


Figure 3-24. HA1630D06  
Voltage Noise Density vs. Frequency



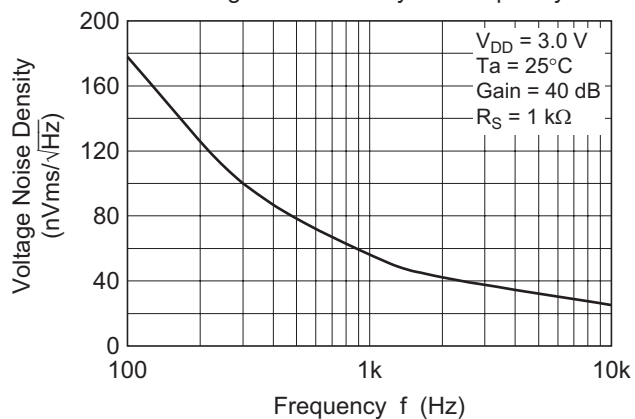


Figure 3-25. HA1630D06  
Channel Separation vs. Frequency

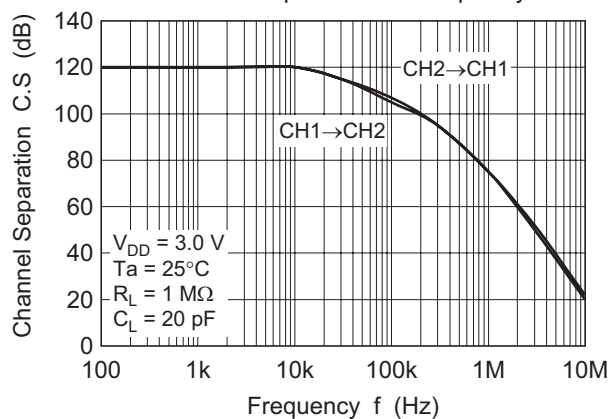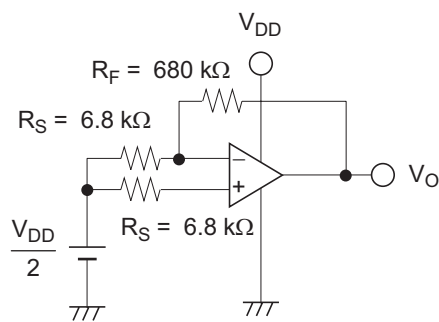

## Test Circuits

1. Power Supply Rejection Ratio, PSRR & Voltage Offset,  $V_{IO}$ 




$$\frac{V_{IO}}{V_{DD}}$$

$$V_{IO} = \left( V_O - \frac{V_{DD}}{2} \right) \times \frac{R_S}{R_S + R_F}$$

$$\text{PSRR}$$

$$\text{PSRR} = -20 \log \left( \left| \frac{V_{DD1} - V_{DD2}}{V_{O1} - V_{O2}} \right| \times \frac{R_S}{R_S + R_F} \right)$$


Measure  $V_O$  corresponding to  $V_{DD1} = 2.95 \text{ V}$  and  $V_{DD2} = 3.05 \text{ V}$

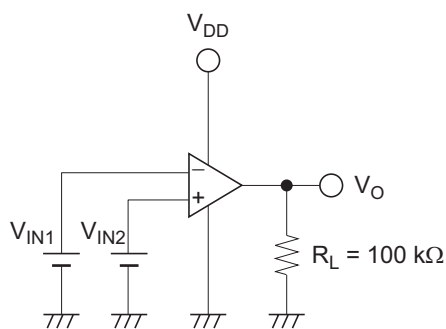2. Supply Current,  $I_{DD}$ 3. Input Bias Current,  $I_{IB}$ 4. Output High Voltage,  $V_{OH}$ 

$$\frac{V_{OH}}{V_{DD}}$$

$$V_{IN1} = V_{DD} / 2 - 0.05 \text{ V}$$


$$V_{IN2} = V_{DD} / 2 + 0.05 \text{ V}$$

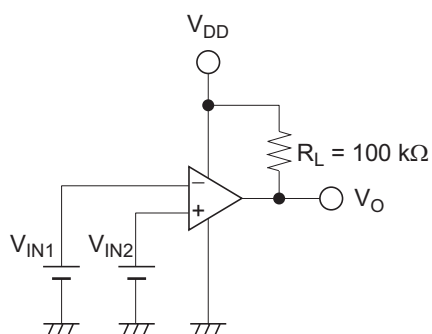5. Output Low Voltage,  $V_{OL}$ 

$$\frac{V_{OL}}{V_{DD}}$$

$$V_{IN1} = V_{DD} / 2 + 0.05 \text{ V}$$

$$V_{IN2} = V_{DD} / 2 - 0.05 \text{ V}$$

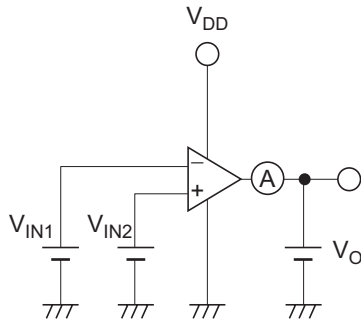6. Output Source Current,  $I_{OSOURCE}$  & Output Sink Current,  $I_{OSINK}$  $I_{OSOURCE}$ 

$$V_O = V_{DD} - 0.5 \text{ V}$$

$$V_{IN1} = V_{DD} / 2 - 0.05 \text{ V}$$


$$V_{IN2} = V_{DD} / 2 + 0.05 \text{ V}$$

 $I_{OSINK}$ 

$$V_O = +0.5 \text{ V}$$

$$V_{IN1} = V_{DD} / 2 + 0.05 \text{ V}$$


$$V_{IN2} = V_{DD} / 2 - 0.05 \text{ V}$$

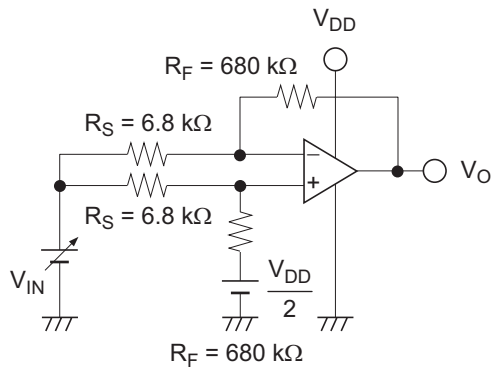7. Common Mode Input Voltage,  $V_{CM}$  & Common Mode Rejection Ratio, CMRRCMRR

$$CMRR = -20 \log \left( \left| \frac{V_{IN1} - V_{IN2}}{V_{O1} - V_{O2}} \right| \times \frac{R_S}{R_S + R_F} \right)$$

Measure  $V_O$  corresponding to  $V_{IN1} = 1.45 \text{ V}$  and  $V_{IN2} = 1.55 \text{ V}$

## 8. Total Harmonic Distortion, THD

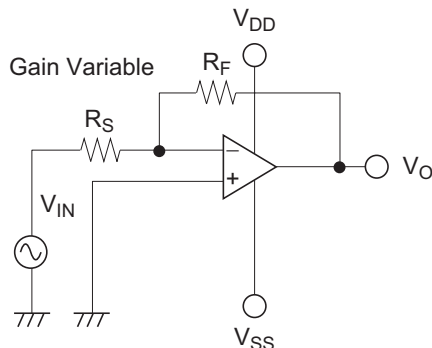THD

Gain Variable



$$R_F / R_S = 20 \log (100 \text{ k}\Omega / 1 \text{ k}\Omega) = 40 \text{ dB}$$

$$R_F / R_S = 20 \log (100 \text{ k}\Omega / 100 \text{ k}\Omega) = 0 \text{ dB}$$



freq = 100 Hz, 1 kHz, 10 kHz

30 kHz LPF ON

## 9. Slew Rate, SR

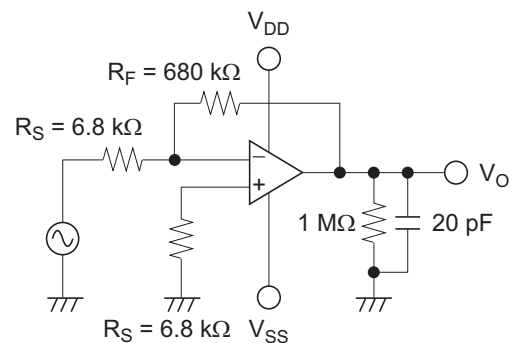10. Gain,  $A_V$  & Phase, GBW


Package Dimensions

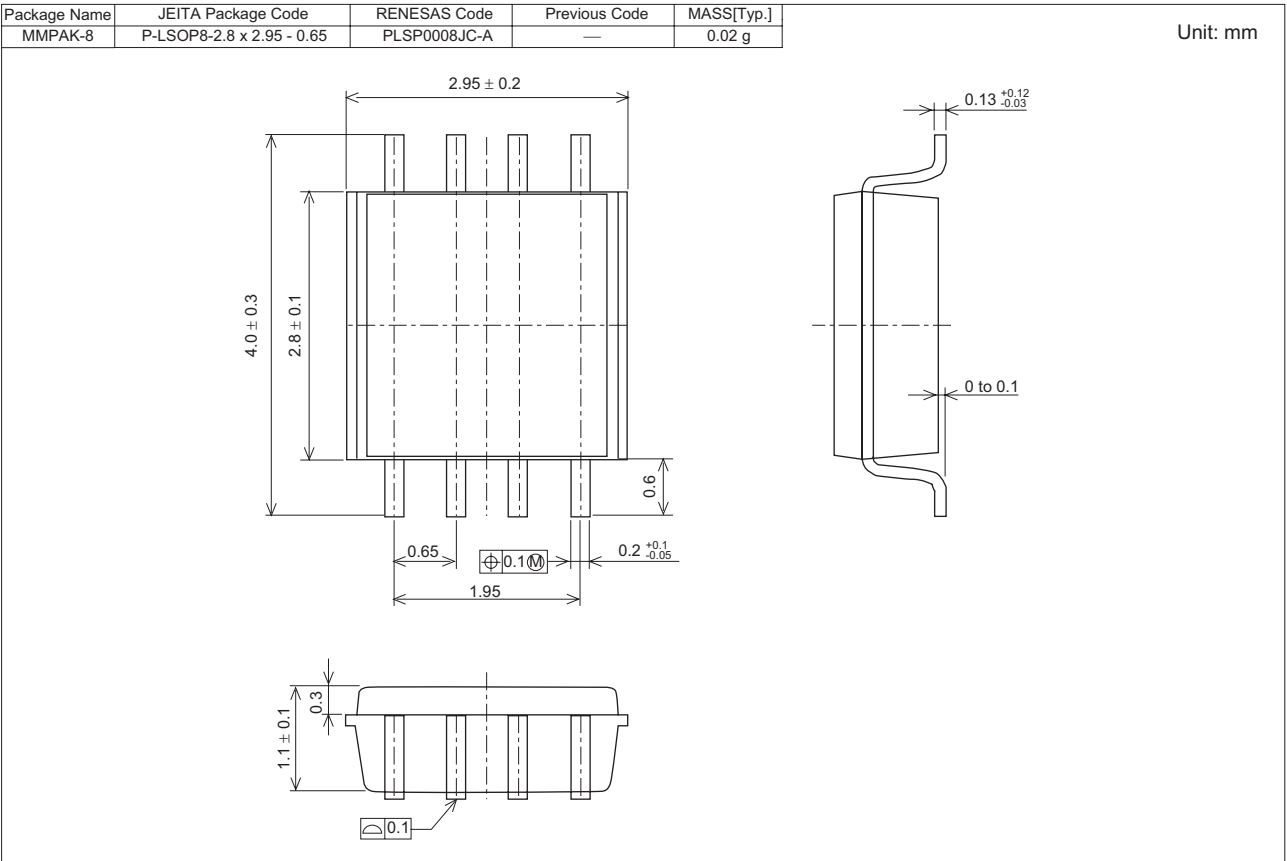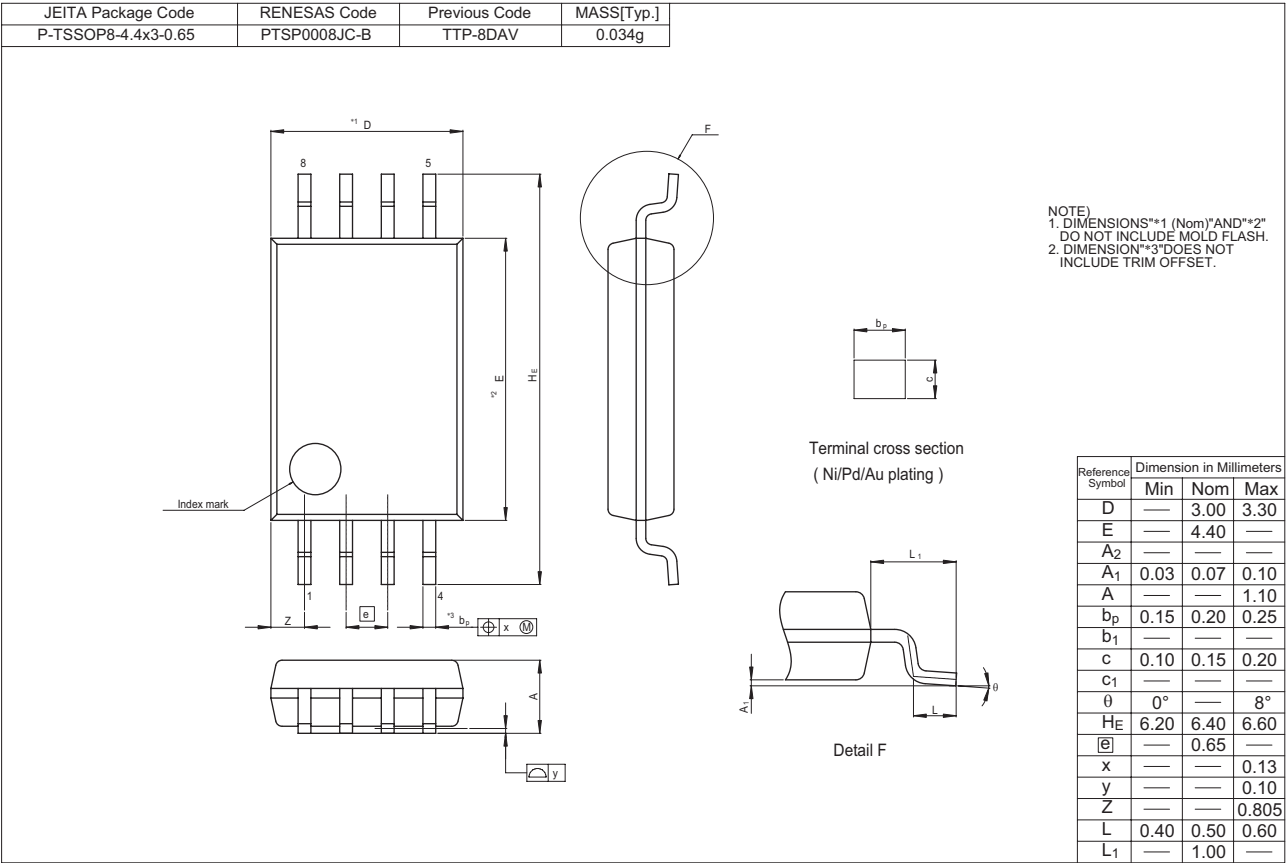

## Taping &amp; Reel Specification



## [Taping]

| Package Code | W  | P   | Ao   | Bo   | Ko  | E    | F   | D1   | Maximum Storage No. |
|--------------|----|-----|------|------|-----|------|-----|------|---------------------|
| TSSOP-8      | 12 | 8   | 6.9  | 3.6  | 1.7 | 1.75 | 5.5 | 1.5  | 3,000 pcs/reel      |
| MMPAK-8      | 12 | 4.0 | 3.15 | 4.35 | —   | —    | 5.5 | 1.05 | 3,000 pcs/reel      |

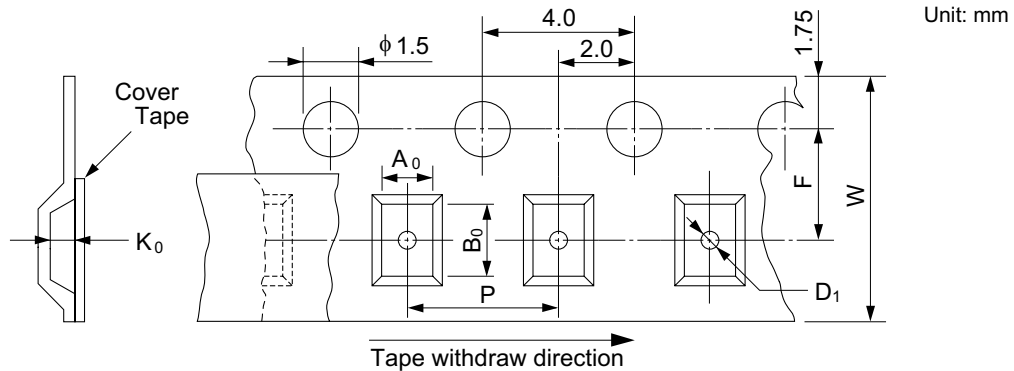

## [Reel]

| Package | Tape width | W1   | W2   | A   |
|---------|------------|------|------|-----|
| TSSOP-8 | 12         | 17.4 | 13.4 | 330 |
| MMPAK-8 | 12         | 17.0 | 13.0 | 178 |

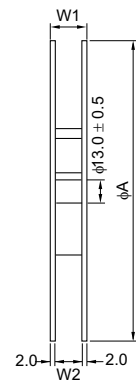


## [Ordering Information]

| Ordering Unit |
|---------------|
| 3,000 pcs     |

## Mark Indication


## TSSOP-8

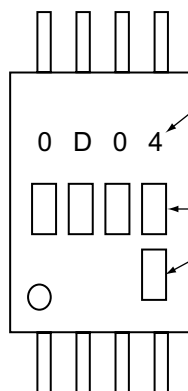

Product Name  
 0D04: HA1630D04  
 0D05: HA1630D05  
 0D06: HA1630D06

Trace Code

## MMPAK-8



Product Name  
 D04: HA1630D04  
 D05: HA1630D05  
 D06: HA1630D06

Trace Code





# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Renesas Electronics:](#)

[HA1630D04MMEL-E](#) [HA1630D05TEL-E](#) [HA1630D06TEL-E](#) [HA1630D06MMEL-E](#) [HA1630D05MMEL-E](#)  
[HA1630D04TEL-E](#)