

# SLG59M1563V

An Ultra-small, 22.5 mΩ, 2.5 A Load Switch with Reverse Blocking


## General Description

The SLG59M1563V is a 22.5 mΩ, 2.5 A single-channel load switch that is able to switch 1 V to 5 V power rails. The product is packaged in an ultra-small 1.0 x 1.6 mm package.

## Features

- 1.0 x 1.6 x 0.55 mm STDFN 8L package (2 fused pins for drain and 2 fused pins for source)
- Logic level ON pin capable of supporting 0.85 V CMOS Logic
- 22.5 mΩ RDS<sub>ON</sub> while supporting 2.5 A
- Power Good Output
- Pb-Free / Halogen-Free / RoHS compliant
- Operating Temperature: -40 °C to 85°C
- Operating Voltage: 1.5 V to 5.5 V

## Pin Configuration




**8-pin FC-TDFN**  
(Top View)

## Applications

- Notebook Power Rail Switching
- Tablet Power Rail Switching
- Smartphone Power Rail Switching

## Block Diagram

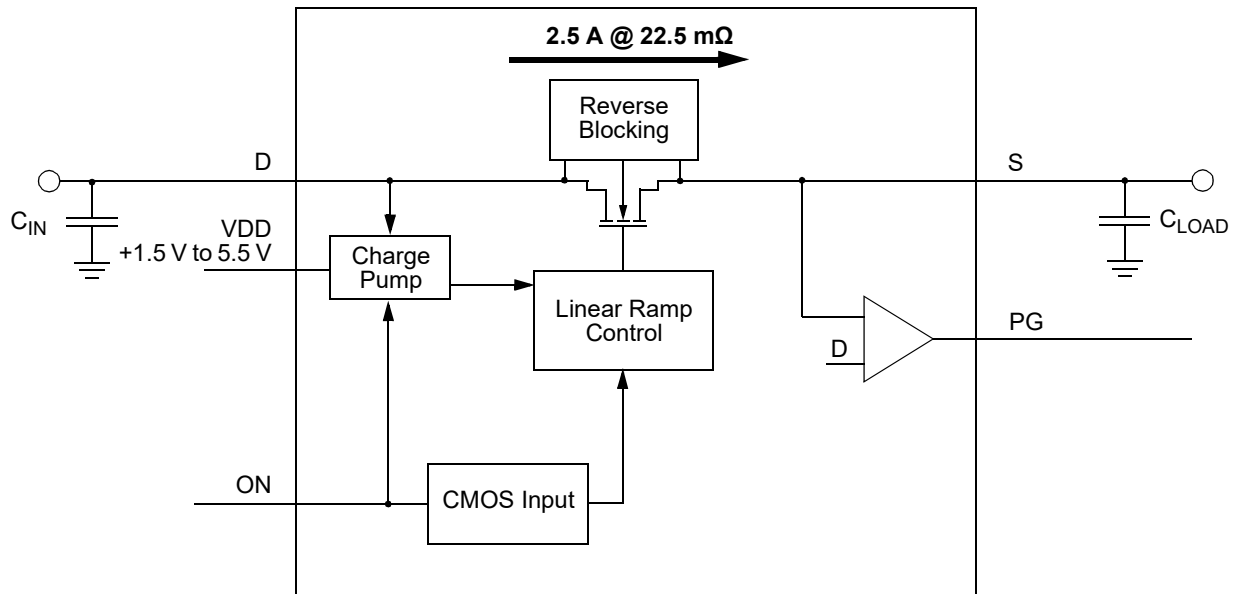

## SLG59M1563V

An Ultra-small, 22.5 mΩ, 2.5 A Load Switch  
with Reverse Blocking

### Pin Description

Pin #	Pin Name	Type	Pin Description
1	VDD	Power	VDD supplies the power for the operation of the load switch and internal control circuitry. Bypass the VDD pin to GND with a 0.1 μF (or larger) capacitor.
2	ON	Input	A low-to-high transition on this pin initiates the operation of the SLG59M1563V's state machine. ON is a CMOS input with $ON\_V_{IL} < 0.3\text{ V}$ and $ON\_V_{IH} > 0.85\text{ V}$ thresholds. While there is an internal pull-down circuit to GND (~4 MΩ), connect this pin directly to a general-purpose output (GPO) of a microcontroller, an application processor, or a system controller.
3, 4	D	MOSFET	Drain terminal connection of the n-channel MOSFET (2 pins fused for D). Connect at least a low-ESR 0.1 μF capacitor from this pin to ground. Capacitors used at D should be rated at 10 V or higher.
5, 6	S	MOSFET	Source terminal connection of the n-channel MOSFET (2 pins fused for S). Connect a low-ESR capacitor from this pin to ground and consult the Electrical Characteristics table for recommended $C_{LOAD}$ range. Capacitors used at S should be rated at 10 V or higher.
7	PG	Output	A push pull output. PG is asserted HIGH when $V_S > 95\%$ of $V_D$ .
8	GND	GND	Ground connection. Connect this pin to system analog or power ground plane.

### Ordering Information

Part Number	Type	Production Flow
SLG59M1563V	STDFN 8L	Industrial, -40 °C to 85 °C
SLG59M1563VTR	STDFN 8L (Tape and Reel)	Industrial, -40 °C to 85 °C

# SLG59M1563V

An Ultra-small, 22.5 mΩ, 2.5 A Load Switch  
with Reverse Blocking

## Absolute Maximum Ratings

Parameter	Description	Conditions	Min.	Typ.	Max.	Unit
$V_{DD}$	Power Supply		--	--	7	V
$T_S$	Storage Temperature		-65	--	150	°C
$ESD_{HBM}$	ESD Protection	Human Body Model	2000	--	--	V
$W_{DIS}$	Package Power Dissipation		--	--	0.4	W
MOSFET $I_{DS_{PK}}$	Peak Current from Drain to Source	For no more than 1 ms with 1% duty cycle	--	--	3.5	A

Note: Stresses greater than those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. This is a stress rating only and functional operation of the device at these or any other conditions above those indicated in the operational sections of this specification is not implied. Exposure to absolute maximum rating conditions for extended periods may affect reliability.

## Electrical Characteristics

$T_A = -40\text{ °C}$  to  $85\text{ °C}$  unless otherwise noted. Typical values are at  $T_A = 25\text{ °C}$ , unless otherwise noted.

Parameter	Description	Conditions	Min.	Typ.	Max.	Unit
$V_{DD}$	Power Supply Voltage	$-40\text{ °C}$ to $85\text{ °C}$	1.5	--	5.5	V
$I_{DD}$	Power Supply Current (PIN 1)	when OFF	--	--	1	μA
		when ON, No load	--	14	30	μA
$R_{DS_{ON}}$	ON Resistance	$T_A = 25\text{ °C}$ ; $I_{DS} = 100\text{ mA}$	--	22.5	25	mΩ
		$T_A = 85\text{ °C}$ ; $I_{DS} = 100\text{ mA}$	--	25.6	30	mΩ
MOSFET $I_{DS}$	Current from D to S	Continuous	--	--	2.5	A
$I_{REVERSE}$	MOSFET Reverse Leakage Current	$V_S = 1.0\text{ V}$ to $5.5\text{ V}$ , $V_D = 0\text{ V}$ , ON = 0 V; $V_{DD} = 1.5\text{ V}$ to $5.5\text{ V}$ ; $T_A = 25\text{ °C}$	--	0.04	0.55	μA
		$V_S = 1.0\text{ V}$ to $5.5\text{ V}$ , $V_D = 0\text{ V}$ , ON = 0 V $V_{DD} = 1.5\text{ V}$ to $5.5\text{ V}$ ; $T_A = 85\text{ °C}$	--	0.26	1.3	μA
		$V_S = 1.0\text{ V}$ to $5.5\text{ V}$ , $V_D = 0\text{ V}$ , ON = 0 V $V_{DD} = 1.5\text{ V}$ to $5.5\text{ V}$ ; $T_A = -40\text{ °C}$	--	0.31	9.70	μA
$V_D$	Drain Voltage		1.0	--	$V_{DD}$	V
$T_{ON\_Delay}$	ON Delay Time	50% ON to $V_S$ Ramp Start	--	300	500	μs
$T_{Total\_ON}$	Total Turn On Time	50% ON to 90% $V_S$ ; Example: $V_{DD} = V_D = 5\text{ V}$ , $C_{LOAD} = 10\text{ μF}$ , $R_{LOAD} = 20\text{ Ω}$	2.1	2.6	3.1	ms
$V_{S(SR)}$	Slew Rate	10% $V_S$ to 90% $V_S$ ; Example: $V_{DD} = V_D = 5\text{ V}$ , $C_{LOAD} = 10\text{ μF}$ , $R_{LOAD} = 20\text{ Ω}$	1.4	1.95	2.2	V/ms
$C_{LOAD}$	Output Load Capacitance	$C_{LOAD}$ connected from S to GND	--	--	500	μF
ON_ $V_{IH}$	High Input Voltage on ON pin		0.85	--	$V_{DD}$	V
ON_ $V_{IL}$	Low Input Voltage on ON pin		-0.3	0	0.3	V
$V_{OL}$	Low Output Voltage on PG pin	$V_{DD} = 5\text{ V}$ , $I_{OL} = -0.1\text{ mA}$	--	--	0.4	V
$V_{OH}$	High Output Voltage on PG pin	$V_{DD} = 5\text{ V}$ , $I_{OH} = 0.1\text{ mA}$	$V_{DD}-0.4$	--	$V_{DD}$	V
THERM <sub>ON</sub>	Thermal shutoff turn-on temperature		--	125	--	°C
THERM <sub>OFF</sub>	Thermal shutoff turn-off temperature		--	100	--	°C
THERM <sub>TIME</sub>	Thermal shutoff time		--	--	1	ms
$T_{OFF\_Delay}$	OFF Delay Time	50% ON to $V_S$ Fall Start; $V_{DD} = V_D = 5\text{ V}$ ; $R_{LOAD} = 20\text{ Ω}$ ; no $C_{LOAD}$	--	8	--	μs

## Electrical Characteristics (continued)

Parameter	Description	Conditions	Min.	Typ.	Max.	Unit
PG <sub>TRIGGER</sub>	Power Good Trigger Level	V <sub>S</sub> % of V <sub>D</sub>	--	95	--	%

The diagram illustrates the timing characteristics of a MOSFET switching circuit. It consists of two main waveforms:  $ON^*$  (top) and  $V_S$  (bottom).

- $ON^*$  Signal:** This signal transitions from a low state to a high state and then back to a low state. Key points on the rising edge are marked at 50% ON and 90%  $V_S$ . Key points on the falling edge are marked at 50% ON and 90%  $V_S$ . The delay from the start of the rising edge to the 50% ON point is labeled  $T_{ON\_Delay}$ . The delay from the 50% ON point to the start of the falling edge is labeled  $T_{OFF\_Delay}$ .
- $V_S$  Signal:** This signal transitions from a low state to a high state and then back to a low state. Key points on the rising edge are marked at 10%  $V_S$  and 90%  $V_S$ . Key points on the falling edge are marked at 90%  $V_S$  and 10%  $V_S$ . The delay from the start of the rising edge to the 10%  $V_S$  point is labeled  $T_{ON\_Delay}$ . The delay from the 10%  $V_S$  point to the 90%  $V_S$  point is labeled  $V_{S(SR)} (V/ms)$ . The delay from the 90%  $V_S$  point to the start of the falling edge is labeled  $T_{FALL}$ .
- Timing Parameters:**
  - $T_{Total\_ON}$ : The total time the signal is in the high state, from the start of the rising edge to the start of the falling edge.
  - $V_{S(SR)} (V/ms)$ : The slope of the rising edge of the  $V_S$  signal.
  - $T_{FALL}$ : The time taken for the  $V_S$  signal to fall from 90%  $V_S$  to 10%  $V_S$ .


## Datasheet

## SLG59M1563V

An Ultra-small, 22.5 mΩ, 2.5 A Load Switch  
with Reverse Blocking

### Typical Performance Characteristics

#### $R_{DS(on)}$ vs. Temperature, $V_{DD}$ , and $V_{IN}$

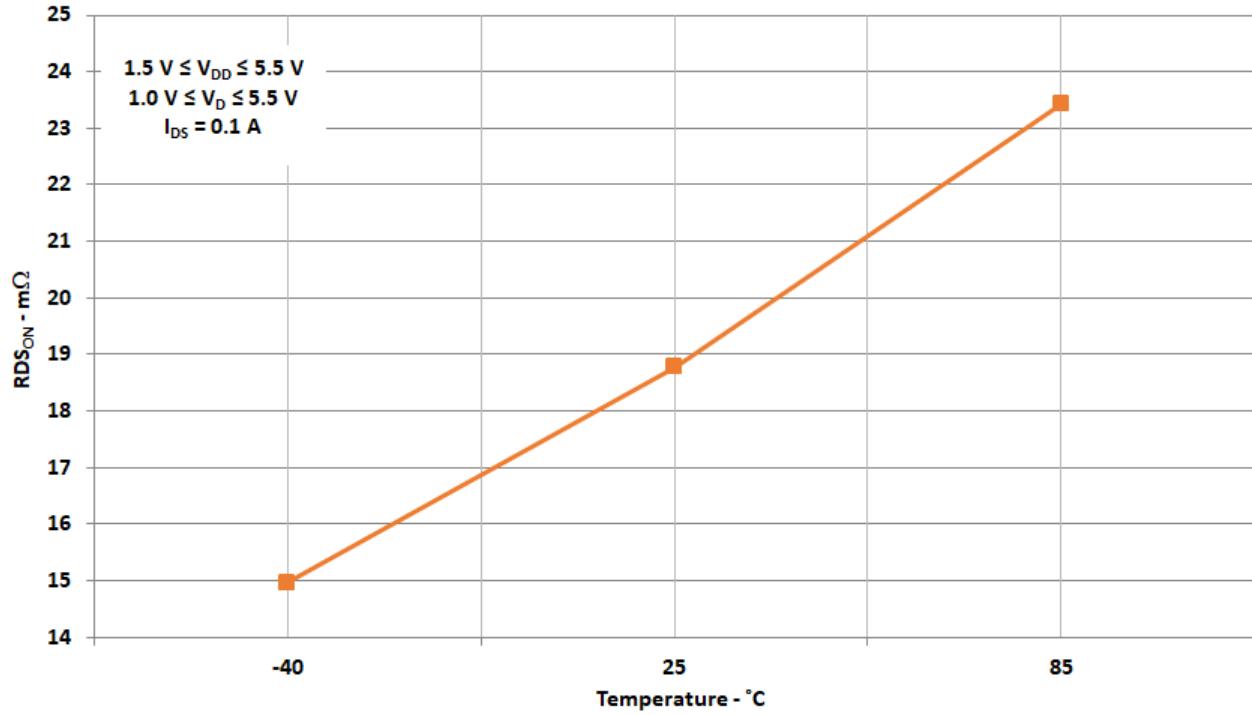

## SLG59M1563V

An Ultra-small, 22.5 mΩ, 2.5 A Load Switch  
with Reverse Blocking

### SLG59M1563V Power-Up/Power-Down Sequence Considerations

To ensure glitch-free power-up under all conditions, apply  $V_{DD}$  first, followed by  $V_D$  after  $V_{DD}$  exceeds 1 V. Then allow  $V_D$  to reach 90% of its max value before toggling the ON pin from Low-to-High. Likewise, power-down in reverse order.

If  $V_{DD}$  and  $V_D$  need to be powered up simultaneously, glitching can be minimized by having a suitable load capacitor. A 10  $\mu\text{F}$   $C_{LOAD}$  will prevent glitches for rise times of  $V_{DD}$  and  $V_D$  higher than 2 ms.

If the ON pin is toggled HIGH before  $V_{DD}$  and  $V_D$  have reached their steady-state values, the load switch timing parameters may differ from datasheet specifications.

## SLG59M1563V

An Ultra-small, 22.5 mΩ, 2.5 A Load Switch  
with Reverse Blocking

### Layout Guidelines:

1. The VDD pin needs a 0.1 μF and 10 μF external capacitors to smooth pulses from the power supply. Locate these capacitors as close as possible to the SLG59M1563V's PIN1.
2. Since the D and S pins dissipate most of the heat generated during high-load current operation, it is highly recommended to make power traces as short, direct, and wide as possible. A good practice is to make power traces with absolute minimum widths of 15 mils (0.381 mm) per Ampere. A representative layout, shown in [Figure 1](#), illustrates proper techniques for heat to transfer as efficiently as possible out of the device;
3. To minimize the effects of parasitic trace inductance on normal operation, it is recommended to connect input C<sub>IN</sub> and output C<sub>LOAD</sub> low-ESR capacitors as close as possible to the SLG59M1563V's D and S pins;
4. The GND pin should be connected to system analog or power ground plane.

### SLG59M1563V Evaluation Board:

A GreenFET Evaluation Board for SLG59M1563V is designed according to the statements above and is illustrated on [Figure 1](#). Please note that evaluation board has D\_Sense and S\_Sense pads. They cannot carry high currents and dedicated only for RDS<sub>ON</sub> evaluation.

Please solder your SLG59M1563V here

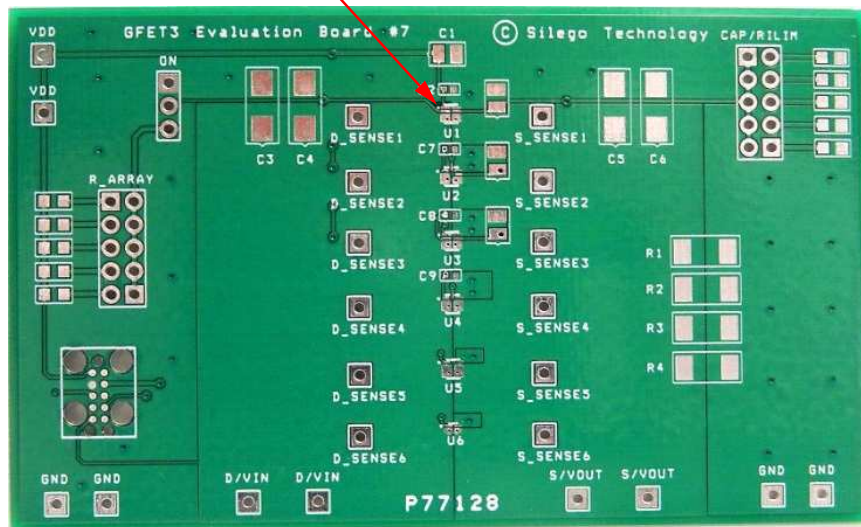


Figure 1. SLG59M1563V Evaluation Board.

# SLG59M1563V

An Ultra-small, 22.5 mΩ, 2.5 A Load Switch  
with Reverse Blocking

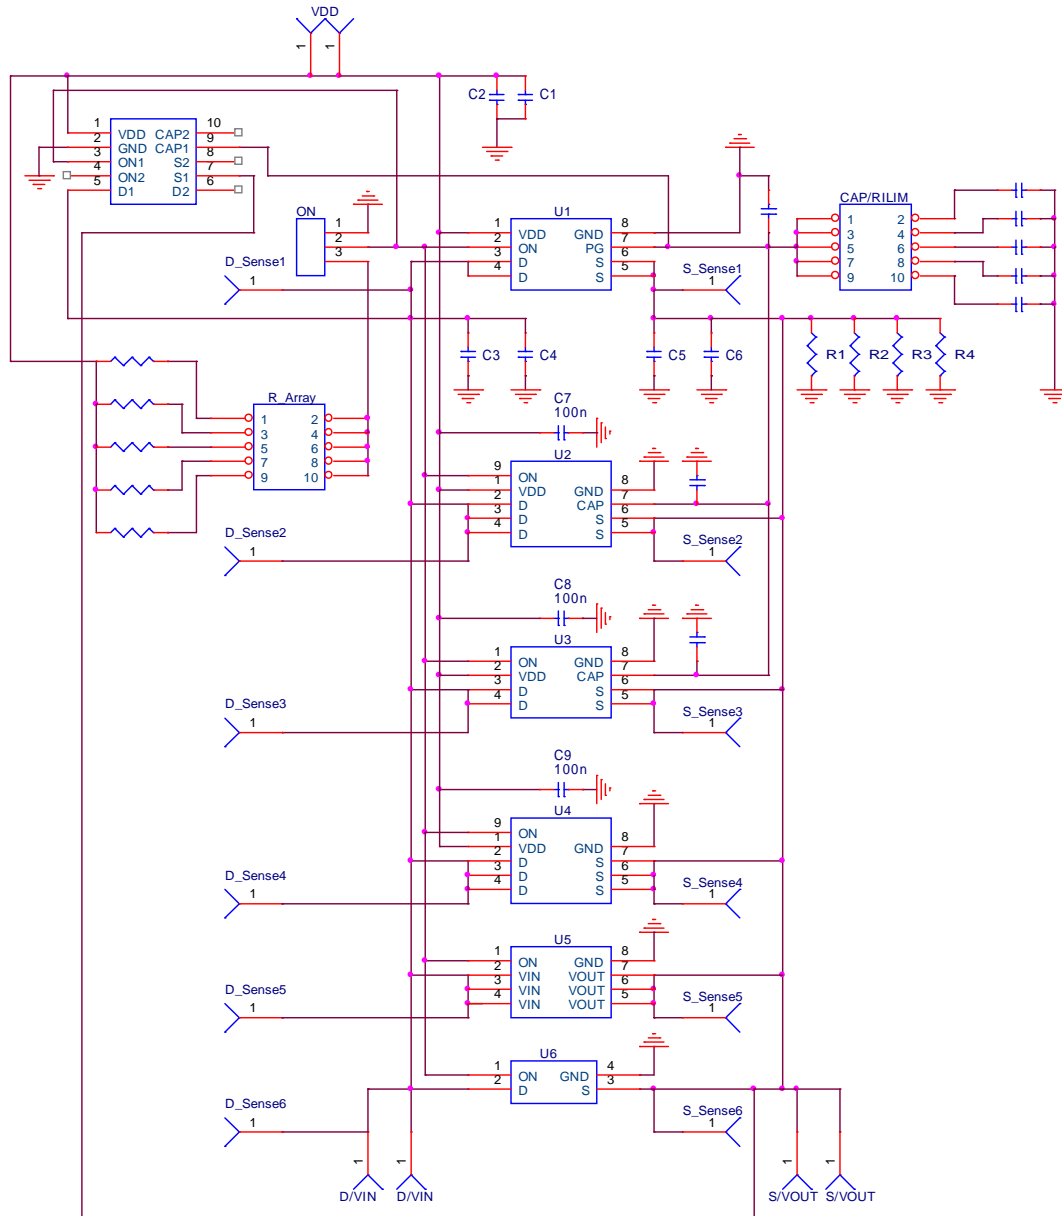


Figure 2. SLG59M1563V Evaluation Board Connection Circuit.



## SLG59M1563V

An Ultra-small, 22.5 mΩ, 2.5 A Load Switch  
with Reverse Blocking

### Basic Test Setup and Connections

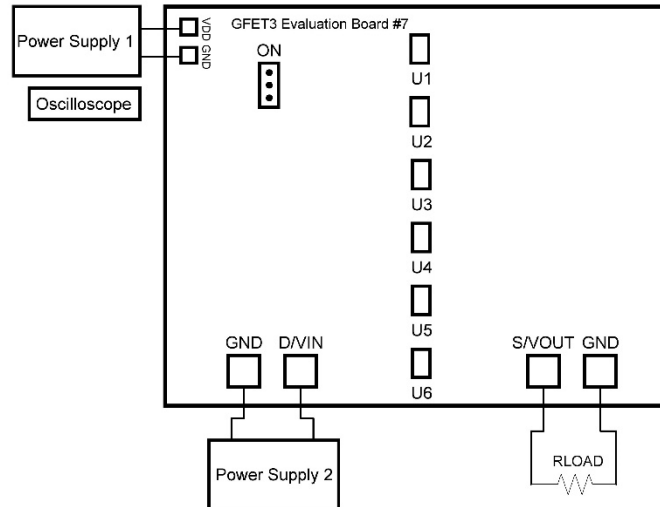


Figure 3. Typical connections for GreenFET Evaluation.


#### EVB Configuration

1. Connect oscilloscope probes to D/VIN, S/VOUT, ON, etc.;
2. Turn on Power Supply 1 and set desired  $V_{DD}$  from 1.5 V...5.5 V range;
3. Turn on Power Supply 2 and set desired  $V_D$  from 1 V... $V_{DD}$  range;
4. Toggle the ON signal High or Low to observe SLG59M1563V operation.

## SLG59M1563V

An Ultra-small, 22.5 mΩ, 2.5 A Load Switch  
with Reverse Blocking

### Package Top Marking System Definition

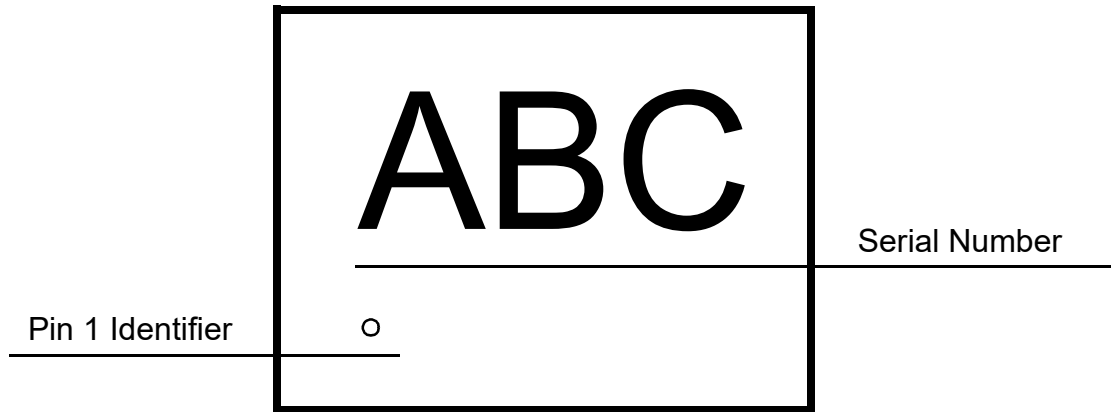


Each character in Serial Number field can be alphanumeric A-Z

# SLG59M1563V

An Ultra-small, 22.5 mΩ, 2.5 A Load Switch  
with Reverse Blocking

## Package Drawing and Dimensions

8 Lead STDFN Package 1.0 x 1.6 mm (Fused Lead)  
IC Net Weight: 0.0025 g

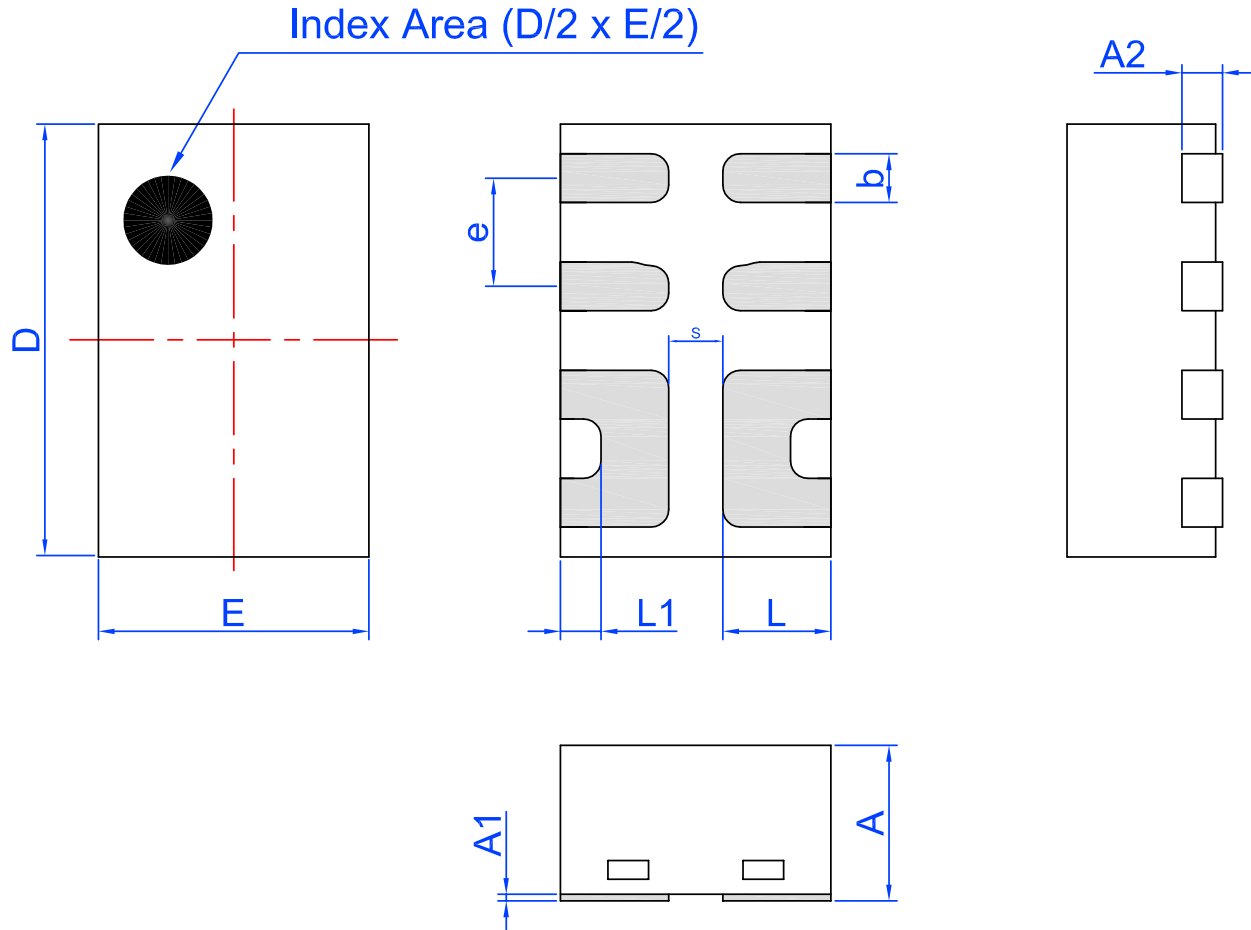

Unit: mm

Symbol	Min	Nom.	Max	Symbol	Min	Nom.	Max
A	0.50	0.55	0.60	D	1.55	1.60	1.65
A1	0.005	-	0.060	E	0.95	1.00	1.05
A2	0.10	0.15	0.20	L	0.35	0.40	0.45
b	0.13	0.18	0.23	L1	0.10	0.15	0.20
e	0.40 BSC			S	0.2 REF		

# SLG59M1563V


An Ultra-small, 22.5 mΩ, 2.5 A Load Switch  
with Reverse Blocking

## Tape and Reel Specifications

Package Type	# of Pins	Nominal Package Size [mm]	Max Units		Reel & Hub Size [mm]	Leader (min)		Trailer (min)		Tape Width [mm]	Part Pitch [mm]
			per Reel	per Box		Pockets	Length [mm]	Pockets	Length [mm]		
STDFN 8L 1x1.6mm 0.4P FC Green	8	1.0 x 1.6 x 0.55	3,000	3,000	178 / 60	100	400	100	400	8	4

## Carrier Tape Drawing and Dimensions

Package Type	PocketBTM Length	PocketBTM Width	Pocket Depth	Index Hole Pitch	Pocket Pitch	Index Hole Diameter	Index Hole to Tape Edge	Index Hole to Pocket Center	Tape Width
	A0	B0	K0	P0	P1	D0	E	F	W
STDFN 8L 1x1.6mm 0.4P FC Green	1.12	1.72	0.7	4	4	1.55	1.75	3.5	8

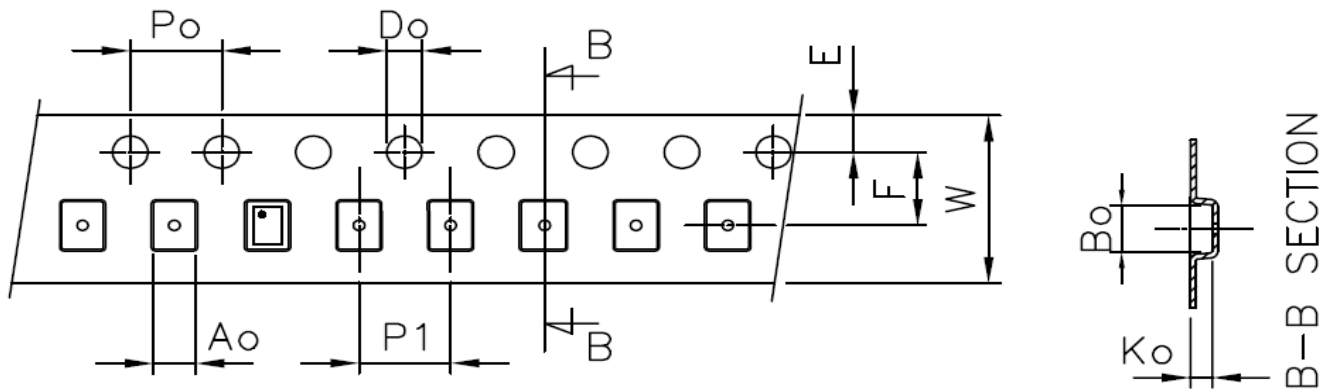

## Recommended Reflow Soldering Profile

Please see IPC/JEDEC J-STD-020: latest revision for reflow profile based on package volume of 0.88 mm<sup>3</sup> (nominal). More information can be found at [www.jedec.org](http://www.jedec.org).

## SLG59M1563V

An Ultra-small, 22.5 mΩ, 2.5 A Load Switch  
with Reverse Blocking

### Revision History

Date	Version	Change
2/2/2022	1.04	Updated Company name and logo Fixed typos
1/11/2019	1.03	Updated Style and formatting Added Chart Added Layout Guidelines Fixed typos
9/13/2016	1.02	Added Power Up/Down Sequencing Considerations Updated text and parameter names for clarity
3/9/2016	1.01	Updated IDSlkg conditions

## IMPORTANT NOTICE AND DISCLAIMER

RENESAS ELECTRONICS CORPORATION AND ITS SUBSIDIARIES ("RENESAS") PROVIDES TECHNICAL SPECIFICATIONS AND RELIABILITY DATA (INCLUDING DATASHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS OR IMPLIED, INCLUDING, WITHOUT LIMITATION, ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, OR NON-INFRINGEMENT OF THIRD-PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for developers who are designing with Renesas products. You are solely responsible for (1) selecting the appropriate products for your application, (2) designing, validating, and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, or other requirements. These resources are subject to change without notice. Renesas grants you permission to use these resources only to develop an application that uses Renesas products. Other reproduction or use of these resources is strictly prohibited. No license is granted to any other Renesas intellectual property or to any third-party intellectual property. Renesas disclaims responsibility for, and you will fully indemnify Renesas and its representatives against, any claims, damages, costs, losses, or liabilities arising from your use of these resources. Renesas' products are provided only subject to Renesas' Terms and Conditions of Sale or other applicable terms agreed to in writing. No use of any Renesas resources expands or otherwise alters any applicable warranties or warranty disclaimers for these products.

(Disclaimer Rev.1.01 Jan 2024)

### Corporate Headquarters

TOYOSU FORESIA, 3-2-24 Toyosu,  
Koto-ku, Tokyo 135-0061, Japan  
[www.renesas.com](http://www.renesas.com)

### Contact Information

For further information on a product, technology, the most up-to-date version of a document, or your nearest sales office, please visit [www.renesas.com/contact-us/](http://www.renesas.com/contact-us/).

### Trademarks

Renesas and the Renesas logo are trademarks of Renesas Electronics Corporation. All trademarks and registered trademarks are the property of their respective owners.

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Renesas Electronics:](#)

[SLG59M1563VTR](#) [SLG59M1563V](#)