




CHB200W-110S SERIES

200 WATT 4:1 INPUT DC-DC CONVERTERS

FEATURES

- * 200W Isolated Output
- * Efficiency to 91%
- * Low No Load Power Consumption
- * Fixed Switching Frequency
- * 4:1 Input Range
- * Regulated Outputs
- * Input Under-Voltage Protection
- * Over Temperature Protection
- * Over Voltage/Current Protection
- * Remote On/Off
- * Half-Brick Size Meet Industrial Standard
- * UL60950-1 2nd (Basic Insulation) Approval
- * Meet EN50155 with External Circuits
- * Shock & Vibration Meet EN50155 (EN61373)
- * Fire & Smoke Meet EN45545-2
- * 5000m Operating Altitude

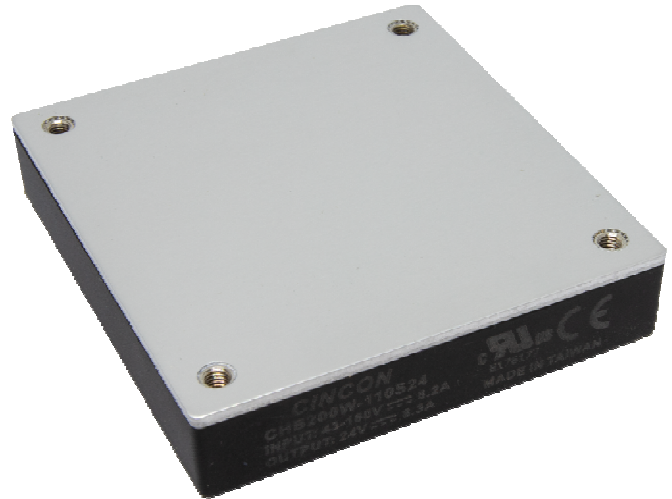

MODEL NUMBER	INPUT VOLTAGE	OUTPUT VOLTAGE	OUTPUT CURRENT		INPUT CURRENT		% EFF. (2)	CAPACITOR LOAD MAX.
			MIN.	MAX.	NO LOAD	FULL LOAD		
CHB200W-110S05	43-160 VDC	5 VDC	0 mA	40 A	10 mA	2043 mA	89	40000uF
CHB200W-110S12	43-160 VDC	12 VDC	0 mA	16.7 A	10 mA	2002 mA	91	16700uF
CHB200W-110S24	43-160 VDC	24 VDC	0 mA	8.3 A	10 mA	2034 mA	89	8300uF
CHB200W-110S28	43-160 VDC	28 VDC	0 mA	7.14 A	10 mA	2042 mA	89	7140uF
CHB200W-110S48	43-160 VDC	48 VDC	0 mA	4.2 A	10 mA	2014 mA	91	3000uF

NOTE:

1. Nominal Input Voltage 110 VDC.
2. Measure at Nominal Input Voltage.
3. An external input capacitor 220uF for all models are Recommended to Reduce Input Ripple Voltage.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Cincon:

[CHB200W-110S12](#) [CHB200W-110S24](#) [CHB200W-110S48](#) [CHB200W-110S05](#) [CHB200W-110S28](#)