



**RF360**  
**Europe GmbH**

## **SAW components**

### **SAW duplexer**

Automotive telematics  
WCDMA band 1

Series/type:	B4425
Ordering code:	B39212B4425P810
Date:	June 05, 2017
Version:	2.1

RF360 products mentioned within this document are products of RF360 Europe GmbH and other subsidiaries of RF360 Holdings Singapore Pte. Ltd. (collectively, the "RF360 Subsidiaries").

RF360 Europe GmbH, Anzinger Str. 13, München, Germany

© 2019 RF360 Europe GmbH and/or its affiliated companies. All rights reserved.



RF360  
Europe GmbH

---


These materials, including the information contained herein, may be used only for informational purposes by the customer. The RF360 Subsidiaries assume no responsibility for errors or omissions in these materials or the information contained herein. The RF360 Subsidiaries reserve the right to make changes to the product(s) or information contained herein without notice. The materials and information are provided on an AS IS basis, and the RF360 Subsidiaries assume no liability and make no warranty or representation, either expressed or implied, with respect to the materials, or any output or results based on the use, application, or evaluation of such materials, including, without limitation, with respect to the non-infringement of trademarks, patents, copyrights or any other intellectual property rights or other rights of third parties.

No use of this documentation or any information contained herein grants any license, whether express, implied, by estoppel or otherwise, to any intellectual property rights, including, without limitation, to any patents owned by QUALCOMM Incorporated or any of its subsidiaries.

Not to be used, copied, reproduced, or modified in whole or in part, nor its contents revealed in any manner to others without the express written permission of RF360 Europe GmbH.

Qualcomm is a trademark of Qualcomm Incorporated, registered in the United States and other countries. Other product and brand names may be trademarks or registered trademarks of their respective owners.

This technical data may be subject to U.S. and international export, re-export, or transfer ("export") laws. Diversion contrary to U.S. and international law is strictly prohibited.

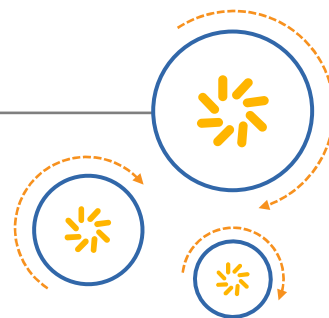

RF360 Europe GmbH  
A Qualcomm – TDK Joint Venture

## SAW components

### SAW duplexer

Automotive telematics  
WCDMA band 1

Series/type:	B4425
Ordering code:	B39212B4425P810
Date:	June 05, 2017
Version:	2.1

RF360 products mentioned within this document are offered by RF360 Europe GmbH and other subsidiaries of RF360 Holdings Singapore Pte. Ltd. (collectively, the “RF360 Subsidiaries”).

RF360 Holdings Singapore Pte. Ltd. is a joint venture of Qualcomm Global Trading Pte. Ltd. and EPCOS AG.

RF360 Europe GmbH, Anzinger Str. 13, München, Germany

© 2017 RF360 Europe GmbH and/or its affiliated companies. All rights reserved.

These materials, including the information contained herein, may be used only for informational purposes by the customer. The RF360 Subsidiaries assume no responsibility for errors or omissions in these materials or the information contained herein. The RF360 Subsidiaries reserve the right to make changes to the product(s) or information contained herein without notice. The materials and information are provided on an AS IS basis, and the RF360 Subsidiaries assume no liability and make no warranty or representation, either expressed or implied, with respect to the materials, or any output or results based on the use, application, or evaluation of such materials, including, without limitation, with respect to the non-infringement of trademarks, patents, copyrights or any other intellectual property rights or other rights of third parties.

No use of this documentation or any information contained herein grants any license, whether express, implied, by estoppel or otherwise, to any intellectual property rights, including, without limitation, to any patents owned by QUALCOMM Incorporated or any of its subsidiaries.

Not to be used, copied, reproduced, or modified in whole or in part, nor its contents revealed in any manner to others without the express written permission of RF360 Europe GmbH.

Qualcomm and Qualcomm RF360 are trademarks of Qualcomm Incorporated, registered in the United States and other countries. RF360 is a trademark of Qualcomm Incorporated. Other product and brand names may be trademarks or registered trademarks of their respective owners.

This technical data may be subject to U.S. and international export, re-export, or transfer ("export") laws. Diversion contrary to U.S. and international law is strictly prohibited.

SAW components	B4425
SAW duplexer	1950 / 2140 MHz

Data sheet

Table of contents

1	<a href="#">Application</a>	4
2	<a href="#">Features</a>	4
3	<a href="#">Package</a>	5
4	<a href="#">Pin configuration</a>	5
5	<a href="#">Matching circuit</a>	6
6	<a href="#">Characteristics</a>	7
7	<a href="#">Maximum ratings</a>	11
8	<a href="#">Transmission coefficients</a>	12
9	<a href="#">Reflection coefficients</a>	15
10	<a href="#">EVMS</a>	16
11	<a href="#">Packing material</a>	18
12	<a href="#">Marking</a>	21
13	<a href="#">Soldering profile</a>	22
14	<a href="#">Annotations</a>	23
15	<a href="#">Cautions and warnings</a>	24
	<a href="#">Important notes</a>	25

## SAW components

B4425

## SAW duplexer

1950 / 2140 MHz


Data sheet

## 1 Application

- Low -loss SAW duplexer for W-CDMA Band 1 (UMTS) systems
- Low insertion attenuation
- Low amplitude ripple
- Usable pass band 60 MHz
- High isolation between Tx and Rx

## 2 Features

- Package size  $2.0 \pm 0.1 \text{ mm} \times 1.6 \pm 0.1 \text{ mm}$
- Package height 0.45 mm (max.)
- Approximate weight 6 mg
- RoHS compatible
- Package for Surface Mount Technology (SMT)
- Ni/Au-plated terminals
- Filter surface passivated
- Electrostatic Sensitive Device (ESD)
- Moisture Sensitivity Level 2a (MSL2a)
- AEC-Q200 qualified component family (Grade 3:  $-40 \text{ }^{\circ}\text{C}$  to  $+85 \text{ }^{\circ}\text{C}$ )

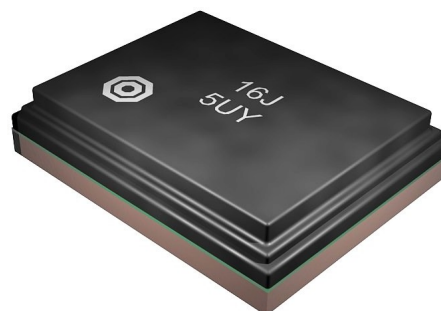

**Figure 1:** Picture of component with example of product marking.

## SAW components

B4425


## SAW duplexer

1950 / 2140 MHz


## Data sheet

## 3 Package


BOTTOM VIEW

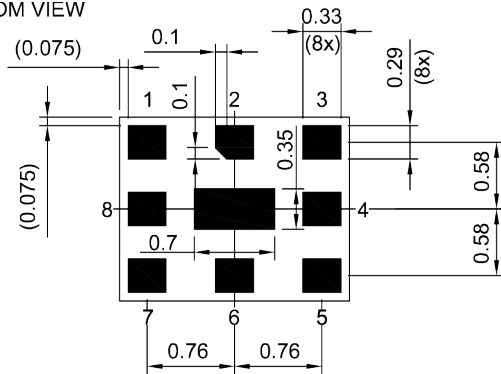Pad and pitch tolerance  $\pm 0.05$ 


SIDE VIEW



TOP VIEW

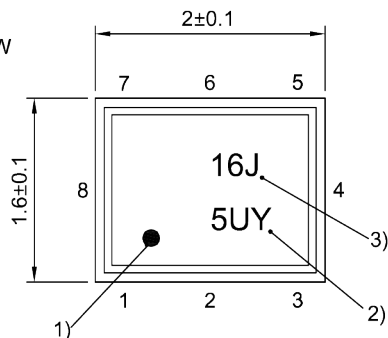

- 1) Marking for pad number 1
- 2) Example of encoded lot number
- 3) Example of encoded filter type number

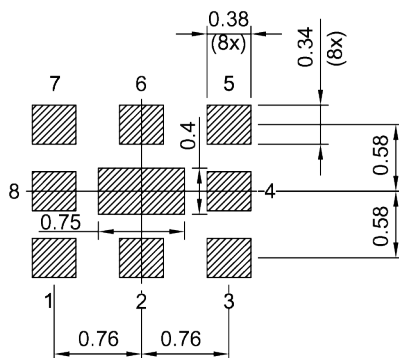Land pattern  
THRU VIEWLanding pad tolerance  $-0.02$ 

## 4 Pin configuration

- 1 RX
- 3 TX
- 6 ANT
- 2, 4, 5, 7, 8, 9 Ground


**Figure 2:** Drawing of package with package height A = 0.45 mm (max.). See Sec. Package information (p. 24).

Data sheet

## 5 Matching circuit

$$\blacksquare L_{p1} = 24 \text{ nH}$$

$$\blacksquare L_{p6} = 2.7 \text{ nH}$$

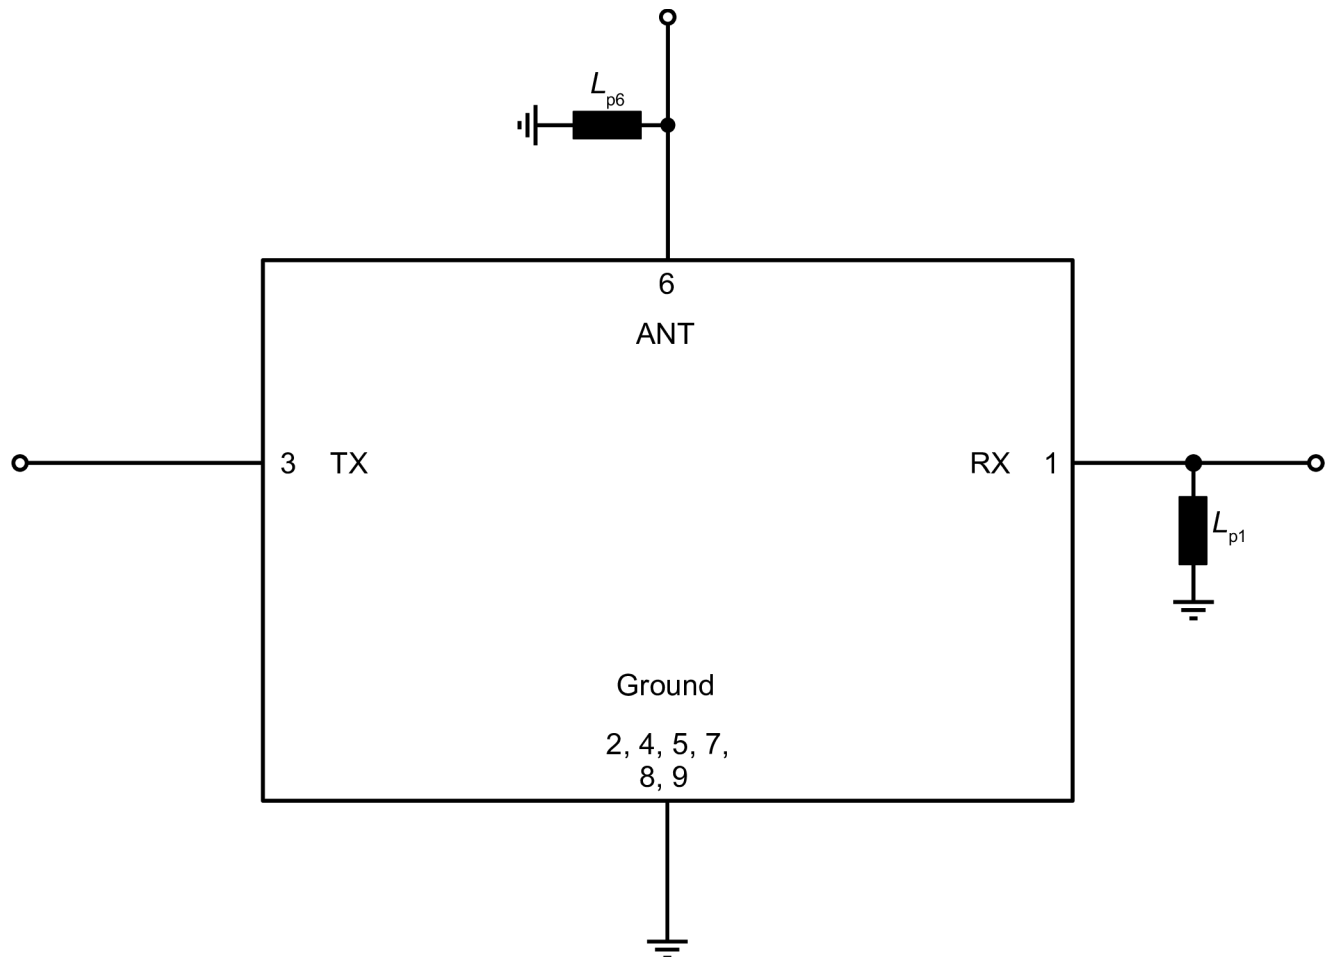

**Figure 3:** Schematic of matching circuit.

## SAW components

B4425

## SAW duplexer

1950 / 2140 MHz

## Data sheet

## 6 Characteristics

## 6.1 TX – ANT

Temperature range for specification

 $T_{\text{SPEC}} = -40\text{ °C} \dots +85\text{ °C}$ 

TX terminating impedance

 $Z_{\text{TX}} = 50\ \Omega$ 

ANT terminating impedance

 $Z_{\text{ANT}} = 50\ \Omega$  with par. 2.7 nH<sup>1)</sup>

RX terminating impedance

 $Z_{\text{RX}} = 50\ \Omega$  with par. 24 nH<sup>1)</sup>

Characteristics TX – ANT					min. for $T_{\text{SPEC}}$	typ. @ +25 °C	max. for $T_{\text{SPEC}}$	
Center frequency				$f_{\text{C}}$	—	1950	—	MHz
Maximum insertion attenuation								
		1920 ... 1980	MHz	$\alpha_{\text{max}}$	—	1.7	2.1	dB
	@ $f_{\text{carrier}}$	1922.4 ... 1977.6	MHz	$\alpha_{\text{WCDMA,max}}^{2)}$	—	1.5	2.0	dB
Amplitude ripple (p-p)								
		1920 ... 1980	MHz	$\Delta\alpha$	—	0.4	1.0	dB
	@ $f_{\text{carrier}}$	1922.4 ... 1977.6	MHz	$\Delta\alpha_{\text{WCDMA}}^{2)}$	—	0.3	0.9	dB
Maximum VSWR				VSWR <sub>max</sub>				
@ TX port		1920 ... 1980	MHz		—	1.6	2.0	
@ ANT port		1920 ... 1980	MHz		—	1.5	2.0	
Maximum error vector magnitude				EVM <sub>max</sub> <sup>3)</sup>				
		1922.4 ... 1977.6	MHz		—	0.8	2.0	%
Minimum attenuation				$\alpha_{\text{min}}$				
		50 ... 420	MHz		46	54	—	dB
		420 ... 494	MHz		44	53	—	dB
		494 ... 894	MHz		35	44	—	dB
		894 ... 1457.9	MHz		32	40	—	dB
		1457.9 ... 1565.4	MHz		32	41	—	dB
		1565.4 ... 1605.9	MHz		32	44	—	dB
		1605.9 ... 1805	MHz		30	35	—	dB
		1805 ... 1880	MHz		15	25	—	dB
		2020 ... 2110	MHz		15	22	—	dB
		2110 ... 2170	MHz		42	45	—	dB
		2170 ... 2400	MHz		29	33	—	dB
		2400 ... 2500	MHz		26	31	—	dB
		2500 ... 2690	MHz		22	27	—	dB
		2690 ... 3830	MHz		19	25	—	dB
		3830 ... 3970	MHz		25	35	—	dB
		3970 ... 4900	MHz		28	35	—	dB
		4900 ... 5150	MHz		25	36	—	dB
		5150 ... 6000	MHz		20	26	—	dB

<sup>1)</sup> See Sec. Matching circuit (p. 6).

<sup>2)</sup> Attenuation of WCDMA signal ("power transfer function"). Please refer to definition of Power Transfer Function (PTF) of

SAW components	B4425
SAW duplexer	1950 / 2140 MHz

Data sheet

- WCDMA signal (p. 23).
- <sup>3)</sup> Error Vector Magnitude (EVM) based on definition in 3GPP TS 25.141.

## SAW components

B4425

## SAW duplexer

1950 / 2140 MHz

## Data sheet

## 6.2 ANT – RX

Temperature range for specification

$$T_{\text{SPEC}} = -40\text{ °C} \dots +85\text{ °C}$$

TX terminating impedance

$$Z_{\text{TX}} = 50\ \Omega$$

ANT terminating impedance

$$Z_{\text{ANT}} = 50\ \Omega \text{ with par. } 2.7\text{ nH}^{1)}$$

RX terminating impedance

$$Z_{\text{RX}} = 50\ \Omega \text{ with par. } 24\text{ nH}^{1)}$$

## Characteristics ANT – RX

				min. for $T_{\text{SPEC}}$	typ. @ +25 °C	max. for $T_{\text{SPEC}}$	
<b>Center frequency</b>				$f_{\text{C}}$	—	2140	— MHz
<b>Maximum insertion attenuation</b>							
	2110... 2170	MHz	$\alpha_{\text{max}}$	—	2.2	2.8	dB
@ $f_{\text{carrier}}$	2112.4... 2167.6	MHz	$\alpha_{\text{WCDMA,max}}^{2)}$	—	2.2	2.8	dB
<b>Amplitude ripple (p-p)</b>							
	2110... 2170	MHz	$\Delta\alpha$	—	0.6	1.2	dB
@ $f_{\text{carrier}}$	2112.4... 2167.6	MHz	$\Delta\alpha_{\text{WCDMA}}^{2)}$	—	0.5	1.2	dB
<b>Maximum VSWR</b>							
			VSWR <sub>max</sub>				
@ ANT port	2110... 2170	MHz		—	1.6	2.1	
@ RX port	2110... 2170	MHz		—	1.5	2.0	
<b>Maximum error vector magnitude</b>							
			EVM <sub>max</sub> <sup>3)</sup>				
	2112.4... 2167.6	MHz		—	0.9	2.0	%
<b>Minimum attenuation</b>							
			$\alpha_{\text{min}}$				
	50... 814	MHz		48	65	—	dB
	814... 915	MHz		45	63	—	dB
	915... 1427.9	MHz		42	58	—	dB
	1427.9... 1605.9	MHz		40	56	—	dB
	1605.9... 1790	MHz		35	54	—	dB
	1790... 1920	MHz		38	54	—	dB
	1920... 1980	MHz		43	56	—	dB
	1980... 2075	MHz		10	25	—	dB
	2210... 2255	MHz		18	30	—	dB
	2255... 2400	MHz		38	44	—	dB
	2400... 2500	MHz		36	46	—	dB
	2500... 2700	MHz		36	48	—	dB
	2700... 4030	MHz		30	48	—	dB
	4030... 4150	MHz		30	47	—	dB
	4150... 4340	MHz		30	44	—	dB
	4340... 4900	MHz		28	44	—	dB
	4900... 6000	MHz		24	42	—	dB

<sup>1)</sup> See Sec. Matching circuit (p. 6).

<sup>2)</sup> Attenuation of WCDMA signal ("power transfer function"). Please refer to definition of Power Transfer Function (PTF) of WCDMA signal (p. 23).

<sup>3)</sup> Error Vector Magnitude (EVM) based on definition in 3GPP TS 25.141.

SAW components	B4425
SAW duplexer	1950 / 2140 MHz

Data sheet

6.3 TX – RX

Temperature range for specification	$T_{SPEC}$	= -40 °C ... +85 °C
TX terminating impedance	$Z_{TX}$	= 50 $\Omega$
ANT terminating impedance	$Z_{ANT}$	= 50 $\Omega$ with par. 2.7 nH <sup>1)</sup>
RX terminating impedance	$Z_{RX}$	= 50 $\Omega$ with par. 24 nH <sup>1)</sup>

Characteristics TX – RX			min. for $T_{SPEC}$	typ. @ +25 °C	max. for $T_{SPEC}$	
Minimum isolation	$\alpha_{min}$	1574... 1577 MHz	42	63	—	dB
		1920... 1980 MHz	53	59	—	dB
		1980... 2110 MHz	40	55	—	dB
		2110... 2170 MHz	46	50	—	dB
		3830... 3970 MHz	30	54	—	dB
		5750... 5950 MHz	20	47	—	dB

<sup>1)</sup> See Sec. Matching circuit (p. 6).

SAW components	B4425
SAW duplexer	1950 / 2140 MHz

Data sheet

7 Maximum ratings

Operable temperature	$T_{OP} = -40\text{ °C} \dots +85\text{ °C}$	
Storage temperature	$T_{STG}^{1)} = -40\text{ °C} \dots +85\text{ °C}$	
DC voltage	$ V_{DC} ^{2)} = 0\text{ V}$	
Input power	$P_{IN}$	
@ TX port: 1920 ... 1980 MHz	29 dBm	Continuous wave for 10000 h @ 55 °C.
@ TX port: other frequency ranges	10 dBm	Continuous wave for 10000 h @ 55 °C.

1) Not valid for packaging material. Storage temperature for packaging material is -25 °C to +40 °C.

2) In case of applied DC voltage blocking capacitors are mandatory.

## Data sheet

## 8 Transmission coefficients

## 8.1 TX – ANT

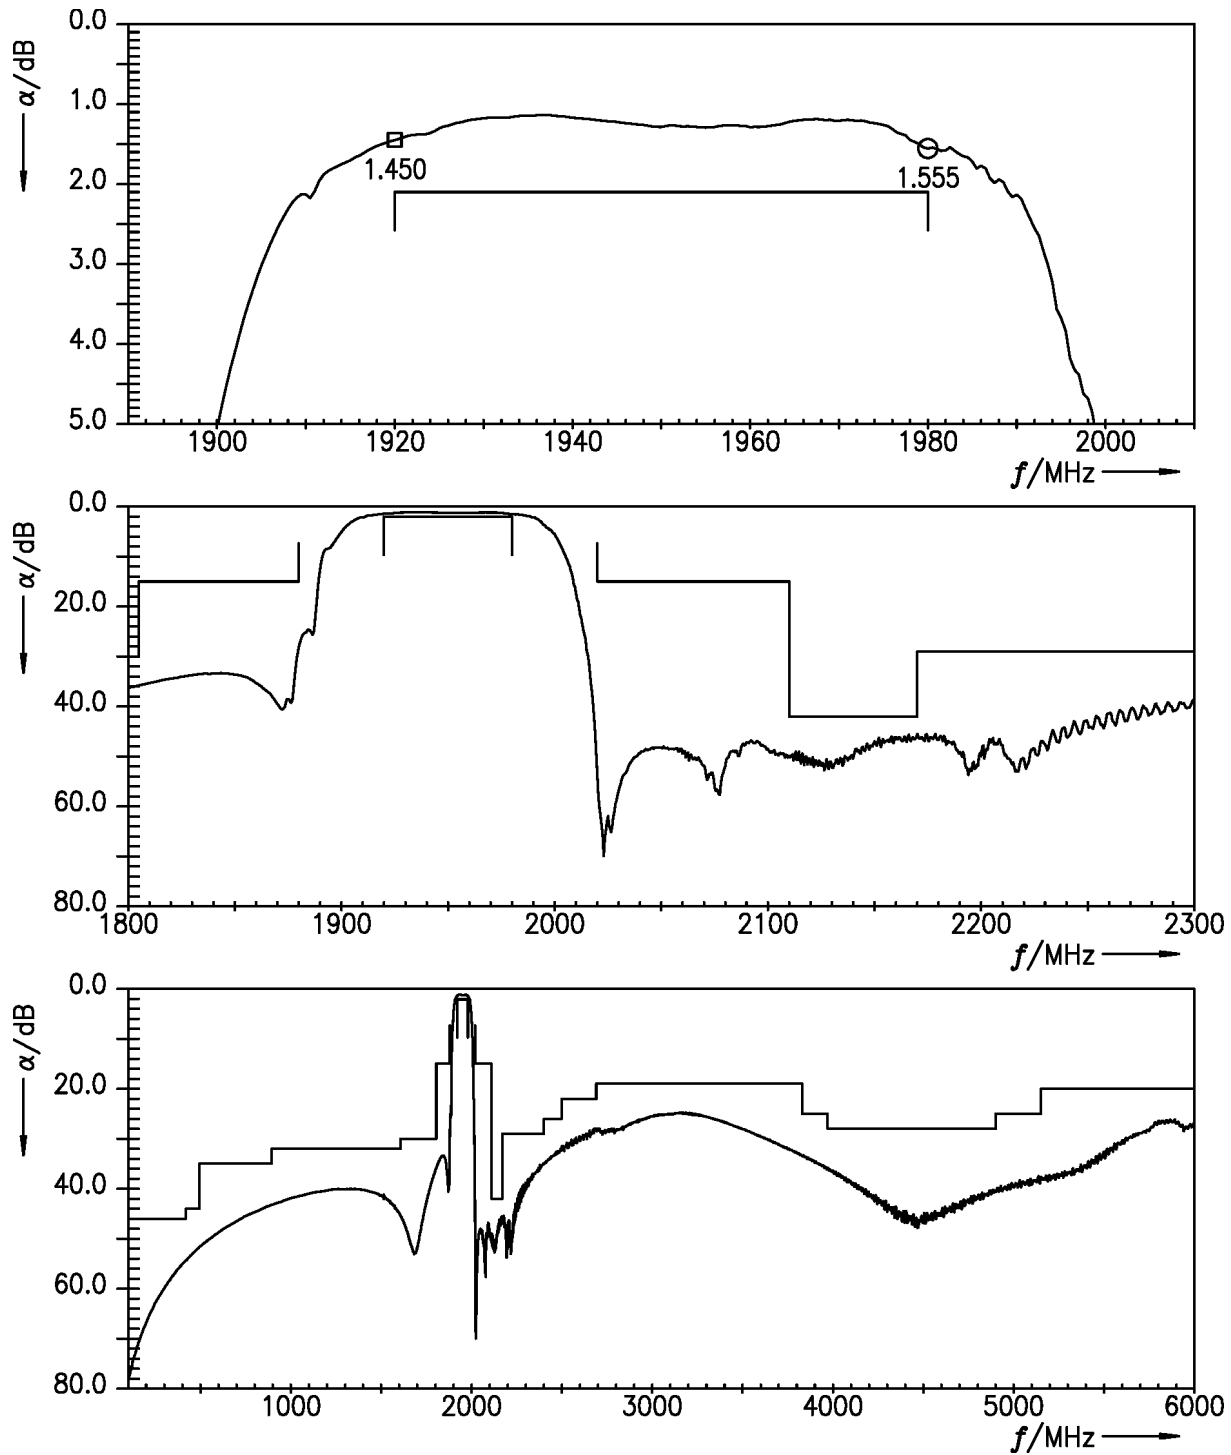


Figure 4: Attenuation TX – ANT.

## Data sheet

## 8.2 ANT – RX

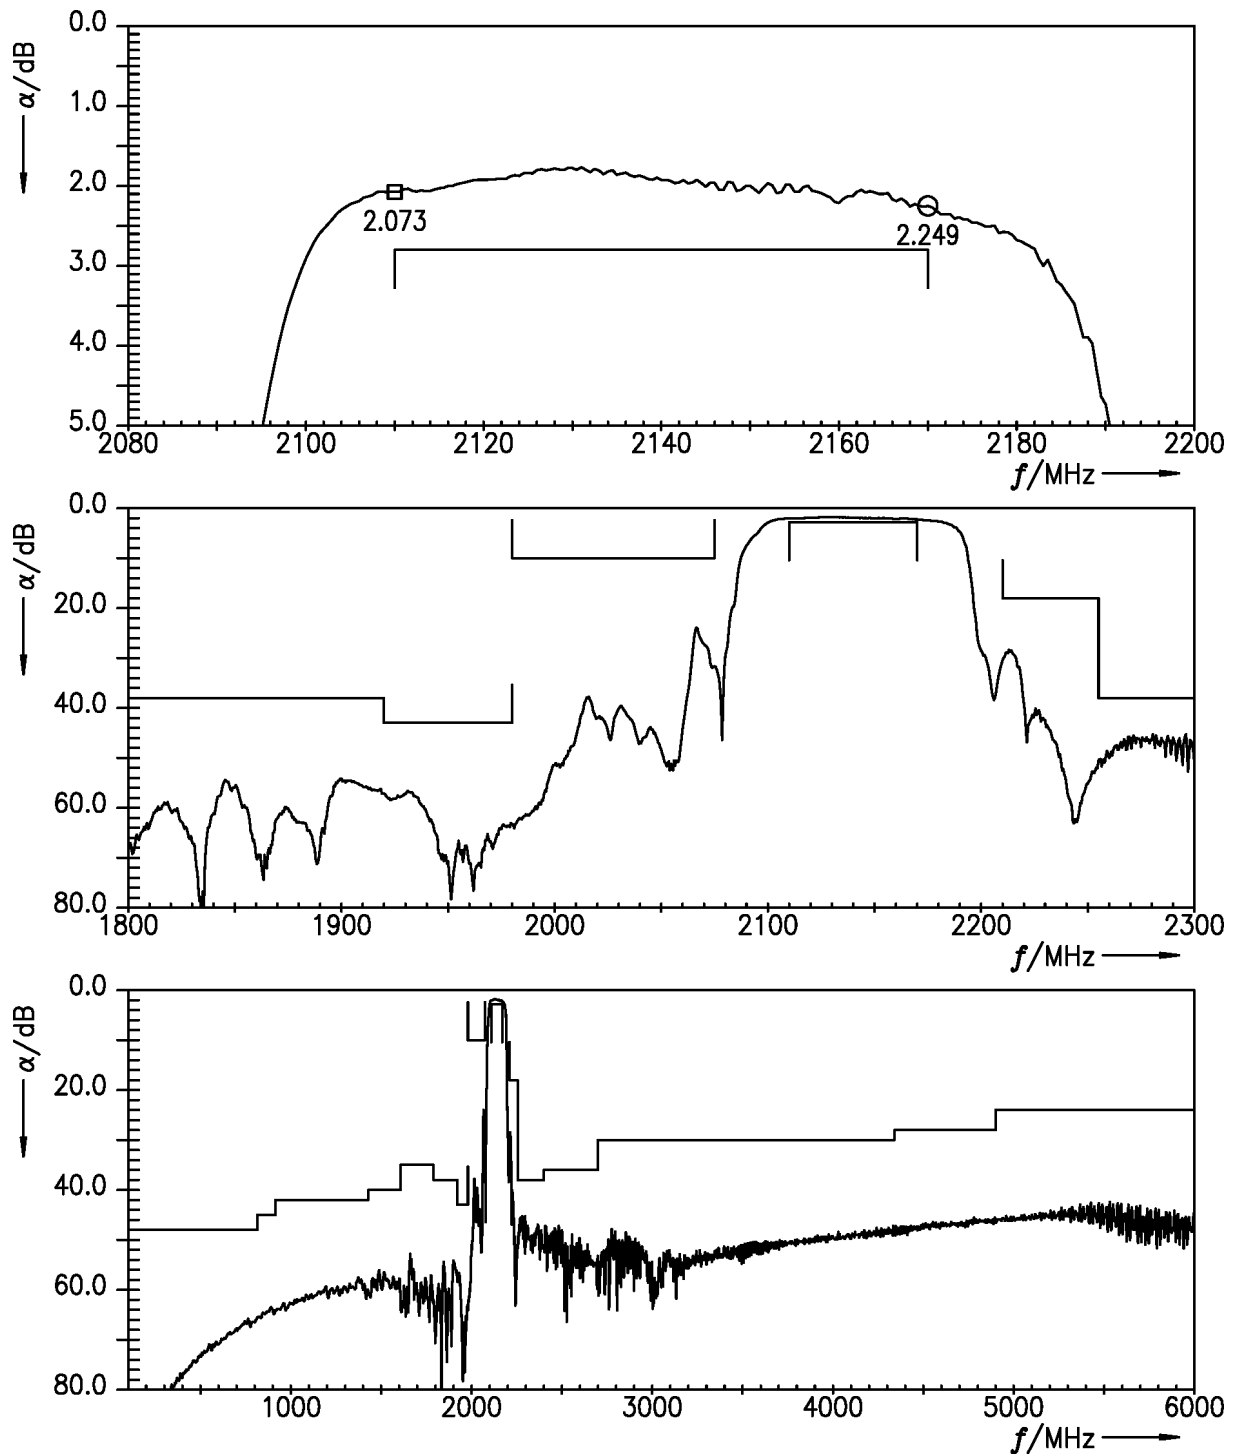


Figure 5: Attenuation ANT – RX.

## Data sheet

## 8.3 TX – RX

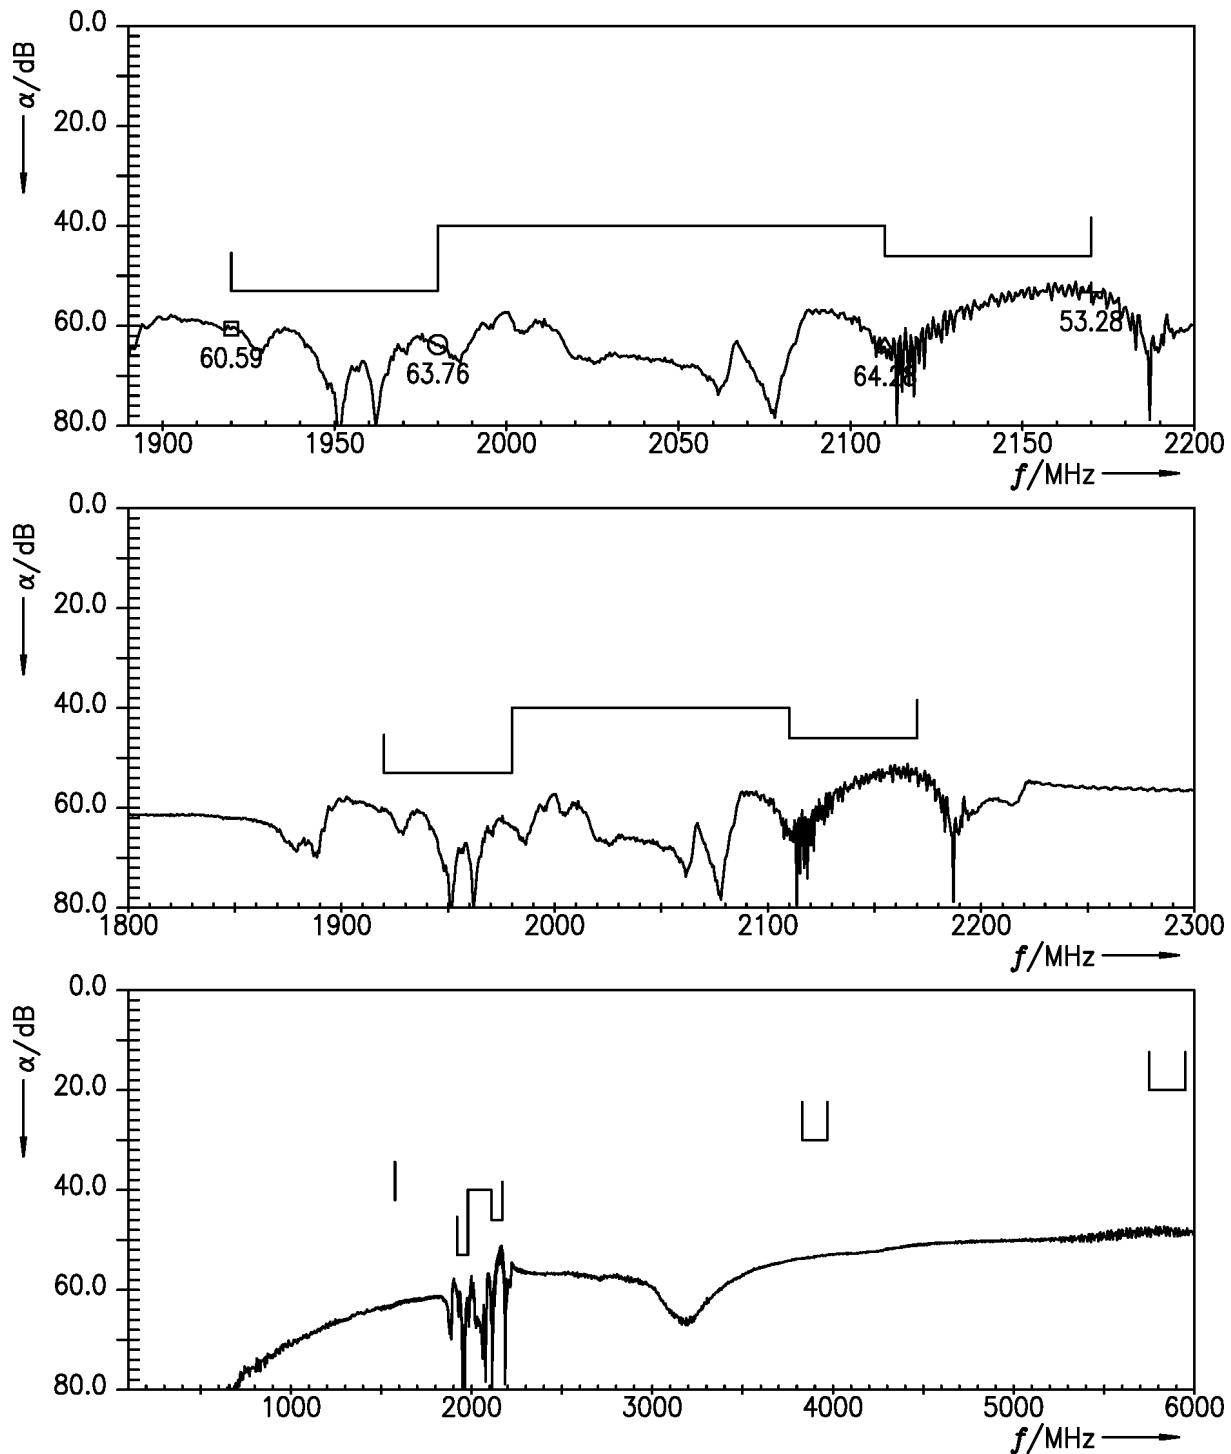


Figure 6: Isolation TX – RX.

Data sheet

9 Reflection coefficients

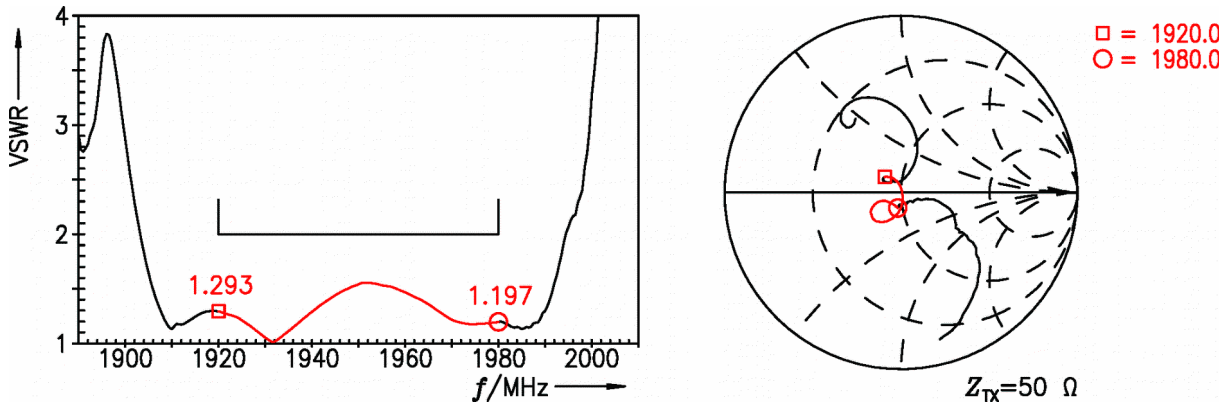


Figure 7: Reflection coefficient at TX port.

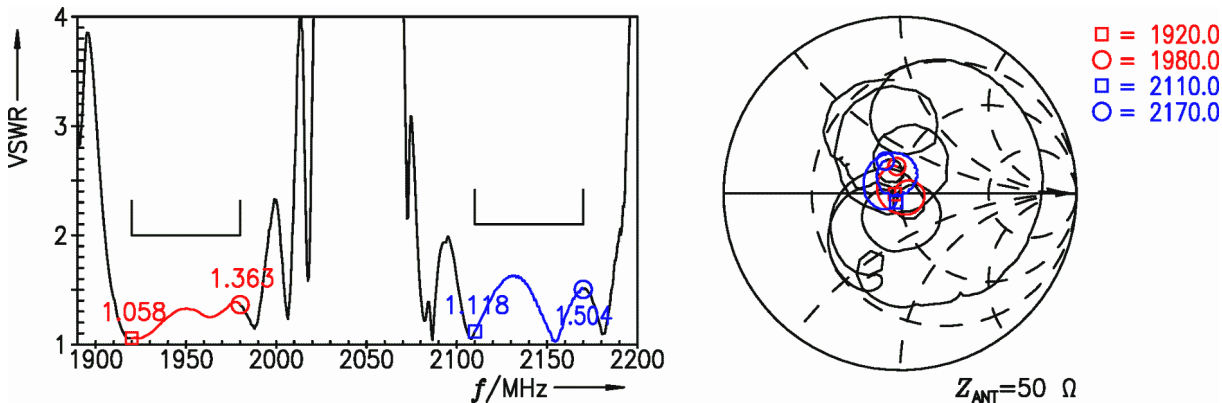


Figure 8: Reflection coefficient at ANT port.

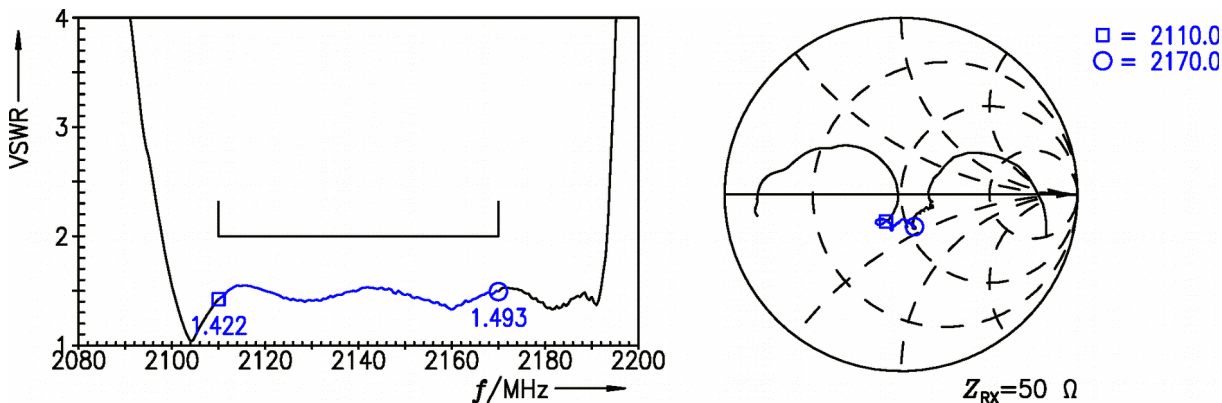


Figure 9: Reflection coefficient at RX port.

## SAW components

B4425


## SAW duplexer

1950 / 2140 MHz

Data sheet

## 10 EVMs

## 10.1 TX – ANT

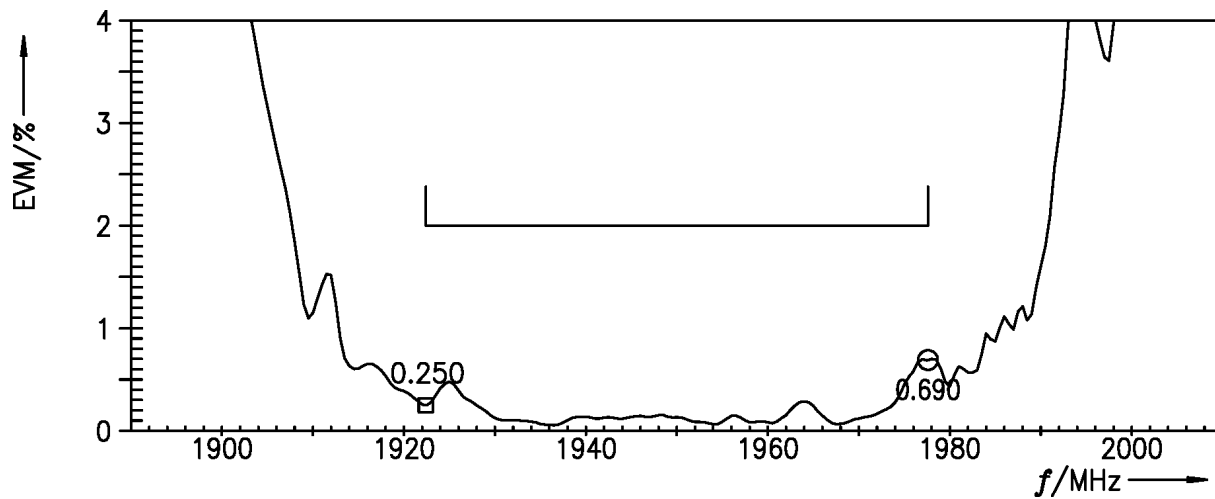**Figure 10:** Error vector magnitude TX – ANT.

SAW components	B4425
SAW duplexer	1950 / 2140 MHz

Data sheet

10.2 ANT – RX

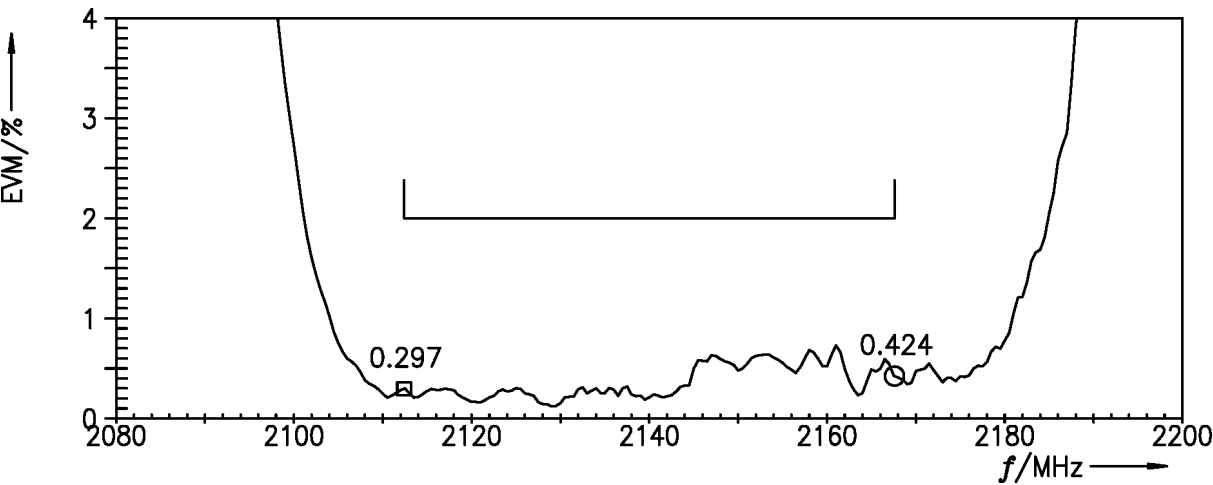


Figure 11: Error vector magnitude ANT – RX.

Data sheet

11 Packing material

11.1 Tape

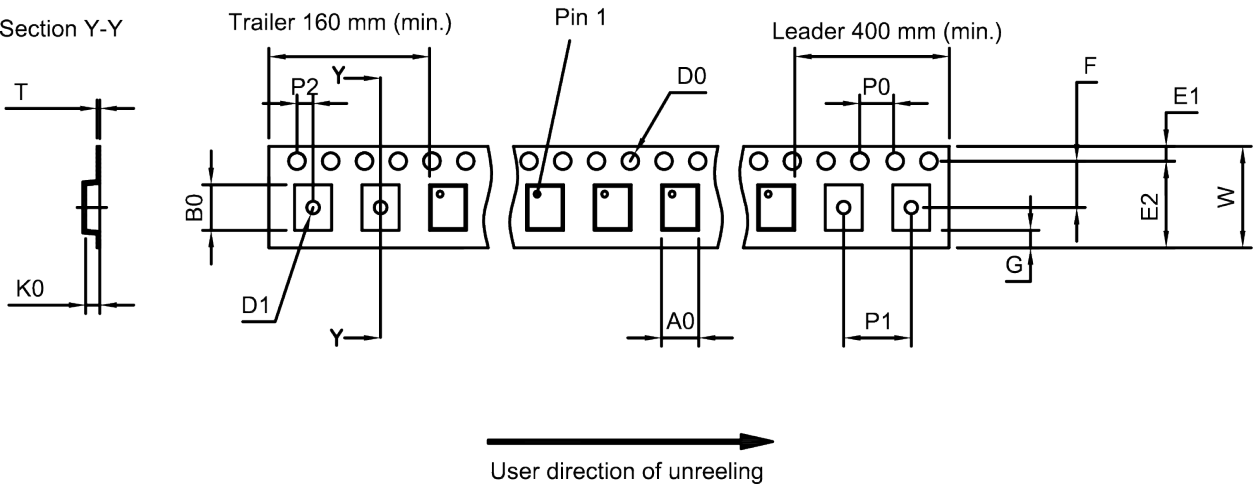


Figure 12: Drawing of tape (first-angle projection) with tape dimensions according to Table 1.

A <sub>0</sub>	1.8±0.05 mm	E <sub>2</sub>	6.25 mm (min.)	P <sub>1</sub>	4.0±0.1 mm
B <sub>0</sub>	2.25±0.05 mm	F	3.5±0.05 mm	P <sub>2</sub>	2.0±0.05 mm
D <sub>0</sub>	1.5+0.1/-0 mm	G	0.75 mm (min.)	T	0.25±0.03 mm
D <sub>1</sub>	1.0 mm (min.)	K <sub>0</sub>	0.6±0.05 mm	W	8.0+0.3/-0.1 mm
E <sub>1</sub>	1.75±0.1 mm	P <sub>0</sub>	4.0±0.1 mm		

Table 1: Tape dimensions.

SAW components	B4425
SAW duplexer	1950 / 2140 MHz

Data sheet

11.2 Reel with diameter of 180 mm

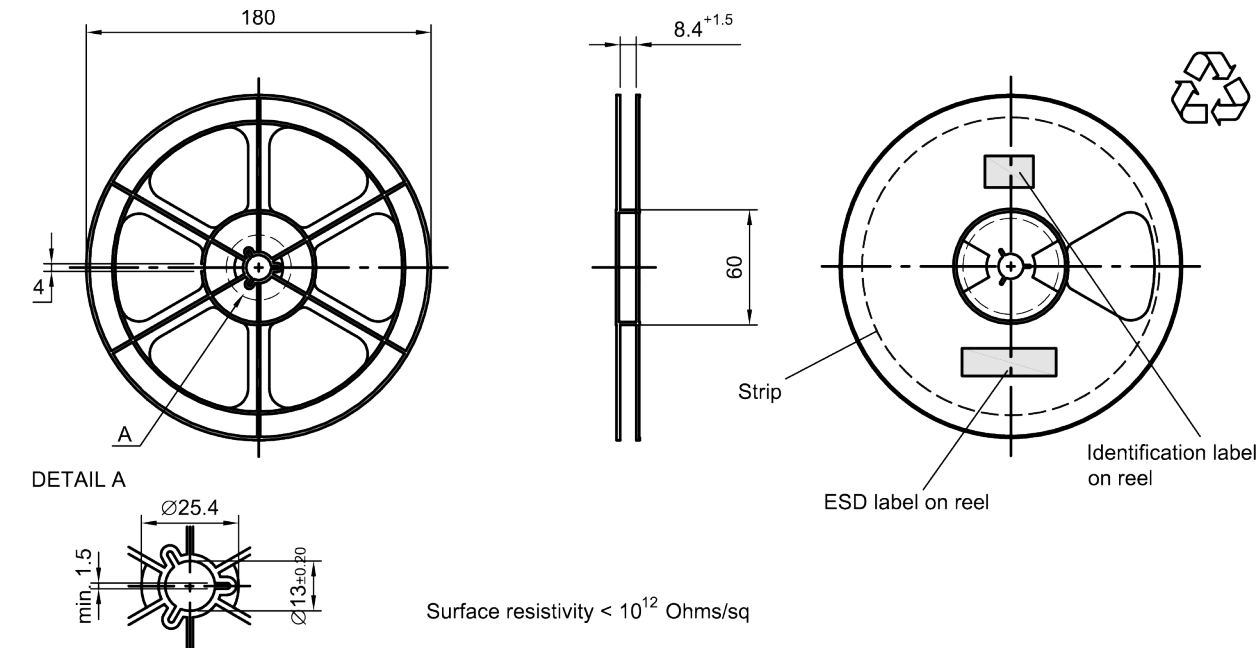


Figure 13: Drawing of reel (first-angle projection) with diameter of 180 mm.

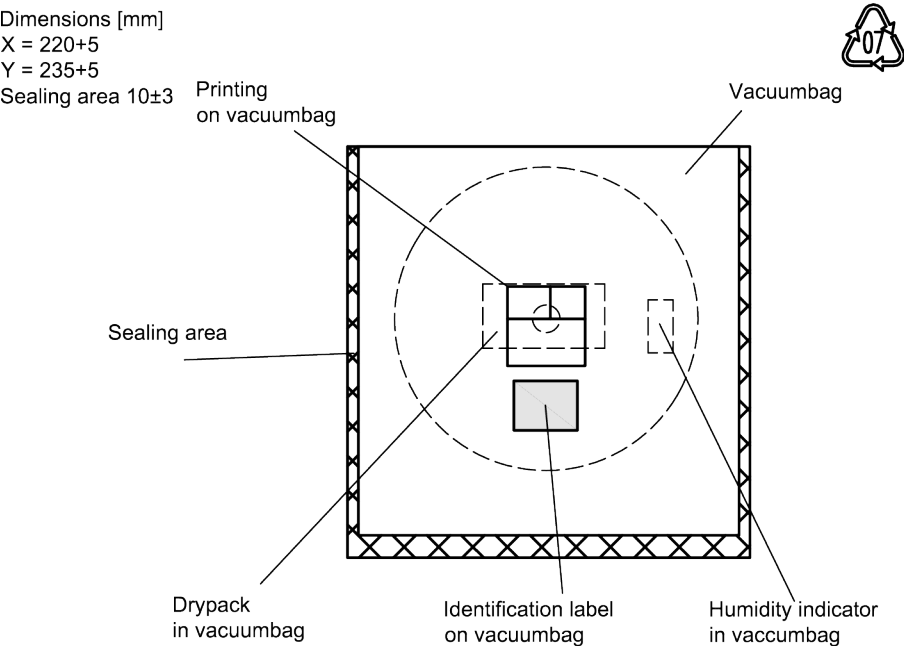


Figure 14: Drawing of moisture barrier bag (MBB) for reel with diameter of 180 mm.

## SAW components

B4425

## SAW duplexer

1950 / 2140 MHz


## Data sheet

## Dimensions [mm]

L = 188

B = 188

H = 30

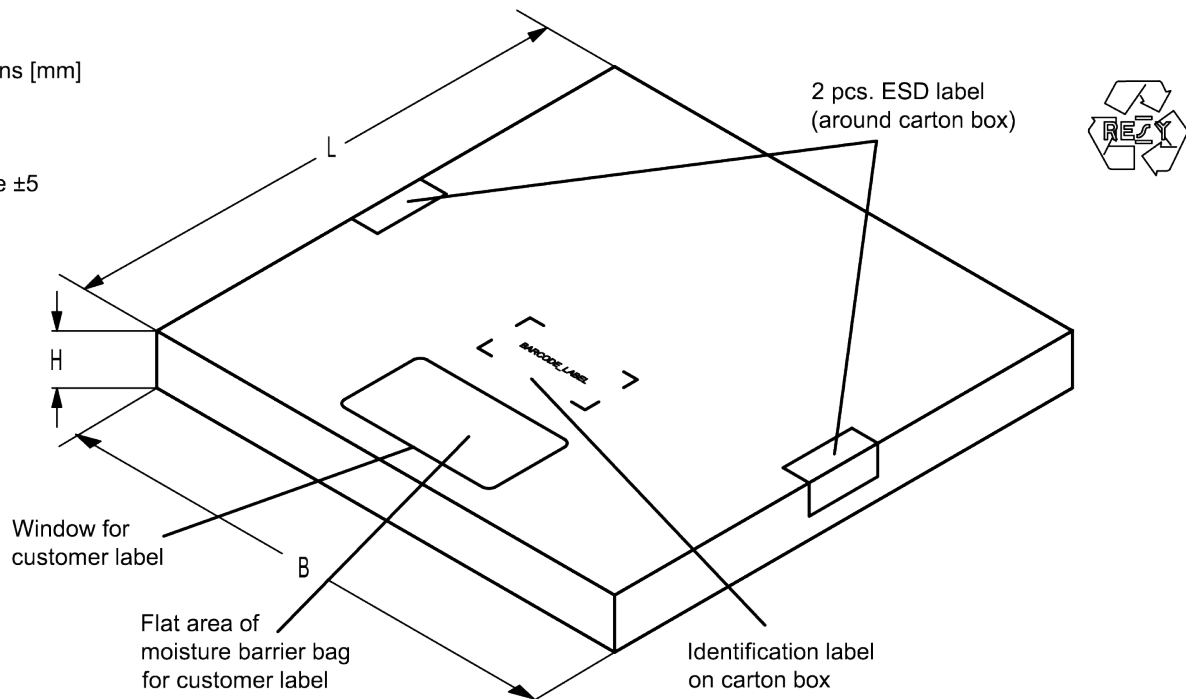Tolerance  $\pm 5$ **Figure 15:** Drawing of folding box for reel with diameter of 180 mm.

## SAW components

B4425

## SAW duplexer

1950 / 2140 MHz

## Data sheet

## 12 Marking

Products are marked with product type number and lot number encoded according to Table 2:

## ■ Type number:

The 4 digit type number of the ordering code, e.g., B3xxxxB**1234**xxxx,  
is encoded by a special BASE32 code into a 3 digit marking.

Example of decoding	type number marking on device	in decimal code.
<b>16J</b>	<b>=&gt;</b>	<b>1234</b>
$1 \times 32^2 + 6 \times 32^1 + 18 (=J) \times 32^0$	<b>=</b>	<b>1234</b>

The BASE32 code for product type B4425 is 4A9.

## ■ Lot number:

The last 5 digits of the lot number, e.g., **12345**,  
are encoded based on a special BASE47 code into a 3 digit marking.

Example of decoding lot number marking on device		in decimal code.
<b>5UY</b>	<b>=&gt;</b>	<b>12345</b>
$5 \times 47^2 + 27 (=U) \times 47^1 + 31 (=Y) \times 47^0$	<b>=</b>	<b>12345</b>

Adopted BASE32 code for type number			
Decimal value	Base32 code	Decimal value	Base32 code
0	0	16	G
1	1	17	H
2	2	18	J
3	3	19	K
4	4	20	M
5	5	21	N
6	6	22	P
7	7	23	Q
8	8	24	R
9	9	25	S
10	A	26	T
11	B	27	V
12	C	28	W
13	D	29	X
14	E	30	Y
15	F	31	Z

Adopted BASE47 code for lot number			
Decimal value	Base47 code	Decimal value	Base47 code
0	0	24	R
1	1	25	S
2	2	26	T
3	3	27	U
4	4	28	V
5	5	29	W
6	6	30	X
7	7	31	Y
8	8	32	Z
9	9	33	b
10	A	34	d
11	B	35	f
12	C	36	h
13	D	37	n
14	E	38	r
15	F	39	t
16	G	40	v
17	H	41	\
18	J	42	?
19	K	43	{
20	L	44	}
21	M	45	<
22	N	46	>
23	P		

**Table 2:** Lists for encoding and decoding of marking.

## SAW components

B4425

## SAW duplexer

1950 / 2140 MHz


## Data sheet

## 13 Soldering profile

The recommended soldering process is in accordance with IEC 60068-2-58 – 3<sup>rd</sup> edit and IPC/JEDEC J-STD-020B.

ramp rate	≤ 3 K/s
preheat	125 °C to 220 °C, 150 s to 210 s, 0.4 K/s to 1.0 K/s
$T > 220\text{ °C}$	30 s to 70 s
$T > 230\text{ °C}$	min. 10 s
$T > 245\text{ °C}$	max. 20 s
$T \geq 255\text{ °C}$	–
peak temperature $T_{\text{peak}}$	250 °C +0/-5 °C
wetting temperature $T_{\text{min}}$	230 °C +5/-0 °C for 10 s ± 1 s
cooling rate	≤ 3 K/s
soldering temperature $T$	measured at solder pads

**Table 3:** Characteristics of recommended soldering profile for lead-free solder (Sn95.5Ag3.8Cu0.7).

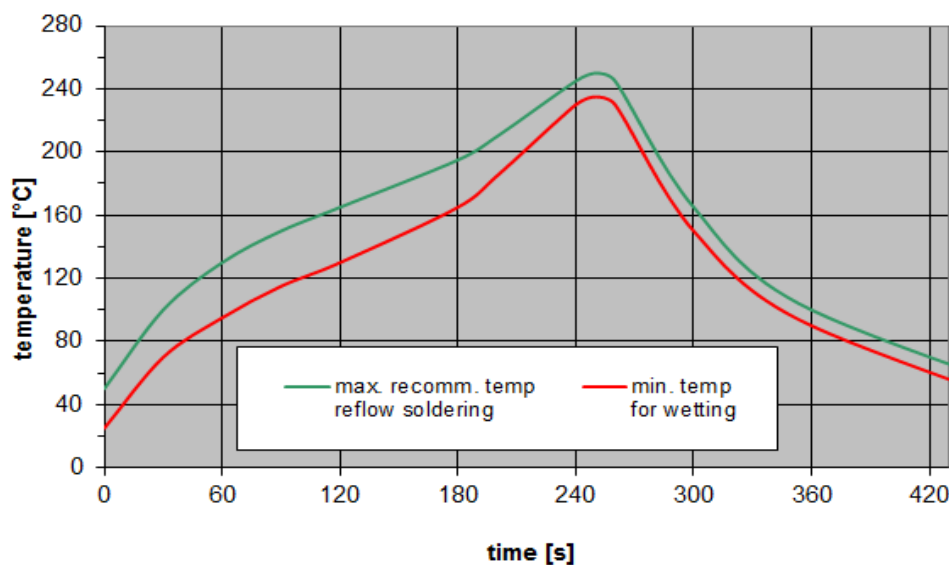

**Figure 16:** Recommended reflow profile for convection and infrared soldering – lead-free solder.

Data sheet

## 14 Annotations

### 14.1 Matching coils

See TDK inductor pdf-catalog <http://www.tdk.co.jp/tefe02/coil.htm#aname1> and Data Library for circuit simulation <http://www.tdk.co.jp/etvcl/index.htm>.

### 14.2 Power Transfer Function (PTF) of WCDMA signal

Attenuation of WCDMA signal,  $\alpha_{\text{WCDMA}}$ , is defined by

$$\alpha_{\text{WCDMA}}(f_{\text{carrier}}) = 10 \log_{10} \left| \frac{1}{\text{PTF}(f_{\text{carrier}})} \right| \text{dB}$$

and

$$\text{PTF}(f_{\text{carrier}}) = \int_{-\infty}^{+\infty} |S_{21}(f) H_{\text{RRC}}(f - f_{\text{carrier}})|^2 df$$

with  $f_{\text{carrier}}$  according to 3GPP TS 25.101 (e.g., for the WCDMA B8 pass band,  $f_{\text{carrier}}$  ranges from 882.4 MHz to 912.6 MHz which correspond to the lowest and highest TX channels, respectively).  $H_{\text{RRC}}(f)$  is the transfer function of the root-raised cosine transmit pulse shaping filter according to 3GPP TS 25.101 using the normalization

$$\int_{-\infty}^{+\infty} |H_{\text{RRC}}(f)|^2 df = 1.$$

### 14.3 RoHS compatibility

ROHS-compatible means that products are compatible with the requirements according to Art. 4 (substance restrictions) of Directive 2011/65/EU of the European Parliament and of the Council of June 8th, 2011, on the restriction of the use of certain hazardous substances in electrical and electronic equipment ("Directive") with due regard to the application of exemptions as per Annex III of the Directive in certain cases.

### 14.4 Scattering parameters (S-parameters)

The pin/port assignment is available in the headers of the S-parameter files. Please contact your local RF360 sales office.

Data sheet

## 15 Cautions and warnings

### 15.1 Display of ordering codes for RF360 products

The ordering code for one and the same product can be represented differently in data sheets, data books, other publications and the website of RF360, or in order-related documents such as shipping notes, order confirmations and product labels. The varying representations of the ordering codes are due to different processes employed and do not affect the specifications of the respective products. Detailed information can be found on the Internet under [www.rf360jv.com/orderingcodes](http://www.rf360jv.com/orderingcodes).

### 15.2 Material information

Due to technical requirements components may contain dangerous substances. For information on the type in question please also contact one of our sales offices.

For information on recycling of tapes and reels please contact one of our sales offices.

### 15.3 Moldability

Before using in overmolding environment, please contact your local RF360 sales office.

### 15.4 Package information

#### Landing area

The printed circuit board (PCB) land pattern (landing area) shown is based on RF360 internal development and empirical data and illustrated for example purposes, only. As customers' SMD assembly processes may have a plenty of variants and influence factors which are not under control or knowledge of RF360, additional careful process development on customer side is necessary and strongly recommended in order to achieve best soldering results tailored to the particular customer needs.

#### Dimensions

Unless otherwise specified all dimensions are understood using unit millimeter (mm).

Dimensions do not include burrs.

#### Projection method

Unless otherwise specified first-angle projection is applied.

## Important notes

The following applies to all products named in this publication:

1. Some parts of this publication contain **statements about the suitability of our products for certain areas of application**. These statements are based on our knowledge of typical requirements that are often placed on our products in the areas of application concerned. We nevertheless expressly point out **that such statements cannot be regarded as binding statements about the suitability of our products for a particular customer application**. As a rule, RF360 Europe GmbH and its affiliates are either unfamiliar with individual customer applications or less familiar with them than the customers themselves. For these reasons, it is always ultimately incumbent on the customer to check and decide whether an RF360 product with the properties described in the product specification is suitable for use in a particular customer application.
2. We also point out that **in individual cases, a malfunction of electronic components or failure before the end of their usual service life cannot be completely ruled out in the current state of the art, even if they are operated as specified**. In customer applications requiring a very high level of operational safety and especially in customer applications in which the malfunction or failure of an electronic component could endanger human life or health (e.g. in accident prevention or life-saving systems), it must therefore be ensured by means of suitable design of the customer application or other action taken by the customer (e.g. installation of protective circuitry or redundancy) that no injury or damage is sustained by third parties in the event of malfunction or failure of an electronic component.
3. **The warnings, cautions and product-specific notes must be observed.**
4. In order to satisfy certain technical requirements, **some of the products described in this publication may contain substances subject to restrictions in certain jurisdictions (e.g. because they are classed as hazardous)**. Useful information on this will be found in our Material Data Sheets on the Internet ([www.rf360jv.com/material](http://www.rf360jv.com/material)). Should you have any more detailed questions, please contact our sales offices.
5. We constantly strive to improve our products. Consequently, **the products described in this publication may change from time to time**. The same is true of the corresponding product specifications. Please check therefore to what extent product descriptions and specifications contained in this publication are still applicable before or when you place an order. We also **reserve the right to discontinue production and delivery of products**. Consequently, we cannot guarantee that all products named in this publication will always be available.  
The aforementioned does not apply in the case of individual agreements deviating from the foregoing for customer-specific products.

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Qualcomm RF360:](#)

[B39212B4425P810](#)