



**HITEK POWER® OL600W SERIES**  
600 W HIGH VOLTAGE POWER SUPPLIES





---

# **AC-to-HVDC single-output rack-mount high voltage power supplies**

The OL600W series range of single output high voltage power supplies meets the exacting requirements found in electron beam, ion beam, and x-ray systems, as well as ion and chemical vapor deposition, electrostatic precipitation, and other 24/7 production processes.

### Features

- › Output voltages from 1 to 80 kV
- › High packing density: 600 W in 1 U (80 kV 2 U)
- › High stability
- › Exceptional reliability
- › Arc count and extinguish (ACE)
- › Full local and remote control monitoring
- › Voltage or current control
- › Complies with SEMI F47 standard
- › CE marked for EU LV directive 2006/95/EC
- › RoHS compliant to EU directive 2011/65/EU
- › Custom options available

### Typical Applications

- › Electron beam
- › Ion beam
- › X-ray
- › Lasers
- › HV pulse generator bias
- › HV amplifier bias
- › Electrostatic precipitation
- › Chemical purification



Designed using the latest power switching IGBTs to ensure efficient and reliable operation over the full operating range, the OL600W series gives excellent performance in the most severe electrical environments. The OL600W utilizes air as the primary insulation medium for voltages up to 80 kV; achieving a high packing density for high voltage supplies giving 65 W per liter, 1 W per inch<sup>3</sup>. The 1 U construction (2 U for 80 kV units) allows operation at full power when close mounted in a standard equipment rack, saving significant rack space in large systems. Featuring a proprietary Arc Count and Extinguish (ACE) system for managing systems where load arcing, is possible, the OL600W protects both itself and the load from damage that may be caused by excessive arcing, while allowing normal operation to continue.



PHYSICAL SPECIFICATIONS	
<b>Output Power</b>	600 W max at full rated output voltage and current
<b>Output Voltage</b>	Units available with max output from 1 to 80 kV
<b>Output Current</b>	Up to 600 mA for 1 kV and 7.5 mA for 80 kV, see page 5 table
<b>Input Voltage</b>	185 to 255 VAC or 103 to 127 VAC (auto range selection). Range does not change after power up. 47 to 63 Hz single phase and earth.
<b>Input Current</b>	Not exceeding 6 A <sub>rms</sub> (185 to 255 VAC) Not exceeding 12 A <sub>rms</sub> (103 to 127 VAC)
<b>Polarity</b>	Positive or negative to order
<b>Specification Range</b>	Specifications apply above 5% of rated output voltage
<b>Voltage Ripple</b>	
<b>Voltage Mode</b>	< 0.1% of rated output voltage +2 V <sub>pk to pk</sub> < 0.02% of rated output voltage +0.5 V <sub>rms</sub>
<b>Current Mode</b>	< 0.5% of rated output voltage +2 V <sub>pk to pk</sub> < 0.1% of rated output voltage +0.5 V <sub>rms</sub>
<b>Voltage Regulation</b>	
<b>Line</b>	< 0.05% ±0.5 V change in output voltage for a 10% change in line voltage
<b>Load</b>	< 0.05% ±0.5 V change in output voltage for 0 to 100% change in load current
<b>Current Regulation</b>	
<b>Line</b>	< 0.5% of rated output current for a 10% change in line voltage
<b>Load</b>	< 0.5% of rated output current for 0 to 100% change in output voltage
<b>Recovery Time</b>	< 500 ms to within 0.1% of previous operating level following a short circuit or arc. Max overshoot 2% of rated output voltage.
<b>Temperature Coefficient</b>	< 100 ppm/°C
<b>Drift</b>	< 0.1% in 8 h after 3 h warmup at constant load, line, and temperature
<b>Efficiency</b>	> 75%
<b>Protection</b>	Over temperature Over voltage Fan failure Current limit Series output resistance
<b>Arc Count and Extinguish (ACE)</b>	Each time the ACE system detects an arc, it blanks the supply off for a brief period to extinguish the arc. The unit is then allowed to recover. If more arcs occur, they are counted to determine the arc rate; if this exceeds a safe level, the power supply is shut down. The parameters are factory set.
<b>Operating Temperature</b>	0 to +40°C (32 to 140°F)
<b>Storage Temperature</b>	-20 to +70°C (-4 to 158°F)
<b>Humidity</b>	80% max relative humidity up to 31°C (37°F) reducing linearly to 50% at 40°C (104°F). Non-condensing.
<b>Altitude</b>	Sea level to 2000 m (6500').
<b>Safety</b>	CE marked to meet the requirements of the Low Voltage Directive, 2006/95/EC, by complying with BS EN61010-1 when installed as a component part of compliant equipment.
<b>Safety Class</b>	Equipment Class 1
<b>Usage</b>	Indoor use only
<b>Installation Category</b>	II (BS EN61010)
<b>Pollution Degree</b>	2 (BS EN61010)
<b>Portability</b>	Non-portable

## PHYSICAL SPECIFICATIONS

<b>EMC</b>	Intended for installation as a component of a system and designed to meet:
	BS EN55022 class B for conducted and radiated emissions
	BS EN61000-4-2 ESD - levels $\pm 4$ kV contact, $\pm 8$ kV air discharge
	BS EN61000-4-4 Fast transients on mains input - levels $\pm 2$ kV
	BS EN61000-4-5 Surges - levels $\pm 2$ kV line to earth, $\pm 1$ kV line to line
	BS EN61000-4-8 Magnetic fields - levels 30 A/m at 50/60 Hz
	BS EN61000-4-11 Voltage dips, interruptions
	The unit will not trip and recovers to normal operation after a disturbance as defined in SEMI F47. The EMC performance of the power supply can only be fully assessed when installed within and as part of the final system.
<b>RoHS</b>	Meets the requirements of EU Directive 2011/65/EU on the Restriction of use of certain Hazardous Substances (RoHS) in electrical and electronic equipment.
<b>Metering</b>	Provided as part of an alphanumeric display. Voltages are displayed with a resolution $> 0.5\%$ of rated output. Current is displayed with a resolution of $> 1.5\%$ of rated output. Voltage and current set values can be displayed by pressing the relevant control potentiometer.
<b>Status indication</b>	Uses the alphanumeric display to show the reason for any trip condition
<b>Cooling</b>	Fan assisted with fan fail detection. Air inlets at the rear of the unit, exhaust on the side panels and top cover. Min air flow required is 3 m/s at the input to the fan.
	For slide mounting, a 15 mm gap shall be provided above the unit for air exhaust if the side air vents are blocked.
	For shelf mounting the 1 U, no gap is required above or below the unit provided the side air vents are clear by at least 15 mm. The 2 U requires a 15mm gap above the unit as well.
<b>Mechanical Specifications</b>	
<b>Dimensions</b>	See outline drawing
<b>Weight</b>	6.5 kg for units up to 60 kV
	8 kg for the 80 kV unit
<b>Connections</b>	All connections are mounted on the rear panel
<b>Mains</b>	IEC320-C20 16 A with integrated two pole switch
<b>Safety Earth</b>	M5 stud
<b>HV Output</b>	Proprietary coaxial connector
<b>Front Panel</b>	Stoving enamel trimite full gloss S60/9 color blue RAL5011 as standard.



## INTERFACE CONNECTIONS


Remote control 25-way female D-type connector:

V STATUS INDICATOR	1		
I STATUS INDICATOR	2	14	HV OUTPUT CURRENT MONITOR
HV OUTPUT VOLTAGE MONITOR	3	15	HV OFF INDICATOR
TRIP INDICATOR	4	16	REMOTE INDICATOR
LOCAL INDICATOR	5	17	ARC INDICATOR
HV ON INDICATION	6	18	+10 V REFERENCE VOLTAGE
PROGRAM VOLTAGE MONITOR	7	19	NO CONNECTION
HV ON - LO	8	20	NO CONNECTION
HV ON - HI	9	21	ENABLE LO
PROGRAM VOLTAGE HI	10	22	ENABLE HI
PROGRAM VOLTAGE LO	11	23	CURRENT PROGRAM 0 V
0 V	12	24	CURRENT PROGRAM
MONITOR 0 V	13	25	CURRENT PROGRAM MONITOR


All logical indicators are open collector outputs rated at 16 V (max) in the off state. An internal 100  $\Omega$  resistor is connected in series with the open collector transistor. The pull down voltage is 0.9 V plus the internal resistor drop. The rated current is 10 mA.

All analog voltage and current monitors are 0 to +10 V  $\pm 0.5\%$   $\pm 20$  mV, with respect to pin 13, representing 0 to rated output. Signal impedance < 100  $\Omega$  and minimum external load resistance is 2 k $\Omega$ .

All analog voltage and current inputs are 0 to +10 V on the HI input with respect to the LO input representing 0 V to rated output  $\pm 0.2\%$  of setting  $\pm 0.1\%$  of rating. Input impedance > 50 k $\Omega$ .

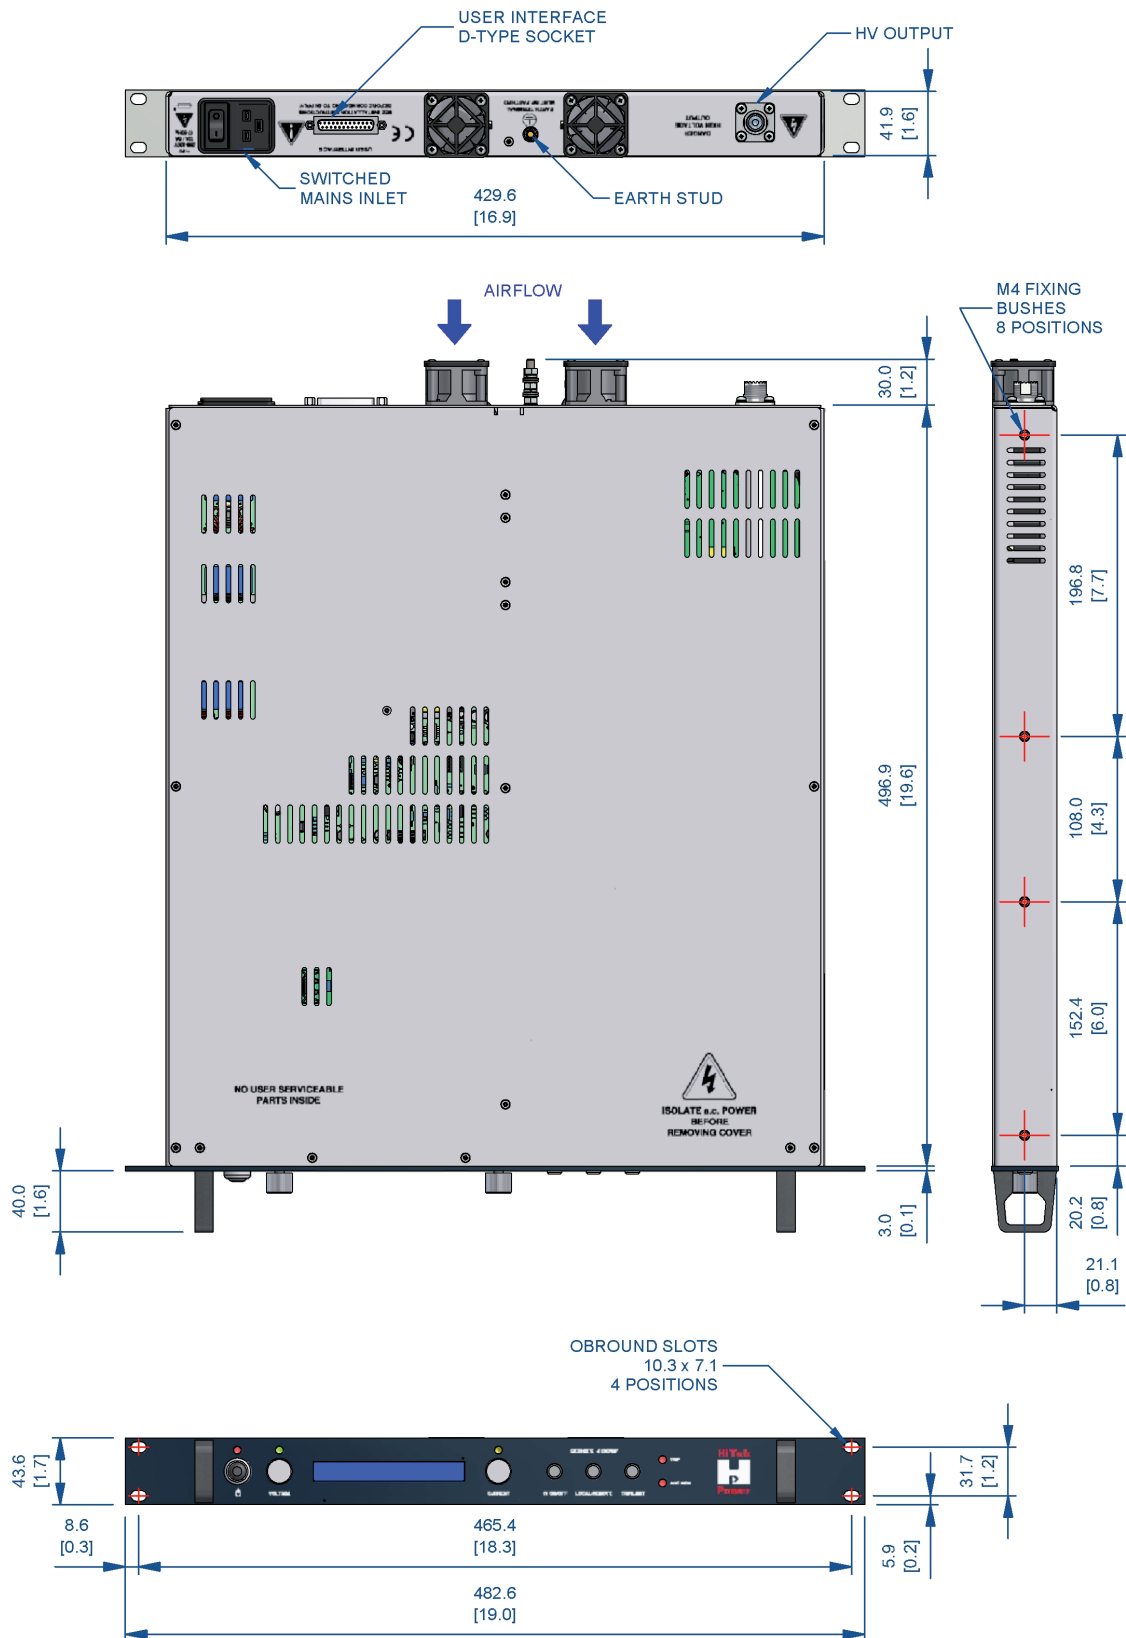

Note: Drawing dimensions are in mm (")

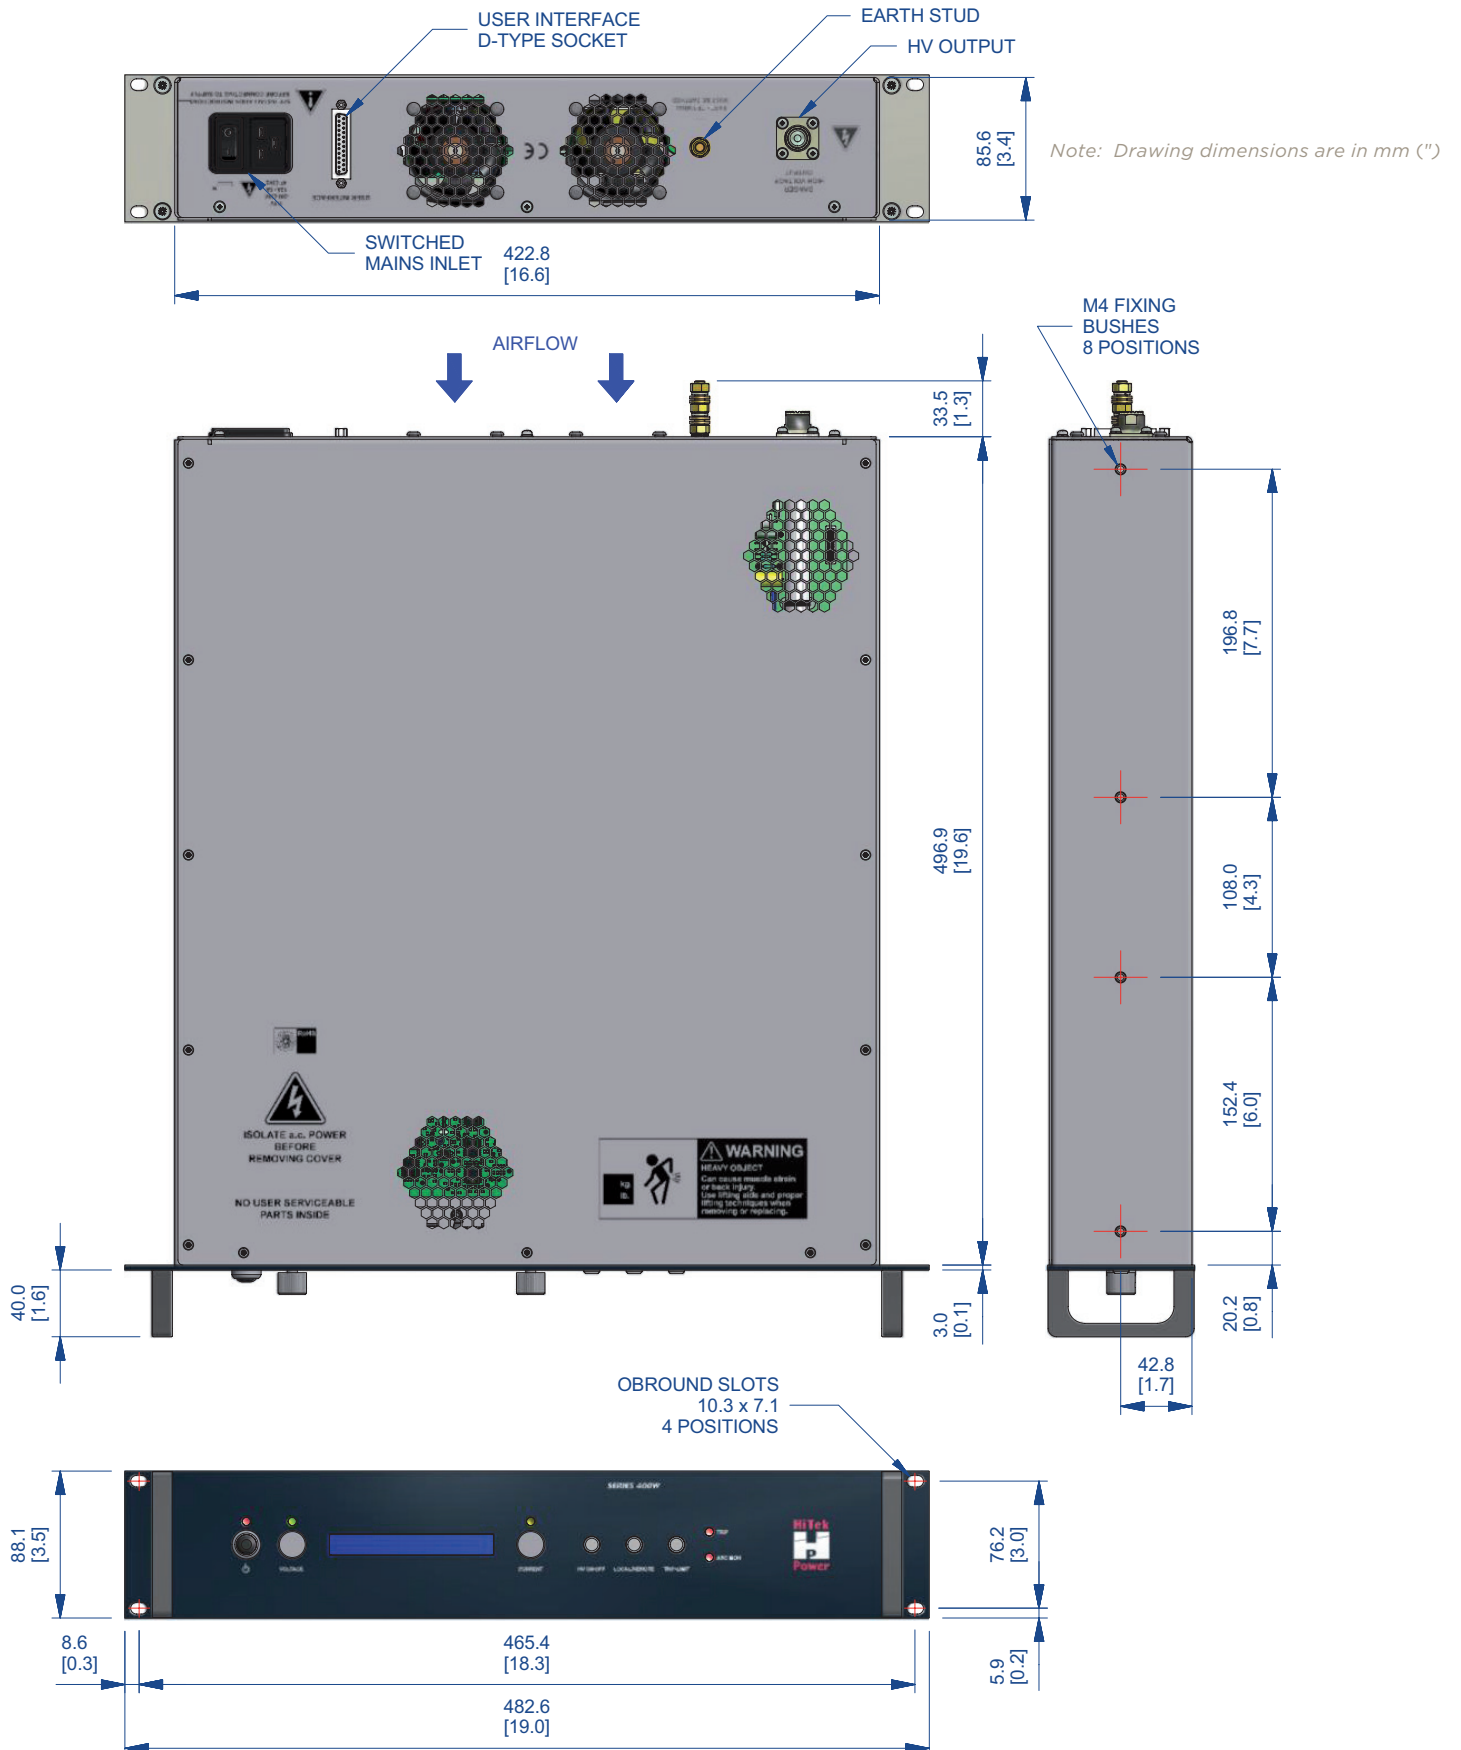



The standard range of units available is as follows:

OUTPUT AND ORDERING INFORMATION		
Model	Output Voltage	Output Current
<b>OL600W-102*</b>	1 kV	600 mA
<b>OL600W-502*</b>	5 kV	120 mA
<b>OL600W-103*</b>	10 kV	60 mA
<b>OL600W-203*</b>	20 kV	30 mA
<b>OL600W-303*</b>	30 kV	20 mA
<b>OL600W-403*</b>	40 kV	15 mA
<b>OL600W-503*</b>	50 kV	12 mA
<b>OL600W-603*</b>	60 kV	10 mA
<b>OL600W-803*</b>	80 kV**	7.5 mA

\* Add P for a positive polarity unit or N for a negative polarity unit. eg: part number for a 20 kV positive unit: OL600W-203P

\*\* 80 kV unit utilizes an encapsulated HV section and is housed within a 2 U chassis.

For voltages not listed above, please contact our sales team.



For international contact information, visit  
[advanced-energy.com](http://advanced-energy.com).

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

## Advanced Energy:

[OL600W-102PC](#) [OL600W-603P](#) [OL600W-203P](#) [OL600W-303N](#) [OL600W-103PC](#) [OL600W-502NC](#) [OL600W-803PC](#)  
[OL600W-502PC](#) [OL600W-102P](#) [OL600W-803N](#) [OL600W-603NC](#) [OL600W-203PC](#) [OL600W-303PC](#) [OL600W-](#)  
[403NC](#) [OL600W-502N](#) [OL600W-403P](#) [OL600W-503P](#) [OL600W-403PC](#) [OL600W-303P](#) [OL600W-102N](#) [OL600W-](#)  
[803P](#) [OL600W-502P](#) [OL600W-103P](#) [OL600W-203N](#) [OL600W-102NC](#) [OL600W-503NC](#) [OL600W-803NC](#) [OL600W-](#)  
[503PC](#) [OL600W-203NC](#) [OL600W-403N](#) [OL600W-303NC](#) [OL600W-603PC](#) [OL600W-603N](#) [OL600W-503N](#)  
[OL600W-103N](#) [OL600W-103NC](#)