

# ESP32-WROOM-32D & ESP32-WROOM-32U

Datasheet Version 2.6

NOT RECOMMENDED  
FOR NEW DESIGNS  
(NRND)



ESPRESSIF

# 1 Module Overview

**Note:**

Check the link or the QR code to make sure that you use the latest version of this document:  
[https://espressif.com/documentation/esp32-wroom-32d\\_esp32-wroom-32u\\_datasheet\\_en.pdf](https://espressif.com/documentation/esp32-wroom-32d_esp32-wroom-32u_datasheet_en.pdf)



## 1.1 Features

### CPU and On-Chip Memory

- ESP32-D0WD embedded, Xtensa dual-core 32-bit LX6 microprocessor, up to 240 MHz
- 448 KB ROM
- 520 KB SRAM
- 8 KB SRAM in RTC

### Wi-Fi

- 802.11b/g/n
- Bit rate: 802.11n up to 150 Mbps
- A-MPDU and A-MSDU aggregation
- 0.4  $\mu$ s guard interval support
- Center frequency range of operating channel: 2412 ~ 2484 MHz

### Bluetooth®

- Bluetooth V4.2 BR/EDR and Bluetooth LE specification
- Class-1, class-2 and class-3 transmitter
- AFH
- CVSD and SBC

### Peripherals

- Up to 32 GPIOs

– 5 strapping GPIOs

- SD card, UART, SPI, SDIO, I2C, LED PWM, Motor PWM, I2S, IR, pulse counter, GPIO, capacitive touch sensor, ADC, DAC, TWAI® (compatible with ISO 11898-1, i.e. CAN Specification 2.0)

### Integrated Components on Module

- 40 MHz crystal oscillator
- 4 MB SPI flash

### Antenna Options

- ESP32-WROOM-32D: On-board PCB antenna
- ESP32-WROOM-32U: External antenna via a connector

### Operating Conditions

- Operating voltage/Power supply: 3.0 ~ 3.6 V
- Operating ambient temperature: -40 ~ 85 °C

### Certification

- RF certification: See [certificates](#)
- Green certification: REACH/RoHS

### Test

- HTOL/HTSL/uHAST/TCT/ESD

## 1.2 Series Comparison

ESP32-WROOM-32D and ESP32-WROOM-32U are powerful, generic Wi-Fi + Bluetooth® + Bluetooth LE MCU modules that target a wide variety of applications, ranging from low-power sensor networks to the most demanding tasks, such as voice encoding, music streaming and MP3 decoding.

[Not Recommended For New Designs \(NRND\)](#)

ESP32-WROOM-32D comes with a PCB antenna. ESP32-WROOM-32U comes with a connector for an external antenna. The modules feature a 4 MB external SPI flash.

The series comparison for the modules is as follows:

**Table 1: ESP32-WROOM-32D (ANT) Series Comparison**

| Ordering Code   | Flash <sup>3</sup> | Ambient Temp. <sup>1</sup><br>(°C) | Size <sup>2</sup><br>(mm) |
|-----------------|--------------------|------------------------------------|---------------------------|
| ESP32-WROOM-32D | 4 MB               | −40 ~ 85                           | 18 × 25.5 × 3.1           |

<sup>1</sup> Ambient temperature specifies the recommended temperature range of the environment immediately outside the Espressif module.

<sup>2</sup> For details, refer to Section [9.1 Module Dimensions](#).

<sup>3</sup> For specifications, refer to Section [5.5 Memory Specifications](#).

**Table 2: ESP32-WROOM-32U (CONN) Series Comparison<sup>4</sup>**

| Ordering Code   | Flash <sup>3</sup> | Ambient Temp. <sup>1</sup><br>(°C) | Size <sup>2</sup><br>(mm) |
|-----------------|--------------------|------------------------------------|---------------------------|
| ESP32-WROOM-32U | 4 MB               | −40 ~ 85                           | 18 × 19.2 × 3.2           |

<sup>4</sup> This table shares the same notes presented in Table 1 above.

At the core of the modules is ESP32-D0WD \*, an Xtensa® 32-bit LX7 CPU that operates at up to 240 MHz. You can power off the CPU and make use of the low-power coprocessor to constantly monitor the peripherals for changes or crossing of thresholds.

**Note:**

- For details on the part numbers of the ESP32 family of chips, please refer to the document [ESP32 Datasheet](#).
- For chip revision identification, ESP-IDF release that supports a specific chip revision, and other information on chip revisions, please refer to [ESP32 Series SoC Errata](#) > Section [Chip Revision Identification](#).

## 1.3 Applications

- Smart Home
- Industrial Automation
- Health Care
- Consumer Electronics
- Smart Agriculture
- POS Machines
- Service Robot
- Audio Devices
- Generic Low-power IoT Sensor Hubs
- Generic Low-power IoT Data Loggers
- Cameras for Video Streaming
- Speech Recognition
- Image Recognition
- SDIO Wi-Fi + Bluetooth Networking Card

[Not Recommended For New Designs \(NRND\)](#)

# Contents

|          |                                                    |           |
|----------|----------------------------------------------------|-----------|
| <b>1</b> | <b>Module Overview</b>                             | <b>2</b>  |
| 1.1      | Features                                           | 2         |
| 1.2      | Series Comparison                                  | 2         |
| 1.3      | Applications                                       | 3         |
| <b>2</b> | <b>Pin Definitions</b>                             | <b>8</b>  |
| 2.1      | Pin Layout                                         | 8         |
| 2.2      | Pin Description                                    | 8         |
| <b>3</b> | <b>Boot Configurations</b>                         | <b>10</b> |
| 3.1      | Chip Boot Mode Control                             | 11        |
| 3.2      | Internal LDO (VDD_SDIO) Voltage Control            | 12        |
| 3.3      | UOTXD Printing Control                             | 13        |
| 3.4      | Timing Control of SDIO Slave                       | 13        |
| 3.5      | JTAG Signal Source Control                         | 13        |
| 3.6      | Chip Power-up and Reset                            | 13        |
| <b>4</b> | <b>Peripherals</b>                                 | <b>15</b> |
| 4.1      | Peripheral Overview                                | 15        |
| 4.2      | Digital Peripherals                                | 15        |
| 4.2.1    | General Purpose Input / Output Interface (GPIO)    | 15        |
| 4.2.2    | Serial Peripheral Interface (SPI)                  | 15        |
| 4.2.3    | Universal Asynchronous Receiver Transmitter (UART) | 16        |
| 4.2.4    | I2C Interface                                      | 16        |
| 4.2.5    | I2S Interface                                      | 17        |
| 4.2.6    | Remote Control Peripheral                          | 17        |
| 4.2.7    | Pulse Counter Controller (PCNT)                    | 18        |
| 4.2.8    | LED PWM Controller                                 | 18        |
| 4.2.9    | Motor Control PWM                                  | 19        |
| 4.2.10   | SD/SDIO/MMC Host Controller                        | 20        |
| 4.2.11   | SDIO/SPI Slave Controller                          | 20        |
| 4.2.12   | TWAI® Controller                                   | 21        |
| 4.2.13   | Ethernet MAC Interface                             | 22        |
| 4.3      | Analog Peripherals                                 | 22        |
| 4.3.1    | Analog-to-Digital Converter (ADC)                  | 22        |
| 4.3.2    | Digital-to-Analog Converter (DAC)                  | 23        |
| 4.3.3    | Touch Sensor                                       | 24        |
| <b>5</b> | <b>Electrical Characteristics</b>                  | <b>25</b> |
| 5.1      | Absolute Maximum Ratings                           | 25        |
| 5.2      | Recommended Operating Conditions                   | 25        |
| 5.3      | DC Characteristics (3.3 V, 25 °C)                  | 25        |
| 5.4      | Current Consumption Characteristics                | 26        |

Not Recommended For New Designs (NRND)

|           |                                            |           |
|-----------|--------------------------------------------|-----------|
| 5.5       | Memory Specifications                      | 26        |
| <b>6</b>  | <b>RF Characteristics</b>                  | <b>27</b> |
| 6.1       | Wi-Fi Radio                                | 27        |
| 6.1.1     | Wi-Fi RF Transmitter (TX) Characteristics  | 27        |
| 6.1.2     | Wi-Fi RF Receiver (RX) Characteristics     | 28        |
| 6.2       | Bluetooth LE Radio                         | 29        |
| 6.2.1     | Receiver                                   | 29        |
| 6.2.2     | Transmitter                                | 30        |
| <b>7</b>  | <b>Module Schematics</b>                   | <b>31</b> |
| <b>8</b>  | <b>Peripheral Schematics</b>               | <b>33</b> |
| <b>9</b>  | <b>Physical Dimensions</b>                 | <b>34</b> |
| 9.1       | Module Dimensions                          | 34        |
| 9.2       | Dimensions of External Antenna Connector   | 36        |
| <b>10</b> | <b>PCB Layout Recommendations</b>          | <b>38</b> |
| 10.1      | PCB Land Pattern                           | 38        |
| 10.2      | Module Placement for PCB Design            | 39        |
| <b>11</b> | <b>Product Handling</b>                    | <b>40</b> |
| 11.1      | Storage Conditions                         | 40        |
| 11.2      | Electrostatic Discharge (ESD)              | 40        |
| 11.3      | Reflow Profile                             | 40        |
| 11.4      | Ultrasonic Vibration                       | 41        |
|           | <b>Datasheet Versioning</b>                | <b>42</b> |
|           | <b>Related Documentation and Resources</b> | <b>43</b> |
|           | <b>Revision History</b>                    | <b>44</b> |

## List of Tables

|    |                                                              |    |
|----|--------------------------------------------------------------|----|
| 1  | ESP32-WROOM-32D (ANT) Series Comparison                      | 3  |
| 2  | ESP32-WROOM-32U (CONN) Series Comparison <sup>4</sup>        | 3  |
| 3  | Pin Definitions                                              | 8  |
| 4  | Default Configuration of Strapping Pins                      | 10 |
| 5  | Description of Timing Parameters for the Strapping Pins      | 11 |
| 6  | Chip Boot Mode Control                                       | 11 |
| 7  | UOTXD Printing Control                                       | 13 |
| 8  | Timing Control of SDIO Slave                                 | 13 |
| 9  | Description of Timing Parameters for Power-up and Reset      | 14 |
| 10 | ADC Characteristics                                          | 23 |
| 11 | ADC Calibration Results                                      | 23 |
| 12 | Capacitive-Sensing GPIOs Available on ESP32                  | 24 |
| 13 | Absolute Maximum Ratings                                     | 25 |
| 14 | Recommended Operating Conditions                             | 25 |
| 15 | DC Characteristics (3.3 V, 25 °C)                            | 25 |
| 16 | Flash Specifications                                         | 26 |
| 17 | Wi-Fi RF Characteristics                                     | 27 |
| 18 | TX Power with Spectral Mask and EVM Meeting 802.11 Standards | 27 |
| 19 | TX EVM Test <sup>1</sup>                                     | 27 |
| 20 | RX Sensitivity                                               | 28 |
| 21 | Maximum RX Level                                             | 29 |
| 22 | RX Adjacent Channel Rejection                                | 29 |
| 23 | Receiver Characteristics – Bluetooth LE                      | 29 |
| 24 | Transmitter Characteristics – Bluetooth LE                   | 30 |

## List of Figures

|    |                                                           |    |
|----|-----------------------------------------------------------|----|
| 1  | ESP32-WROOM-32D Pin Layout (Top View)                     | 8  |
| 2  | Visualization of Timing Parameters for the Strapping Pins | 11 |
| 3  | Chip Boot Flow                                            | 12 |
| 4  | Visualization of Timing Parameters for Power-up and Reset | 13 |
| 5  | ESP32-WROOM-32D Schematics                                | 31 |
| 6  | ESP32-WROOM-32U Schematics                                | 32 |
| 7  | ESP32-WROOM-32D & ESP32-WROOM-32U Peripheral Schematics   | 33 |
| 8  | Physical Dimensions of ESP32-WROOM-32D                    | 34 |
| 9  | Physical Dimensions of ESP32-WROOM-32U                    | 35 |
| 10 | Dimensions of External Antenna Connector                  | 36 |
| 11 | Recommended PCB Land Pattern of ESP32-WROOM-32D           | 38 |
| 12 | Recommended PCB Land Pattern of ESP32-WROOM-32U           | 39 |
| 13 | Reflow Profile                                            | 40 |

## 2 Pin Definitions

### 2.1 Pin Layout

The pin diagram below shows the approximate location of pins on the module. For the actual diagram drawn to scale, please refer to Figure 9.1 *Module Dimensions*.

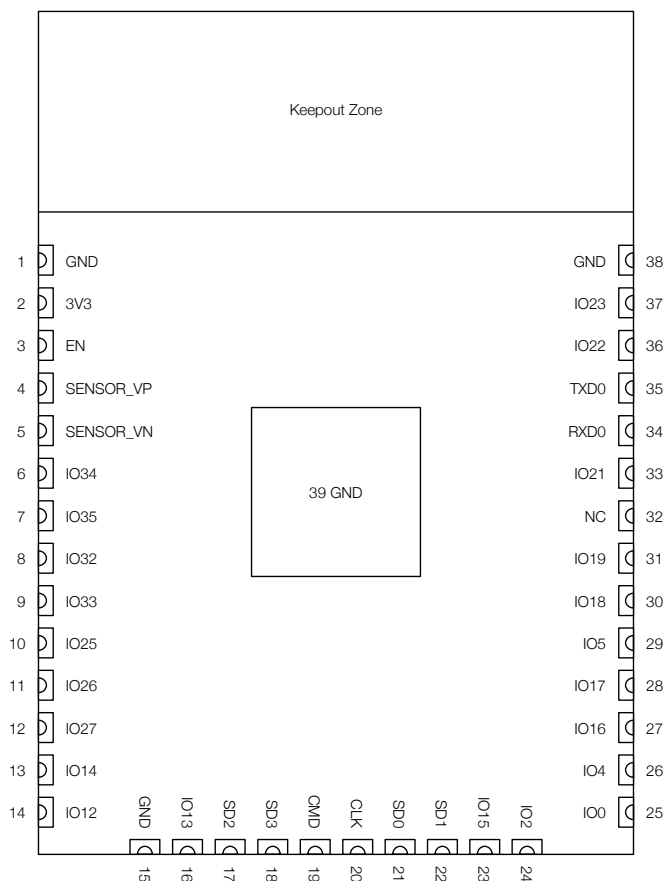


Figure 1: ESP32-WROOM-32D Pin Layout (Top View)

**Note:**

The pin layout of ESP32-WROOM-32U is the same as that of ESP32-WROOM-32D, except that ESP32-WROOM-32U has no keepout zone.

### 2.2 Pin Description

The module has 38 pins. See pin definitions in Table 3 *Pin Description*.

Table 3: Pin Definitions

| Name | No. | Type | Function     |
|------|-----|------|--------------|
| GND  | 1   | P    | Ground       |
| 3V3  | 2   | P    | Power supply |



| Name      | No. | Type | Function                                                                               |
|-----------|-----|------|----------------------------------------------------------------------------------------|
| EN        | 3   | I    | Module-enable signal. Active high.                                                     |
| SENSOR_VP | 4   | I    | GPIO36, ADC1_CH0, RTC_GPIO0                                                            |
| SENSOR_VN | 5   | I    | GPIO39, ADC1_CH3, RTC_GPIO3                                                            |
| IO34      | 6   | I    | GPIO34, ADC1_CH6, RTC_GPIO4                                                            |
| IO35      | 7   | I    | GPIO35, ADC1_CH7, RTC_GPIO5                                                            |
| IO32      | 8   | I/O  | GPIO32, XTAL_32K_P (32.768 kHz crystal oscillator input), ADC1_CH4, TOUCH9, RTC_GPIO9  |
| IO33      | 9   | I/O  | GPIO33, XTAL_32K_N (32.768 kHz crystal oscillator output), ADC1_CH5, TOUCH8, RTC_GPIO8 |
| IO25      | 10  | I/O  | GPIO25, DAC_1, ADC2_CH8, RTC_GPIO6, EMAC_RXD0                                          |
| IO26      | 11  | I/O  | GPIO26, DAC_2, ADC2_CH9, RTC_GPIO7, EMAC_RXD1                                          |
| IO27      | 12  | I/O  | GPIO27, ADC2_CH7, TOUCH7, RTC_GPIO17, EMAC_RX_DV                                       |
| IO14      | 13  | I/O  | GPIO14, ADC2_CH6, TOUCH6, RTC_GPIO16, MTMS, HSPICLK, HS2_CLK, SD_CLK, EMAC_TXD2        |
| IO12      | 14  | I/O  | GPIO12, ADC2_CH5, TOUCH5, RTC_GPIO15, MTDI, HSPIQ, HS2_DATA2, SD_DATA2, EMAC_TXD3      |
| GND       | 15  | P    | Ground                                                                                 |
| IO13      | 16  | I/O  | GPIO13, ADC2_CH4, TOUCH4, RTC_GPIO14, MTCK, HSPID, HS2_DATA3, SD_DATA3, EMAC_RX_ER     |
| SHD/SD2*  | 17  | I/O  | GPIO9, SD_DATA2, SPIHD, HS1_DATA2, U1RXD                                               |
| SWP/SD3*  | 18  | I/O  | GPIO10, SD_DATA3, SPIWP, HS1_DATA3, U1TXD                                              |
| SCS/CMD*  | 19  | I/O  | GPIO11, SD_CMD, SPICSO, HS1_CMD, U1RTS                                                 |
| SCK/CLK*  | 20  | I/O  | GPIO6, SD_CLK, SPICLK, HS1_CLK, U1CTS                                                  |
| SDO/SD0*  | 21  | I/O  | GPIO7, SD_DATA0, SPIQ, HS1_DATA0, U2RTS                                                |
| SDI/SD1*  | 22  | I/O  | GPIO8, SD_DATA1, SPID, HS1_DATA1, U2CTS                                                |
| IO15      | 23  | I/O  | GPIO15, ADC2_CH3, TOUCH3, MTDO, HSPICSO, RTC_GPIO13, HS2_CMD, SD_CMD, EMAC_RXD3        |
| IO2       | 24  | I/O  | GPIO2, ADC2_CH2, TOUCH2, RTC_GPIO12, HSPIWP, HS2_DATA0, SD_DATA0                       |
| IO0       | 25  | I/O  | GPIO0, ADC2_CH1, TOUCH1, RTC_GPIO11, CLK_OUT1, EMAC_TX_CLK                             |
| IO4       | 26  | I/O  | GPIO4, ADC2_CH0, TOUCH0, RTC_GPIO10, HSPICLK, HS2_DATA1, SD_DATA1, EMAC_TX_ER          |
| IO16      | 27  | I/O  | GPIO16, HS1_DATA4, U2RXD, EMAC_CLK_OUT                                                 |
| IO17      | 28  | I/O  | GPIO17, HS1_DATA5, U2TXD, EMAC_CLK_OUT_180                                             |
| IO5       | 29  | I/O  | GPIO5, VSPICSO, HS1_DATA6, EMAC_RX_CLK                                                 |
| IO18      | 30  | I/O  | GPIO18, VSPICLK, HS1_DATA7                                                             |
| IO19      | 31  | I/O  | GPIO19, VSPIQ, UOCTS, EMAC_TXD0                                                        |
| NC        | 32  | -    | -                                                                                      |
| IO21      | 33  | I/O  | GPIO21, VSPIHD, EMAC_TX_EN                                                             |
| RXD0      | 34  | I/O  | GPIO3, UORXD, CLK_OUT2                                                                 |
| TXD0      | 35  | I/O  | GPIO1, UOTXD, CLK_OUT3, EMAC_RXD2                                                      |
| IO22      | 36  | I/O  | GPIO22, VSPWP, UORTS, EMAC_TXD1                                                        |
| IO23      | 37  | I/O  | GPIO23, VSPID, HS1_STROBE                                                              |
| GND       | 38  | P    | Ground                                                                                 |

## 3 Boot Configurations

**Note:**

The content below is excerpted from [ESP32 Series Datasheet](#) > Section *Boot Configurations*. For the strapping pin mapping between the chip and modules, please refer to Chapter [7 Module Schematics](#).

The chip allows for configuring the following boot parameters through strapping pins and eFuse bits at power-up or a hardware reset, without microcontroller interaction.

- **Chip boot mode**
  - Strapping pin: GPIO0 and GPIO2
- **Internal LDO (VDD\_SDIO) Voltage**
  - Strapping pin: MTDI
  - eFuse bit: EFUSE\_SDIO\_FORCE and EFUSE\_SDIO\_TIEH
- **UOTXD printing**
  - Strapping pin: MTDO
- **Timing of SDIO Slave**
  - Strapping pin: MTDO and GPIO5
- **JTAG signal source**
  - eFuse bit: EFUSE\_DISABLE\_JTAG

The default values of all the above eFuse bits are 0, which means that they are not burnt. Given that eFuse is one-time programmable, once an eFuse bit is programmed to 1, it can never be reverted to 0. For how to program eFuse bits, please refer to [ESP32 Technical Reference Manual](#) > Chapter *eFuse Controller*.

The default values of the strapping pins, namely the logic levels, are determined by pins' internal weak pull-up/pull-down resistors at reset if the pins are not connected to any circuit, or connected to an external high-impedance circuit.

**Table 4: Default Configuration of Strapping Pins**

| Strapping Pin | Default Configuration | Bit Value |
|---------------|-----------------------|-----------|
| GPIO0         | Pull-up               | 1         |
| GPIO2         | Pull-down             | 0         |
| MTDI          | Pull-down             | 0         |
| MTDO          | Pull-up               | 1         |
| GPIO5         | Pull-up               | 1         |

To change the bit values, the strapping pins should be connected to external pull-down/pull-up resistances. If the ESP32 is used as a device by a host MCU, the strapping pin voltage levels can also be controlled by the host MCU.


All strapping pins have latches. At system reset, the latches sample the bit values of their respective strapping pins and store them until the chip is powered down or shut down. The states of latches cannot be changed in any other way. It makes the strapping pin values available during the entire chip operation, and the pins are freed up to be used as regular IO pins after reset.

[Not Recommended For New Designs \(NRND\)](#)

The timing of signals connected to the strapping pins should adhere to the *setup time* and *hold time* specifications in Table 5 and Figure 2.

**Table 5: Description of Timing Parameters for the Strapping Pins**

| Parameter | Description                                                                                                                                                                 | Min (ms) |
|-----------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------|
| $t_{SU}$  | <i>Setup time</i> is the time reserved for the power rails to stabilize before the CHIP_PU pin is pulled high to activate the chip.                                         | 0        |
| $t_H$     | <i>Hold time</i> is the time reserved for the chip to read the strapping pin values after CHIP_PU is already high and before these pins start operating as regular IO pins. | 1        |

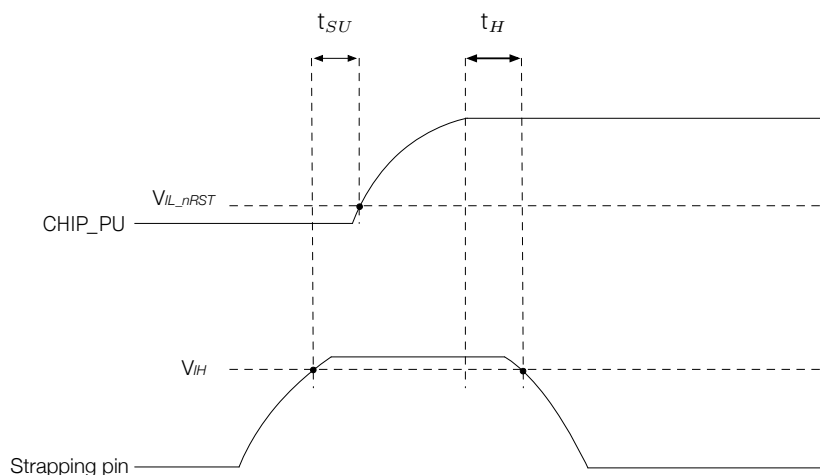

**Figure 2: Visualization of Timing Parameters for the Strapping Pins**

### 3.1 Chip Boot Mode Control

GPIO0 and GPIO2 control the boot mode after the reset is released. See Table 6 *Chip Boot Mode Control*.

**Table 6: Chip Boot Mode Control**

| Boot Mode                             | GPIO0    | GPIO2     |
|---------------------------------------|----------|-----------|
| <b>SPI Boot Mode</b>                  | <b>1</b> | Any value |
| Joint Download Boot Mode <sup>2</sup> | 0        | 0         |

<sup>1</sup> **Bold** marks the default value and configuration.

<sup>2</sup> Joint Download Boot mode supports the following download methods:

- SDIO Download Boot
- UART Download Boot

In Joint Download Boot mode, the detailed boot flow of the chip is put below 3.

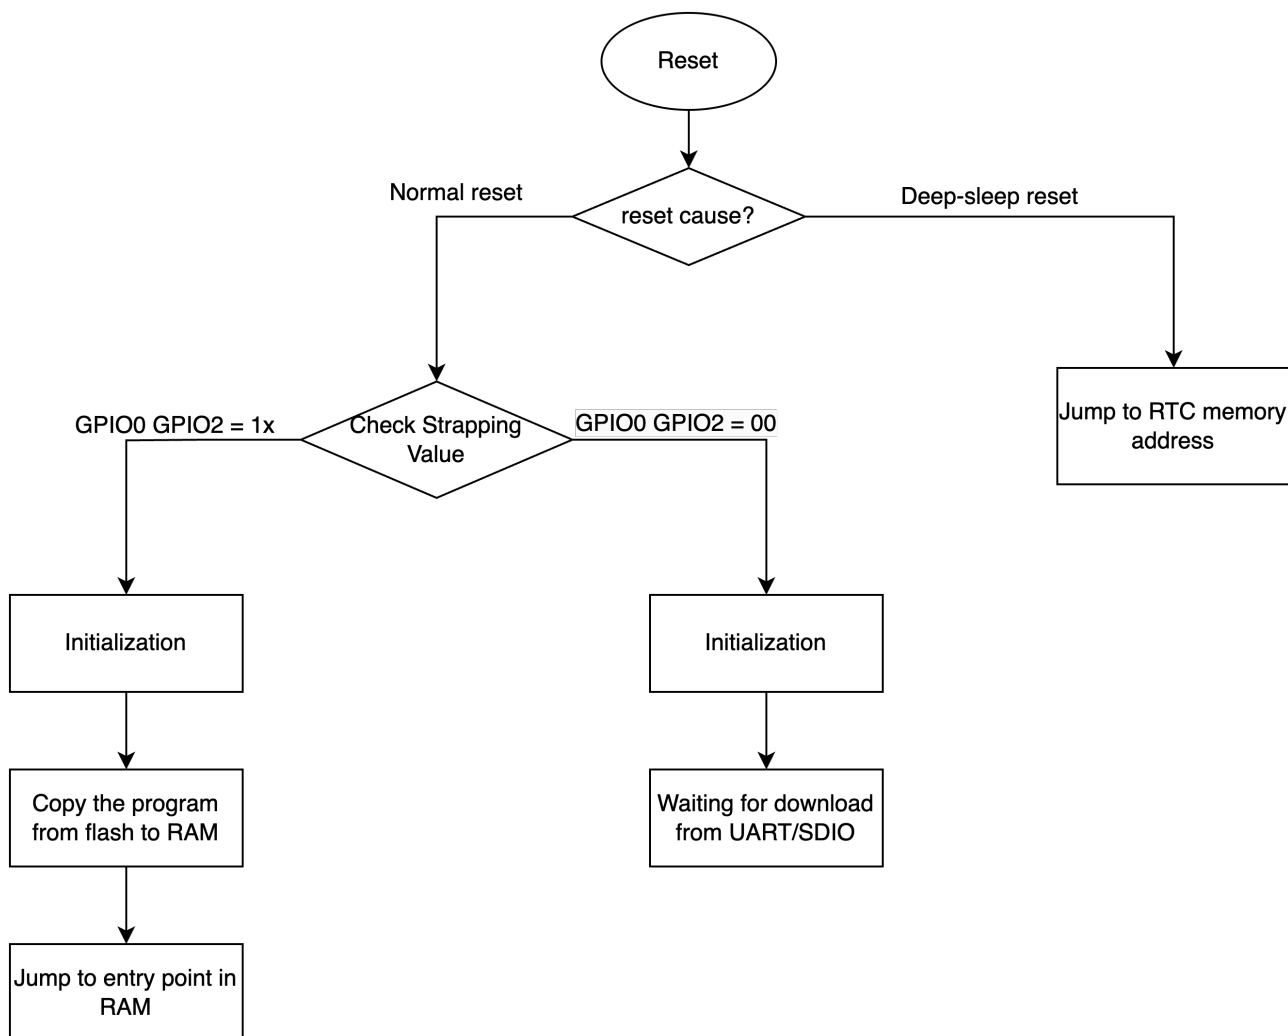


Figure 3: Chip Boot Flow

uart\_download\_dis controls boot mode behaviors:

It permanently disables Download Boot mode when uart\_download\_dis is set to 1 (valid only for ESP32 chip revisions v3.0 and higher).

## 3.2 Internal LDO (VDD\_SDIO) Voltage Control

MTDI is used to select the VDD\_SDIO power supply voltage at reset:

- MTDI = 0 (by default), VDD\_SDIO pin is powered directly from VDD3P3\_RTC. Typically this voltage is 3.3 V. For more information, see [ESP32 Series Datasheet](#) > Section *Power Scheme*.
- MTDI = 1, VDD\_SDIO pin is powered from internal 1.8 V LDO.

This functionality can be overridden by setting EFUSE\_SDIO\_FORCE to 1, in which case the EFUSE\_SDIO\_TIEH determines the VDD\_SDIO voltage:

- EFUSE\_SDIO\_TIEH = 0, VDD\_SDIO connects to 1.8 V LDO.
- EFUSE\_SPI\_TIEH = 1, VDD\_SDIO connects to VDD3P3\_RTC.

### 3.3 UOTXD Printing Control

During booting, the strapping pin MTDO can be used to control the UOTXD Printing, as Table 7 shows.

Table 7: UOTXD Printing Control

| UOTXD Printing Control      | MTDO     |
|-----------------------------|----------|
| <b>Enabled</b> <sup>1</sup> | <b>1</b> |
| Disabled                    | 0        |

<sup>1</sup> **Bold** marks the default value and configuration.

### 3.4 Timing Control of SDIO Slave

The strapping pin MTDO and GPIO5 can be used to control the timing of SDIO slave, see Table 8 *Timing Control of SDIO Slave*.

Table 8: Timing Control of SDIO Slave

| Edge behavior                                   | MTDO     | GPIO5    |
|-------------------------------------------------|----------|----------|
| Falling edge sampling, falling edge output      | 0        | 0        |
| Falling edge sampling, rising edge output       | 0        | 1        |
| Rising edge sampling, falling edge output       | 1        | 0        |
| <b>Rising edge sampling, rising edge output</b> | <b>1</b> | <b>1</b> |

<sup>1</sup> **Bold** marks the default value and configuration.

### 3.5 JTAG Signal Source Control

If EFUSE\_DISABLE\_JTAG is set to 1, the source of JTAG signals can be disabled.

### 3.6 Chip Power-up and Reset

Once the power is supplied to the chip, its power rails need a short time to stabilize. After that, CHIP\_PU – the pin used for power-up and reset – is pulled high to activate the chip. For information on CHIP\_PU as well as power-up and reset timing, see Figure 4 and Table 9.

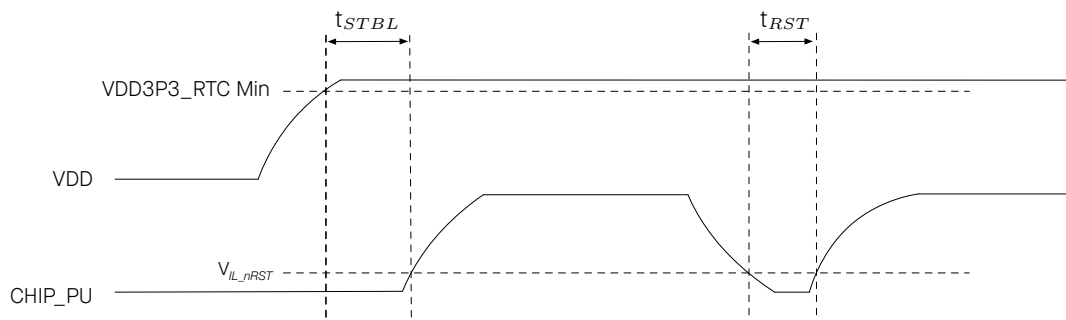


Figure 4: Visualization of Timing Parameters for Power-up and Reset

**Table 9: Description of Timing Parameters for Power-up and Reset**

| Parameter  | Description                                                                                               | Min ( $\mu$ s) |
|------------|-----------------------------------------------------------------------------------------------------------|----------------|
| $t_{STBL}$ | Time reserved for the 3.3 V rails to stabilize before the CHIP_PU pin is pulled high to activate the chip | 50             |
| $t_{RST}$  | Time reserved for CHIP_PU to stay below $V_{IL\_nRST}$ to reset the chip (see Table 15)                   | 50             |

For details, please refer to [ESP32 Series Datasheet](#) > Section *Chip Power-up and Reset*.

## 4 Peripherals

### 4.1 Peripheral Overview

ESP32-D0WD chip integrates a rich set of peripherals including SPI, I2S, UART, I2C, pulse count controller, TWAI®, ADC, DAC, touch sensor, etc.

To learn more about on-chip components, please refer to [ESP32 Series Datasheet](#) > Section *Functional Description*.

**Note:**

- The content below is sourced from [ESP32 Series Datasheet](#) > Section *Functional Description*. Some information may not be applicable to ESP32-WROOM-32D and ESP32-WROOM-32U as not all the IO signals are exposed on the module.
- To learn more about peripheral signals, please refer to [ESP32 Technical Reference Manual](#) > Section *Peripheral Signal List*.

### 4.2 Digital Peripherals

#### 4.2.1 General Purpose Input / Output Interface (GPIO)

ESP32 has 34 GPIO pins which can be assigned various functions by programming the appropriate registers. There are several kinds of GPIOs: digital-only, analog-enabled, capacitive-touch-enabled, etc. Analog-enabled GPIOs and Capacitive-touch-enabled GPIOs can be configured as digital GPIOs.

Most of the digital GPIOs can be configured as internal pull-up or pull-down, or set to high impedance. When configured as an input, the input value can be read through the register. The input can also be set to edge-trigger or level-trigger to generate CPU interrupts. Most of the digital IO pins are bi-directional, non-inverting and tristate, including input and output buffers with tristate control. These pins can be multiplexed with other functions, such as the SDIO, UART, SPI, etc. (More details can be found in [ESP32 Series Datasheet](#) > Appendix, Table *IO\_MUX*. ) For low-power operations, the GPIOs can be set to hold their states.

For details, see [ESP32 Series Datasheet](#) > Section *Peripheral Pin Configurations*, [ESP32 Series Datasheet](#) > Appendix A – *ESP32 Pin Lists* and [ESP32 Technical Reference Manual](#) > Chapter *IO\_MUX and GPIO Matrix*.

#### 4.2.2 Serial Peripheral Interface (SPI)

ESP32 integrates four SPI controllers which can be used to communicate with external devices that use the SPI protocol. Controller SPIO is used as a buffer for accessing external memory. Controller SPI1 can be used as a master. Controllers SPI2 and SPI3 can be configured as either a master or a slave.

SPI1, SPI2, and SPI3 use signal buses prefixed with SPI, HSPI, and VSPI, respectively.

##### Features of General Purpose SPI (GP-SPI)

- Programmable data transfer length, in multiples of 1 byte

[Not Recommended For New Designs \(NRND\)](#)

- Four-line full-duplex/half-duplex communication and three-line half-duplex communication support
- Master mode and slave mode
- Programmable CPOL and CPHA
- Programmable clock

For details, see [ESP32 Technical Reference Manual](#) > Chapter *SPI Controller*.

#### Pin Assignment

For SPI, the pins are multiplexed with GPIO6 ~ GPIO11 via the IO MUX. For HSPI, the pins are multiplexed with GPIO2, GPIO4, GPIO12 ~ GPIO15 via the IO MUX. For VSPI, the pins are multiplexed with GPIO5, GPIO18 ~ GPIO19, GPIO21 ~ GPIO23 via the IO MUX.

For more information about the pin assignment, see [ESP32 Series Datasheet](#) > Section *Peripheral Pin Configurations* and [ESP32 Technical Reference Manual](#) > Chapter *IO\_MUX and GPIO Matrix*.

### 4.2.3 Universal Asynchronous Receiver Transmitter (UART)

The UART in the ESP32 chip facilitates the transmission and reception of asynchronous serial data between the chip and external UART devices. It consists of two UARTs in the main system, and one low-power LP UART.

#### Feature List

- Programmable baud rate
- RAM shared by TX FIFOs and RX FIFOs
- Supports input baud rate self-check
- Support for various lengths of data bits and stop bits
- Parity bit support
- Asynchronous communication (RS232 and RS485) and IrDA support
- Supports DMA to communicate data in high speed
- Supports UART wake-up
- Supports both software and hardware flow control

For details, see [ESP32 Technical Reference Manual](#) > Chapter *UART Controller*.

#### Pin Assignment

The pins for UART can be chosen from any GPIOs via the GPIO Matrix.

For more information about the pin assignment, see [ESP32 Series Datasheet](#) > Section *Peripheral Pin Configurations* and [ESP32 Technical Reference Manual](#) > Chapter *IO\_MUX and GPIO Matrix*.

### 4.2.4 I2C Interface

ESP32 has two I2C bus interfaces which can serve as I2C master or slave, depending on the user's configuration.

[Not Recommended For New Designs \(NRND\)](#)



### Feature List

- Two I2C controllers: one in the main system and one in the low-power system
- Standard mode (100 Kbit/s)
- Fast mode (400 Kbit/s)
- Up to 5 MHz, yet constrained by SDA pull-up strength
- Support for 7-bit and 10-bit addressing, as well as dual address mode
- Supports continuous data transmission with disabled Serial Clock Line (SCL)
- Supports programmable digital noise filter

Users can program command registers to control I2C interfaces, so that they have more flexibility.

For details, see [ESP32 Technical Reference Manual](#) > Chapter *I2C Controller*.

### Pin Assignment

For regular I2C, the pins used can be chosen from any GPIOs via the GPIO Matrix.

For more information about the pin assignment, see [ESP32 Series Datasheet](#) > Section *Peripheral Pin Configurations* and [ESP32 Technical Reference Manual](#) > Chapter *IO\_MUX and GPIO Matrix*.

## 4.2.5 I2S Interface

The I2S Controller in the ESP32 chip provides a flexible communication interface for streaming digital data in multimedia applications, particularly digital audio applications.

### Feature List

- Master mode and slave mode
- Full-duplex and half-duplex communications
- A variety of audio standards supported
- Configurable high-precision output clock
- Supports PDM signal input and output
- Configurable data transmit and receive modes

For details, see [ESP32 Technical Reference Manual](#) > Chapter *I2S Controller*.

### Pin Assignment

The pins for the I2S Controller can be chosen from any GPIOs via the GPIO Matrix.

For more information about the pin assignment, see [ESP32 Series Datasheet](#) > Section *Peripheral Pin Configurations* and [ESP32 Technical Reference Manual](#) > Chapter *IO\_MUX and GPIO Matrix*.

## 4.2.6 Remote Control Peripheral

The Remote Control Peripheral (RMT) controls the transmission and reception of infrared remote control signals.

### Feature List

- Eight channels for sending and receiving infrared remote control signals
- Independent transmission and reception capabilities for each channel
- Clock divider counter, state machine, and receiver for each RX channel
- Supports various infrared protocols

For details, see [ESP32 Technical Reference Manual](#) > Chapter *Remote Control Peripheral*.

### Pin Assignment

The pins for the Remote Control Peripheral can be chosen from any GPIOs via the GPIO Matrix.

For more information about the pin assignment, see [ESP32 Series Datasheet](#) > Section *Peripheral Pin Configurations* and [ESP32 Technical Reference Manual](#) > Chapter *IO\_MUX and GPIO Matrix*.

## 4.2.7 Pulse Counter Controller (PCNT)

The pulse counter controller (PCNT) is designed to count input pulses by tracking rising and falling edges of the input pulse signal.

### Feature List

- Eight independent pulse counter units
- Each pulse counter unit has a 16-bit signed counter register and two channels
- Counter modes: increment, decrement, or disable
- Glitch filtering for input pulse signals and control signals
- Selection between counting on rising or falling edges of the input pulse signal

For details, see [ESP32 Technical Reference Manual](#) > Chapter *Pulse Count Controller*.

### Pin Assignment

The pins for the Pulse Count Controller can be chosen from any GPIOs via the GPIO Matrix.

For more information about the pin assignment, see [ESP32 Series Datasheet](#) > Section *Peripheral Pin Configurations* and [ESP32 Technical Reference Manual](#) > Chapter *IO\_MUX and GPIO Matrix*.

## 4.2.8 LED PWM Controller

The LED PWM Controller (LEDC) is designed to generate PWM signals for LED control.

### Feature List

- Sixteen independent PWM generators
- Maximum PWM duty cycle resolution of 20 bits
- Eight independent timers with 20-bit counters, configurable fractional clock dividers and counter overflow values

- Adjustable phase of PWM signal output
- PWM duty cycle dithering
- Automatic duty cycle fading

For details, see [ESP32 Technical Reference Manual](#) > Chapter *LED PWM Controller*.

### Pin Assignment

The pins for the LED PWM Controller can be chosen from any GPIOs via the GPIO Matrix.

For more information about the pin assignment, see [ESP32 Series Datasheet](#) > Section *Peripheral Pin Configurations* and [ESP32 Technical Reference Manual](#) > Chapter *IO\_MUX and GPIO Matrix*.

## 4.2.9 Motor Control PWM

The Pulse Width Modulation (PWM) controller can be used for driving digital motors and smart lights. The controller consists of PWM timers, the PWM operator and a dedicated capture sub-module. Each timer provides timing in synchronous or independent form, and each PWM operator generates a waveform for one PWM channel. The dedicated capture sub-module can accurately capture events with external timing.

### Feature List

- Three PWM timers for precise timing and frequency control
  - Every PWM timer has a dedicated 8-bit clock prescaler
  - The 16-bit counter in the PWM timer can work in count-up mode, count-down mode, or count-up-down mode
  - A hardware sync can trigger a reload on the PWM timer with a phase register. It will also trigger the prescaler's restart, so that the timer's clock can also be synced, with selectable hardware synchronization source
- Three PWM operators for generating waveform pairs
  - Six PWM outputs to operate in several topologies
  - Configurable dead time on rising and falling edges; each set up independently
  - Modulating of PWM output by high-frequency carrier signals, useful when gate drivers are insulated with a transformer
- Fault Detection module
  - Programmable fault handling in both cycle-by-cycle mode and one-shot mode
  - A fault condition can force the PWM output to either high or low logic levels
- Capture module for hardware-based signal processing
  - Speed measurement of rotating machinery
  - Measurement of elapsed time between position sensor pulses
  - Period and duty cycle measurement of pulse train signals

- Decoding current or voltage amplitude derived from duty-cycle-encoded signals of current/voltage sensors
- Three individual capture channels, each of which with a 32-bit time-stamp register
- Selection of edge polarity and prescaling of input capture signals
- The capture timer can sync with a PWM timer or external signals

For details, see [ESP32 Technical Reference Manual](#) > Chapter *Motor Control PWM*.

### Pin Assignment

The pins for the Motor Control PWM can be chosen from any GPIOs via the GPIO Matrix.

For more information about the pin assignment, see [ESP32 Series Datasheet](#) > Section *Peripheral Pin Configurations* and [ESP32 Technical Reference Manual](#) > Chapter *IO\_MUX and GPIO Matrix*.

## 4.2.10 SD/SDIO/MMC Host Controller

An SD/SDIO/MMC host controller is available on ESP32.

### Feature List

- Supports two external cards
- Supports SD Memory Card standard: version 3.0 and version 3.01)
- Supports SDIO Version 3.0
- Supports Consumer Electronics Advanced Transport Architecture (CE-ATA Version 1.1)
- Supports Multimedia Cards (MMC version 4.41, eMMC version 4.5 and version 4.51)

The controller allows up to 80 MHz clock output in three different data-bus modes: 1-bit, 4-bit, and 8-bit modes. It supports two SD/SDIO/MMC4.41 cards in a 4-bit data-bus mode. It also supports one SD card operating at 1.8 V.

For details, see [ESP32 Technical Reference Manual](#) > Chapter *SD/MMC Host Controller*.

### Pin Assignment

The pins for SD/SDIO/MMC Host Controller are multiplexed with GPIO2, GPIO4, GPIO6 ~ GPIO15 via IO MUX.

For more information about the pin assignment, see [ESP32 Series Datasheet](#) > Section *Peripheral Pin Configurations* and [ESP32 Technical Reference Manual](#) > Chapter *IO\_MUX and GPIO Matrix*.

## 4.2.11 SDIO/SPI Slave Controller

ESP32 integrates an SD device interface that conforms to the industry-standard SDIO Card Specification Version 2.0, and allows a host controller to access the SoC, using the SDIO bus interface and protocol. ESP32 acts as the slave on the SDIO bus. The host can access the SDIO-interface registers directly and can access shared memory via a DMA engine, thus maximizing performance without engaging the processor cores.

### Feature List

The SDIO/SPI slave controller supports the following features:

- SPI, 1-bit SDIO, and 4-bit SDIO transfer modes over the full clock range from 0 to 50 MHz
- Configurable sampling and driving clock edge
- Special registers for direct access by host
- Interrupts to host for initiating data transfer
- Automatic loading of SDIO bus data and automatic discarding of padding data
- Block size of up to 512 bytes
- Interrupt vectors between the host and the slave, allowing both to interrupt each other
- Supports DMA for data transfer

For details, see [ESP32 Technical Reference Manual](#) > Chapter *SDIO Slave Controller*.

### Pin Assignment

The pins for SDIO/SPI Slave Controller are multiplexed with GPIO2, GPIO4, GPIO6 ~ GPIO15 via IO MUX.

For more information about the pin assignment, see [ESP32 Series Datasheet](#) > Section *Peripheral Pin Configurations* and [ESP32 Technical Reference Manual](#) > Chapter *IO\_MUX and GPIO Matrix*.

## 4.2.12 TWAI® Controller

The Two-wire Automotive Interface (TWAI®) is a multi-master, multi-cast communication protocol designed for automotive applications. The TWAI controller facilitates the communication based on this protocol.

### Feature List

- Compatible with ISO 11898-1 protocol (CAN Specification 2.0)
- Standard frame format (11-bit ID) and extended frame format (29-bit ID)
- Bit rates:
  - From 25 Kbit/s to 1 Mbit/s in chip revision v0.0/v1.0/v1.1
  - From 12.5 Kbit/s to 1 Mbit/s in chip revision v3.0/v3.1
- Multiple modes of operation: Normal, Listen Only, and Self-Test
- 64-byte receive FIFO
- Special transmissions: single-shot transmissions and self reception
- Acceptance filter (single and dual filter modes)
- Error detection and handling: error counters, configurable error interrupt threshold, error code capture, arbitration lost capture

For details, see [ESP32 Technical Reference Manual](#) > Chapter *Two-wire Automotive Interface (TWAI)*.

## Pin Assignment

The pins for the Two-wire Automotive Interface can be chosen from any GPIOs via the GPIO Matrix.

For more information about the pin assignment, see [ESP32 Series Datasheet](#) > Section *Peripheral Pin Configurations* and [ESP32 Technical Reference Manual](#) > Chapter *IO\_MUX and GPIO Matrix*.

### 4.2.13 Ethernet MAC Interface

An IEEE-802.3-2008-compliant Media Access Controller (MAC) is provided for Ethernet LAN communications. ESP32 requires an external physical interface device (PHY) to connect to the physical LAN bus (twisted-pair, fiber, etc.). The PHY is connected to ESP32 through 17 signals of MII or nine signals of RMII.

#### Feature List

- 10 Mbps and 100 Mbps rates
- Dedicated DMA controller allowing high-speed transfer between the dedicated SRAM and Ethernet MAC
- Tagged MAC frame (VLAN support)
- Half-duplex (CSMA/CD) and full-duplex operation
- MAC control sublayer (control frames)
- 32-bit CRC generation and removal
- Several address-filtering modes for physical and multicast address (multicast and group addresses)
- 32-bit status code for each transmitted or received frame
- Internal FIFOs to buffer transmit and receive frames. The transmit FIFO and the receive FIFO are both 512 words (32-bit)
- Hardware PTP (Precision Time Protocol) in accordance with IEEE 1588 2008 (PTP V2)
- 25 MHz/50 MHz clock output

For details, see [ESP32 Technical Reference Manual](#) > Chapter *Ethernet Media Access Controller (MAC)*.

## Pin Assignment

For information about the pin assignment of Ethernet MAC Interface, see [ESP32 Series Datasheet](#) > Section *Peripheral Pin Configurations* and [ESP32 Technical Reference Manual](#) > Chapter *IO\_MUX and GPIO Matrix*.

## 4.3 Analog Peripherals

### 4.3.1 Analog-to-Digital Converter (ADC)

ESP32 integrates two 12-bit SAR ADCs and supports measurements on 18 channels (analog-enabled pins). The ULP coprocessor in ESP32 is also designed to measure voltage, while operating in the sleep mode, which enables low-power consumption. The CPU can be woken up by a threshold setting and/or via other triggers.

Table 10 describes the ADC characteristics.

**Table 10: ADC Characteristics**

| Parameter                       | Description                                                                                                                       | Min | Max | Unit  |
|---------------------------------|-----------------------------------------------------------------------------------------------------------------------------------|-----|-----|-------|
| DNL (Differential nonlinearity) | RTC controller; ADC connected to an external 100 nF capacitor; DC signal input; ambient temperature at 25 °C; Wi-Fi&Bluetooth off | -7  | 7   | LSB   |
| INL (Integral nonlinearity)     |                                                                                                                                   | -12 | 12  | LSB   |
| Sampling rate                   | RTC controller                                                                                                                    | —   | 200 | ksps  |
|                                 | DIG controller                                                                                                                    | —   | 2   | Msp/s |

**Notes:**

- When atten = 3 and the measurement result is above 3000 (voltage at approx. 2450 mV), the ADC accuracy will be worse than described in the table above.
- To get better DNL results, users can take multiple sampling tests with a filter, or calculate the average value.
- The input voltage range of GPIO pins within VDD3P3\_RTC domain should strictly follow the DC characteristics provided in Table 15. Otherwise, measurement errors may be introduced, and chip performance may be affected.

By default, there are  $\pm 6\%$  differences in measured results between chips. ESP-IDF provides couple of [calibration methods](#) for ADC1. Results after calibration using eFuse Vref value are shown in Table 11. For higher accuracy, users may apply other calibration methods provided in ESP-IDF, or implement their own.

**Table 11: ADC Calibration Results**

| Parameter   | Description                                             | Min | Max | Unit |
|-------------|---------------------------------------------------------|-----|-----|------|
| Total error | Atten = 0, effective measurement range of 100 ~ 950 mV  | -23 | 23  | mV   |
|             | Atten = 1, effective measurement range of 100 ~ 1250 mV | -30 | 30  | mV   |
|             | Atten = 2, effective measurement range of 150 ~ 1750 mV | -40 | 40  | mV   |
|             | Atten = 3, effective measurement range of 150 ~ 2450 mV | -60 | 60  | mV   |

For details, see [ESP32 Technical Reference Manual](#) > Chapter *On-Chip Sensors and Analog Signal Processing*.

## Pin Assignment

With appropriate settings, the ADCs can be configured to measure voltage on 18 pins maximum. For detailed information about the pin assignment, see [ESP32 Series Datasheet](#) > Section *Peripheral Pin Configurations* and [ESP32 Technical Reference Manual](#) > Chapter *IO\_MUX and GPIO Matrix*.

### 4.3.2 Digital-to-Analog Converter (DAC)

Two 8-bit DAC channels can be used to convert two digital signals into two analog voltage signal outputs. The design structure is composed of integrated resistor strings and a buffer. This dual DAC supports power supply as input voltage reference. The two DAC channels can also support independent conversions.

For details, see [ESP32 Technical Reference Manual](#) > Chapter *On-Chip Sensors and Analog Signal Processing*.

[Not Recommended For New Designs \(NRND\)](#)

## Pin Assignment

The DAC can be configured by GPIO 25 and GPIO 26. For detailed information about the pin assignment, see [ESP32 Series Datasheet](#) > Section *Peripheral Pin Configurations* and [ESP32 Technical Reference Manual](#) > Chapter *IO\_MUX and GPIO Matrix*.

### 4.3.3 Touch Sensor

ESP32 has 10 capacitive-sensing GPIOs, which detect variations induced by touching or approaching the GPIOs with a finger or other objects. The low-noise nature of the design and the high sensitivity of the circuit allow relatively small pads to be used. Arrays of pads can also be used, so that a larger area or more points can be detected.

## Pin Assignment

The 10 capacitive-sensing GPIOs are listed in Table 12.

**Table 12: Capacitive-Sensing GPIOs Available on ESP32**

| Capacitive-Sensing Signal Name | Pin Name |
|--------------------------------|----------|
| T0                             | GPIO4    |
| T1                             | GPIO0    |
| T2                             | GPIO2    |
| T3                             | MTDO     |
| T4                             | MTCK     |
| T5                             | MTDI     |
| T6                             | MTMS     |
| T7                             | GPIO27   |
| T8                             | 32K_XN   |
| T9                             | 32K_XP   |

For details, see [ESP32 Technical Reference Manual](#) > Chapter *On-Chip Sensors and Analog Signal Processing*.

**Note:**

ESP32 Touch Sensor has not passed the Conducted Susceptibility (CS) test for now, and thus has limited application scenarios.



## 5 Electrical Characteristics

### 5.1 Absolute Maximum Ratings

Stresses beyond the absolute maximum ratings listed in Table 13 *Absolute Maximum Ratings* below may cause permanent damage to the device. These are stress ratings only, and do not refer to the functional operation of the device that should follow the Table 14 *Recommended Operating Conditions*.

Table 13: Absolute Maximum Ratings

| Symbol         | Parameter                    | Min  | Max   | Unit |
|----------------|------------------------------|------|-------|------|
| VDD33          | Power supply voltage         | -0.3 | 3.6   | V    |
| $I_{output}^1$ | Cumulative IO output current | -    | 1,100 | mA   |
| $T_{store}$    | Storage temperature          | -40  | 105   | °C   |

1. The module worked properly after a 24-hour test in ambient temperature at 25 °C, and the IOs in three domains (VDD3P3\_RTC, VDD3P3\_CPU, VDD\_SDIO) output high logic level to ground. Please note that pins occupied by flash and/or PSRAM in the VDD\_SDIO power domain were excluded from the test.
2. Please see Appendix IO\_MUX of [ESP32 Datasheet](#) for IO's power domain.

### 5.2 Recommended Operating Conditions

Table 14: Recommended Operating Conditions

| Symbol    | Parameter                                  | Min | Typical | Max | Unit |
|-----------|--------------------------------------------|-----|---------|-----|------|
| VDD33     | Power supply voltage                       | 3.0 | 3.3     | 3.6 | V    |
| $I_{VDD}$ | Current delivered by external power supply | 0.5 | -       | -   | A    |
| T         | Operating ambient temperature              | -40 | -       | 85  | °C   |

### 5.3 DC Characteristics (3.3 V, 25 °C)

Table 15: DC Characteristics (3.3 V, 25 °C)

| Symbol   | Parameter                                                                                                             |                                         | Min                 | Typ | Max                 | Unit |
|----------|-----------------------------------------------------------------------------------------------------------------------|-----------------------------------------|---------------------|-----|---------------------|------|
| $C_{IN}$ | Pin capacitance                                                                                                       |                                         | -                   | 2   | -                   | pF   |
| $V_{IH}$ | High-level input voltage                                                                                              |                                         | $0.75 \times VDD^1$ | -   | $VDD^1 + 0.3$       | V    |
| $V_{IL}$ | Low-level input voltage                                                                                               |                                         | -0.3                | -   | $0.25 \times VDD^1$ | V    |
| $I_{IH}$ | High-level input current                                                                                              |                                         | -                   | -   | 50                  | nA   |
| $I_{IL}$ | Low-level input current                                                                                               |                                         | -                   | -   | 50                  | nA   |
| $V_{OH}$ | High-level output voltage                                                                                             |                                         | $0.8 \times VDD^1$  | -   | -                   | V    |
| $V_{OL}$ | Low-level output voltage                                                                                              |                                         | -                   | -   | $0.1 \times VDD^1$  | V    |
| $I_{OH}$ | High-level source current<br>( $VDD^1 = 3.3$ V, $V_{OH} \geq 2.64$ V,<br>output drive strength set to<br>the maximum) | VDD3P3_CPU power domain <sup>1, 2</sup> | -                   | 40  | -                   | mA   |
|          |                                                                                                                       | VDD3P3_RTC power domain <sup>1, 2</sup> | -                   | 40  | -                   | mA   |
|          |                                                                                                                       | VDD_SDIO power domain <sup>1, 3</sup>   | -                   | 20  | -                   | mA   |

[Not Recommended For New Designs \(NRND\)](#)

| Symbol         | Parameter                                                                                                                        | Min | Typ | Max | Unit       |
|----------------|----------------------------------------------------------------------------------------------------------------------------------|-----|-----|-----|------------|
| $I_{OL}$       | Low-level sink current<br>( $V_{DD}^1 = 3.3\text{ V}$ , $V_{OL} = 0.495\text{ V}$ ,<br>output drive strength set to the maximum) | -   | 28  | -   | mA         |
| $R_{PU}$       | Resistance of internal pull-up resistor                                                                                          | -   | 45  | -   | k $\Omega$ |
| $R_{PD}$       | Resistance of internal pull-down resistor                                                                                        | -   | 45  | -   | k $\Omega$ |
| $V_{IL\_nRST}$ | Low-level input voltage of CHIP_PU to shut down the chip                                                                         | -   | -   | 0.6 | V          |

**Notes:**

1. Please see Appendix IO\_MUX of [ESP32 Datasheet](#) for IO's power domain. VDD is the I/O voltage for a particular power domain of pins.
2. For VDD3P3\_CPU and VDD3P3\_RTC power domain, per-pin current sourced in the same domain is gradually reduced from around 40 mA to around 29 mA,  $V_{OH} \geq 2.64\text{ V}$ , as the number of current-source pins increases.
3. Pins occupied by flash and/or PSRAM in the VDD\_SDIO power domain were excluded from the test.

## 5.4 Current Consumption Characteristics

Owing to the use of advanced power-management technologies, the module can switch between different power modes. For details on different power modes, please refer to Section *RTC and Low-Power Management* in [ESP32 Series Datasheet](#).

## 5.5 Memory Specifications

The data below is sourced from the memory vendor datasheet. These values are guaranteed through design and/or characterization but are not fully tested in production. Devices are shipped with the memory erased.

**Table 16: Flash Specifications**

| Parameter | Description                  | Min     | Typ  | Max  | Unit   |
|-----------|------------------------------|---------|------|------|--------|
| VCC       | Power supply voltage (1.8 V) | 1.65    | 1.80 | 2.00 | V      |
|           | Power supply voltage (3.3 V) | 2.7     | 3.3  | 3.6  | V      |
| $F_C$     | Maximum clock frequency      | 80      | —    | —    | MHz    |
| —         | Program/erase cycles         | 100,000 | —    | —    | cycles |
| $T_{RET}$ | Data retention time          | 20      | —    | —    | years  |
| $T_{PP}$  | Page program time            | —       | 0.8  | 5    | ms     |
| $T_{SE}$  | Sector erase time (4 KB)     | —       | 70   | 500  | ms     |
| $T_{BE1}$ | Block erase time (32 KB)     | —       | 0.2  | 2    | s      |
| $T_{BE2}$ | Block erase time (64 KB)     | —       | 0.3  | 3    | s      |
| $T_{CE}$  | Chip erase time (16 Mb)      | —       | 7    | 20   | s      |
|           | Chip erase time (32 Mb)      | —       | 20   | 60   | s      |
|           | Chip erase time (64 Mb)      | —       | 25   | 100  | s      |
|           | Chip erase time (128 Mb)     | —       | 60   | 200  | s      |
|           | Chip erase time (256 Mb)     | —       | 70   | 300  | s      |

## 6 RF Characteristics

This section contains tables with RF characteristics of the Espressif product.

The RF data is measured at the antenna port, where RF cable is connected, including the front-end loss. The external antennas used for the tests on the modules with external antenna connectors have an impedance of 50  $\Omega$ . Devices should operate in the center frequency range allocated by regional regulatory authorities. The target center frequency range and the target transmit power are configurable by software. See [ESP RF Test Tool and Test Guide](#) for instructions.

Unless otherwise stated, the RF tests are conducted with a 3.3 V ( $\pm 5\%$ ) supply at 25 °C ambient temperature.

### 6.1 Wi-Fi Radio

Table 17: Wi-Fi RF Characteristics

| Name                                        | Description      |
|---------------------------------------------|------------------|
| Center frequency range of operating channel | 2412 ~ 2484 MHz  |
| Wi-Fi wireless standard                     | IEEE 802.11b/g/n |

#### 6.1.1 Wi-Fi RF Transmitter (TX) Characteristics

Table 18: TX Power with Spectral Mask and EVM Meeting 802.11 Standards

| Rate                | Min (dBm) | Typ (dBm) | Max (dBm) |
|---------------------|-----------|-----------|-----------|
| 802.11b, 1 Mbps     | —         | 19.5      | —         |
| 802.11b, 11 Mbps    | —         | 19.5      | —         |
| 802.11g, 6 Mbps     | —         | 18.0      | —         |
| 802.11g, 54 Mbps    | —         | 14.0      | —         |
| 802.11n, HT20, MCS0 | —         | 18.0      | —         |
| 802.11n, HT20, MCS7 | —         | 13.0      | —         |
| 802.11n, HT40, MCS0 | —         | 18.0      | —         |
| 802.11n, HT40, MCS7 | —         | 13.0      | —         |

Table 19: TX EVM Test<sup>1</sup>

| Rate                   | Min (dB) | Typ (dB) | Limit (dB) |
|------------------------|----------|----------|------------|
| 802.11b, 1 Mbps, DSSS  | —        | -25.0    | -10.0      |
| 802.11b, 11 Mbps, CCK  | —        | -25.0    | -10.0      |
| 802.11g, 6 Mbps, OFDM  | —        | -24.0    | -5.0       |
| 802.11g, 54 Mbps, OFDM | —        | -28.0    | -25.0      |
| 802.11n, HT20, MCS0    | —        | -24.0    | -5.0       |

Cont'd on next page

[Not Recommended For New Designs \(NRND\)](#)

Table 19 – cont'd from previous page

| Rate                | Min (dB) | Typ (dB) | Limit (dB) |
|---------------------|----------|----------|------------|
| 802.11n, HT20, MCS7 | —        | -30.0    | -27.0      |
| 802.11n, HT40, MCS0 | —        | -24.0    | -5.0       |
| 802.11n, HT40, MCS7 | —        | -30.0    | -27.0      |

<sup>1</sup> EVM is measured at the corresponding typical TX power provided in Table 18 *Wi-Fi RF Transmitter (TX) Characteristics* above.

## 6.1.2 Wi-Fi RF Receiver (RX) Characteristics

For RX tests, the PER (packet error rate) limit is 8% for 802.11b, and 10% for 802.11g/n.

Table 20: RX Sensitivity

| Rate                   | Min (dBm) | Typ (dBm) | Max (dBm) |
|------------------------|-----------|-----------|-----------|
| 802.11b, 1 Mbps, DSSS  | —         | -97.0     | —         |
| 802.11b, 2 Mbps, DSSS  | —         | -94.0     | —         |
| 802.11b, 5.5 Mbps, CCK | —         | -91.0     | —         |
| 802.11b, 11 Mbps, CCK  | —         | -88.0     | —         |
| 802.11g, 6 Mbps, OFDM  | —         | -93.0     | —         |
| 802.11g, 9 Mbps, OFDM  | —         | -91.0     | —         |
| 802.11g, 12 Mbps, OFDM | —         | -90.0     | —         |
| 802.11g, 18 Mbps, OFDM | —         | -87.0     | —         |
| 802.11g, 24 Mbps, OFDM | —         | -84.0     | —         |
| 802.11g, 36 Mbps, OFDM | —         | -81.0     | —         |
| 802.11g, 48 Mbps, OFDM | —         | -77.0     | —         |
| 802.11g, 54 Mbps, OFDM | —         | -75.0     | —         |
| 802.11n, HT20, MCS0    | —         | -91.0     | —         |
| 802.11n, HT20, MCS1    | —         | -88.0     | —         |
| 802.11n, HT20, MCS2    | —         | -86.0     | —         |
| 802.11n, HT20, MCS3    | —         | -83.0     | —         |
| 802.11n, HT20, MCS4    | —         | -80.0     | —         |
| 802.11n, HT20, MCS5    | —         | -75.0     | —         |
| 802.11n, HT20, MCS6    | —         | -73.0     | —         |
| 802.11n, HT20, MCS7    | —         | -72.0     | —         |
| 802.11n, HT40, MCS0    | —         | -88.0     | —         |
| 802.11n, HT40, MCS1    | —         | -85.0     | —         |
| 802.11n, HT40, MCS2    | —         | -83.0     | —         |
| 802.11n, HT40, MCS3    | —         | -80.0     | —         |
| 802.11n, HT40, MCS4    | —         | -76.0     | —         |
| 802.11n, HT40, MCS5    | —         | -72.0     | —         |
| 802.11n, HT40, MCS6    | —         | -70.0     | —         |
| 802.11n, HT40, MCS7    | —         | -69.0     | —         |

Table 21: Maximum RX Level

| Rate                | Min (dBm) | Typ (dBm) | Max (dBm) |
|---------------------|-----------|-----------|-----------|
| 802.11b, 1 Mbps     | —         | 5         | —         |
| 802.11b, 11 Mbps    | —         | 5         | —         |
| 802.11g, 6 Mbps     | —         | 0         | —         |
| 802.11g, 54 Mbps    | —         | -8        | —         |
| 802.11n, HT20, MCS0 | —         | 0         | —         |
| 802.11n, HT20, MCS7 | —         | -8        | —         |
| 802.11n, HT40, MCS0 | —         | 0         | —         |
| 802.11n, HT40, MCS7 | —         | -8        | —         |

Table 22: RX Adjacent Channel Rejection

| Rate                   | Min (dB) | Typ (dB) | Max (dB) |
|------------------------|----------|----------|----------|
| 802.11b, 1 Mbps, DSSS  | —        | 35       | —        |
| 802.11b, 11 Mbps, CCK  | —        | 35       | —        |
| 802.11g, 6 Mbps, OFDM  | —        | 27       | —        |
| 802.11g, 54 Mbps, OFDM | —        | 13       | —        |
| 802.11n, HT20, MCS0    | —        | 27       | —        |
| 802.11n, HT20, MCS7    | —        | 12       | —        |
| 802.11n, HT40, MCS0    | —        | 16       | —        |
| 802.11n, HT40, MCS7    | —        | 7        | —        |

## 6.2 Bluetooth LE Radio

### 6.2.1 Receiver

Table 23: Receiver Characteristics – Bluetooth LE

| Parameter                          | Condition           | Min | Typ | Max | Unit |
|------------------------------------|---------------------|-----|-----|-----|------|
| Sensitivity @30.8% PER             | -                   | -   | -97 | -   | dBm  |
| Maximum received signal @30.8% PER | -                   | 0   | -   | -   | dBm  |
| Co-channel C/I                     | -                   | -   | +10 | -   | dB   |
| Adjacent channel selectivity C/I   | F = FO + 1 MHz      | -   | -5  | -   | dB   |
|                                    | F = FO - 1 MHz      | -   | -5  | -   | dB   |
|                                    | F = FO + 2 MHz      | -   | -25 | -   | dB   |
|                                    | F = FO - 2 MHz      | -   | -35 | -   | dB   |
|                                    | F = FO + 3 MHz      | -   | -25 | -   | dB   |
|                                    | F = FO - 3 MHz      | -   | -45 | -   | dB   |
| Out-of-band blocking performance   | 30 MHz ~ 2000 MHz   | -10 | -   | -   | dBm  |
|                                    | 2000 MHz ~ 2400 MHz | -27 | -   | -   | dBm  |

[Not Recommended For New Designs \(NRND\)](#)

| Parameter       | Condition           | Min | Typ | Max | Unit |
|-----------------|---------------------|-----|-----|-----|------|
|                 | 2500 MHz ~ 3000 MHz | -27 | -   | -   | dBm  |
|                 | 3000 MHz ~ 12.5 GHz | -10 | -   | -   | dBm  |
| Intermodulation | -                   | -36 | -   | -   | dBm  |

## 6.2.2 Transmitter

Table 24: Transmitter Characteristics – Bluetooth LE

| Parameter                                       | Condition                     | Min | Typ   | Max | Unit                 |
|-------------------------------------------------|-------------------------------|-----|-------|-----|----------------------|
| RF transmit power                               | -                             | -   | 0     | -   | dBm                  |
| Gain control step                               | -                             | -   | 3     | -   | dBm                  |
| RF power control range                          | -                             | -12 | -     | +9  | dBm                  |
| Adjacent channel transmit power                 | $F = F_0 \pm 2 \text{ MHz}$   | -   | -52   | -   | dBm                  |
|                                                 | $F = F_0 \pm 3 \text{ MHz}$   | -   | -58   | -   | dBm                  |
|                                                 | $F = F_0 \pm > 3 \text{ MHz}$ | -   | -60   | -   | dBm                  |
| $\Delta f_{1\text{avg}}$                        | -                             | -   | -     | 265 | kHz                  |
| $\Delta f_{2\text{max}}$                        | -                             | 247 | -     | -   | kHz                  |
| $\Delta f_{2\text{avg}}/\Delta f_{1\text{avg}}$ | -                             | -   | -0.92 | -   | -                    |
| ICFT                                            | -                             | -   | -10   | -   | kHz                  |
| Drift rate                                      | -                             | -   | 0.7   | -   | kHz/50 $\mu\text{s}$ |
| Drift                                           | -                             | -   | 2     | -   | kHz                  |

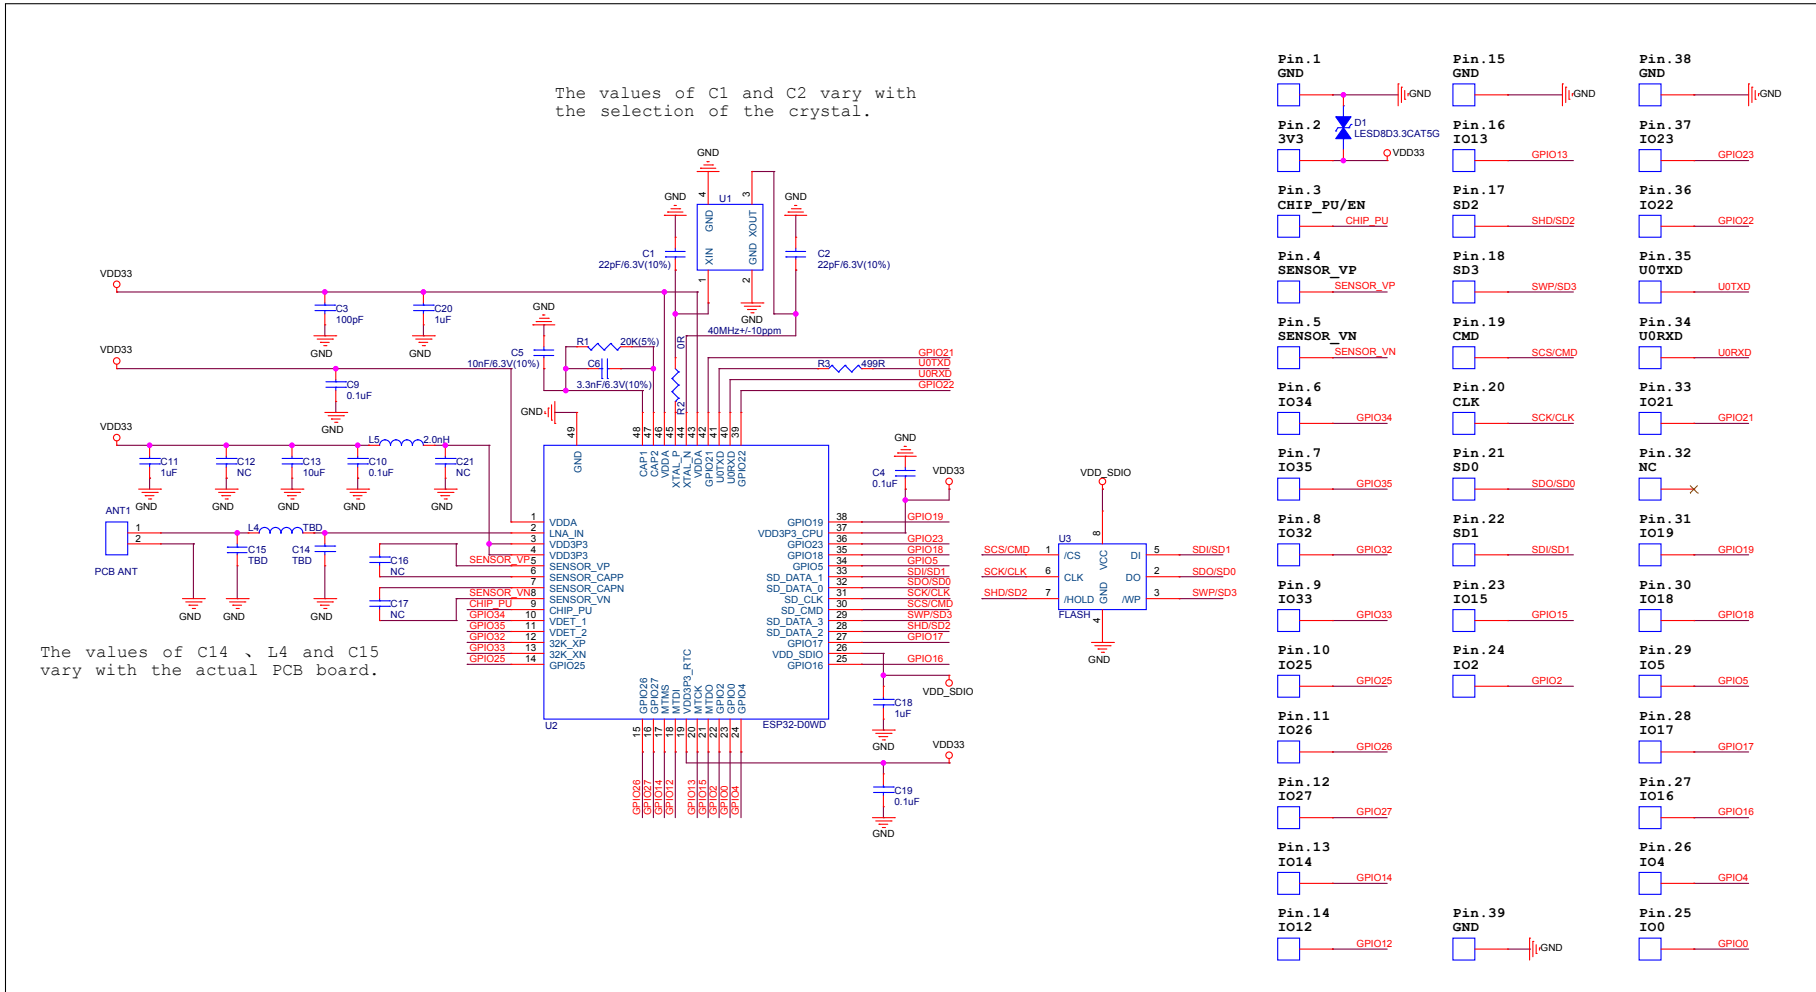


Figure 5: ESP32-WROOM-32D Schematics

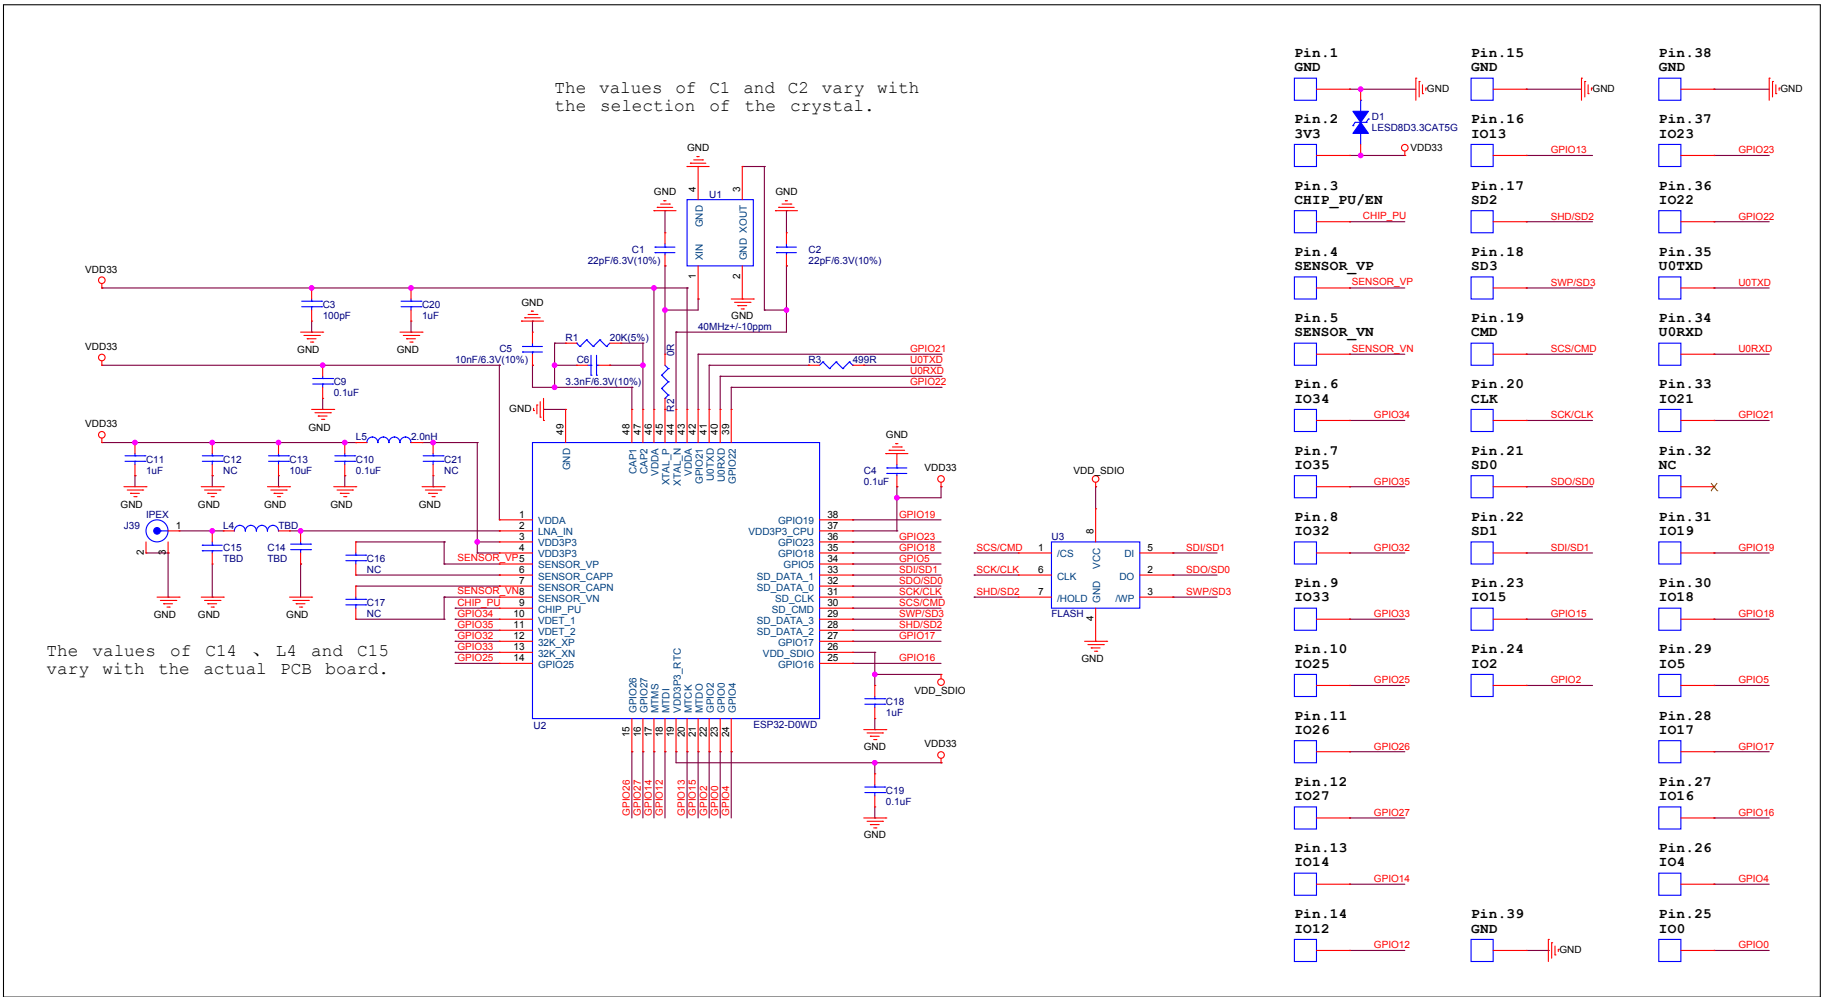


Figure 6: ESP32-WROOM-32U Schematics



## 8 Peripheral Schematics

This is the typical application circuit of the module connected with peripheral components (for example, power supply, antenna, reset button, JTAG interface, and UART interface).

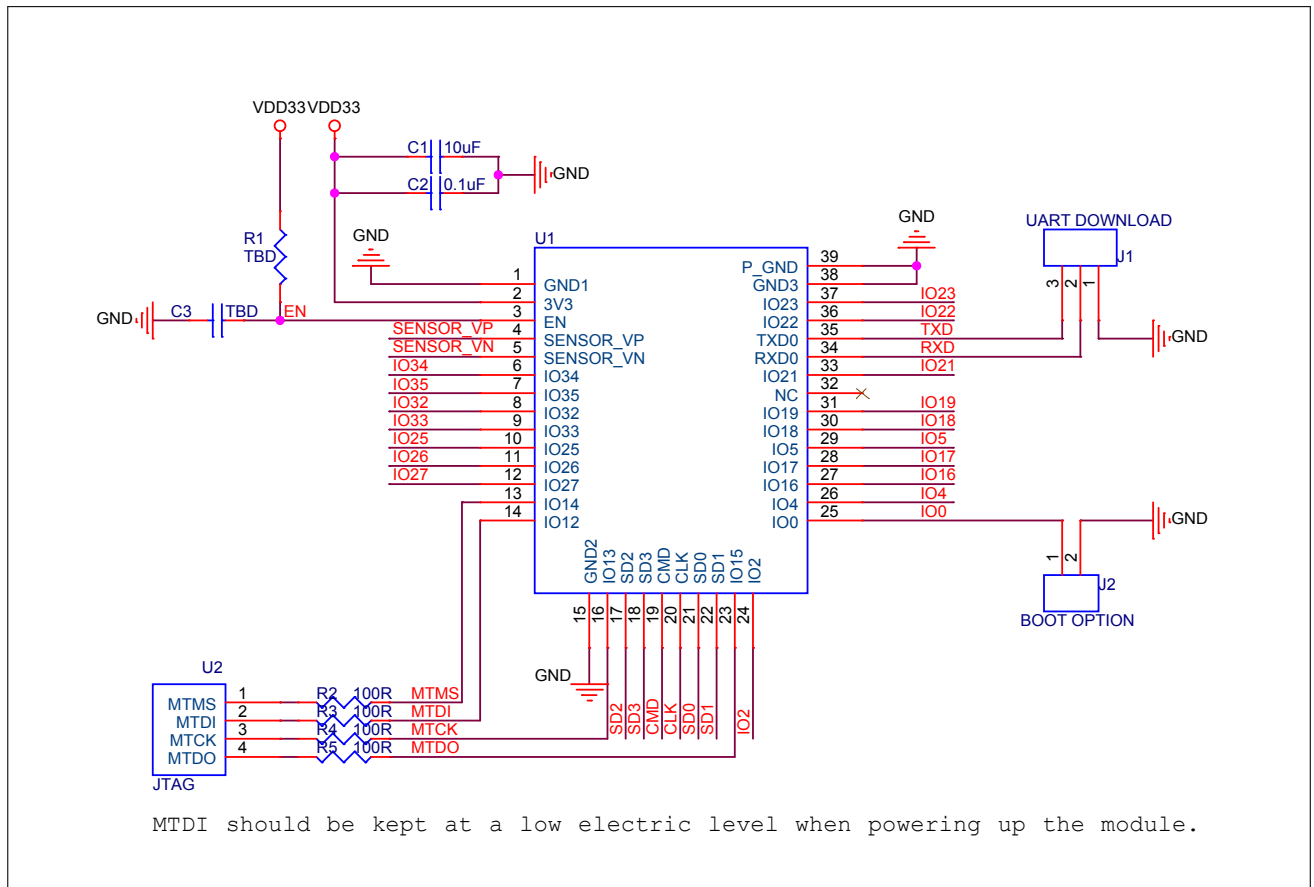


Figure 7: ESP32-WROOM-32D & ESP32-WROOM-32U Peripheral Schematics

- Soldering Pad 39 to the ground of the base board is not a must. If you choose to solder it, please apply the correct amount of soldering paste. Too much soldering paste may increase the gap between the module and the baseboard. As a result, the adhesion between other pins and the baseboard may be poor.
- To ensure the power supply to the ESP32 chip during power-up, it is advised to add an RC delay circuit at the EN pin. The recommended setting for the RC delay circuit is usually  $R = 10\text{ k}\Omega$  and  $C = 1\text{ }\mu\text{F}$ . However, specific parameters should be adjusted based on the power-up timing of the module and the power-up and reset sequence timing of the chip. For ESP32's power-up and reset sequence timing diagram, please refer to Section [3.6 Chip Power-up and Reset](#).
- UART0 is used to download firmware and log output. When using the AT firmware, note that the UART GPIO is already configured. It is recommended to use the default configuration. Please refer to [ESP-AT User Guide for ESP32](#) > Section *Hardware Connection*.

## 9 Physical Dimensions

### 9.1 Module Dimensions

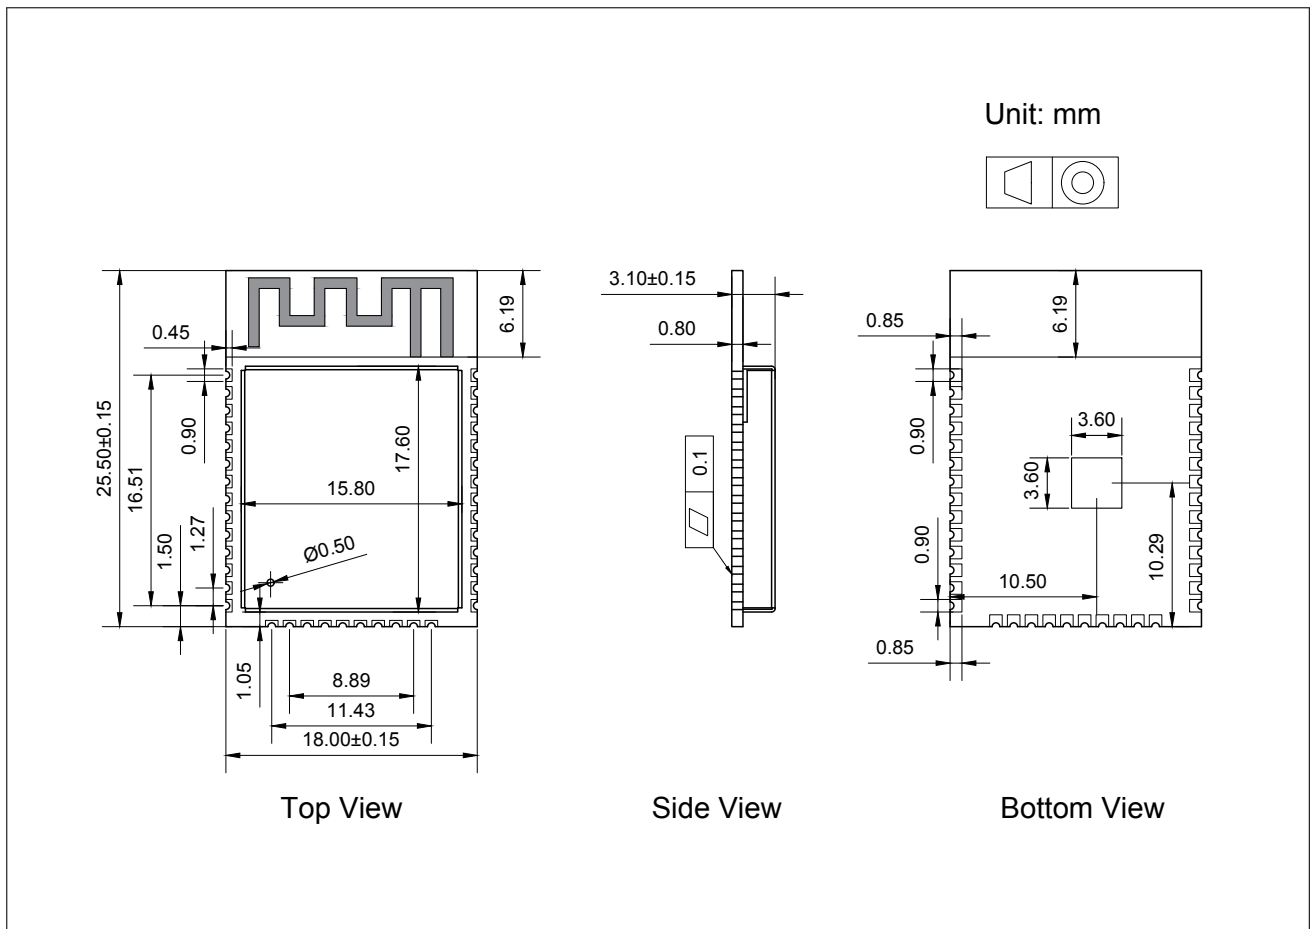


Figure 8: Physical Dimensions of ESP32-WROOM-32D

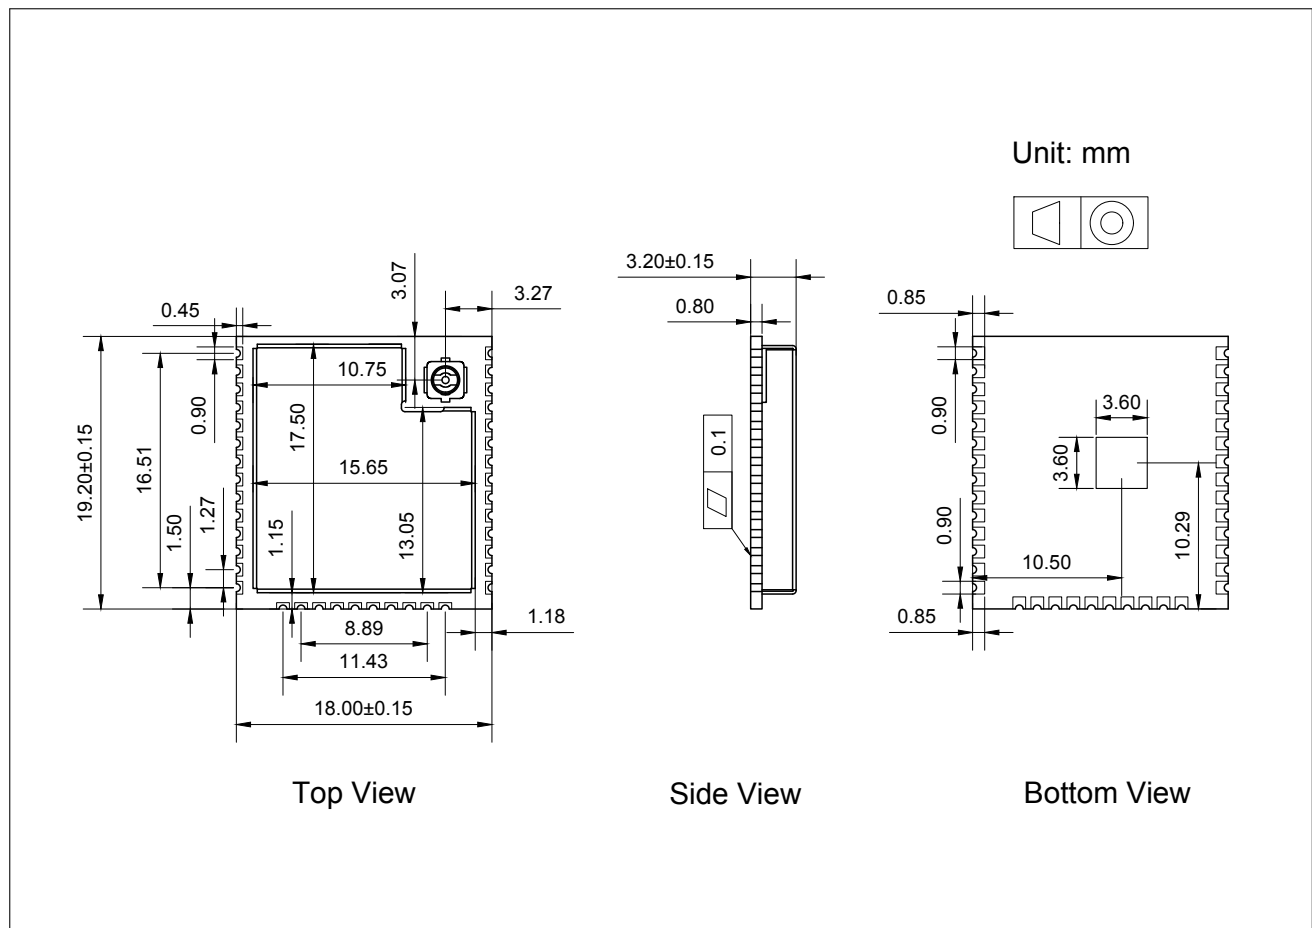


Figure 9: Physical Dimensions of ESP32-WROOM-32U

**Note:**

For information about tape, reel, and product marking, please refer to [ESP32 Module Packaging Information](#).

## 9.2 Dimensions of External Antenna Connector

ESP32-WROOM-32U uses the first generation external antenna connector as shown in Figure 10 *Dimensions of External Antenna Connector*. This connector is compatible with the following connectors:

- U.FL Series connector from Hirose
- MHF I connector from I-PEX
- AMC connector from Amphenol

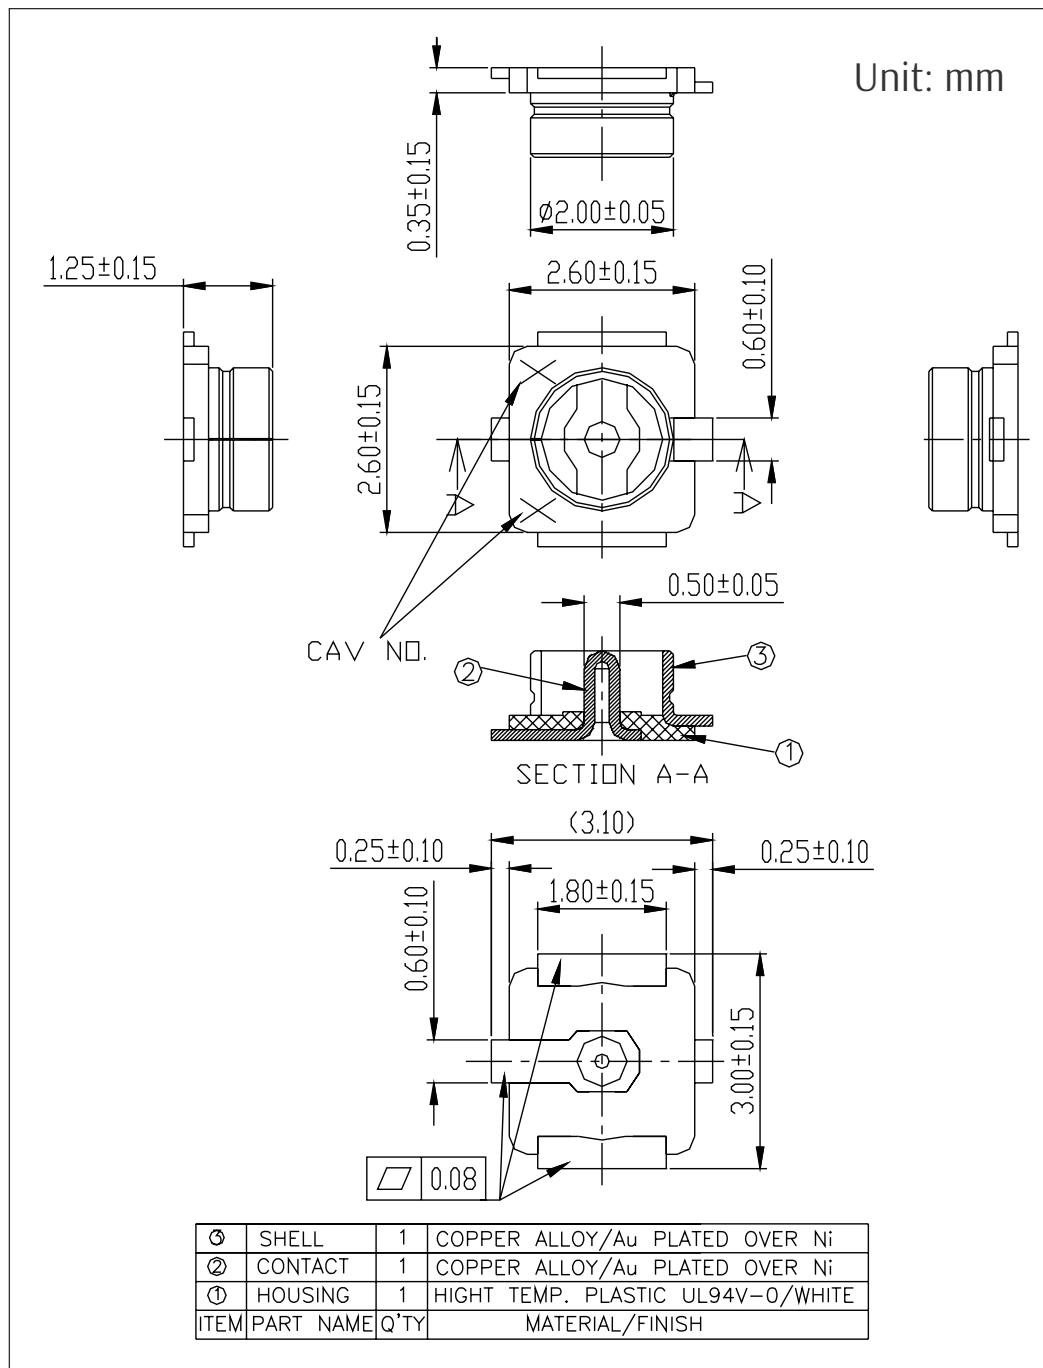


Figure 10: Dimensions of External Antenna Connector

The external antenna used for ESP32-WROOM-32U during certification testing is the first generation monopole antenna, with material code TFPD05H08750011.

[Not Recommended For New Designs \(NRND\)](#)

The module does not include an external antenna upon shipment. If needed, select a suitable external antenna based on the product's usage environment and performance requirements.

It is recommended to select an antenna that meets the following requirements:

- 2.4 GHz band
- 50  $\Omega$  impedance
- The maximum gain does not exceed 2.33 dBi, the gain of the antenna used for certification
- The connector matches the specifications shown in Figure [10 Dimensions of External Antenna Connector](#)

**Note:**

If you use an external antenna of a different type or gain, additional testing, such as EMC, may be required beyond the existing antenna test reports for Espressif modules. Specific requirements depend on the certification type.

## 10 PCB Layout Recommendations

### 10.1 PCB Land Pattern

This section provides the following resources for your reference:

- Figures for recommended PCB land patterns with all the dimensions needed for PCB design. See Figure 11 *Recommended PCB Land Pattern of ESP32-WROOM-32D* and Figure 12 *Recommended PCB Land Pattern of ESP32-WROOM-32U*.
- Source files of recommended PCB land patterns to measure dimensions not covered in Figure 11 and Figure 12. You can view the source files for [ESP32-WROOM-32D](#) and [ESP32-WROOM-32U](#) with [Autodesk Viewer](#).
- 3D models of [ESP32-WROOM-32D](#). Please make sure that you download the 3D model file in .STEP format (beware that some browsers might add .txt).

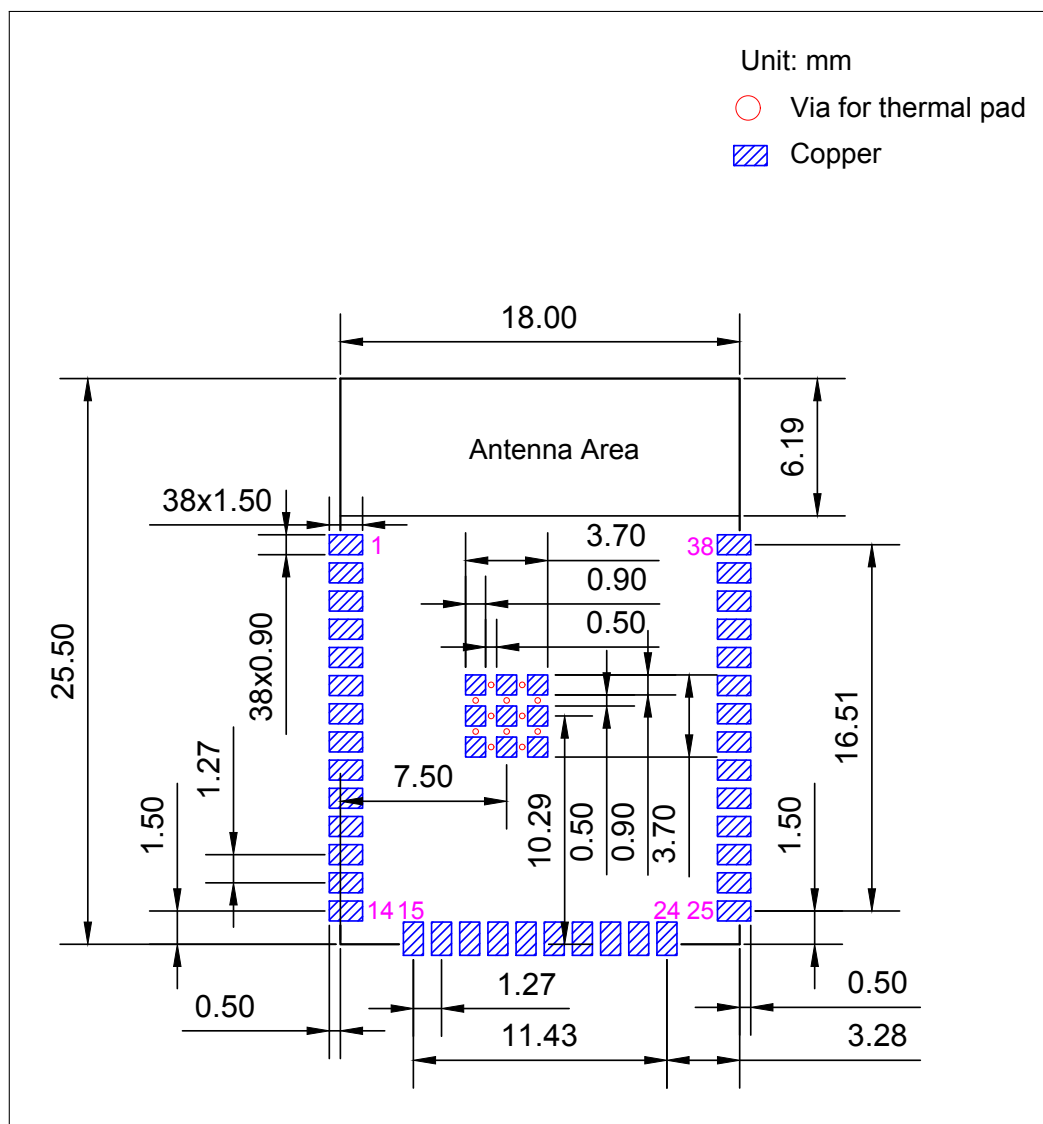


Figure 11: Recommended PCB Land Pattern of ESP32-WROOM-32D

[Not Recommended For New Designs \(NRND\)](#)

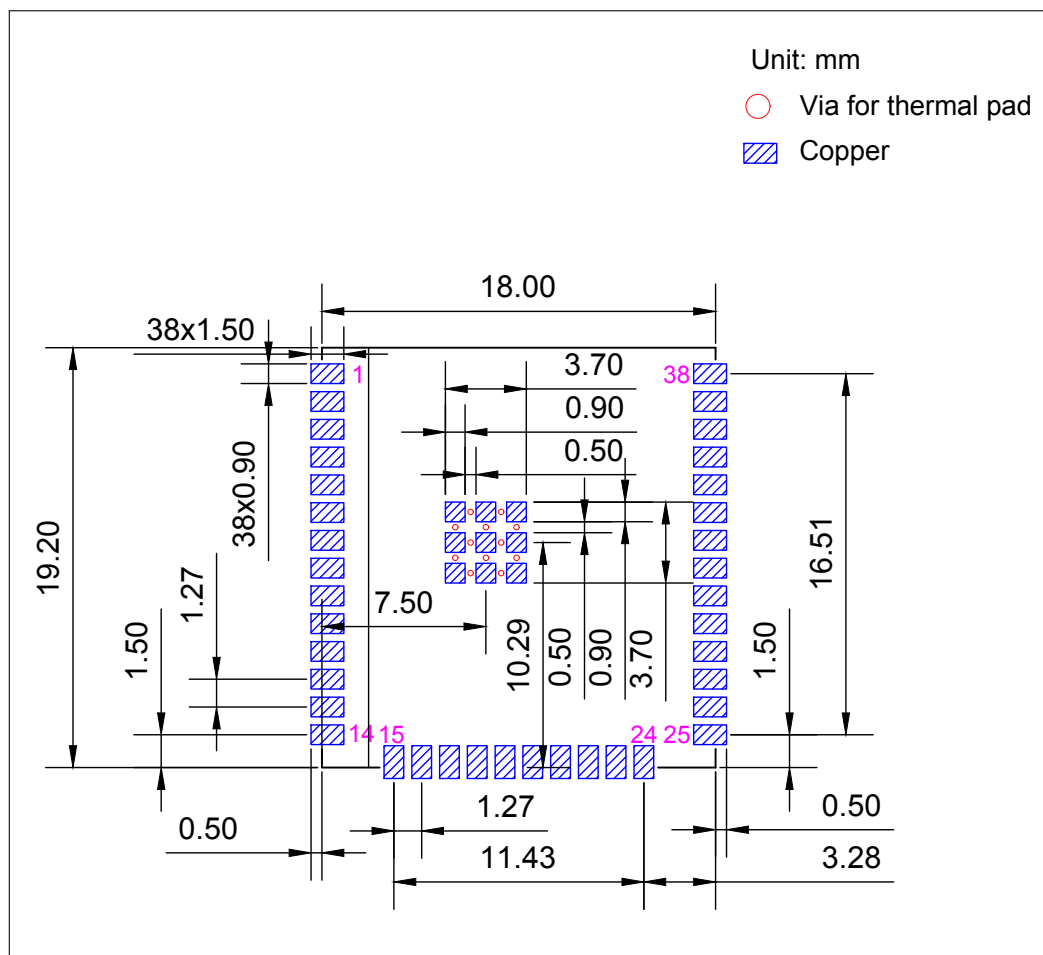


Figure 12: Recommended PCB Land Pattern of ESP32-WROOM-32U

## 10.2 Module Placement for PCB Design

If module-on-board design is adopted, attention should be paid while positioning the module on the base board. The interference of the base board on the module's antenna performance should be minimized.

For details about module placement for PCB design, please refer to [ESP32 Hardware Design Guidelines](#) > Section *General Principles of PCB Layout for Modules*.

## 11 Product Handling

### 11.1 Storage Conditions

The products sealed in moisture barrier bags (MBB) should be stored in a non-condensing atmospheric environment of  $< 40\text{ }^{\circ}\text{C}$  and 90%RH. The module is rated at the moisture sensitivity level (MSL) of 3.

After unpacking, the module must be soldered within 168 hours with the factory conditions  $25 \pm 5\text{ }^{\circ}\text{C}$  and 60 %RH. If the above conditions are not met, the module needs to be baked.

### 11.2 Electrostatic Discharge (ESD)

- Human body model (HBM):  $\pm 2000\text{ V}$
- Charged-device model (CDM):  $\pm 500\text{ V}$

### 11.3 Reflow Profile

Solder the module in a single reflow.

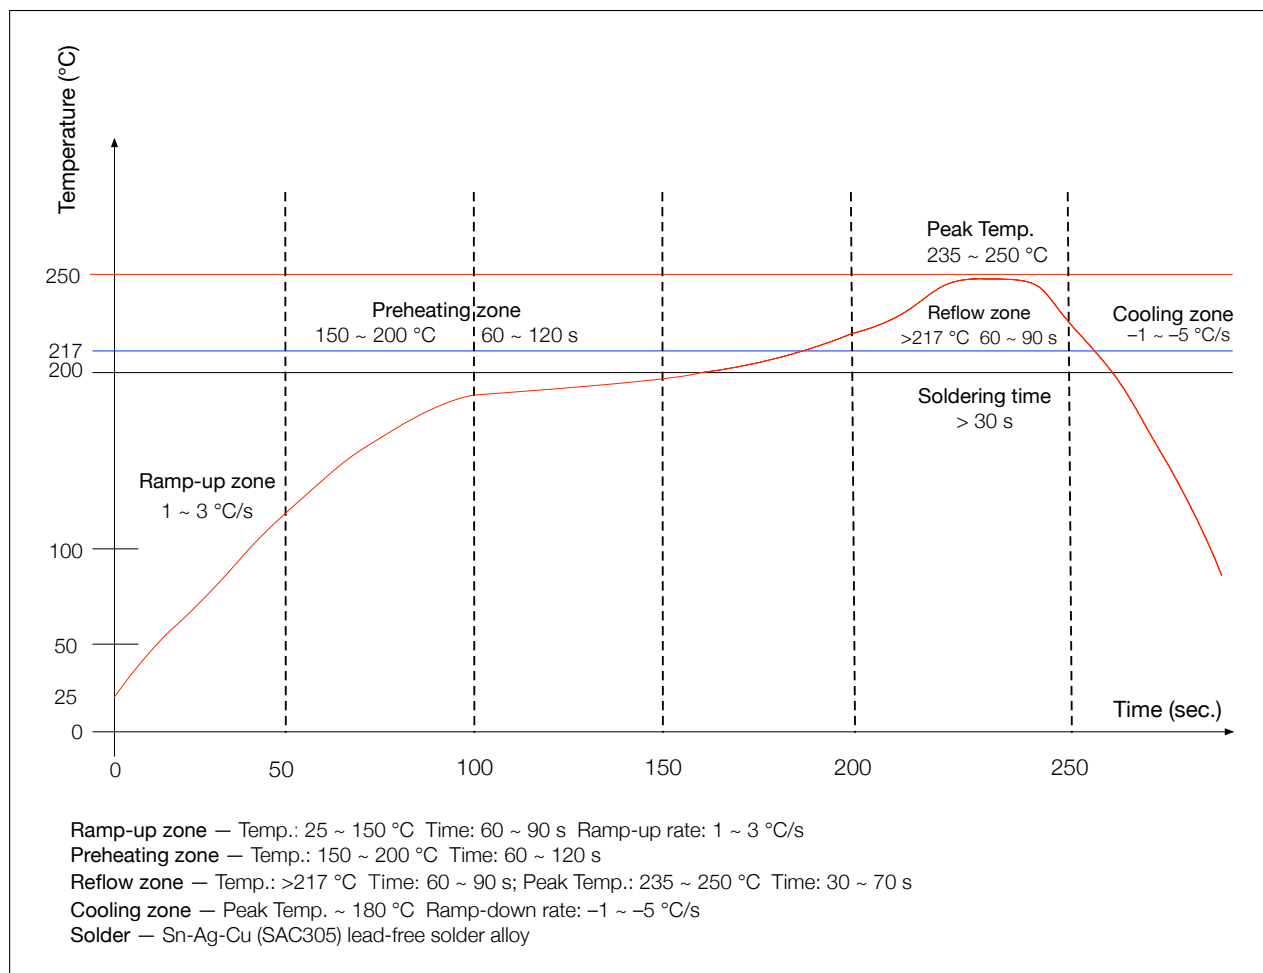


Figure 13: Reflow Profile



## 11.4 Ultrasonic Vibration

Avoid exposing Espressif modules to vibration from ultrasonic equipment, such as ultrasonic welders or ultrasonic cleaners. This vibration may induce resonance in the in-module crystal and lead to its malfunction or even failure. As a consequence, **the module may stop working or its performance may deteriorate.**

## Datasheet Versioning

| Datasheet Version               | Status              | Watermark                                          | Definition                                                                                                                                                                                           |
|---------------------------------|---------------------|----------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| v0.1 ~ v0.5<br>(excluding v0.5) | Draft               | Confidential                                       | This datasheet is under development for products in the design stage. Specifications may change without prior notice.                                                                                |
| v0.5 ~ v1.0<br>(excluding v1.0) | Preliminary release | Preliminary                                        | This datasheet is actively updated for products in the verification stage. Specifications may change before mass production, and the changes will be documented in the datasheet's Revision History. |
| v1.0 and higher                 | Official release    | —                                                  | This datasheet is publicly released for products in mass production. Specifications are finalized, and major changes will be communicated via <a href="#">Product Change Notifications (PCN)</a> .   |
| Any version                     | —                   | Not Recommended for New Design (NRND) <sup>1</sup> | This datasheet is updated less frequently for products not recommended for new designs.                                                                                                              |
| Any version                     | —                   | End of Life (EOL) <sup>2</sup>                     | This datasheet is no longer maintained for products that have reached end of life.                                                                                                                   |

<sup>1</sup> Watermark will be added to the datasheet title page only when all the product variants covered by this datasheet are not recommended for new designs.

<sup>2</sup> Watermark will be added to the datasheet title page only when all the product variants covered by this datasheet have reached end of life.

## Related Documentation and Resources

### Related Documentation

- [ESP32 Series Datasheet](#) – Specifications of the ESP32 hardware.
- [ESP32 Technical Reference Manual](#) – Detailed information on how to use the ESP32 memory and peripherals.
- [ESP32 Hardware Design Guidelines](#) – Guidelines on how to integrate the ESP32 into your hardware product.
- [ESP32 ECO and Workarounds for Bugs](#) – Correction of ESP32 design errors.
- [ESP32 Series SoC Errata](#) – Descriptions of known errors in ESP32 series of SoCs.
- *Certificates*  
<https://espressif.com/en/support/documents/certificates>
- *ESP32 Product/Process Change Notifications (PCN)*  
<https://espressif.com/en/support/documents/pcns>
- *ESP32 Advisories* – Information on security, bugs, compatibility, component reliability.  
<https://espressif.com/en/support/documents/advisories>
- *Documentation Updates and Update Notification Subscription*  
<https://espressif.com/en/support/download/documents>

### Developer Zone

- [ESP-IDF Programming Guide for ESP32](#) – Extensive documentation for the ESP-IDF development framework.
- *ESP-IDF* and other development frameworks on GitHub.  
<https://github.com/espressif>
- *ESP32 BBS Forum* – Engineer-to-Engineer (E2E) Community for Espressif products where you can post questions, share knowledge, explore ideas, and help solve problems with fellow engineers.  
<https://esp32.com/>
- *ESP-FAQ* – A summary document of frequently asked questions released by Espressif.  
<https://espressif.com/projects/esp-faq/en/latest/index.html>
- *The ESP Journal* – Best Practices, Articles, and Notes from Espressif folks.  
<https://blog.espressif.com/>
- See the tabs *SDKs and Demos*, *Apps*, *Tools*, *AT Firmware*.  
<https://espressif.com/en/support/download/sdks-demos>

### Products

- *ESP32 Series SoCs* – Browse through all ESP32 SoCs.  
<https://espressif.com/en/products/socs?id=ESP32>
- *ESP32 Series Modules* – Browse through all ESP32-based modules.  
<https://espressif.com/en/products/modules?id=ESP32>
- *ESP32 Series DevKits* – Browse through all ESP32-based devkits.  
<https://espressif.com/en/products/devkits?id=ESP32>
- *ESP Product Selector* – Find an Espressif hardware product suitable for your needs by comparing or applying filters.  
<https://products.espressif.com/#/product-selector?language=en>

### Contact Us

- See the tabs *Sales Questions*, *Technical Enquiries*, *Circuit Schematic & PCB Design Review*, *Get Samples* (Online stores), *Become Our Supplier*, *Comments & Suggestions*.  
<https://espressif.com/en/contact-us/sales-questions>

[Not Recommended For New Designs \(NRND\)](#)

## Revision History

| Date       | Version | Release notes                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
|------------|---------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 2025-08-05 | v2.6    | <ul style="list-style-type: none"> <li>Improved the wording and structure of following sections:               <ul style="list-style-type: none"> <li>1: <a href="#">Module Overview</a>: Updated Table "ESP32-WROOM-32D and ESP32-WROOM-32U Specifications" to Section 1.1: <a href="#">Features</a> and added Section 1.2: <a href="#">Series Comparison</a></li> <li>Updated Section "Strapping Pins" and renamed to <a href="#">Boot Configurations</a></li> <li>Added Section 4: <a href="#">Peripherals</a></li> <li>Added Section 5.5: <a href="#">Memory Specifications</a></li> <li>Added Section 6: <a href="#">RF Characteristics</a></li> <li>Added a note about UART and pin 39 in Section 8: <a href="#">Peripheral Schematics</a></li> <li>Added notes about the external antenna connector in Section 9.2: <a href="#">Dimensions of External Antenna Connector</a></li> <li>Added Section <a href="#">Datasheet Versioning</a></li> </ul> </li> </ul> |
| 2025-04-14 | v2.5    | Added notes about erase cycles and retention time for flash in Table "ESP32-WROOM-32D vs. ESP32-WROOM-32U" which later were moved to Section 5.5: <a href="#">Memory Specifications</a>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| 2023.02    | v2.4    | <p>Major updates:</p> <ul style="list-style-type: none"> <li>Removed contents about hall sensor according to <a href="#">PCN20221202</a></li> <li>Added Section 11: <a href="#">Product Handling</a></li> </ul> <p>Other updates:</p> <ul style="list-style-type: none"> <li>Added strapping pin timing in Section "Strapping Pins"</li> <li>Added source files of PCB land patterns and 3D models of the modules (if available) in Section 10.1: <a href="#">PCB Land Pattern</a></li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| 2022.03    | v2.3    | <p>Updated Table Table "ESP32-WROOM-32D vs. ESP32-WROOM-32U"</p> <p>Added a link to RF certificates in Section 1.1: <a href="#">Features</a></p> <p>Updated Table 13</p> <p>Added a note below Figure 9</p> <p>Updated the description to the connector</p> <p>Added Section <a href="#">Related Documentation and Resources</a></p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| 2021.08    | v2.2    | <p>Replaced Espressif Product Ordering Information with <a href="#">ESP Product Selector</a></p> <p>Updated the description of TWAI in Section 1.1: <a href="#">Features</a></p> <p>Labeled this document as <a href="#">(Not Recommended For New Designs)</a></p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| 2021.02    | v2.1    | <p>Updated Figure 8: <a href="#">Physical Dimensions of ESP32-WROOM-32D</a>, Figure 9: <a href="#">Physical Dimensions of ESP32-WROOM-32U</a>, Figure 11: <a href="#">Recommended PCB Land Pattern of ESP32-WROOM-32D</a>, and Figure 12: <a href="#">Recommended PCB Land Pattern of ESP32-WROOM-32U</a></p> <p>Modified the note below Figure: Reflow Profile</p> <p>Modified the note below Figure 7: <a href="#">ESP32-WROOM-32D &amp; ESP32-WROOM-32U Peripheral Schematics</a></p> <p>Updated the trade mark from TWAI™ to TWAI®</p>                                                                                                                                                                                                                                                                                                                                                                                                                             |

| Date    | Version | Release notes                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
|---------|---------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 2020.11 | v2.0    | <p>Added TWAJ™ in Section 1.1: <a href="#">Features</a></p> <p>Added a note under Figure: Reflow Profile</p> <p>Updated the C value in RC delay circuit from 0.1 <math>\mu</math>F to 1 <math>\mu</math>F</p> <p>Provided feedback link</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| 2019.09 | v1.9    | <ul style="list-style-type: none"> <li>Changed the supply voltage range from 2.7 V ~ 3.6 V to 3.0 V ~ 3.6 V</li> <li>Added Moisture sensitivity level (MSL) 3 in Section 1.1: <a href="#">Features</a></li> <li>Added notes about "Operating frequency range" and "TX power" under Table "Wi-Fi Radio Characteristics" which later was updated to several tables in Section 6: <a href="#">RF Characteristics</a></li> <li>Updated Section 8 <a href="#">Peripheral Schematics</a> and added a note about RC delay circuit under it</li> <li>Updated Figure 11 and Figure 12 <a href="#">Recommended PCB Land Pattern</a></li> </ul>                                                                                                             |
| 2019.01 | v1.8    | Changed the RF power control range in Table 24 from -12 ~ +12 to -12 ~ +9 dBm.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| 2018.10 | V1.7    | <p>Added notice on module custom options under Section 1.1: <a href="#">Features</a></p> <p>Added "Cumulative IO output current" entry to Table 13: Absolute Maximum Ratings</p> <p>Added more parameters to Table 15: DC Characteristics</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| 2018.09 | V1.6    | Updated the hole diameter in the shield from 1.00 mm to 0.50 mm, in Figure 8                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| 2018.08 | V1.5    | <ul style="list-style-type: none"> <li>Added certifications and reliability test items the module has passed in Section 1.1: <a href="#">Features</a>, and removed software-specific information</li> <li>Updated Section "RTC and Low-Power Management" which later renamed to 5.4: <a href="#">Current Consumption Characteristics</a></li> <li>Changed the modules' dimensions</li> <li>Updated Figure 8 and 9: Physical Dimensions</li> <li>Updated Table "Wi-Fi Radio Characteristics"</li> </ul>                                                                                                                                                                                                                                           |
| 2018.06 | V1.4    | <ul style="list-style-type: none"> <li>Deleted Temperature Sensor in Section 1.1: <a href="#">Features</a></li> <li>Updated Chapter "Functional Description"</li> <li>Added notes to Chapter 8: <a href="#">Peripheral Schematics</a></li> <li>Added Chapter 10.1: <a href="#">Recommended PCB Land Pattern</a></li> </ul> <p>Changes to electrical characteristics:</p> <ul style="list-style-type: none"> <li>Updated Table 13: Absolute Maximum Ratings</li> <li>Added Table 14: <a href="#">Recommended Operating Conditions</a></li> <li>Added Table 15: DC Characteristics</li> <li>Updated the values of "Gain control step", "Adjacent channel transmit power" in Table 24: <a href="#">Transmitter Characteristics - BLE</a></li> </ul> |
| 2018.04 | v1.3    | Updated Figure 6 ESP32-WROOM-32U Schematics and Figure 5 ESP32-WROOM-32D Schematics                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| 2018.02 | v1.2    | Update Figure 6 ESP32-WROOM-32U Schematics                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| 2018.02 | V1.1    | <p>Updated Chapter 7 <a href="#">Module Schematics</a></p> <p>Deleted description of low-noise amplifier</p> <p>Replaced the module name ESP-WROOM-32D with ESP32-WROOM-32D</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |

| Date    | Version | Release notes                                                                                                                                                      |
|---------|---------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|         |         | Added information about module certification in Section 1.1: <a href="#">Features</a><br>Updated the description of eFuse bits in Chapter "Functional Description" |
| 2017.11 | v1.0    | First release                                                                                                                                                      |



## Disclaimer and Copyright Notice

Information in this document, including URL references, is subject to change without notice.

ALL THIRD PARTY'S INFORMATION IN THIS DOCUMENT IS PROVIDED AS IS WITH NO WARRANTIES TO ITS AUTHENTICITY AND ACCURACY.

NO WARRANTY IS PROVIDED TO THIS DOCUMENT FOR ITS MERCHANTABILITY, NON-INFRINGEMENT, FITNESS FOR ANY PARTICULAR PURPOSE, NOR DOES ANY WARRANTY OTHERWISE ARISING OUT OF ANY PROPOSAL, SPECIFICATION OR SAMPLE.

All liability, including liability for infringement of any proprietary rights, relating to use of information in this document is disclaimed. No licenses express or implied, by estoppel or otherwise, to any intellectual property rights are granted herein.

The Wi-Fi Alliance Member logo is a trademark of the Wi-Fi Alliance. The Bluetooth logo is a registered trademark of Bluetooth SIG.

All trade names, trademarks and registered trademarks mentioned in this document are property of their respective owners, and are hereby acknowledged.

Copyright © 2025 Espressif Systems (Shanghai) Co., Ltd. All rights reserved.

[www.espressif.com](http://www.espressif.com)

[Not Recommended For New Designs \(NRND\)](#)

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Espressif:](#)

[ESP32-WROOM-32U \(16MB\)](#) [ESP32-WROOM-32U \(8MB\)](#) [ESP32-WROOM-32D \(8MB\)](#) [ESP32-WROOM-32D \(16MB\)](#) [ESP32-WROOM-32D](#) [ESP32-WROOM-32U](#) [ESP32-WROOM-32D \(4MB PS\)](#) [ESP32-WROOM-32U \(4MB US\)](#) [ESP32-WROOM-32U \(4MB\)](#) [ESP32-WROOM-32D \(4MB\)](#) [ESP32-WROOM-32U\(M113DH3200UH3Q0\)](#) [ESP32-WROOM-32D\(M113DH3200PS3Q0\)](#) [ESP32-WROOM-32U\(M113DH3200US3Q0\)](#) [ESP32-WROOM-32D\(M113DH2800PH3Q0\)](#) [ESP32-WROOM-32D\(M113DH3200PH3Q0\)](#) [ESP32-WROOM-32D\(M113DH6400PH3Q0\)](#) [ESP32-WROOM-32U\(M113DH2800UH3Q0\)](#) [ESP32-WROOM-32U\(M113DH6400UH3Q0\)](#) [ESP32-WROOM-32D-H4](#) [ESP32-WROOM-32D-N16](#) [ESP32-WROOM-32D-N4](#) [ESP32-WROOM-32D-N8](#) [ESP32-WROOM-32U-H4](#) [ESP32-WROOM-32U-N16](#) [ESP32-WROOM-32U-N4](#) [ESP32-WROOM-32U-N8](#)