

7.5° 12.5 Watts 2 phases Part number made to order



- 48 steps/revolution (7.5°)
- Absorbed power : 12.5 W
- 2 or 4 phase versions available


Part numbers

| | Type | Type | Number of phases | Electronic controller used | Resistance per phase (Ω) | Inductance per phase (mH) | Current per phase (A) | Voltage at motor terminals (V) |
|-------------------|----------|-----------|------------------|----------------------------|--------------------------|---------------------------|-----------------------|--------------------------------|
| 82 940 002 | 2 phases | 82 940 02 | | Bipolar | 26.7 | 93 | 0,48 | 12,7 |

Specifications

| | |
|---|-------------------|
| Absorbed power (W) | 12,5 |
| Holding torque (mNm) | 300 |
| Step angle (°) | 7,5 |
| Positioning accuracy (%) | 5 |
| Rotor inertia (gcm ²) | 180 |
| Max. detent torque (mNm) | 16 |
| Max. coil temperature (°C) | 120 |
| Storage temperature (°C) | -40 → +80 |
| Thermal resistance of coil - ambient air (°C/W) | 5,6 |
| Insulation resistance (at 500 Vcc) (MQ) following NFC 51200 standard | > 10 ³ |
| Insulation voltage (50 Hz, 1 minute) (V) following NFC 51200 standard | > 600 |
| Wires length (mm) | 250 |
| Weight (g) | 540 |
| Protection rating | IP40 |


Dimensions (mm)

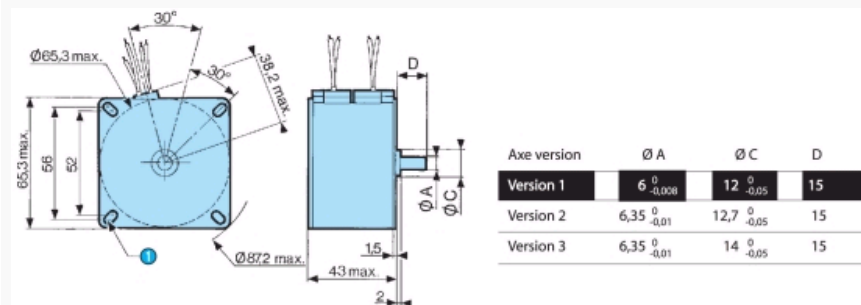

| N° | Legend |
|----|--------------------------------|
| 1 | 4 oblong fixing holes 4.2 wide |

Curves

2 phases

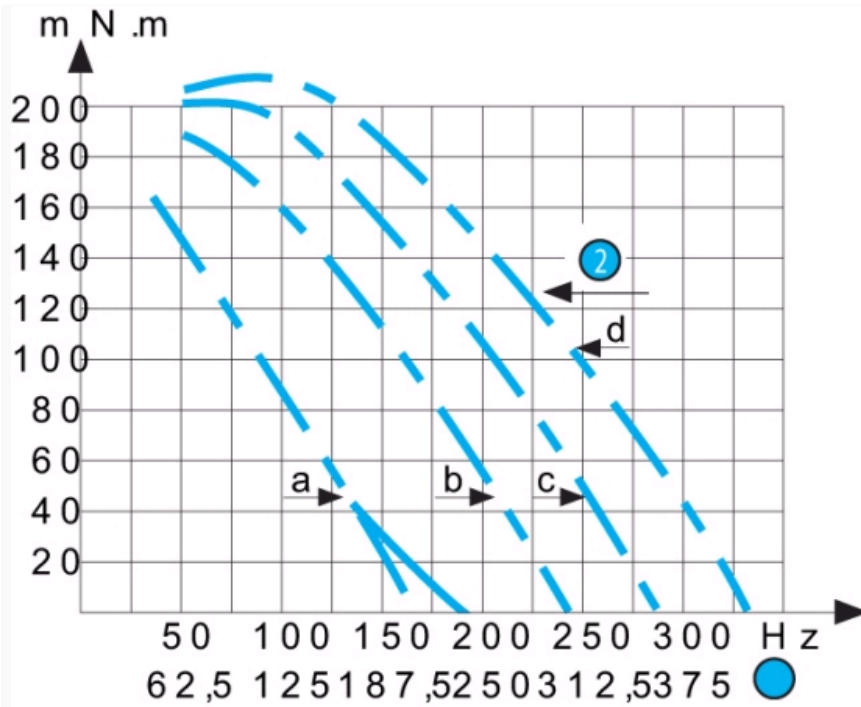


Inertia of measuring chain : 20.5 g.cm² a = constant voltage controller with R_s (resistance in series) = 0 b = constant voltage controller with R_s (resistance in series) = R motor c = constant voltage controller with R_s (resistance in series) = 2R motor d = constant voltage controller with R_s (resistance in series) = 3R motor The measurements are made with full stepping, 2-phases energised.

| N° | Legend |
|----|-------------------------------|
| ① | RPM |
| ② | Max. stopping-starting curves |

Curves

2 phases - Max. stopping-starting and operating curves at I constant (PBL 3717) for 2 (motor) phases 5.2 Ω . Holding torque 240 mN.m. Current per phase 0.55 A

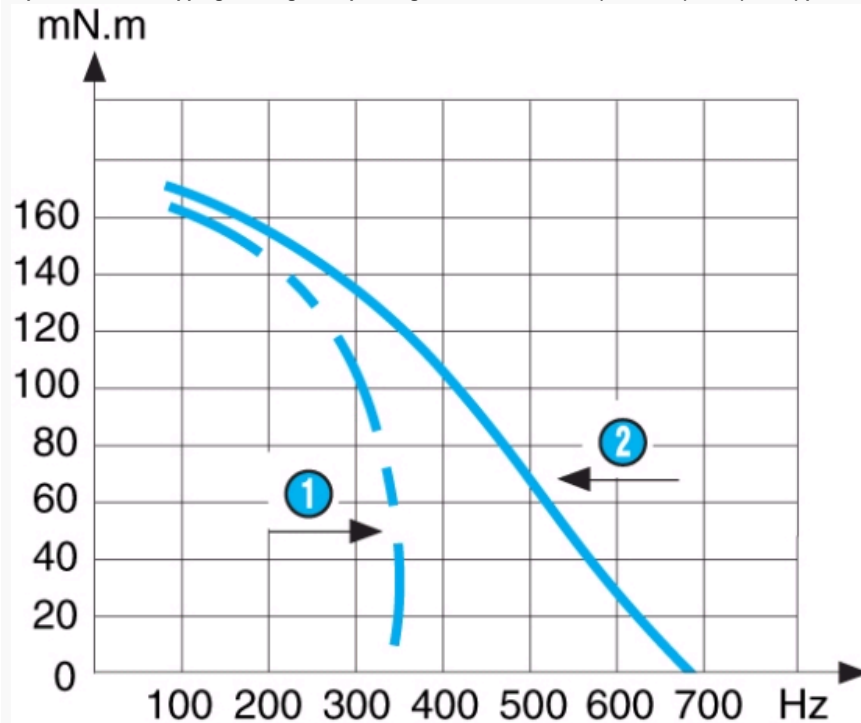


Inertia of measuring chain : 20.5 g.cm² a = constant voltage controller with R_s (resistance in series) = 0 b = constant voltage controller with R_s (resistance in series) = R motor c = constant voltage controller with R_s (resistance in series) = 2R motor d = constant voltage controller with R_s (resistance in series) = 3R motor The measurements are made with full stepping, 2-phases energised.

| N° | Legend |
|----|-------------------------------|
| ① | Max. stopping-starting curves |

| | |
|--|-----------------------|
|  | Max. operating curves |
|--|-----------------------|

Curves

Max. stopping-starting frequency curves as a function of the external inertia load at zero antagonistic torque. Tests at constant U.

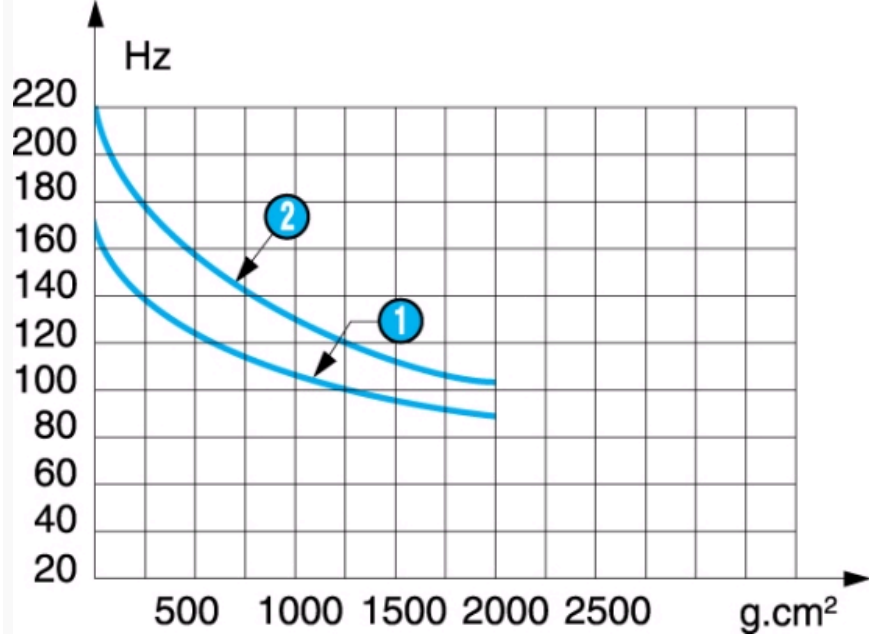


N.B. Measurement conditions : Tam = 25 °C, motor cold

| N° | Legend |
|----|----------|
| 1 | 2 phases |
| 2 | 4 phases |

Connections

2 phases

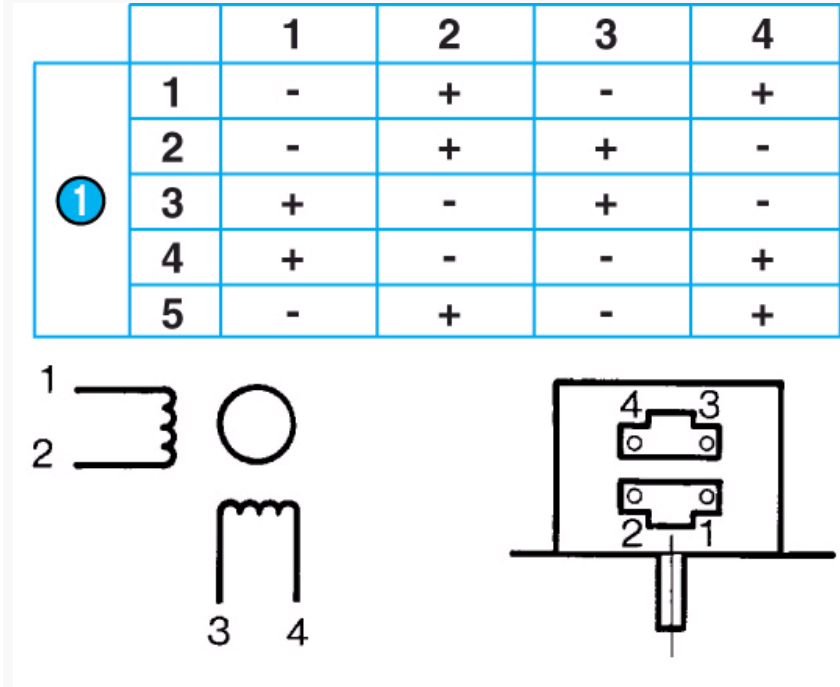

Energisation sequence for clockwise rotation : (viewed shaft end)

| N° | Legend |
|----|--------|
|----|--------|

**Product adaptations**

- Special output shafts
- Special supply voltages
- Special cable lengths
- Special connectors

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Crouzet:

82940002