

IEEE 802.3at PoE PD with Integrated DC-DC Controller


Brief Description

The KTA1137A Evaluation (EVAL) Kit is used to demonstrate and evaluate the KTA1137A functionality, performance, and PCB layout. The kit includes a fully assembled and tested PCB with the KTA1137A IC installed, and a printed copy of the Quick Start Guide. The KTA1137A device is an IEEE 802.3af/at compliant combination powered device (PD) controller and power supply controller optimized for isolated and non-isolated converter topologies. This KTA1137A EVAL board provides power and signal I/O connections and an array of test points for signal observation. A non-synchronous 12V, 25W flyback topology design is featured, but synchronous rectified designs are also possible using synchronous winding of the transformer.

Ordering Information

Part Number	Description	IC Package
KTA1137AEUAB-MMEV02	KTA1137A EVAL Kit – Version 2	QFN55-20


3D CAD Image

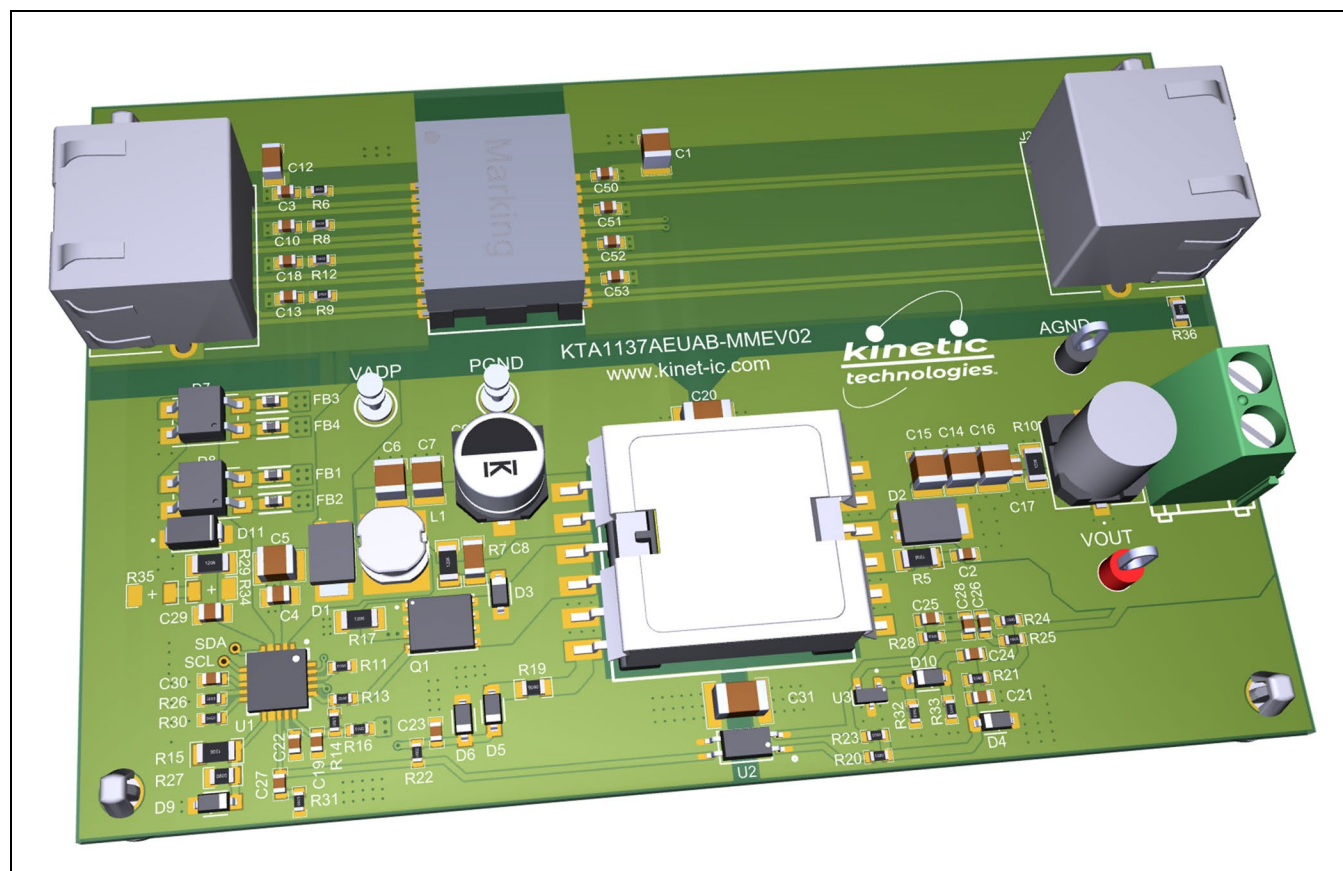

EVAL Kit Physical Contents

Item #	Description	Quantity
1	KTA1137A Evaluation board fully assembled PCB	1
2	Anti-static bag	1
3	KTA1137A Quick Start Guide, printed 1 page (A4 or US Letter)	1
4	EVAL Kit box	1

QR Links for Documents

IC Datasheet	EVAL Kit Landing Page
 https://www.kinet-ic.com/kta1137a	 https://www.kinet-ic.com/kta1137aeuab-mmeev02

User-Supplied Equipment

- Power Sourcing Equipment (PSE) or Bench Power Supply for VIN = 37V-57V and 1A as needed for intended application.
- Digital Multimeter – used to measure input/output voltages and currents.
- Load – either power resistors, an E-Load, or an actual system load.

Recommended Operating Conditions

Parameter	Condition	Min	Typ	Max	Units
Power Interface					
Input voltage	Applied to power pins of connectors RJ1 or J1	0		57	V
Operation voltage	After start-up with 37V or above	34		57	V
Input UVLO	Rising input voltage		34		V
	Falling input voltage		30		V
Detection voltage	At device terminals	2.7		13	V
Classification voltage	At device terminals	11		24	V
Classification current	R _{CLASS} = 63.4kΩ	36		44	mA
Inrush current-limit		100		400	mA
Operation current-limit			1200		mA
DC/DC Converter					
Output voltage	34 ≤ V _{IN} ≤ 57V, I _{LOAD} ≤ I _{LOAD (MAX)}	12V output			V
Output current	34 ≤ V _{IN} ≤ 57V	12V output	2.1		A
Output ripple voltage (peak to peak)	V _{IN} = 48V, I _{LOAD} = 2.1A	12V output	50		mV
Efficiency (end to end)	V _{IN} = 48V, I _{LOAD} = 2.1A	12V output	86.61		%
Switching frequency		110		130	kHz

Quick Start Procedures

The output voltage of this board is set to 12V. There are two methods to start KTA1137AEUAB-MMEV02:

Method 1: Connect to PSE

1. Connect a voltage meter to the output VOUT and AGND test pins, it should measure the output voltage.
2. Connect the load to the output VOUT and AGND test pins.
3. Connect the cable coming from the PSE into the Ethernet Jack J1. The board will automatically startup.

Method 2: Connect to Local Power Supply

1. Connect one pair of power cables to the connector of EVAL Kit at VADP (9.5V ~ 57V) and PGND.
2. Before connecting the EVAL Kit to the bench power supply, turn on the supply and adjust the voltage as close to 0V as possible. Then turn off the supply. While off, connect the power cables ends to the bench supply.
3. Connect a voltage meter to the output VOUT and AGND test pins, it should measure the output voltage.
4. Connect the load to the output VOUT and AGND test pins.
5. Turn on the VIN bench supply and very slowly ramp its voltage to an appropriate voltage, such as 48V. While ramping VIN slowly, use the bench supply's output current indication (or a digital multimeter) to monitor the VIN current. If the current becomes high, reduce the VIN voltage quickly to prevent damage. Then inspect the setup for any wiring errors.


General Configuration

Connector Functionality

Connector	Description
J1	Ethernet power input connector (RJ45 style connector)
J2	Ethernet data port connector (RJ45 style connector)
J3	VOUT (output) to system DC power
PGND	Adapter ground
VADP	External adaptor input (9.5V ~ 57V)

Typical Test Setup Diagram


The figure below shows a typical setup for KTA1137A EVB. Input voltage can be applied as described in the Connector Functionality table above.

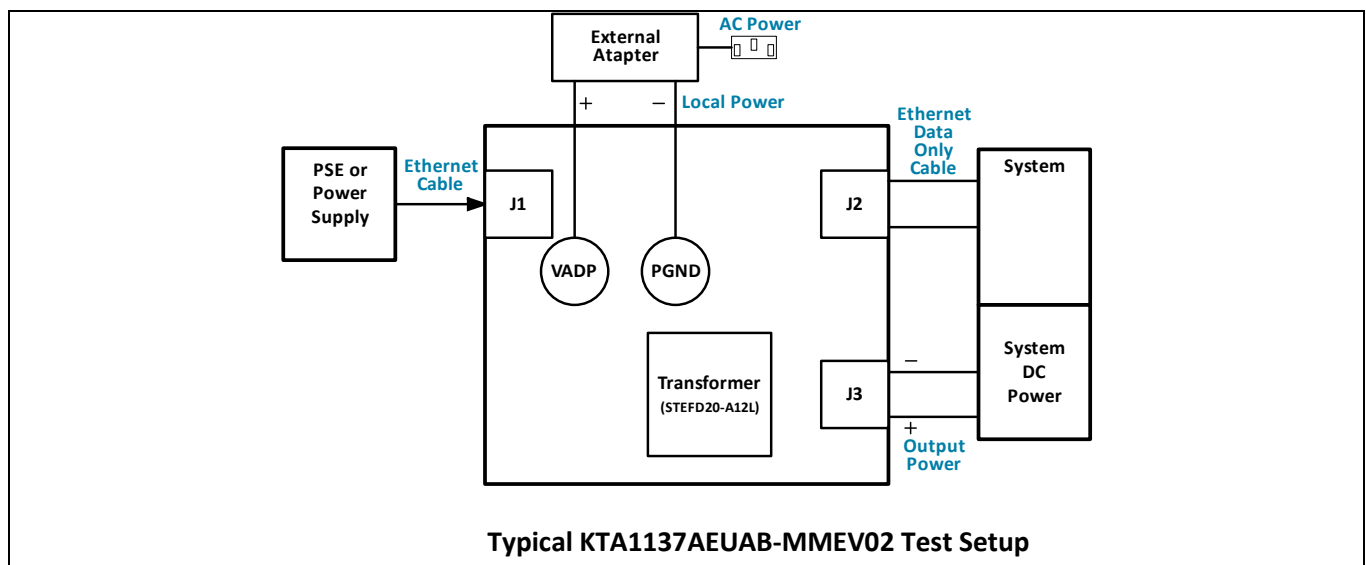


Bill of Materials (BOM)

Designator	Description	Quantity	Manufacturer	Manufacturer Part Number	Digikey Part Number	Mouser Part Number
C1	CAP CER 1000pF 2KV X7R 1210	1	Johanson Dielectrics Inc.	202S41W102KV4E	709-1040-1-ND	605-202S41W102KV4E
C2	CAP CER 1000pF 100V X7R 0603	1	Samsung	CL10B102KC8NNNC	1276-1131-1-ND	187-CL10B102KC8NNNC
C3, C10, C13, C18	CAP CER 10nF 100V X7R 0603	4	Samsung	CL10B103KC8NNNC	1276-1196-1-ND	187-CL10B103KC8NNNC
C4	CAP CER 0.1uF 100V X7R 0805	1	Yageo	CC0805KKX7R0BB104	311-2083-1-ND	603-CC0805KKX7R0BB104
C5, C6, C7	CAP CER 4.7uF 100V X7S 1210	3	Taiyo Yuden	HMK325C7475KN-TE	587-5038-1-ND	963-HMK325C7475KN-TE
C8	CAP CER 0.022uF 100V X7R 1206	1	Yageo	CC1206KRX7R0BB223	311-1986-1-ND	603-CC126KRX7R0BB223
C9	CAP ALUM 47uF 20% 63V SMD	1	Panasonic	EEE-HA1J470UP	PCE4233CT-ND	667-EEE-HA1J470UP
C11	CAP ALUM 330UF 20% 25V SMD	1	Würth Electronics	865060453008	732-8537-2-ND	710-865060453008
C12	CAP CER 1000pF 2KV X7R 1206	1	Yageo	CC1206KKX7RDBB102	311-1487-1-ND	603-CC206KKX7RDBB102
C14, C15, C16	CAP CER 47uF 16V X5R 1210	3	Murata	GRM32ER61C476KE15L	490-6539-1-ND	81-GRM32ER61C476KE5L
C17, C50, C51, C52, C53	CAP CER 0.1uF 16V X7R 0603	5	Samsung	CL10B104KO8NNNC	1276-1005-1-ND	187-CL10B104KO8NNNC
C19, C25	CAP CER 100pF 50V C0G/NP0 0603	2	Samsung	CL10C101JB8NNNC	1276-1008-1-ND	187-CL10C101JB8NNNC
C20, C31	CAP CER 4700pF 2KV X7R 1812	2	Yageo	CC1812KKX7RDBB472	311-3650-1-ND	603-CC812KKX7RDBB47
C21	CAP CER 10uF 16V X5R 0603	1	Murata	GRM188R61C106MA73D	490-7201-1-ND	81-GRM188R61C106MA3D
C22, C23, C30	CAP CER 1uF 16V X5R 0603	3	Samsung	CL10A105KO8NNNC	1276-1034-1-ND	187-CL10A105KO8NNNC
C24	CAP CER 0.22uF 25V X7R 0603	1	Samsung	CL10B224KA8NNNC	1276-1111-1-ND	187-CL10B224KA8NNNC
C26, C27	DNP	2				
C28	CAP CER 0.01uF 50V X7R 0603	1	Samsung	CL10B103KB8NNNC	1276-1009-1-ND	187-CL10B103KB8NNNC
C29	CAP CER 0.068uF 100V X7R 0805	1	Yageo	CC0805KKX7R0BB683	311-4287-1-ND	603-CC0805KR0BB683
D1, D2	DIODE SCHOTTKY 100V 10A T0277B	2	LITTELFUSE	DST10100S-A	F10098CT-ND	576-DST10100S-A
D3	DIODE GEN PURP 200V 200MA SOD123	1	SMC Diode Solutions	BAV21W	1655-BAV21WTR-ND	621-BAV21W-F
D4, D6, D9	DIODE ZENER 5.6V 500MW SOD123	3	Diodes Inc	BZT52C5V6-7-F	BZT52C5V6-FDICT-ND	621-BZT52C5V6-F
D5, D10	DIODE GEN PURP 100V 200MA SOD123	2	onsemi	MMSD4148T1G	2156-MMSD4148T1G-OS-ND	863-MMSD4148T1G
D7, D8	BRIDGE RECT 1PHASE 100V 2A MBS-2	2	Comchip Technology	CDBHM2100L-HF	641-1432-1-ND	750-CDBHM2100L-HF
D11	TVS DIODE 58VWM 93.6VC DO214AC	1	Littelfuse Inc.	SMAJ58A	SMAJ58ALFCT-ND	576-SMAJ58A
FB1, FB2, FB3, FB4	FERRITE BEAD 220 OHM 0603 1LN	4	Murata Electronics	BLM18EG221SN1D	490-3992-1-ND	81-BLM18EG221SN1D
H1, H2, H3, H4	BRD SPT SNAP LOCK REST MNT 4MM	4	Essentra Components	PSD-4M-19	PSD-4M-19-ND	144-PSD-4M-19
J1, J2	CONN MOD JACK 8P8C R/A SHIELDED	2	TE Connectivity	1-406541-1	A97716-ND	571-1-406541-1
J3	TERM BLK 2P SIDE ENT 5.08MM PCB	1	TE Connectivity	282837-2	A113320-ND	571-2828372
L1	FIXED IND 6.8UH 2.8A 47.3MOHM SM	1	Bourns Electronics	SRN6045-6R8Y	SRN6045-6R8YCT-ND	652-SRN6045-6R8Y
Q1	MOSFET N-CH 150V 4.4A 8PQFN	1	ON Semiconductor	FDMS86252L	FDMS86252LCT-ND	512-FDMS86252L


Designator	Description	Quantity	Manufacturer	Manufacturer Part Number	Digikey Part Number	Mouser Part Number
R5	RES SMD 4.7 OHM 1% 1/4W 1206	1	Yageo	RC1206FR-074R7L	311-4.70FRCT-ND	603-RC1206FR-074R7L
R6, R8, R9, R12	RES SMD 75 OHM 1% 1/10W 0603	4	Yageo	RC0603FR-0775RL	311-75.0HRCT-ND	603-RC0603FR-0775RL
R7	RES SMD 24.9K OHM 1% 1/4W 1206	1	Yageo	RC1206FR-0724K9L	311-24.9KFRCT-ND	603-RC1206FR-0724K9L
R10	DNP	1				
R11	RES SMD 143K 1% 1/10W 0603	1	Yageo	RC0603FR-07143KL	311-143KHRCT-ND	603-RC0603FR-07143KL
R13	RES SMD 10 OHM 1% 1/10W 0603	1	Yageo	RC0603FR-0710RL	311-10.0HRCT-ND	603-RC0603FR-0710RL
R14, R28	RES SMD 30.1K 1% 1/10W 0603	2	Yageo	RC0603FR-0730K1L	311-30.1KHRCT-ND	603-RC0603FR-0730K1L
R15	RES SMD 2.74k 1% 1/4W 1206	1	Yageo	RC1206FR-072K74L	311-2.74KFRCT-ND	603-RC1206FR-072K74L
R16, R20	RES SMD 1K 1% 1/10W 0603	2	Yageo	RC0603FR-071KL	311-1.00KHRCT-ND	603-RC0603FR-071KL
R17	RES SMD 100mOHM 1% 1/4W 1206	1	Yageo	RL1206FR-070R1L	311-0.1LWCT-ND	603-RL1206FR070R1L
R19	RES SMD 22.1 OHM 1% 1/10W 0805	1	Yageo	RC0805FR-0722R1L	311-22.1CRCT-ND	603-RC0805FR-0722R1L
R21	RES SMD 499 OHM 1% 1/10W 0603	1	Yageo	RC0603FR-07499RL	311-499HRCT-ND	603-RC0603FR-07499RL
R22	RES SMD 10K 1% 1/10W 0603	1	Yageo	RC0603FR-0710KL	311-10.0KHRCT-ND	603-RC0603FR-0710KL
R23	RES SMD 3.24K 1% 1/10W 0603	1	Yageo	RC0603FR-073K24L	311-3.24KHRCT-ND	603-RC0603FR-073K24L
R24	RES SMD 39.2K 1% 1/10W 0603	1	Yageo	RC0603FR-0739K2L	311-39.2KHRCT-ND	603-RC0603FR-0739K2L
R25, R26, R31	DNP	3				
R27	RES SMD 4.02K 1% 1/10W 0805	1	Yageo	RC0805FR-074K02L	311-4.02KCRCT-ND	603-RC0805FR-074K02L
R29	RES SMD 25.5K 1% 1/4W 1206	1	Yageo	RC1206FR-0725K5L	311-25.5KFRCT-ND	603-RC1206FR-0725K5L
R30	RES SMD 63.4K 1% 1/10W 0603	1	Yageo	RC0603FR-0763K4L	311-63.4KHRCT-ND	603-RC0603FR-0763K4L
R32	RES SMD 10.2K 1% 1/10W 0603	1	Yageo	RC0603FR-0710K2L	311-10.2KHRCT-ND	603-RC0603FR-0710K2L
R33	RES SMD 10.7K 1% 1/10W 0603	1	Yageo	RC0603FR-0710K7L	311-10.7KHRCT-ND	603-RC0603FR-0710K7L
R34, R35	DNP	2				
R36	RES SMD 10 OHM 1% 1/10W 0805	1	Yageo	RC0805FR-0710RL	311-10.0CRCT-ND	603-RC0805FR-0710RL
T1	WE-LAN LAN Transformer, SMT, 1000 Base-T, 1 port	1	Würth Elektronik	7490220122	732-10731-1-ND	710-7490220122
T2	POE 12V 30W Power Transformer	1	Samwha	STFED20-A12L		
TP1, TP2	TERM TURRET SINGLE L=5.56MM TIN	2	Keystone	1502-2	36-1502-2-ND	534-1502-2
TP3	PC TEST POINT MULTIPURPOSE RED	1	Keystone	5010	36-5010-ND	534-5010
TP4	PC TEST POINT MULTIPURPOSE BLACK	1	Keystone	5011	36-5011-ND	534-5011
U1	Power Over Ethernet Controller 1 Channel 802.3at (PoE+), 802.3af (PoE) 20-TQFN (5x5)	1	Kinetic Technologies	KTA1137AEUAB	2763-KTA1137AEUAB-TRCT-ND	389-KTA1137AEUAB-TR
U2	OPTOISO 3.75KV TRANSISTOR 4SMD	1	ON Semiconductor / Fairchild	HMHA2801A	HMHA2801A-ND	512-HMHA2801
U3	IC VREF SHUNT ADJ 0.5% SOT23-3	1	Texas Instruments	TL432BIDBZR	TL432BIDBZR	595-TL432BIDBZR

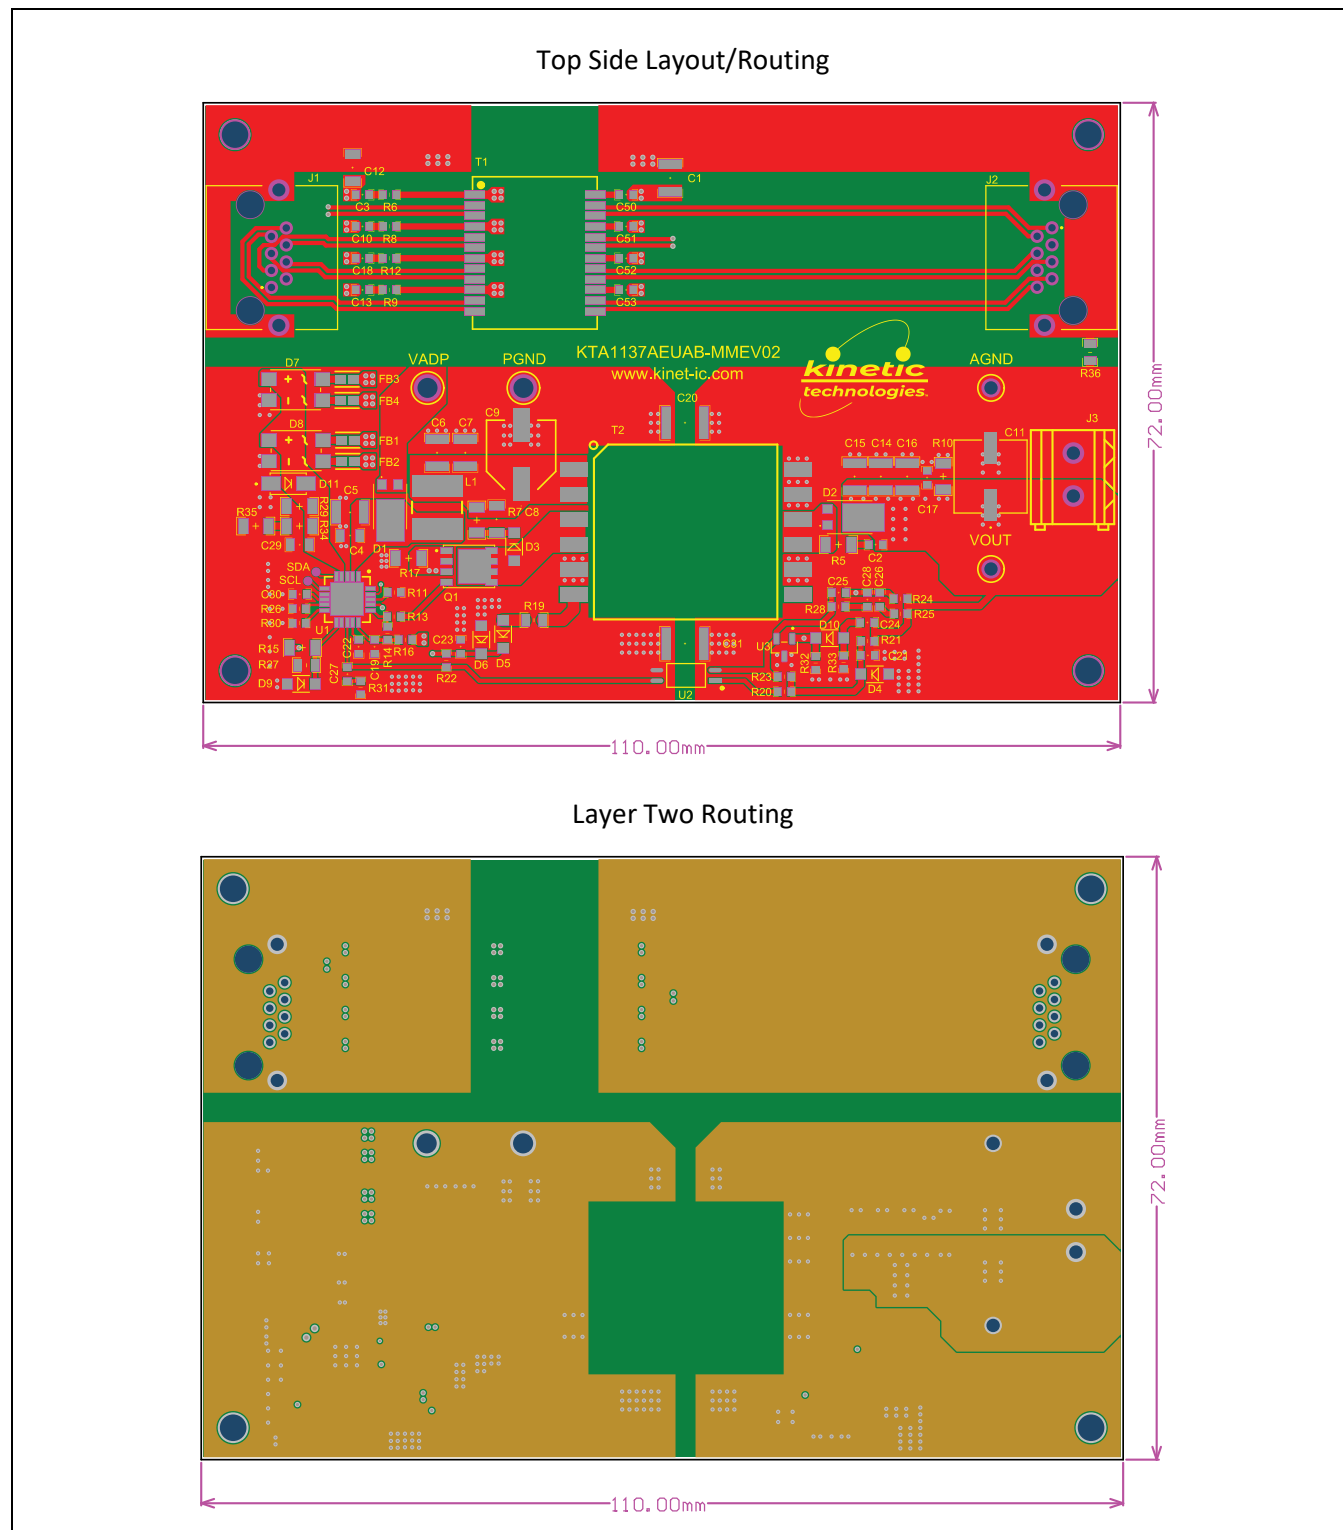

Layer Three Routing

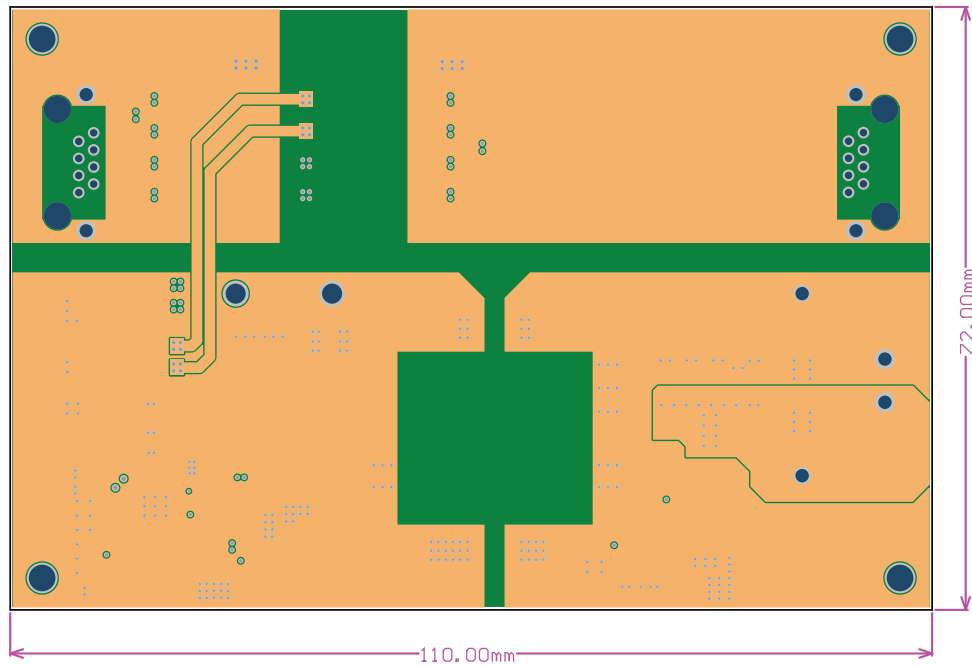

Bottom Layer Routing

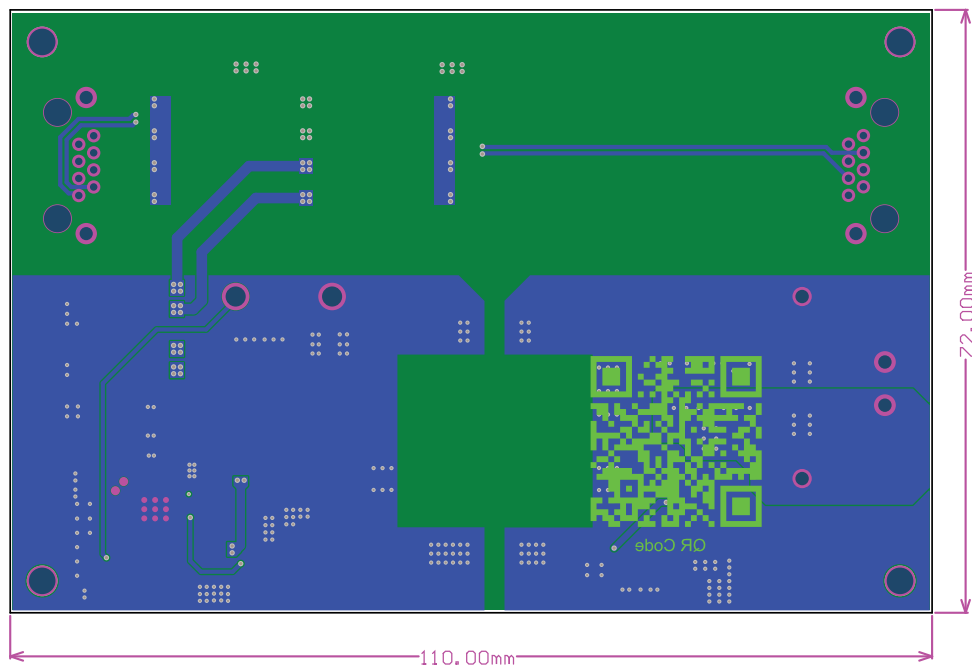



Troubleshooting

Please contact a Kinetic Technologies Sales Representative to help troubleshoot and solve symptoms / root causes for issues with this EVB.

Important Notices

Legal notice

Copyright © Kinetic Technologies. Other names, brands and trademarks are the property of others.

Kinetic Technologies assumes no responsibility or liability for information contained in this document. Kinetic Technologies reserves the right to make corrections, modifications, enhancements, improvements, and other changes to its products and services at any time and to discontinue any product or services without notice. The information contained herein is believed to be accurate and reliable at the time of printing.

Reference design policy

This document is provided as a design reference and Kinetic Technologies assumes no responsibility or liability for the information contained in this document. Kinetic Technologies reserves the right to make corrections, modifications, enhancements, improvements, and other changes to this reference design documentation without notice.

Reference designs are created using Kinetic Technologies' published specifications as well as the published specifications of other device manufacturers. This information may not be current at the time the reference design is built. Kinetic Technologies and/or its licensors do not warrant the accuracy or completeness of the specifications or any information contained therein.

Kinetic Technologies does not warrant that the designs are production worthy. Customer should completely validate and test the design implementation to confirm the system functionality for the end use application.

Kinetic Technologies provides its customers with limited product warranties, according to the standard Kinetic Technologies terms and conditions.

For the most current product information visit us at www.kinet-ic.com

Life support policy

LIFE SUPPORT: KINETIC TECHNOLOGIES' PRODUCTS ARE NOT DESIGNED, INTENDED, OR AUTHORIZED FOR USE AS COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS. NO WARRANTY, EXPRESS OR IMPLIED, IS MADE FOR THIS USE. AUTHORIZATION FOR SUCH USE SHALL NOT BE GIVEN BY KINETIC TECHNOLOGIES, AND THE PRODUCTS SHALL NOT BE USED IN SUCH DEVICES OR SYSTEMS, EXCEPT UPON THE WRITTEN APPROVAL OF THE PRESIDENT OF KINETIC TECHNOLOGIES FOLLOWING A DETERMINATION BY KINETIC TECHNOLOGIES THAT SUCH USE IS FEASIBLE. SUCH APPROVAL MAY BE WITHHELD FOR ANY OR NO REASON.

"Life support devices or systems" are devices or systems which (1) are intended for surgical implant into the human body, (2) support or sustain human life, or (3) monitor critical bodily functions including, but not limited to, cardiac, respirator, and neurological functions, and whose failure to perform can be reasonably expected to result in a significant bodily injury to the user. A "critical component" is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

SUBSTANCE COMPLIANCE

Kinetic Technologies IC products are compliant with RoHS, formally known as Directive 2002/95/EC of the European Parliament and of the Council of 27 January 2003 on the restriction of the use of certain hazardous substances in electrical and electronic equipment. However, this evaluation kit does not fall within the scope of the EU directives regarding electromagnetic compatibility, restricted substances (RoHS), recycling (WEEE), FCC, CE or UL, and may not meet the requirements of these or related directives. To the best of our knowledge the information is true and correct as of the date of the original publication of the information. Kinetic Technologies bears no responsibility to update such statement.