


3M™ SlimLine Twin Axial Cable Assembly (SFF-8654) for SAS and PCIe applications

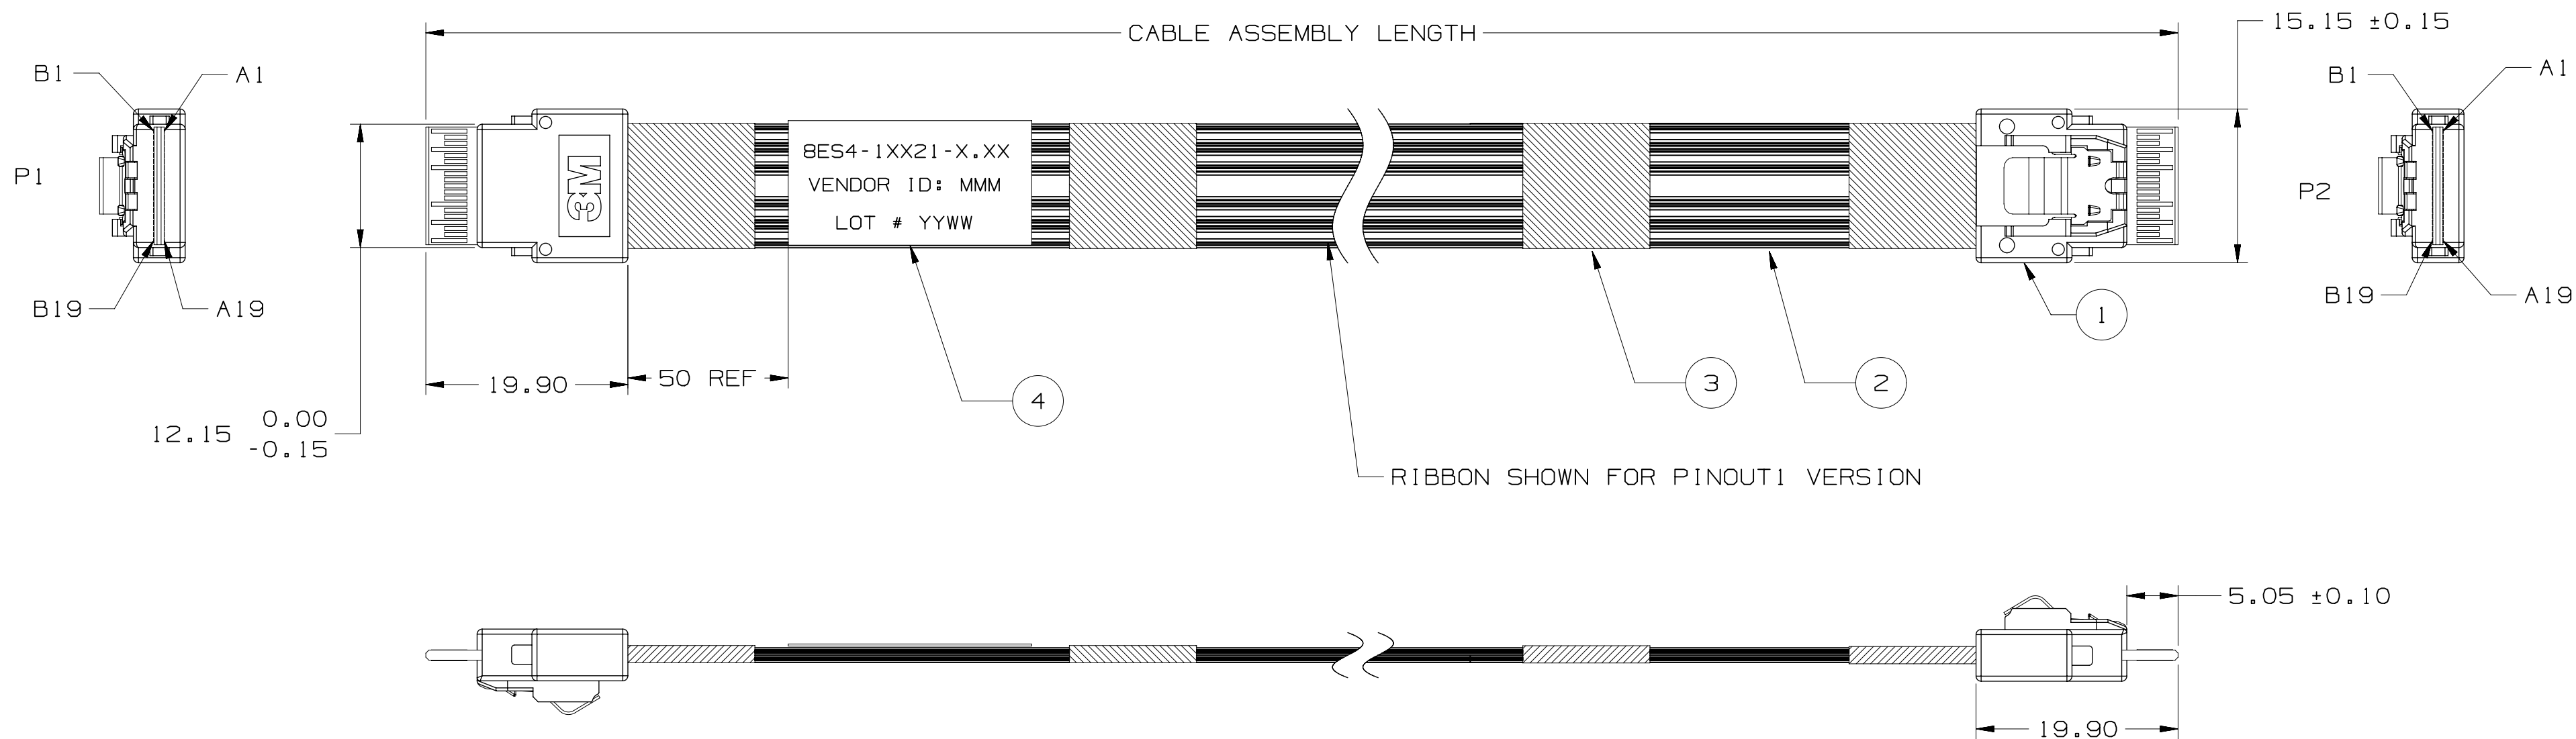

4	LABEL, PART NUMBER	1X
3	ACETATE TAPE	AS REQUIRED
2	TWIN AX CABLE , REFER TO NOTES	AS PER LENGTH
1	SLIMSAS 4X PLUG STRAIGHT	2X
ITEM	SPECIFICATION	QUANTITY

8ES4-1XX2X-X.XX
VENDOR : MMM
LOT #WWYY

LABEL INFORMATION

PART NUMBER: 8ES4-1XX2X-X.XX

- AA- PINOUT 1
DF- PINOUT 2
- 1 - ST-ST Plug Assembly.
2 - RA-ST Plug Assembly.
3 - RA-RA Plug Assembly.

LENGTH IN METERS
0.1m TO 1.0 m MAX.

PINOUT 1				PINOUT 2			
P1		P2		P1		P2	
A1	GND	GND	B1	B1	GND	GND	A1
A2	RX0+	TX0+	B2	B2	RX0+	TX0+	A2
A3	RX0-	TX1-	B3	B3	RX0-	TX1-	A3
A4	GND	GND	B4	B4	GND	GND	A4
A5	RX1+	TX1+	B5	B5	RX1+	TX1+	A5
A6	RX1-	TX1-	B6	B6	RX1-	TX1-	A6
A7	GND	GND	B7	B7	GND	GND	A7
A8	SB	SB	B8	B8	SB	SB	A8
A9	SB	SB	B9	B9	SB	SB	A9
A10	SB	SB	B10	B10	SB	SB	A10
A11	SB	SB	B11	B11	SB	SB	A11
A12	SB	SB	B12	B12	SB	SB	A12
A13	GND	GND	B13	B13	GND	GND	A13
A14	RX2+	TX2+	B14	B14	RX2+	TX2+	A14
A15	RX2-	TX2-	B15	B15	RX2-	TX2-	A15
A16	GND	GND	B16	B16	GND	GND	A16
A17	RX3+	TX3+	B17	B17	RX3+	TX3+	A17
A18	RX3-	TX3-	B18	B18	RX3-	TX3-	A18
A19	GND	GND	B19	B19	GND	GND	A19

PINOUT 1				PINOUT 2			
P1		P2		P1		P2	
A1	GND	GND	B1	B1	GND	GND	A1
A2	RX0+	TX0+	B2	B2	RX0+	TX0+	A2
A3	RX0-	TX1-	B3	B3	RX0-	TX1-	A3
A4	GND	GND	B4	B4	GND	GND	A4
A5	RX1+	TX1+	B5	B5	RX1+	TX1+	A5
A6	RX1-	TX1-	B6	B6	RX1-	TX1-	A6
A7	GND	GND	B7	B7	GND	GND	A7
A8	SB+	SB+	B8	B8	SB+	SB+	A8
A9	SB-	SB-	B9	B9	SB-	SB-	A9
A10	GND	GND	B10	B10	GND	GND	A10
A11	SB+	SB+	B11	B11	SB+	SB+	A11
A12	SB-	SB-	B12	B12	SB-	SB-	A12
A13	GND	GND	B13	B13	GND	GND	A13
A14	RX2+	TX2+	B14	B14	RX2+	TX2+	A14
A15	RX2-	TX2-	B15	B15	RX2-	TX2-	A15
A16	GND	GND	B16	B16	GND	GND	A16
A17	RX3+	TX3+	B17	B17	RX3+	TX3+	A17
A18	RX3-	TX3-	B18	B18	RX3-	TX3-	A18
A19	GND	GND	B19	B19	GND	GND	A19

PINOUT 1				PINOUT 2			
P1		P2		P1		P2	
B1	GND	GND	A1	B1	GND	GND	A1
B2	RX0+	TX0+	A2	B2	RX0+	TX0+	A2
B3	RX0-	TX1-	A3	B3	RX0-	TX1-	A3
B4	GND	GND	A4	B4	GND	GND	A4
B5	RX1+	TX1+	A5	B5	RX1+	TX1+	A5
B6	RX1-	TX1-	A6	B6	RX1-	TX1-	A6
B7	GND	GND	A7	B7	GND	GND	A7
B8	SB+	SB+	A8	B8	SB+	SB+	A8
B9	SB-	SB-	A9	B9	SB-	SB-	A9
B10	GND	GND	A10	B10	GND	GND	A10
B11	SB+	SB+	A11	B11	SB+	SB+	A11
B12	SB-	SB-	A12	B12	SB-	SB-	A12
B13	GND	GND	A13	B13	GND	GND	A13
B14	RX2+	TX2+	A14	B14	RX2+	TX2+	A14
B15	RX2-	TX2-	A15	B15	RX2-	TX2-	A15
B16	GND	GND	A16	B16	GND	GND	A16
B17	RX3+	TX3+	A17	B17	RX3+	TX3+	A17
B18	RX3-	TX3-	A18	B18	RX3-	TX3-	A18
B19	GND	GND	A19	B19	GND	GND	A19

NOTE: ALL GND SIGNALS ARE TIED TOGETHER IN THE PADDLECARDS AT EACH END OF ASSEMBLY


DESIGN REFERENCE		NEXT ASSEMBLY		REV		ECO		ISSUE DATE AND DESCRIPTION		DRFT	CHKD
ACCESS CODES	U5682	S9830a		DRFT	Rao Vittopalli	DATE	AUG 24, 2016	MFG	JG Liu	DATE	AUG 24, 2016
				CHKD	Rao Vittopalli	DATE	AUG 24, 2016	APPVL	Saujit Bandhu	DATE	AUG 24, 2016
DIVISION		DIVISION CODE		3M		3M Center St. Paul, MN 55144		© 3M COPYRIGHT 2017		This document and the information it contains are 3M property and may not be reproduced or further distributed without 3M permission, or used or disclosed other than for 3M authorized purposes. All rights reserved.	
DO NOT SCALE DRAWING		SCALE 2/1		TOLERANCES EXCEPT AS NOTED		INCHES 0 ± 1		MILLIMETERS 0 ± 1		0.00 ± 0.005	
THIRD ANGLE PROJECTION		INTERPRET PER ASME Y14.5 - 2009		MAX SURFACE ROUGHNESS 125		ALL SURFACES MARKED ONLY		ANGLES ± 1°		TITLE CUSTOMER DRAWING SLIMLINE 85 OHM X4 30AWG CABLE ASSY	
CAGE NUMBER		SIZE		DRAWING NO.		REV.		MODEL		DET. LISTS	
78-5100-2666-5		C		78-5100-2666-5		B		SHT 1 OF 2			

3M™ SlimLine Twin Axial Cable Assembly (SFF-8654) for SAS and PCIe applications


NOTES :

1. REGULATORY INFORMATION:
EU ROHS COMPLIANT.
ALL MATERIAL COMPONENTS AND
MANUFACTURING PROCESSES FOR
THIS PRODUCT COMPLY WITH ROHS
2015/863. SEE [HTTP://SOLUTIONS
.3M.COM/WPS/PORTAL/3M/EN_US/
ROHS-CERT/HOME/ROHSSEARCH/
FOR ROHS/REACH DECLARATION](http://solutions.3m.com/wps/portal/3m/en_us/rohs-cert/home/rohssearch/for_rohs/reach_declaration).
2. PADDLECARD PLATING:
30 μ " MIN. GOLD PLATING
50 μ " MIN. NICKEL UNDERPLATING.
P/N: 78-9102-4552-7 (4P+5SB)
P/N: 78-9102-3249-1 (6P)
3. SLIMLINE CABLE PLUG DIMENSIONS
ARE DESIGNED TO SFF-8654.
4. PRODUCT SPECIFICATION: PS-240.
5. TWO RIBBONS OF 3M RIBBON TWIN
AXIAL CABLE.
PINOUT 1:
SL8801/13-2JBK5-00 - 4 PAIR
30AWG,5SB,VW1, GND TUCKED-IN.
PINOUT 2:
SL8802/12-2JBN5-00 - 6 PAIR
30AWG,VW1, GND TUCKED-IN.
6. THIS CABLE CONSTRUCTION HAS A THIN
ALUMINUM LAYER AT EACH EDGE.
USER SHOULD EVALUATE ITS USE IN
THEIR APPLICATION AND, IF NECESSARY,
INSULATING TAPE MAY BE APPLIED TO
COVER THE ALUMINUM LAYER, AS
USER DEEMS APPROPRIATE.
7. UNLESS OTHERWISE NOTED,
REFERENCE TO INDUSTRY SPECIFICATIONS
ARE INTENDED TO INDICATE SUBSTANTIAL
COMPLIANCE TO MATERIAL ELEMENTS OF
THE SPECIFICATION. SUCH REFERENCES
SHOULD NOT BE CONSTRUED AS A GUARANTEE
OF COMPLIANCE TO ALL REQUIREMENTS IN A
GIVEN SPECIFICATION.
8. CLOTH TAPE WRAPPED AROUND CABLE
RIBBONS AT BACK OF EACH CONNECTOR.
ALSO, UP TO TWO ADDITIONAL TAPE
PIECES WILL BE WRAPPED AROUND THE
TWO CABLE RIBBONS SPACED EQUIDISTANT
FROM THE CONNECTOR ENDS AND EACH
OTHER, DEPENDING ON ASS'Y LENGTH (L):
L <= 0.2M: NO ADDITIONAL TAPE
0.2M < L <= 0.6M: 1 TAPE WRAP
0.6M < L <= 1.0M: 2 TAPE WRAP
9. LENGTH TOLERANCE:
±6 MM FOR LENGTHS 0.1 TO 0.4 METERS,
±10 MM FOR LENGTHS 0.4 TO 1.0 METERS.

RA-RA Assembly.

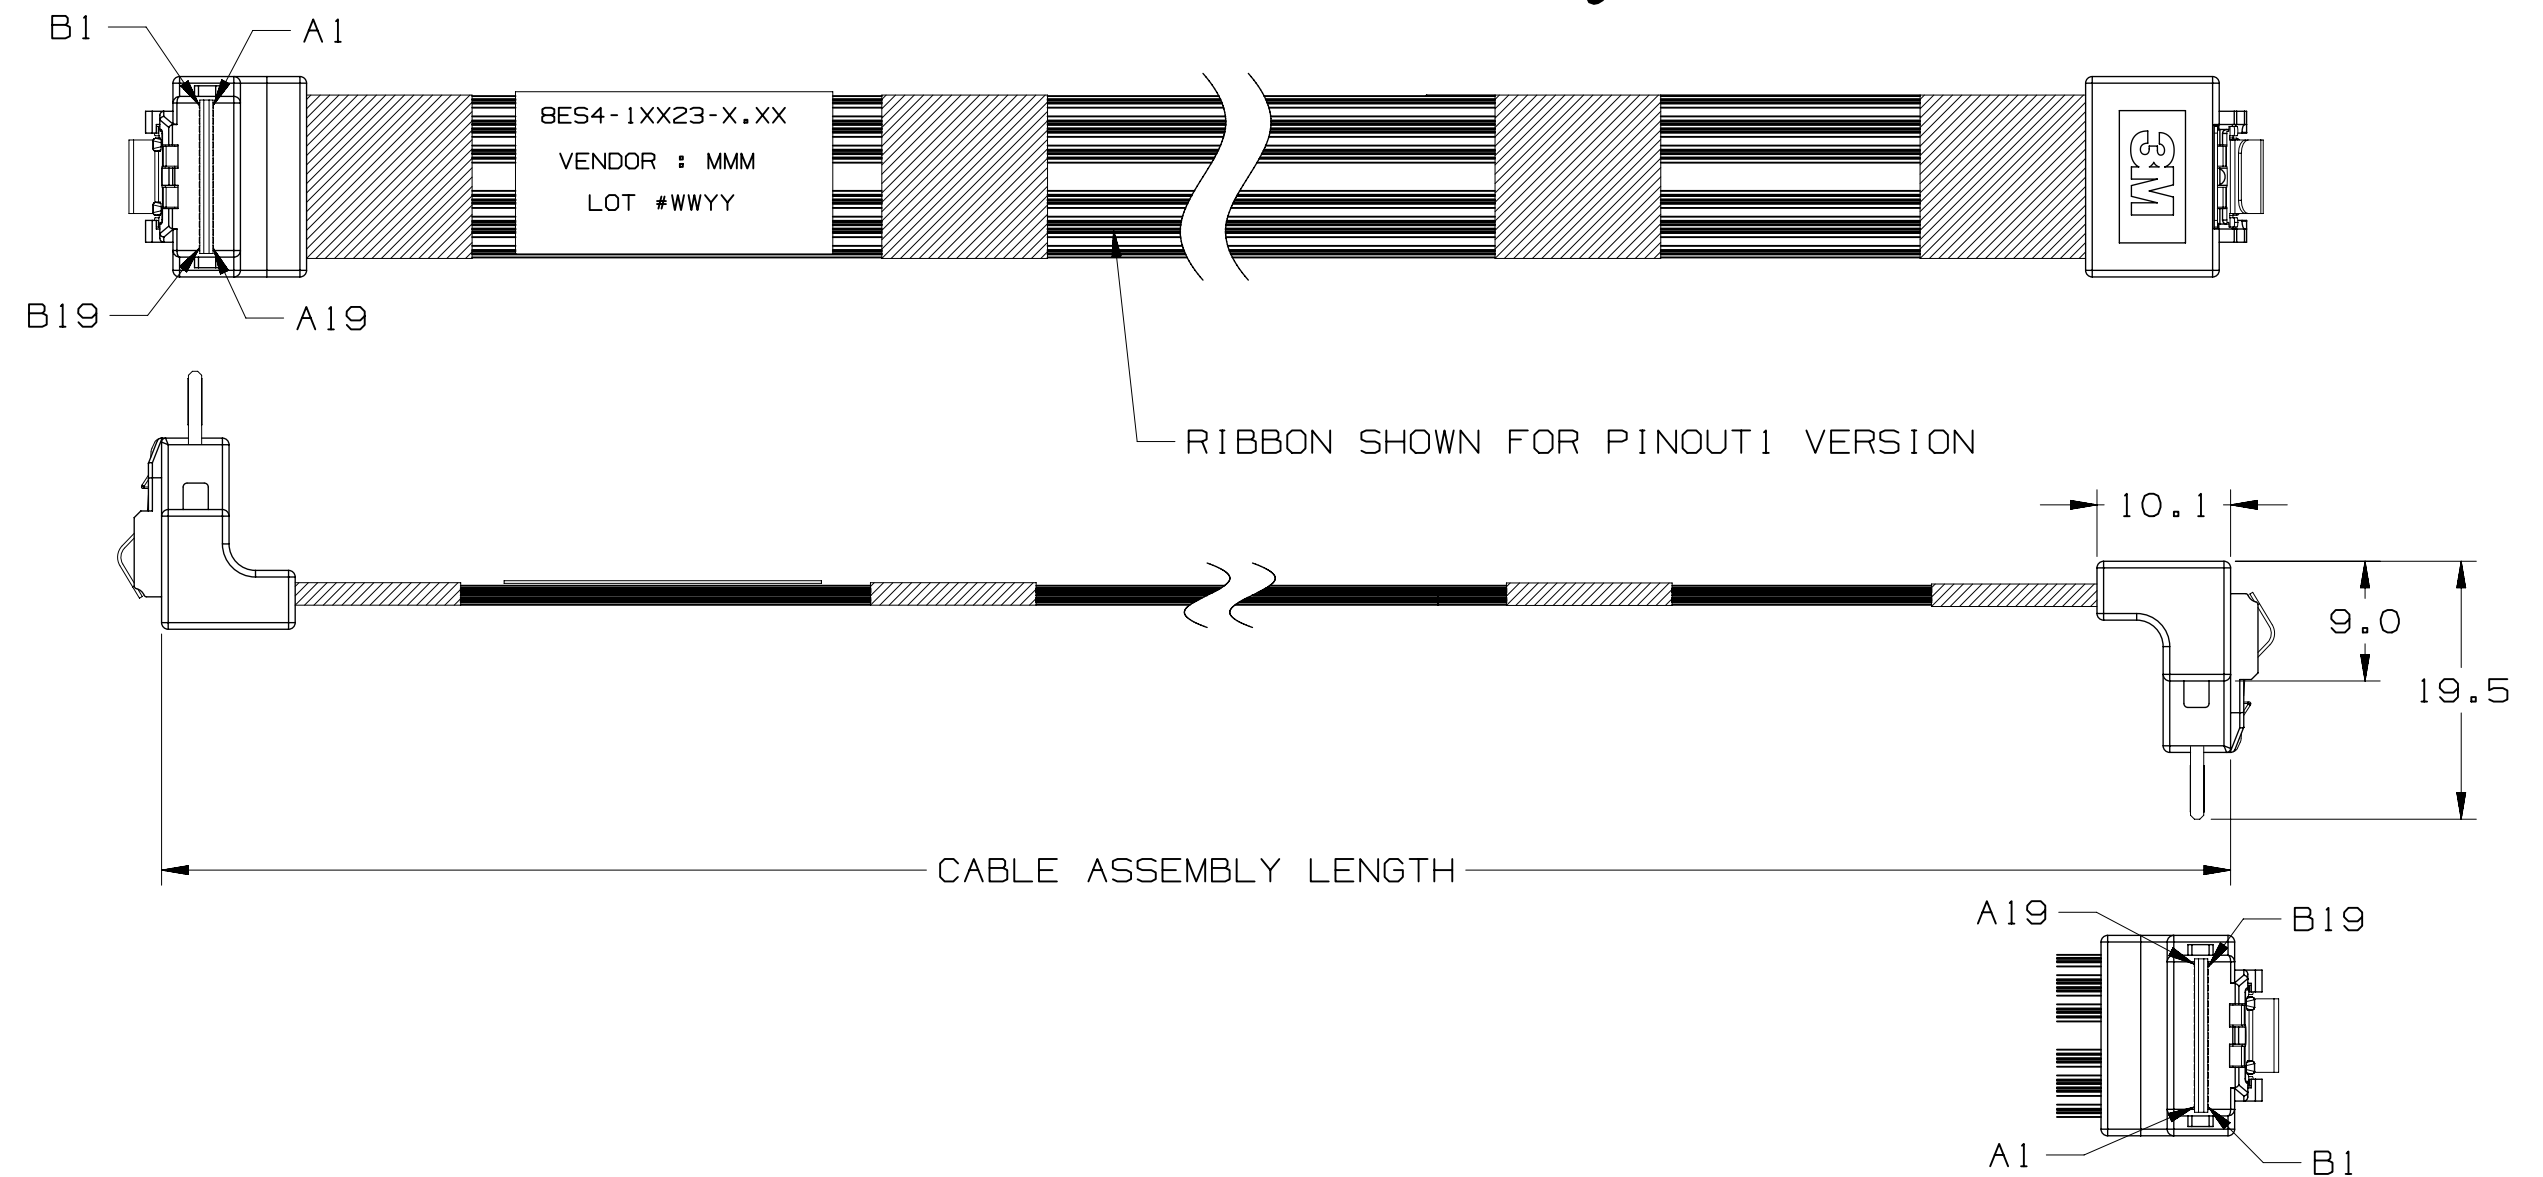

RA-ST Assembly.

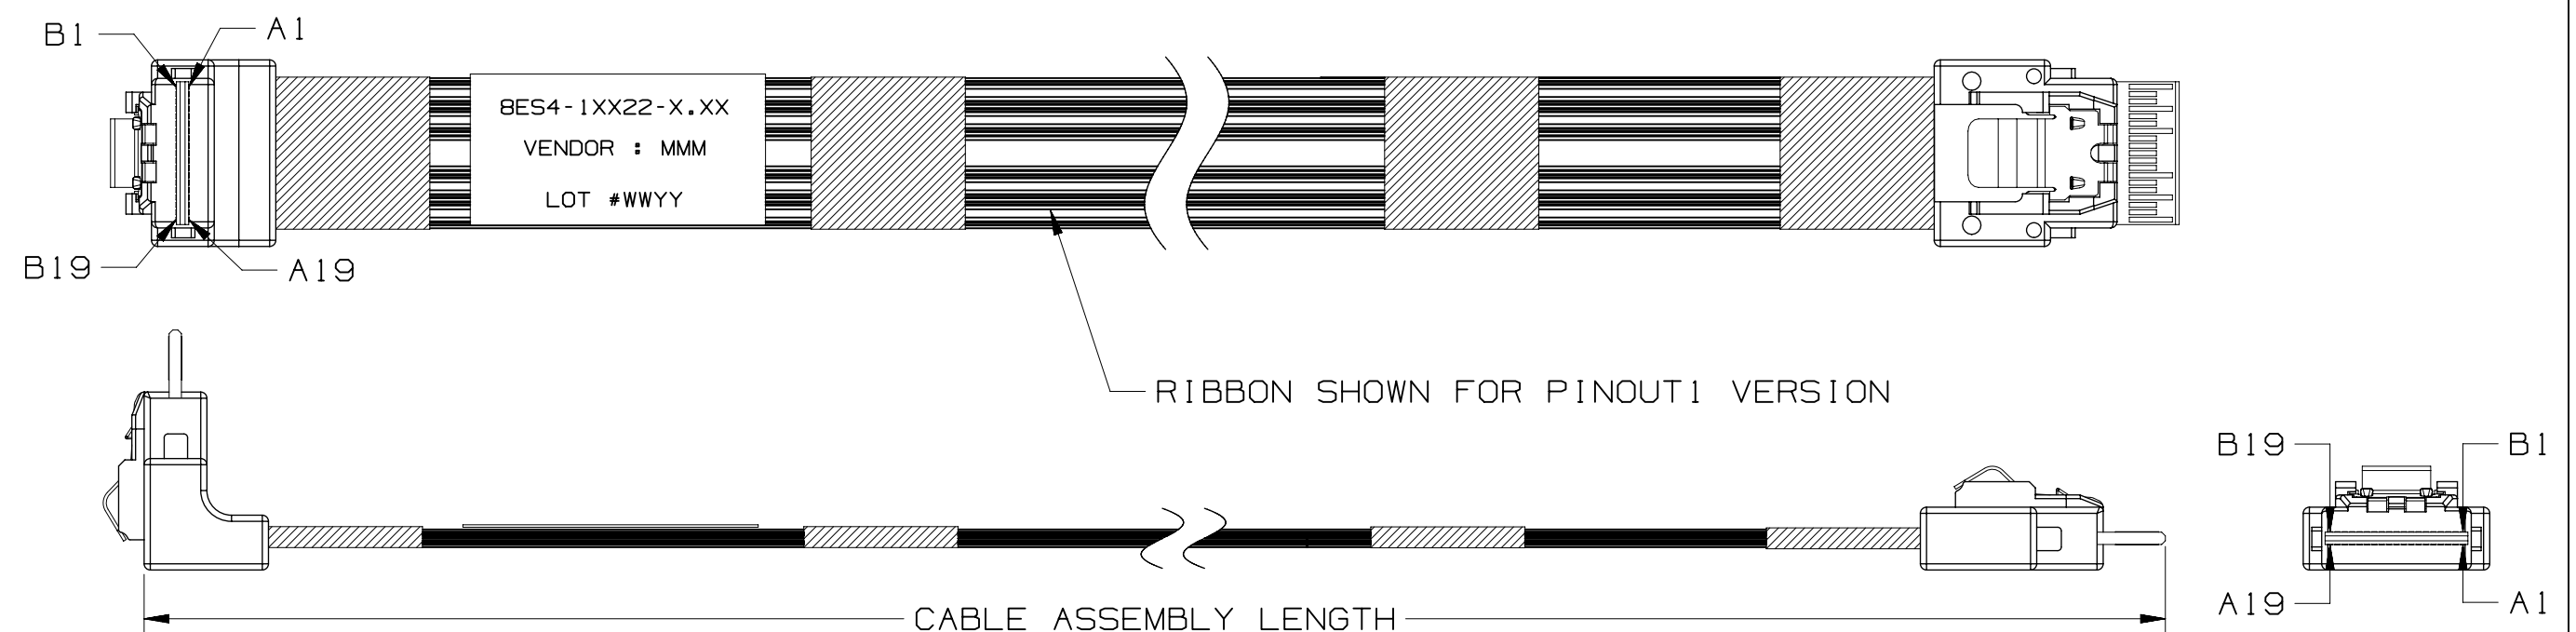


Technical Information: The technical information, recommendations and other statements contained in this document are based upon tests or experience that 3M believes are reliable, but the accuracy or completeness of such information is not guaranteed.

Product Use: Many factors beyond 3M's control and uniquely within user's knowledge and control can affect the use and performance of a 3M product in a particular application. Given the variety of factors that can affect the use and performance of a 3M product, user is solely responsible for evaluating the 3M product and determining whether it is fit for a particular purpose and suitable for user's method of application.

Warranty, Limited Remedy, and Disclaimer: Unless an additional warranty is specifically stated on the applicable 3M product packaging or product literature, 3M warrants that each 3M product meets the applicable 3M product specification at the time of sale. This 3M WARRANTY MAKES NO OTHER WARRANTIES OR CONDITIONS, EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, ANY IMPLIED WARRANTY OR CONDITION OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE OR ANY IMPLIED WARRANTY OR CONDITION ARISING OUT OF A COURSE OF DEALING, CUSTOM OR USAGE OF TRADE. If the 3M product does not conform to this warranty, then the sole and exclusive remedy is, at 3M's option, replacement of the 3M product or refund of the purchase price.

Limitation of Liability: Except where prohibited by law, 3M will not be liable for any loss or damage arising from the 3M product, whether direct, indirect, special, incidental or consequential, regardless of the legal theory asserted, including warranty, contract, negligence or strict liability.

DESIGN REFERENCE				NEXT ASSEMBLY				REV		ECO		ISSUE DATE AND DESCRIPTION				DRFT		CHKD			
ACCESS CODES		U5682		S9830a				DRFT		Rao Vittapalli		DATE		AUG 24, 2016		MFG		JG Liu			
												DATE		AUG 24, 2016							
								CHKD		Rao Vittapalli		DATE		AUG 24, 2016		APPRVL		Savjit Bandhu			
																DATE		AUG 24, 2016			
DIVISION						DIVISION CODE						3M 3M Center St. Paul, MN 55144 © 3M COPYRIGHT 2017 This document and the information it contains are 3M property and may not be reproduced or further distributed without 3M permission, or used or disclosed other than for 3M authorized purposes. All rights reserved.									
DO NOT SCALE DRAWING		SCALE 1 1		TOLERANCES EXCEPT AS NOTED				TITLE													
				INCHES				CUSTOMER DRAWING SLIMLINE 85 OHM X4 30AWG CABLE ASSY													
				.0 ±																	
				.00 ±																	
				.000 ±																	
THIRD ANGLE PROJECTION				.0000 ±																	
				MILLIMETERS																	
				0 ± 1																	
				.0 ± .5																	
INTERPRET PER ASME Y14.5 - 2009				.00 ± .2				CAGE NUMBER		SIZE		DRAWING NO.				REV.					
MAX SURFACE ROUGHNESS 125				.000 ± .005				C		C		78-5100-2666-5				B					
☐ ALL SURFACES								MODEL								DET. LISTS		☐ YES ☒ NO		SHT 2 OF 2	
☒ MARKED ONLY																					
				ANGLES ± 1 °																	