



## 1. Connections Diagram

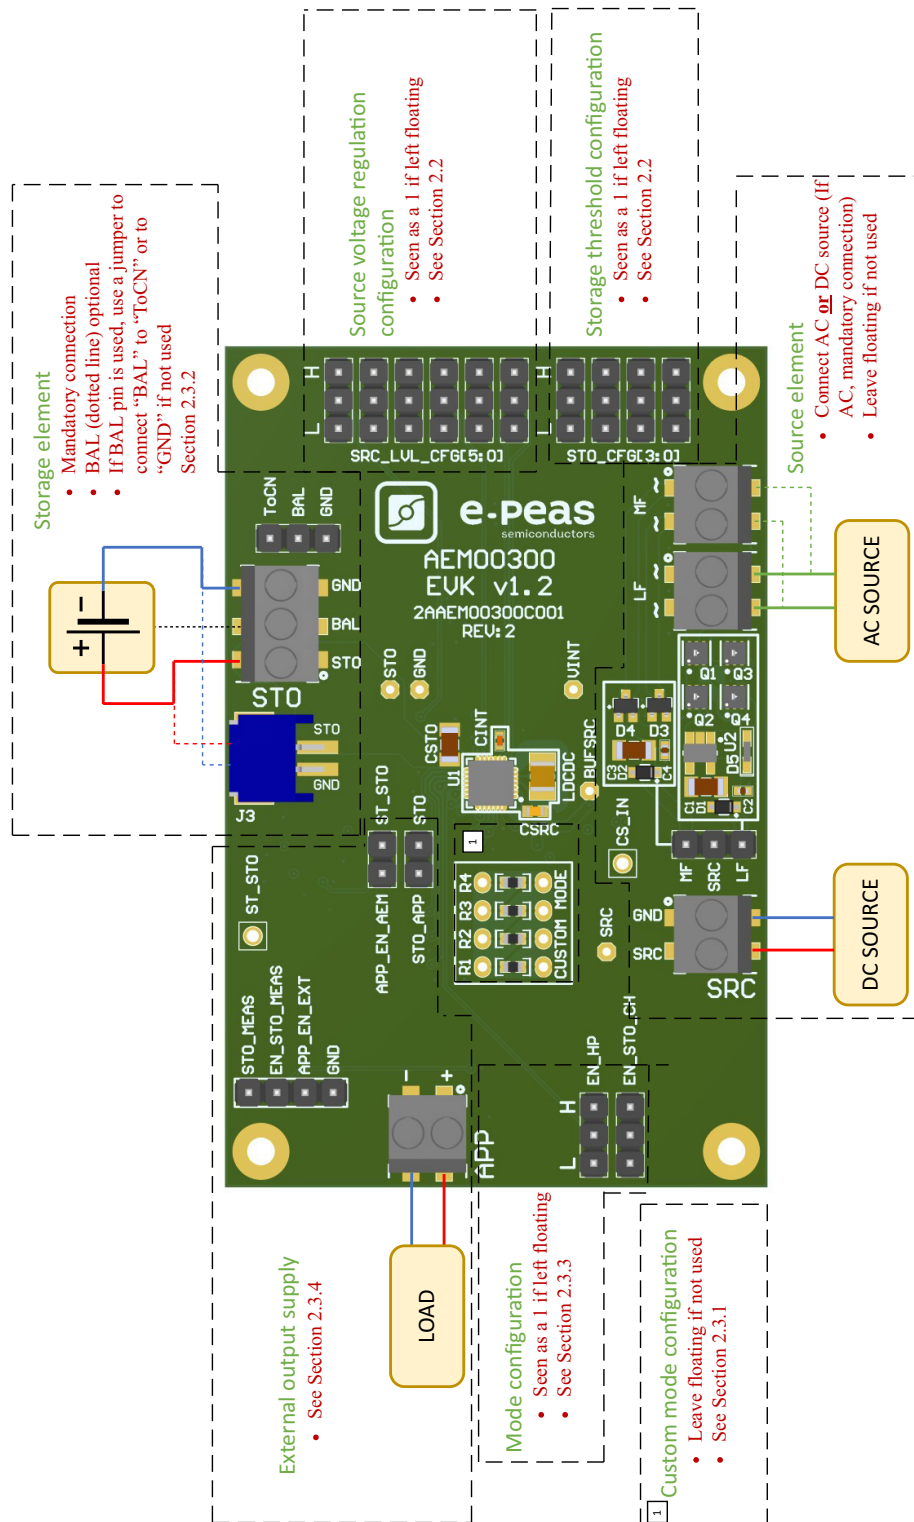


Figure 1: Connection Diagram



## 1.1. Signals Description

NAME	FUNCTION	CONNECTION	
		If used	If not used
Power signals			
SRC	Connection to the harvested energy source.	Connect the source element.	
STO	Connection to the energy storage element.	Connect the storage element in addition to CSTO (150 μF).	Do not remove CSTO.
BAL	Connection to mid-point of the dual-cell supercapacitor.	Connect balancing and place a jumper shorting “BAL” and “ToCN”.	Use a jumper to connect “BAL” to “GND”.
LF	Connection to the AC harvested energy source. (Low frequency).	Connect the source element.	Leave floating.
MF	Connection to the AC harvested energy source. (Medium frequency).	Connect the source element.	Leave floating.
APP	Connection to the application.	Connect the jumper on APP_EN_AEM and a jumper on STO_APP.	Remove the jumper on APP_EN_AEM and the jumper on STO_APP.
Debug signals			
VINT	Internal voltage supply.		
BUFSRC	Connection to an external capacitor buffering the buck-boost converter input.		
Configuration signals			
SRC_LVL_CFG[5:0]	Configuration of the source voltage regulation.	Connect jumpers.	
STO_CFG[3:0]	Configuration of the threshold voltages for the energy storage element.	Connect jumpers.	Leave floating.
Control signals			
EN_HP	Enabling pin for the high-power mode.	Connect jumper.	
EN_STO_CH	Enabling pin for the storage charging.	Connect jumper.	
APP_EN_AEM	Enabling pin for the application supply.	Connect jumper.	
APP_EN_EXT		External signal.	Leave floating.
EN_STO_MEAS	Enabling pin for the storage element measure.	External signal.	Leave floating.
Status Signals			
ST_STO	Logic output. Asserted when the storage device voltage rises above the VCHRDY threshold. Reset when the storage device voltage drops below VOVDIS threshold. High level is VSTO.		
STO_MEAS	Voltage level on the storage element.	High level in EN_STO_MEAS (from external signal) to enable the measure.	Leave floating EN_STO_MEAS.

Table 1: Signals Description

## 2. General Considerations

### 2.1. Safety Information

Always connect the elements in the following order:

1. Reset the board: Short VINT, STO and SRC test points to GND.

2. Completely configure the PCB (jumpers/resistors):

- Source voltage regulation configuration.
- Battery configuration.
- Balancing circuit configuration.
- Mode configuration.

3. Connect the storage elements on STO.

4. Connect the source (DC or AC) to the SRC connector.

To avoid damaging the board, users are required to follow this procedure.

The pin “BAL” cannot remain floating.

### 2.2. Basic Configurations

Configuration pins				Storage element threshold voltages			Typical use
STO_CFG[3:0]				V <sub>OVDIS</sub>	V <sub>CHRDY</sub>	V <sub>OVCH</sub>	
L	L	L	L	3.00 V	3.50 V	4.05 V	Li-ion battery
L	L	L	H	2.80 V	3.10 V	3.60 V	LiFePO4 battery
L	L	H	L	1.85 V	2.40 V	2.70 V	Dual-cell NiMH battery
L	L	H	H	0.20 V	1.00 V	4.65 V	Dual-cell supercapacitor
L	H	L	L	0.20 V	1.00 V	2.60 V	Single-cell supercapacitor
L	H	L	H	1.00 V	1.20 V	2.95 V	Single-cell supercapacitor
L	H	H	L	1.85 V	2.30 V	2.60 V	NGK
L	H	H	H	Custom Mode (single-cell NiMH, LiC, etc.)			
H	L	L	L	1.10 V	1.25 V	1.50 V	Ni-Cd 1 cells
H	L	L	H	2.20 V	2.50 V	3.00 V	Ni-Cd 2 cells
H	L	H	L	1.45 V	2.00 V	4.65 V	Dual-cell supercapacitor
H	L	H	H	1.00 V	1.20 V	2.60 V	Single-cell supercapacitor
H	H	L	L	2.00 V	2.30 V	2.60 V	Micro batteries
H	H	L	H	3.00 V	3.50 V	4.35 V	Li-Po battery
H	H	H	L	2.60 V	2.70 V	4.00 V	Tadiran TLI1020A
H	H	H	H	2.60 V	3.50 V	3.90 V	Tadiran HLC1020

Table 2: Storage Element Configuration Pins



Configuration pins						Voltage Level
SRC_LVL_CFG[5:0]						$V_{SRC,REG}$
L	L	L	L	L	L	0.14 V
L	L	L	L	L	H	0.17 V
L	L	L	L	H	L	0.20 V
L	L	L	L	H	H	0.23 V
L	L	L	H	L	L	0.26 V
L	L	L	H	L	H	0.30 V
L	L	L	H	H	L	0.34 V
L	L	L	H	H	H	0.39 V
L	L	H	L	L	L	0.43 V
L	L	H	L	L	H	0.48 V
L	L	H	L	H	L	0.52 V
L	L	H	L	H	H	0.57 V
L	L	H	H	L	L	0.61 V
L	L	H	H	L	H	0.66 V
L	L	H	H	H	L	0.70 V
L	L	H	H	H	H	0.75 V
L	H	L	L	L	L	0.80 V
L	H	L	L	L	H	0.84 V
L	H	L	L	H	L	0.89 V
L	H	L	L	H	H	0.95 V
L	H	L	H	L	L	1.05 V
L	H	L	H	L	H	1.14 V
L	H	L	H	H	L	1.23 V
L	H	L	H	H	H	1.32 V
L	H	H	L	L	L	1.41 V
L	H	H	L	L	H	1.50 V
L	H	H	L	H	L	1.59 V
L	H	H	L	H	H	1.68 V
L	H	H	H	L	L	1.77 V
L	H	H	H	L	H	1.86 V

Configuration pins						Voltage Level
SRC_LVL_CFG[5:0]						$V_{SRC,REG}$
L	H	H	H	H	L	1.95 V
L	H	H	H	H	H	2.05 V
H	L	L	L	L	L	2.14 V
H	L	L	L	L	H	2.23 V
H	L	L	L	H	L	2.32 V
H	L	L	L	H	H	2.41 V
H	L	L	H	L	L	2.50 V
H	L	L	H	L	H	2.59 V
H	L	L	H	H	L	2.68 V
H	L	L	H	H	H	2.77 V
H	L	H	L	L	L	2.86 V
H	L	H	L	L	H	2.95 V
H	L	H	L	H	L	3.05 V
H	L	H	L	H	H	3.14 V
H	L	H	H	L	L	3.23 V
H	L	H	H	L	H	3.32 V
H	L	H	H	H	L	3.41 V
H	L	H	H	H	H	3.50 V
H	H	L	L	L	L	3.59 V
H	H	L	L	L	H	3.68 V
H	H	L	L	H	L	3.77 V
H	H	L	L	H	H	3.86 V
H	H	L	H	L	L	3.95 V
H	H	L	H	L	H	4.05 V
H	H	L	H	H	L	4.14 V
H	H	L	H	H	H	4.23 V
H	H	H	L	L	L	4.32 V
H	H	H	L	L	H	4.41 V
H	H	H	L	H	L	4.50 V

Table 3: Source Regulation Configuration Pins

## 2.3. Advanced Configurations

A complete description of the system constraints and configurations is available in the AEM00300 datasheet "System Configuration" Section.

A reminder on how to calculate the configuration resistors value is provided below. Calculation can be made with the help of the spreadsheet found on the e-peas website.

### 2.3.1. Custom Mode

In addition to the pre-defined protection levels, the custom mode allows users to define their own levels via resistors R1 to R4, according to the following equations:

- $R_T = R_1 + R_2 + R_3 + R_4$
- $1\text{M}\Omega \leq R_T \leq 100\text{M}\Omega$
- $R_1 = R_T \cdot \frac{1\text{V}}{V_{\text{OVCH}}}$
- $R_2 = R_T \cdot \left( \frac{1\text{V}}{V_{\text{CHRDY}}} - \frac{1\text{V}}{V_{\text{OVCH}}} \right)$
- $R_3 = R_T \cdot \left( \frac{1\text{V}}{V_{\text{OVDIS}}} - \frac{1\text{V}}{V_{\text{CHRDY}}} \right)$
- $R_4 = R_T \cdot \left( 1 - \frac{1\text{V}}{V_{\text{OVDIS}}} \right)$

User must ensure that the protection levels satisfy the following conditions:

- $V_{\text{CHRDY}} + 0.05\text{V} \leq V_{\text{OVCH}} \leq 4.5\text{V}$
- $V_{\text{OVDIS}} + 0.05\text{V} \leq V_{\text{CHRDY}} \leq V_{\text{OVCH}} - 0.05\text{V}$
- $1\text{V} \leq V_{\text{OVDIS}}$

If unused, leave the resistor footprints (R1 to R4) empty.

### 2.3.2. Balancing Circuit Configuration

When using a dual-cell supercapacitor (that does not already include a balancing circuit), enable the balancing circuit configuration to ensure equal voltage on both cells. To do so:

- Connect the node between the two supercapacitor cells to **BAL** (on **STO** connector).
- Use a jumper to connect "BAL" to "ToCN".

If unused, use a jumper to connect "BAL" to "GND".

### 2.3.3. Mode Configuration

#### EN\_HP

When **EN\_HP** is pulled up to **VINT**, the DCDC converter is set to **HIGH POWER MODE**. This allows higher currents to be extracted from the buck-boost input (**SRC**) to the buck-boost output (**STO** or **VINT**).

- Use a jumper to connect **EN\_HP** to H to enable the high-power mode.
- Use a jumper to connect **EN\_HP** to L to disable the high-power mode.

#### EN\_STO\_CH

To disable battery charging, the 3-pin header is available.

- Use a jumper to connect the **EN\_STO\_CH** to H to enable the charge of the storage element.
- Use a jumper to connect the **EN\_STO\_CH** to L to disable the charge of the storage element.

An internal pull-up resistor is setting the **EN\_STO\_CH** at H by default.

### 2.3.4. External Output Supply

The AEM00300 is a battery charger. An external application can be supplied from the battery using the APP connector in the EVK.

To enable this feature a jumper may be placed connecting **STO** to **STO\_APP**. A switch will connect the storage element to the **APP** connector if one of these two signals, **APP\_EN\_AEM** or **APP\_EN\_EXT**, have a high logic level.

Placing a jumper linking **ST\_STO** and **APP\_EN\_AEM** will enable the **APP** output when the voltage in the storage element rises above  $V_{\text{CHRDY}}$  (if the AEM comes from **RESET STATE**) and while the storage element voltages is over  $V_{\text{OVDIS}}$ . The AEM00300 goes to **RESET STATE** if there is no more energy to harvest in the **SRC** input, the **ST\_STO** signal is also reset. The **APP\_EN\_EXT** signal may be asserted from the application to continue using the **APP** output when the AEM is in **RESET STATE**.

The storage element voltage can be measured in the **STO\_MEAS** pin. This pin is connected to a power gated resistor bridge that can be enabled through the **EN\_STO\_MEAS** signal.

### 3. Functional Tests

This section presents a few simple tests that allow the user to understand the functional behavior of the AEM00300. To avoid damaging the board, follow the procedure found in Section 2.1 “Safety Information”. If a test has to be restarted make sure to properly reset the system to obtain reproducible results.

The following functional tests were made using the following setup:

- **SRC\_LVL\_CFG[5:0]** = LHHLLH.
- **STO\_CFG[3:0]** = LLLL.
- **EN\_HP** = H.
- **EN\_STO\_CH** = H.
- Storage element: Capacitor (4.7 mF + **CSTO**).
- **SRC**: current source (1mA or 100uA) with voltage compliance (4V).

Setup can be adapted to match user’s system as long as the input and cold-start constraints are met (see the AEM00300 datasheet “Introduction” Section).

#### 3.1. Start-up

The following example allows the user to observe the behavior of the AEM00300 in Wake-up state.

##### Setup

- Place the probes on the nodes to be observed.
- Referring to Figure 1, follow steps 1 to 5 explained in Section 2.1 “Safety Information”.

##### Observations and Measurements

- **STO**: Voltage rises as the power provided by the source is transferred to the storage element.
- **ST\_STO**: Asserted when the voltage on **STO** rises above  $V_{CHRDY}$ .

#### 3.2. Shutdown

This test allows users to observe the behavior of the AEM00300 when the system is running out of energy.

##### Setup

- Place the probes on the nodes to be observed.
- Referring to Figure 1, follow steps 1 to 5 explained in Section 2.1 “Safety Information”. Configure the board in the desired state and start the system (see Section 3.1).
- Let the system reach a steady state (i.e. voltage on **STO** between  $V_{CHRDY}$  and  $V_{OVCH}$  and **ST\_STO** asserted).
- Remove your source element and let the system discharge through quiescent current.

##### Observations and Measurements

- **STO**: Voltage decreases as the system consumes the power accumulated in the storage element. The voltage reaches  $V_{OVDIS}$ .
- **ST\_STO**: De-asserted when the storage element is running out of energy ( $V_{OVDIS}$ ).

#### 3.3. Cold Start

The following test allows the user to observe the minimum voltage required to coldstart the AEM00300. To prevent leakage current induced by the probe the user should avoid probing any unnecessary node. Make sure to properly reset the board to observe the cold-start behavior.

##### Setup

- Place the probes on the nodes to be observed.
- Referring Figure 1, follow steps 1 and 2 explained in Section 2.1. Configure the board in the desired state. Do not plug any storage element in addition to **CSTO**.
- **SRC**: Connect your source element.

##### Observations and Measurements

- **SRC**: Equal to the cold-start voltage during the cold-start phase. Regulated at the source voltage configured thanks to **SRC\_LVL\_CFG[5:0]** when cold start is over. Be careful that the cold-start phase time will shorten with the input power. Limit it to ease the observation.
- **STO**: Starts to charge the storage element when the cold-start phase is over.

### 3.4. Dual-cell Supercapacitor Balancing Circuit

This test allows users to observe the balancing circuit behavior that maintains the voltage on **BAL** at half the voltage on **STO**.

#### Setup

- Following steps 1 and 2 explained in Section 2.1 and referring to Figure 1, configure the board in the desired state. Plug the jumper linking “BAL” to “ToCN”.
- **STO**: Connect capacitor C1 between the positive (+) and the BAL pins and a capacitor C2 between **BAL** and the negative (-) pins. Select C1 and C2 so that:
  - $C1 \neq C2$
  - $C1 > 1\text{mF}$
  - $C2 > 1\text{mF}$
  - $\frac{C2 \cdot V_{\text{CHRDY}}}{C1} \geq 0.9\text{V}$
- **SRC**: Plug your source element to start the power flow to the system.

#### Observations and Measurements

- **BAL**: Equals to half the voltage on **STO**.

Do not leave **BAL** floating, doing so could damage the AEM.





## 4. Schematics

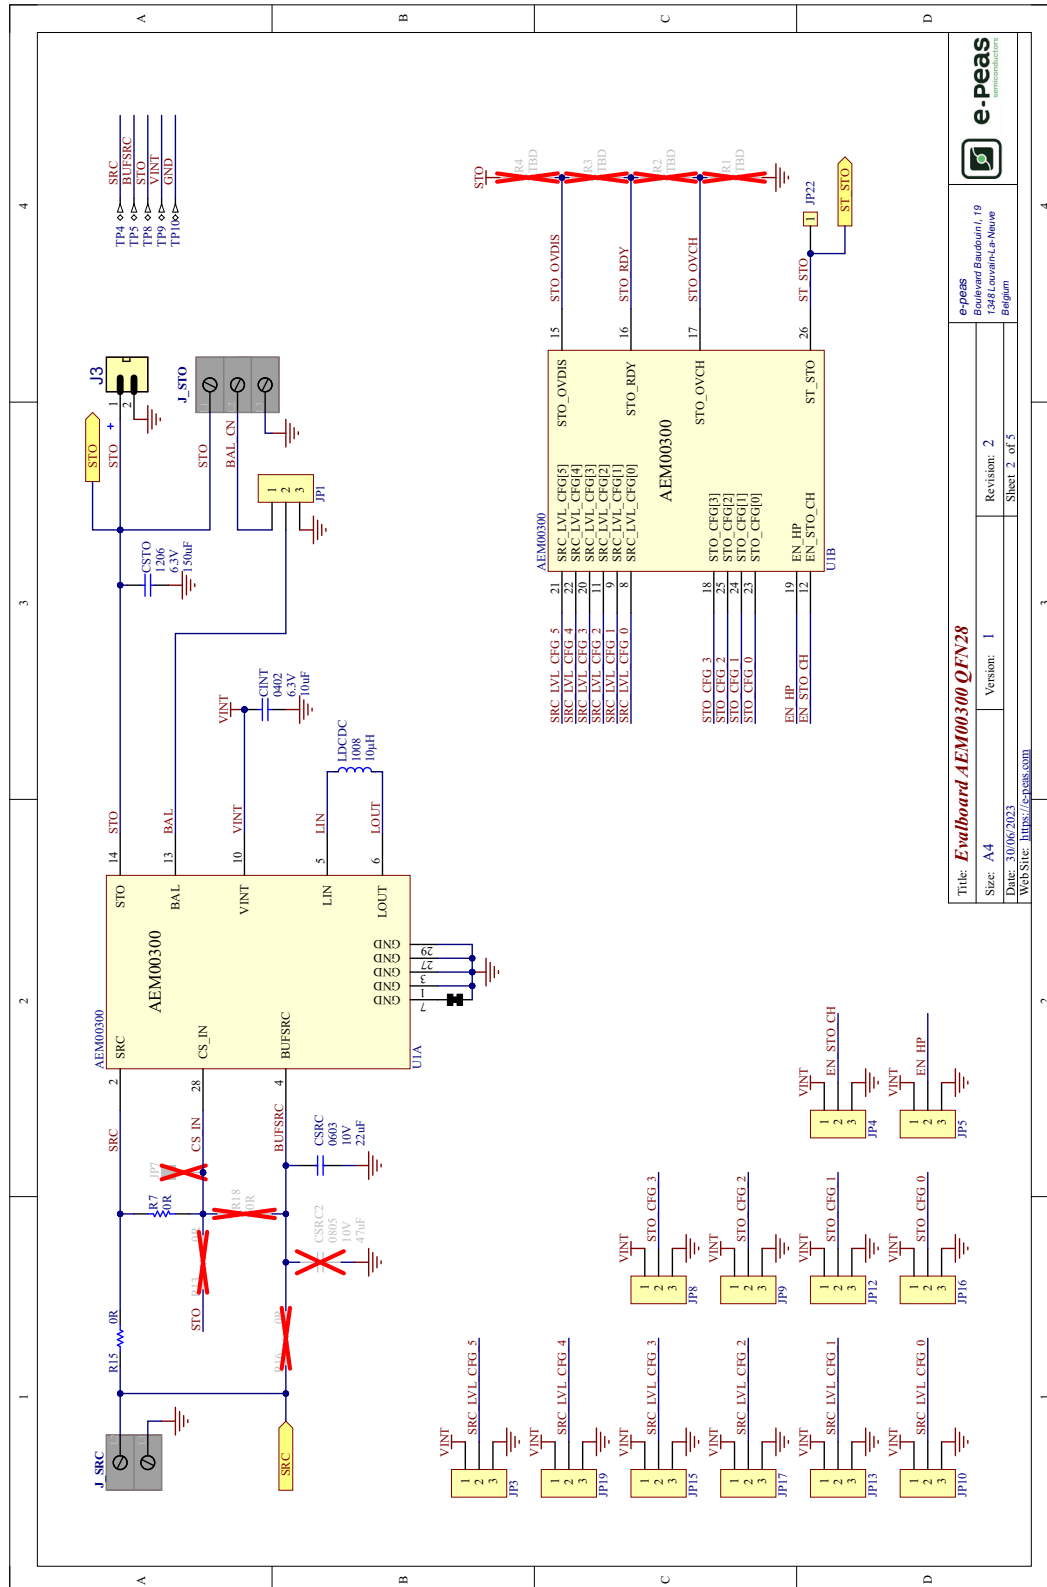


Figure 2: Schematic Part 1

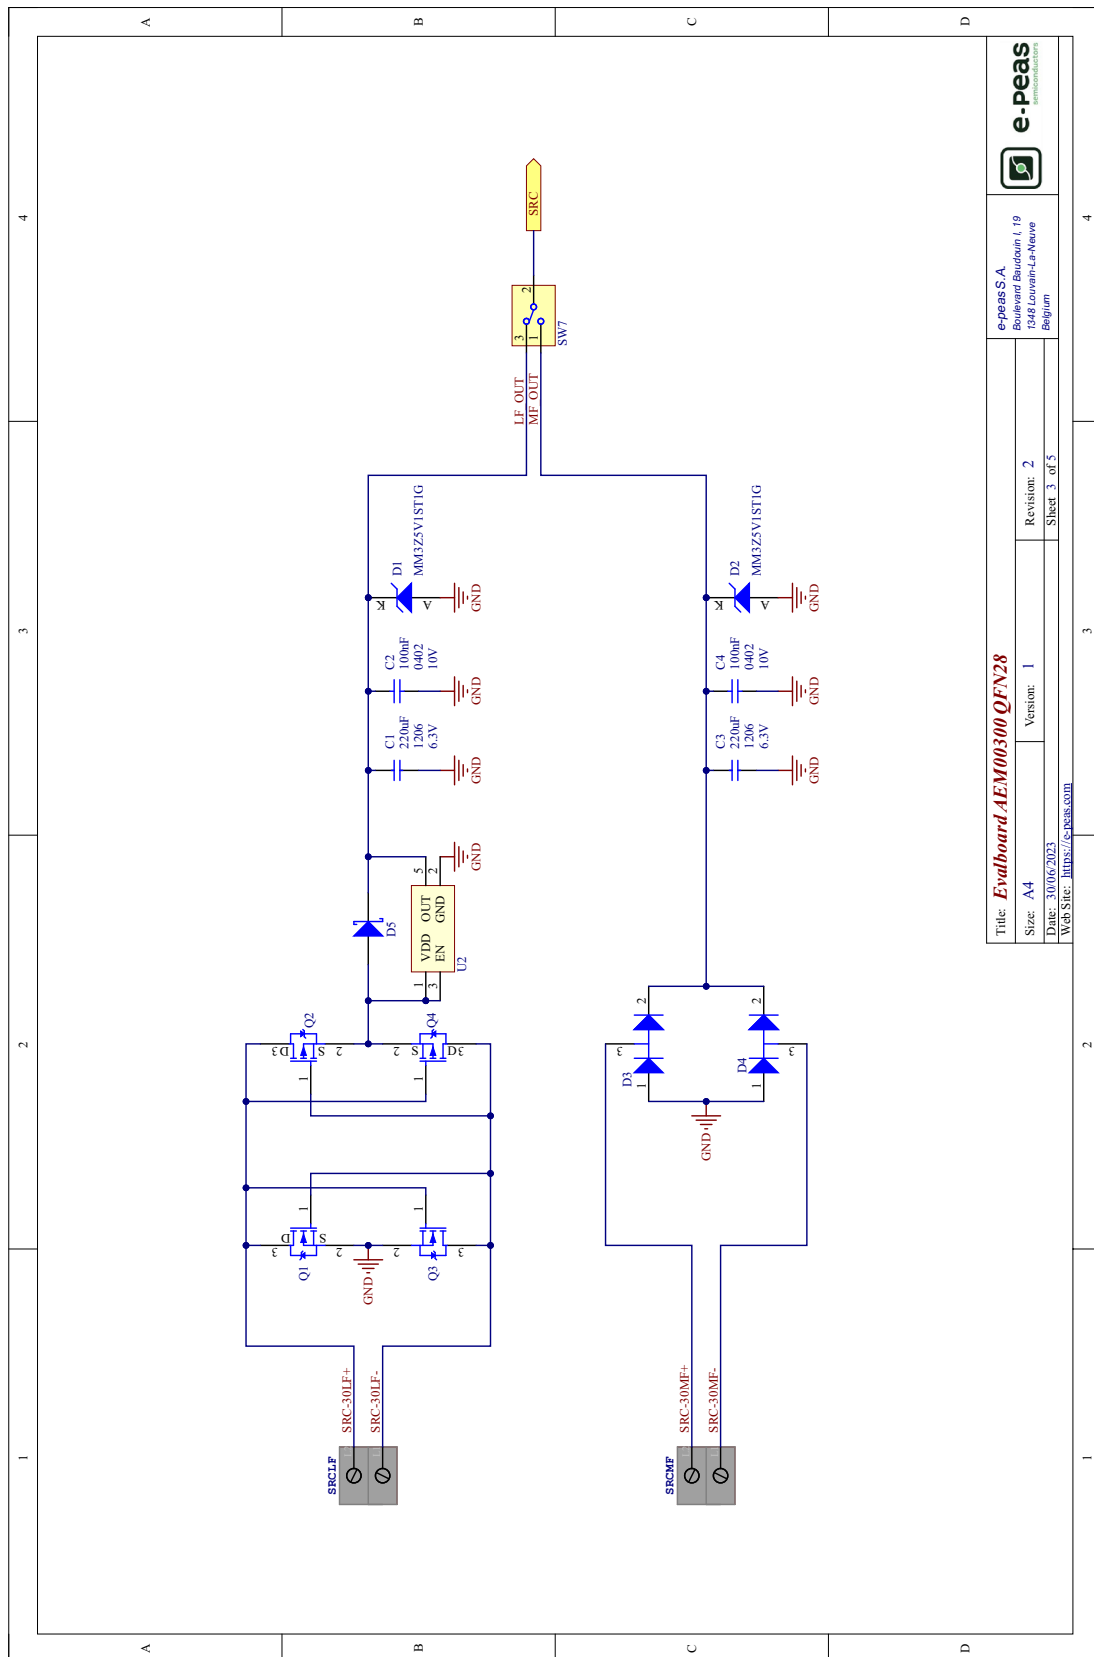


Figure 3: Schematic Part 2

Title: <b>Evaluation Board AEM00300 QFN28</b>	
Size: A4	Revision: 2
Date: 30/06/2023	Sheet 3 of 5
Web Site: <a href="https://www.e-peas.com">https://www.e-peas.com</a>	



e-peas SA  
Rue de la Liberté 119  
1348 Louvain-la-Neuve  
Belgium

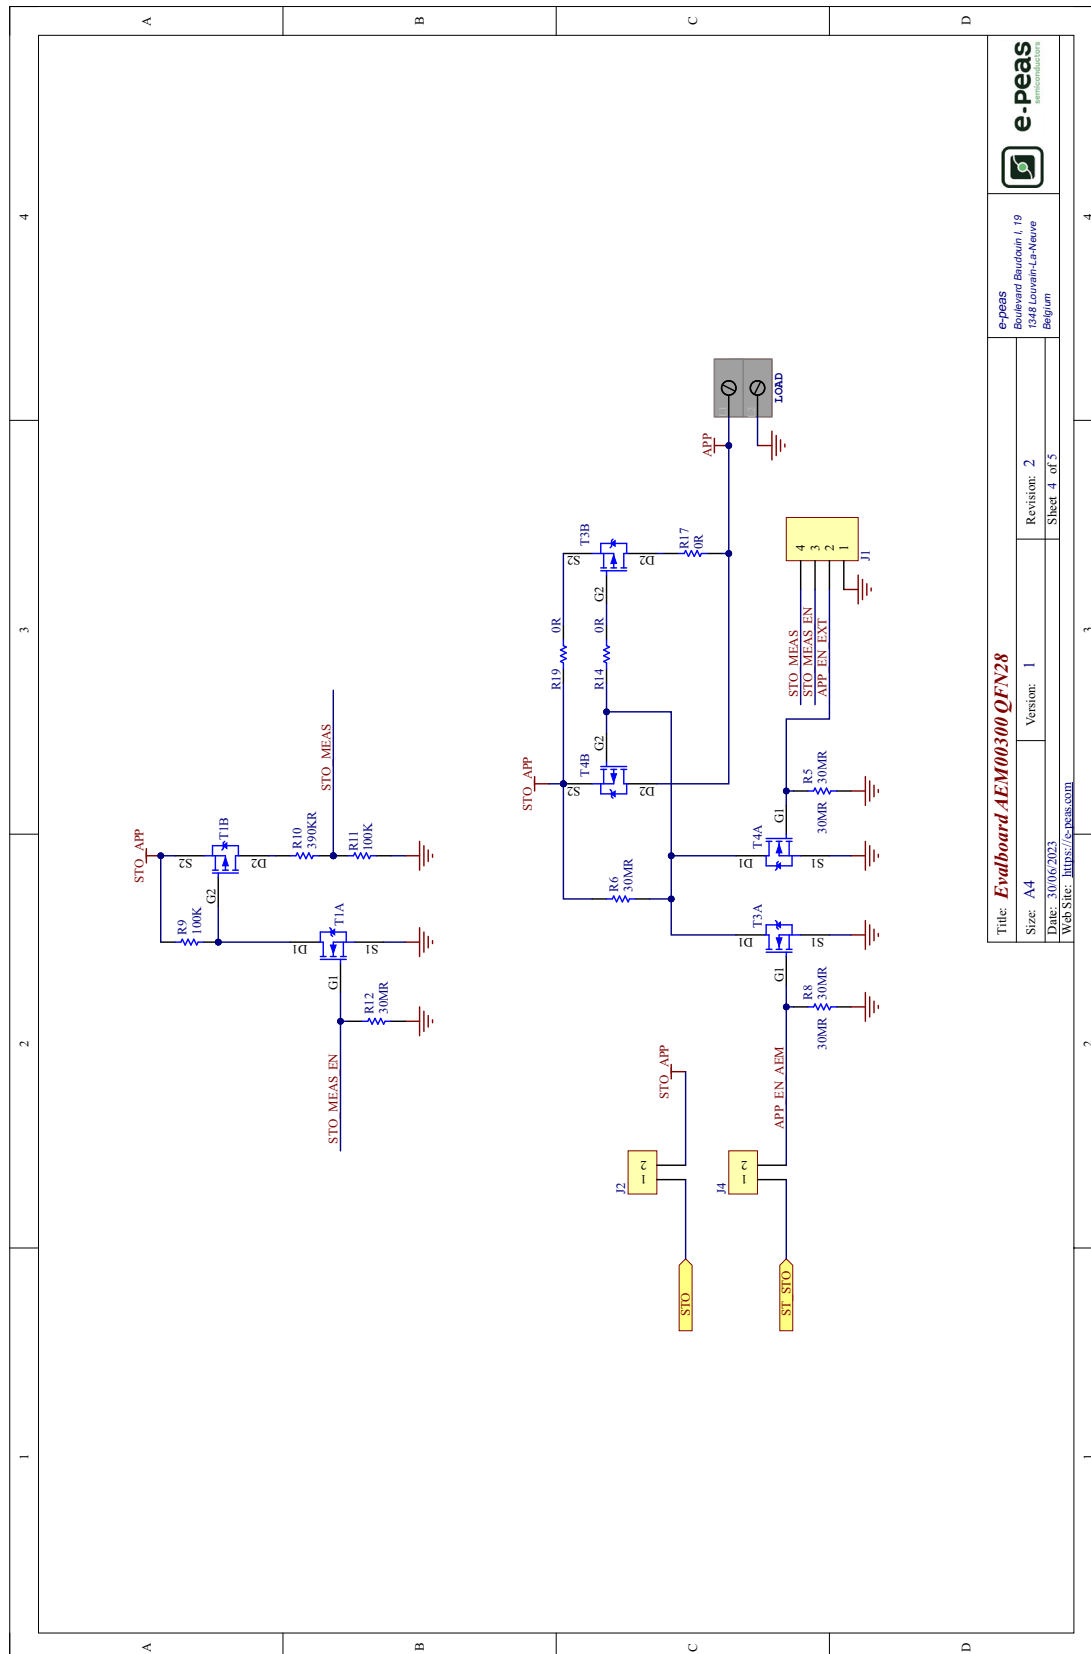


Figure 4: Schematic Part 3

Title: <b>Evalboard AEM00300 QFN28</b>		e-peas Boulevard Baudouin 1, 19 1348 Louvain-La-Neuve Belgium	
Size: A4	Version: 1	Revision: 2	
Date: 30/06/2023		Sheet 4 of 5	
Web Site: <a href="https://e-peas.com">https://e-peas.com</a>			

## 5. Revision History

EVK Version	User Guide Revision	Date	Description
Up to 1.1	1.0	September, 2021	Creation of the document.
	1.1	November, 2022	Fixed some inconsistencies and updated images.
1.2	1.0	August, 2023	Images and schematics update to EVK v1.2.
1.2	1.1	December, 2023	<ul style="list-style-type: none"> <li>- Updated Revision History table to separate EVK version and User Guide version.</li> <li>- Replaced 0/1 by L/H.</li> </ul>

Table 4: Revision History