



Best Compact Choice for the Al-Driven Future.













Introducing the ASUS NUC 15 Pro—where intelligent design meets unparalleled performance. Its compact form factor is engineered for versatility, making it ideal for a variety of development scenarios, from AI model training to data visualization. Powered by the latest Gen Intel® Core™ Ultra processors, DDR5 6400 MHz memory, and Intel® Arc GPU, it delivers exceptional speed and efficiency. Experience lightning-fast connectivity and seamless collaboration with cutting-edge Wi-Fi 7. Elevate your workflow and adapt to any environment with the NUC 15 Pro—your compact powerhouse for innovation.

## **Key Selling Points**

**Al-Optimized Power:** Features the Latest Gen Intel® Core™ Ultra Series 2 CPU, Up to 99 Platform TOPS, optimized for a wide range of workloads delivering up to 18% gen/gen performance

**Superior Connectivity:** Features Intel® Wi-Fi 7 with up to 2.4X faster transfer rates, Wi-Fi Proximity Sensing, and certified Bluetooth® for enhanced audio quality and seamless connections.

**Robust Security:** Robust Security: With Intel® vPro™ on Arrow Lake architecture, offering faster threat detection and fTPM 2.0 for stronger data protection.

**Integrated & Expandable:** Compact 0.48L design with a tool-less 2.0 chassis for quick upgrades, offering 6X faster integration gen/gen.

**Exceptional Display Potential:** Connect to four 4K displays via HDMI 2.1 and Thunderbolt™ 4, with headless emulation. New sync power-off feature automatically shuts the screen for better energy efficiency

**Reliable & Sustainable:** Features 24/7 reliability with rigorous torture testing and MIL-STD-810H certification, ensuring durability in extreme conditions. The advanced cooling system enhances reliability by maintaining optimal performance, and eco-friendly packaging reflects a commitment to sustainability.

## Audience:

- Small and Medium Business Enterprises
- Retail
- Education
- Collaboration
- · Remote Workers

### **Target Usages:**

- Traditional and Smart Classrooms
- Communication File Sharing/ Virtual Meetings
- Daily Tasks/ Entertainment
- Digital Signage / Kiosk / POS









Mini-PC Specifications	Image A	Image B
------------------------	---------	---------

Mini-PC Specific	eations	Image A	Image B
Marketing Name	ASUS NUC 15 PRO Mini-PC (Tall)	ASUS NUC 1	5 PRO Mini-PC (slim)
Photo	Image A	Image B	
ASUS Logo	Yes		Yes
ASUS NUC Logo	Yes		Yes
Color	Black		Black
OS Support	Microsoft Windows 11 64-bit	Microsoft	Windows 11 64-bit
CPU	Intel® Core <sup>TM</sup> Ultra 7 265H (vPro) Intel® Core <sup>TM</sup> Ultra 5 235H (vPro) Intel® Core <sup>TM</sup> Ultra 7 255H Intel® Core <sup>TM</sup> Ultra 5 225H Intel® Core <sup>TM</sup> 7 240H Intel® Core <sup>TM</sup> 5 210H Intel® Core <sup>TM</sup> 3 100U	Intel® Core <sup>™</sup> Intel® Co Intel® Co Intel® Intel®	M Ultra 7 265H (vPro) M Ultra 5 235H (vPro) re™ Ultra 7 255H re™ Ultra 7 255H core™ 7 240H Core™ 7 240H Core™ 3 100U
Chipset	Integrated		ntegrated
Graphics	Intel® Arc™ GPU (Core Ultra)¹ Intel® Graphics (Core3, Core 5, Core 7)		<sup>™</sup> GPU (Core Ultra) <sup>1</sup> (Core3, Core 5, Core 7)
Memory	2 x SO-DIMM, Up to DDR5-5600, 48GB*2 (Core 3, Core 5, Core 7) 2 x CSO-DIMM, Up to DDR5-6400, 48GB*2 (Core Ultra)		600, 48GB*2 (Core 3, Core 5, Core 7) DDR5-6400, 48GB*2 (Core Ultra)
Storage	1 x M.2 2280 PCIe Gen4x4, supports 128GB~2TB NVMe SSD 1 x M.2 2242 PCIe Gen4x4, supports 128GB~2TB NVMe SSD PCIe Gen 5 ready design	1 x M.2 2242 PCle Gen4x	4, supports 128GB~2TB NVMe SSD 4, supports 128GB~2TB NVMe SSD in 5 ready design
Wireless Network	Intel® Wi-Fi 7 BE201 + Bluetooth 5.4 (Core Ultra) Intel® Wi-Fi 7 BE202 + Bluetooth 5.4 (Core 3, Core 5, Core 7)		BE201 + Bluetooth 5.4 etooth 5.4 (Core 3, Core 5, Core 7)
LAN	Intel® Ethernet Controller I226-V/LM, 2.5G <sup>2</sup>		ontroller I226-V/LM, 2.5G <sup>2</sup>
Audio	Up to 7.1 multichannel (or 8-channel) digital audio on HDMI and DP Type-C ports	·	l (or 8-channel) digital audio on d DP Type-C ports
TPM	fTPM		fTPM
Card Reader	None		None
HDMI CEC	Yes, 2 ports on back panel	Yes, 2 po	orts on back panel
Front I/O Ports	1 x USB 3.2 Gen2x2 Type-C 2 x USB 3.2 Gen2 Type-A		3.2 Gen2x2 Type-C 3.2 Gen2 Type-A
Back I/O Ports	2 x HDMI 2.1 TMDS Compatible (4K@60Hz) 2 x Thunderbolt™ 4 ports (incl. DP 2.1 and USB4) 1x USB 3.2 Gen2 Type-A 1x USB 2.0 Type-A 1 x RJ45 LAN 1 x DC-in	2 x Thunderbolt <sup>TM</sup> 4 1x USB 1x U 1	DS Compatible (4K@60Hz) ports (incl. DP 2.1 and USB4) 3.2 Gen2 Type-A SB 2.0 Type A x RJ45 LAN 1 x DC-in
Side I/O Ports	1 x Kensington Lock	1 x Ke	ensington Lock
Power Supply	Power Adapter Meets DOE Level VI, efficiency >=88% 19VDC, 6.32A, 120W Power Adapter	Power Adapter Meets	DOE Level VI, efficiency >=88% , 120W Power Adapter
Operating Temp	0 to 40°C		0 to 40°C
Storage Temp	-40 to 60°C	-	40 to 60°C
Humidity	0%-92% non-condensing <sup>3</sup>	0%-92%	non-condensing <sup>3</sup>
Produce Dimensions (W x D x H)	117 x 112 x 54mm	117	x 112 x 54mm
Product Weights Color Box Dimensions	364.3g		357.4g
(W x D x H)	151 x 183 x 127mm	151 >	183 x 127mm
Packaged Weight	1385g		1385g
Accessories	AC Adapter+Power Cord <sup>4</sup> VESA Bracket and Screws Cable Clip Safety/Caution/Regulatory Insert Warranty Card	VESA Br Safety/Caut	oter+Power Cord <sup>4</sup> acket and Screws Cable Clip on/Regulatory Insert ırranty Card

<sup>(1)</sup> Intel® Arc™ GPU requires using 2 x SO-DIMM
(2) Intel® Ethernet Controller I226-LM included on vPro enabled systems

<sup>(3)</sup> Humidity Info detail please check link: Non-condensing humidity as defined by temperature vs dew point (4) Power cord included is region specific, and some SKUs do not include the power cord









Image C

Image D

<b>Specifications</b>		Image C Image D	
Marketing Name	ASUS NUC 15 PRO Kit (Tall)	ASUS NUC 15 PRO Kit (Slim)	
Photo	Image C	Image D	
ASUS Logo	No	No	
•			
ASUS NUC Logo	No	No	
Color	Black	Black	
	Microsoft Windows 11 Pro	Microsoft Windows 11 Pro	
OS Support	Ubuntu 24.04 LTS 64-bit	Ubuntu 24.04 LTS 64-bit	
ОЗ Зиррогі	RedHat Enterprise Linux 64-bit	RedHat Enterprise Linux 64-bit	
	No OS installed at shipment	No OS installed at shipment	
	· ·	·	
	Intel® Core <sup>TM</sup> Ultra 7 265H (vPro)	Intel® Core <sup>TM</sup> Ultra 7 265H (vPro)	
	Intel® Core <sup>TM</sup> Ultra 5 235H (vPro)	Intel® Core <sup>TM</sup> Ultra 5 235H (vPro)	
	Intel® Core <sup>TM</sup> Ultra 7 255H	Intel® Core™ Ultra 7 255H	
CPU	Intel® Core <sup>TM</sup> Ultra 5 225H	Intel® Core <sup>TM</sup> Ultra 5 225H	
	Intel® Core™ 7 240H	Intel® Core <sup>TM</sup> 7 240H	
	Intel® Core™ 5 210H	Intel® Core™ 5 210H	
	Intel® Core <sup>TM</sup> 3 100U	Intel® Core <sup>TM</sup> 3 100U	
Cl : .			
Chipset	Integrated	Integrated	
Graphics	Intel® Arc™ GPU (Core Ultra)¹	Intel® Arc™ GPU (Core Ultra)¹	
Отартисэ	Intel® Graphics (Core 3, 5, 7)	Intel® Graphics (Core 3, 5, 7)	
	2 x SO-DIMM, Up to DDR5-5600, 48GB*2 (Core 3, Core 5, Core 7)	2 x SO-DIMM, Up to DDR5-5600, 48GB*2 (Core 3, Core 5, Core	
Memory	2 x CSO-DIMM, Up to DDR5-6400, 48GB*2 (Core Ultra)	2 x CSO-DIMM, Up to DDR5-6400, 48GB*2 (Core Ultra)	
,	No memory installed at shipment	No memory installed at shipment	
	·	·	
	1 x M.2 2280 PCle Gen4x4, supports 128GB~2TB NVMe SSD	1 x M.2 2280 PCIe Gen4x4, supports 128GB~2TB NVMe SSD	
Storage	1 x M.2 2242 PCIe Gen4x4, supports 128GB~2TB NVMe SSD	1 x M.2 2242 PCIe Gen4x4, supports 128GB~2TB NVMe SSD	
oto. age	No storage installed at shipment	No storage installed at shipment	
	PCIe Gen 5 ready design	PCIe Gen 5 ready design	
	Intel® Wi-Fi 7 BE201 (Gig+), Bluetooth 5.4 (Core Ultra)	Intel® Wi-Fi 7 BE201 (Gig+), Bluetooth 5.4 (Core Ultra)	
Wireless Network	Intel® Wi-Fi 7 BE202 (Gig+), Bluetooth 5.4 (Core 3, Core 5, Core 7)	Intel® Wi-Fi 7 BE202 (Gig+), Bluetooth 5.4 (Core 3, Core 5, Core	
LAN	Intel® Ethernet Controller I226-V/LM, 2.5G <sup>2</sup>	Intel® Ethernet Controller I226-V/LM. 2.5G <sup>2</sup>	
LAIN			
Audio	Up to 7.1 multichannel (or 8-channel) digital audio on	Up to 7.1 multichannel (or 8-channel) digital audio on	
	HDMI and DP Type-C ports	HDMI and DP Type-C ports	
TPM	fTPM	fTPM	
Card Reader	None	None	
HDMI CEC	Yes, 2 ports on back panel	Yes, 2 ports on back panel	
5 11/0 5 1	1 x USB 3.2 Gen2x2 Type-C	1 x USB 3.2 Gen2x2 Type-C	
Front I/O Ports	2 x USB 3.2 Gen2 Type-A	2 x USB 3.2 Gen2 Type-A	
	2 x HDMI 2.1 TMDS Compatible (4K@60Hz)	2 x HDMI 2.1 TMDS Compatible (4K@60Hz)	
	2 x Thunderbolt™ 4 ports (incl. DP 2.1 and USB4)	2 x Thunderbolt <sup>TM</sup> 4 ports (incl. DP 2.1 and USB4)	
	· · · · · · · · · · · · · · · · · · ·		
Back I/O Ports	1x USB 3.2 Gen2 Type-A	1x USB 3.2 Gen2 Type-A	
	1x USB 2.0 Type A	1x USB 2.0 Type A	
	1 x RJ45 LAN	1 x RJ45 LAN	
	1 x DC-in	1 x DC-in	
Side I/O Ports	1 x Kensington Lock	1 x Kensington Lock	
	Power Adapter Meets DOE Level VI, efficiency >=88%	Power Adapter Meets DOE Level VI, efficiency >=88%	
Power Supply		19VDC, 6.32A, 120W Power Adapter	
	19VDC, 6.32A, 120W Power Adapter		
Operating Town		• • • • • • • • • • • • • • • • • • • •	
Operating Temp	0 to 40°C	0 to 40°C	
Storage Temp		0 to 40°C -40 to 60°C	
	0 to 40°C	0 to 40°C	
Storage Temp Humidity	0 to 40°C -40 to 60°C 0%-92% non-condensing³	0 to 40°C -40 to 60°C 0%-92% non-condensing³	
Storage Temp Humidity roduct Dimensions	0 to 40°C -40 to 60°C	0 to 40°C -40 to 60°C	
Storage Temp Humidity roduct Dimensions (W x D x H)	0 to 40°C -40 to 60°C 0%-92% non-condensing³ 117 x 112 x 54mm	0 to 40°C -40 to 60°C 0%-92% non-condensing³ 117 x 112 x 37mm	
Storage Temp Humidity roduct Dimensions (W x D x H) Product Weights	0 to 40°C -40 to 60°C 0%-92% non-condensing³ 117 x 112 x 54mm 364.3g	0 to 40°C -40 to 60°C 0%-92% non-condensing³ 117 x 112 x 37mm 357.4g	
Storage Temp Humidity roduct Dimensions (W x D x H) Product Weights lor Box Dimensions	0 to 40°C -40 to 60°C 0%-92% non-condensing³ 117 x 112 x 54mm	0 to 40°C -40 to 60°C 0%-92% non-condensing³ 117 x 112 x 37mm	
Storage Temp Humidity roduct Dimensions (W x D x H) Product Weights lor Box Dimensions (W x D x H)	0 to 40°C -40 to 60°C 0%-92% non-condensing³ 117 x 112 x 54mm 364.3g 151 x 183 x 127mm	0 to 40°C -40 to 60°C 0%-92% non-condensing³ 117 x 112 x 37mm 357.4g 151 x 183 x 127mm	
Storage Temp Humidity roduct Dimensions (W x D x H) Product Weights lor Box Dimensions	0 to 40°C -40 to 60°C 0%-92% non-condensing³ 117 x 112 x 54mm 364.3g	0 to 40°C -40 to 60°C 0%-92% non-condensing³ 117 x 112 x 37mm 357.4g	
Storage Temp Humidity roduct Dimensions (W x D x H) Product Weights lor Box Dimensions (W x D x H)	0 to 40°C -40 to 60°C 0%-92% non-condensing³ 117 x 112 x 54mm 364.3g 151 x 183 x 127mm	0 to 40°C -40 to 60°C 0%-92% non-condensing³ 117 x 112 x 37mm 357.4g 151 x 183 x 127mm	
Storage Temp Humidity roduct Dimensions (W x D x H) Product Weights lor Box Dimensions (W x D x H)	0 to 40°C -40 to 60°C 0%-92% non-condensing³ 117 x 112 x 54mm 364.3g 151 x 183 x 127mm 1385g	0 to 40°C -40 to 60°C 0%-92% non-condensing³ 117 x 112 x 37mm 357.4g 151 x 183 x 127mm 1385g	
Storage Temp Humidity roduct Dimensions (W x D x H) Product Weights lor Box Dimensions (W x D x H)	0 to 40°C -40 to 60°C 0%-92% non-condensing³ 117 x 112 x 54mm 364.3g 151 x 183 x 127mm 1385g AC Adapter+Power Cord⁴	0 to 40°C -40 to 60°C  0%-92% non-condensing³  117 x 112 x 37mm  357.4g  151 x 183 x 127mm  1385g  AC Adapter+Power Cord⁴	
Storage Temp Humidity roduct Dimensions (W x D x H) Product Weights lor Box Dimensions (W x D x H) Packaged Weight	0 to 40°C -40 to 60°C  0%-92% non-condensing³  117 x 112 x 54mm  364.3g  151 x 183 x 127mm  1385g  AC Adapter+Power Cord⁴ VESA Bracket and Screws	0 to 40°C -40 to 60°C  0%-92% non-condensing³  117 x 112 x 37mm  357.4g  151 x 183 x 127mm  1385g  AC Adapter+Power Cord⁴ VESA Bracket and Screws	

<sup>&</sup>lt;sup>(1)</sup> Intel® Arc<sup>™</sup> GPU requires using 2 x SO-DIMM

<sup>(2)</sup> Intel® Ethernet Controller I226-LM included on vPro enabled systems

<sup>(3)</sup> Humidity Info detail please check link: Non-condensing Humidity defined by dew point

<sup>(4)</sup> Power cord included is region specific, and some SKUs do not include the power cord





Image E



# **ASUS NUC 15 PRO**

<b>Board Specifications</b>	image E
Marketing Name	ACLICALICATE Pro Doord
Marketing Name  Photo	ASUS NUC 15 Pro Board
ASUS Logo	Image E N/A
ASUS NUC Logo	N/A
Color	N/A
COIOI	Supports
OS Support	Windows 11 64-bit Ubuntu 24.04 LTS 64-bit RedHat Enterprise Linux 64-bit *No OS installed at shipment
СРИ	Intel® Core™ Ultra 7 265H, cTDP 40W Intel® Core™ Ultra 7 255H, cTDP 40W Intel® Core™ Ultra 5 235H, cTDP 40W Intel® Core™ Ultra 5 225H, cTDP 40W Intel® Core™ 7 Processor 240H, cTDP 25W Intel® Core™ 5 Processor 210H, cTDP 25W Intel® Core™ 3 Processor 100U, cTDP 25W
Chipset	Integrated
Graphics	Intel® Arc™ GPU (Core Ultra)¹ Intel® Graphics Technology (Core 3, Core 5, Core7)
Memory	2 x SO-DIMM, Up to DDR5-5600, 48GB*2 OR 2 x CSO-DIMM, Up to DDR5-6400, 48GB*2
Storage	$1 \times M.2 2280$ PCIe Gen $5 \times 4$ , supports $128GB^8TB \text{ NVMe SSD}^2$ $1 \times M.2 2242$ PCIe Gen $4 \times 4$ , supports $128GB^2TB \text{ NVMe SSD}$
Wireless Network	None
LAN	Intel® Ethernet Controller I226-V/LM, 2.5G <sup>3</sup>
Audio	N/A
TPM	fTPM
Card Reader	None
HDMI CEC	Yes, 2 ports on back panel
Front I/O Ports	1 x USB 3.2 Gen2x2 Type-C 2 x USB 3.2 Gen2 Type-A
Back I/O Ports	2 x Thunderbolt 4 Type-C w/ DisplayPort 2.1 1 x USB 3.2 Gen 2 Type-A 1 x USB 2.0 Type-A 2 x HDMI 2.1 (TMDS Compatible) 1 x RJ45 LAN 1 x DC-in
Side I/O Ports	N/A
Power Supply	Not Included
Dimensions (W x D x H)	101.6mm x 107.5mm x 29.5mm
Weights	226g
Operating Temperature	0°C - 40°C
Storage Temperature	-40°C to 60°C
Humidity	0%-92% non-condensing <sup>4</sup>
Accessories	Warranty Card Safety/Caution/Regulatory Insert

<sup>(1)</sup> Intel® Arc™ GPU requires using 2 x SO-DIMM

<sup>(2)</sup> Intel® Ethernet Controller I226-LM included on vPro enabled systems

<sup>(3)</sup> Humidity Info detail please check link: Non-condensing Humidity defined by dew point (4) Power cord included is region specific, and some SKUs do not include the power cord





Tall



Kensington Lock

4 5 6 7 8 9 10 6 7

- 1. 2x USB 3.2 Gen2 Type-A
- 2. USB 3.2 Type-C Gen 2x2
- 3. Power button

- 4. Security mechanism for power cable
- 5. DC-in

- 9. USB 2.0 Type-A 10. USB 3.2 Gen2 Type-A
- 6. 2x HDMI 2.1 (TMDS)
- 7. 2x Thunderbolt™ 4
- 8. 2.5Gb Ethernet Port
- \* All USB ports with individual USB power control

Slim



Kensington Lock

4 5 6 7 8 9 10 6 7


- 1. 2x USB 3.2 Gen2 Type-A
- 2. USB 3.2 Gen 2x2 Type-C
- 3. Power button

- 4. Security mechanism for power cable
- 5. DC-in
- 9. USB 2.0 Type-A 10. USB 3.2 Gen2 Type-A
- 6. 2x HDMI 2.1 (TMDS)
- 7. 2x Thunderbolt™ 4
- 8. 2.5Gb Ethernet Port





What's in the box

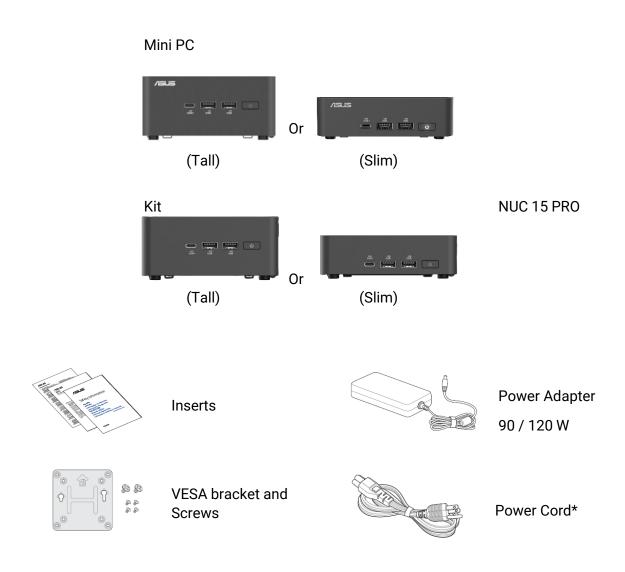

#### NOTE:

- The most up-to-date and accurate product specifications are available on www.asus.com for download.
- Product and accessory images are for illustrative purposes only. The actual appearance and specifications may vary depending on the model.
- \*The bundled power adapter may vary depending on the model and the country (or region) of sale.
- Some bundled accessories may vary depending on the model. For details on these accessories, refer to their respective user manuals.
- If the device or its components fail or malfunction during normal and proper use within the warranty period, bring the warranty card to the ASUS Service Center for replacement of the defective components.