

TMR-LTXX09-XXXXPCXXX

KEYING OPTIONS	
A	LIGHT BROWN
B	RED
C	BLUE
D	GREEN


CONTACT FINISH	
0	GOLD

TERMINATION SIZE	
0	STANDARD



INSERT CODE	
008A	8 POSITION, STD
010A	10 POSITION, STD

HOUSING FINISH	
N	TIN NICKEL


HOUSING MATERIAL	
A	ALUMINUM

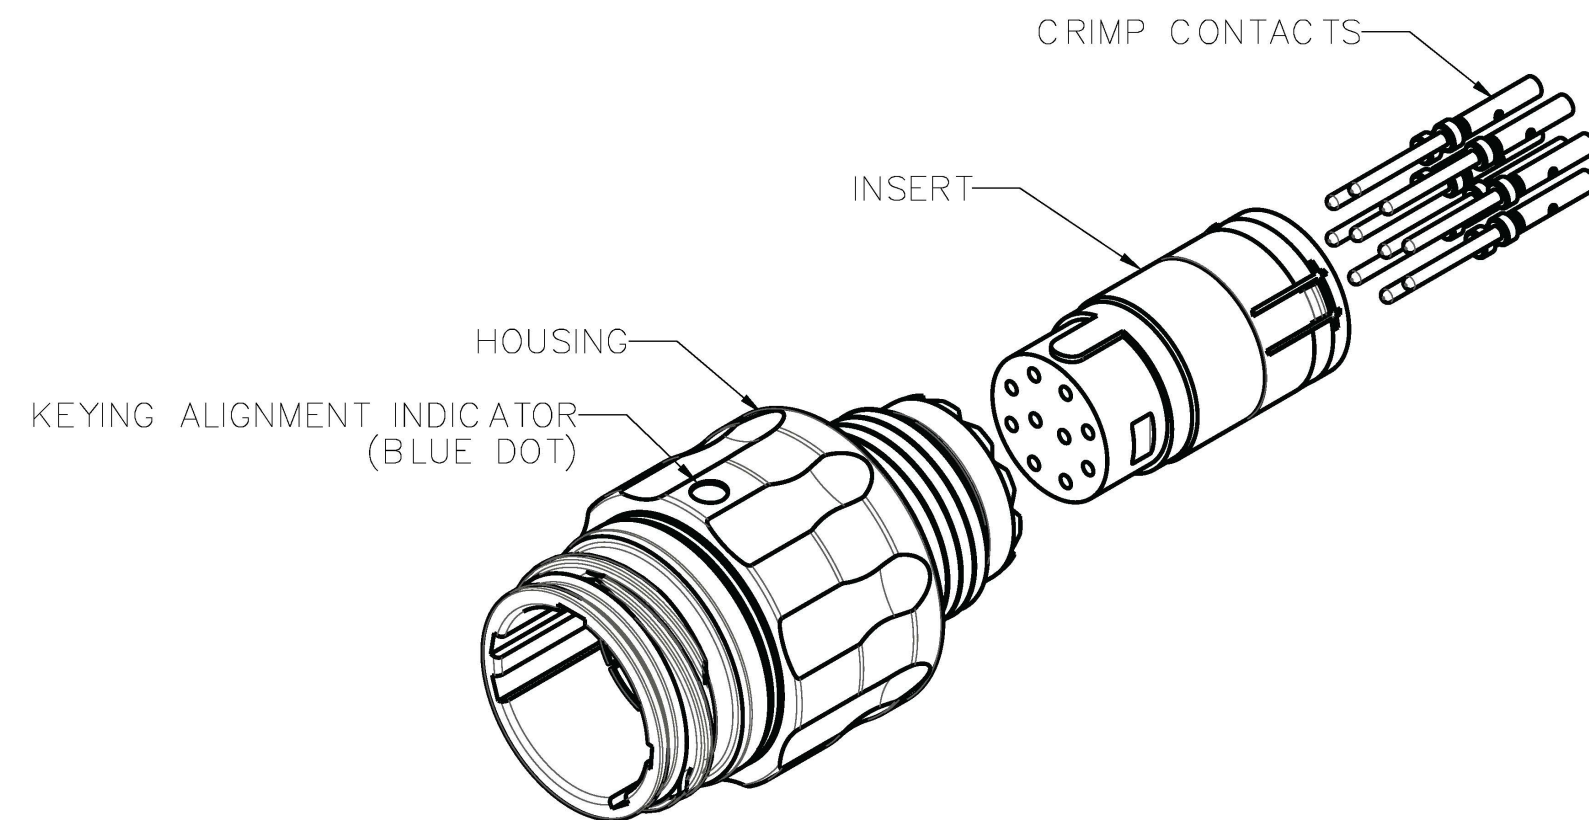


ISOMETRIC VIEW  
FOR REFERENCE ONLY  
TMR-LTAN09-010APC00A SHOWN

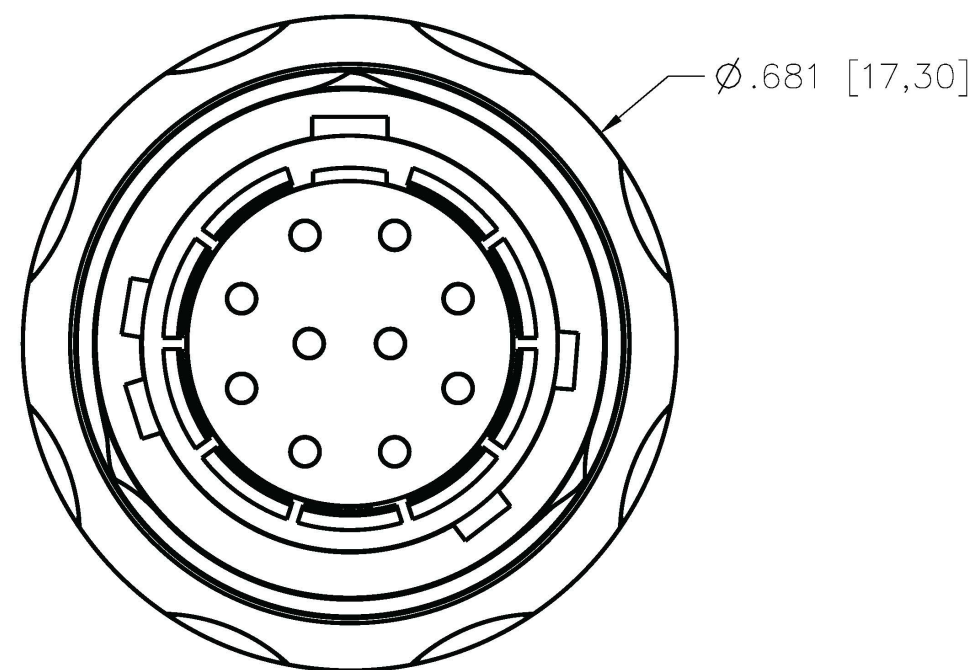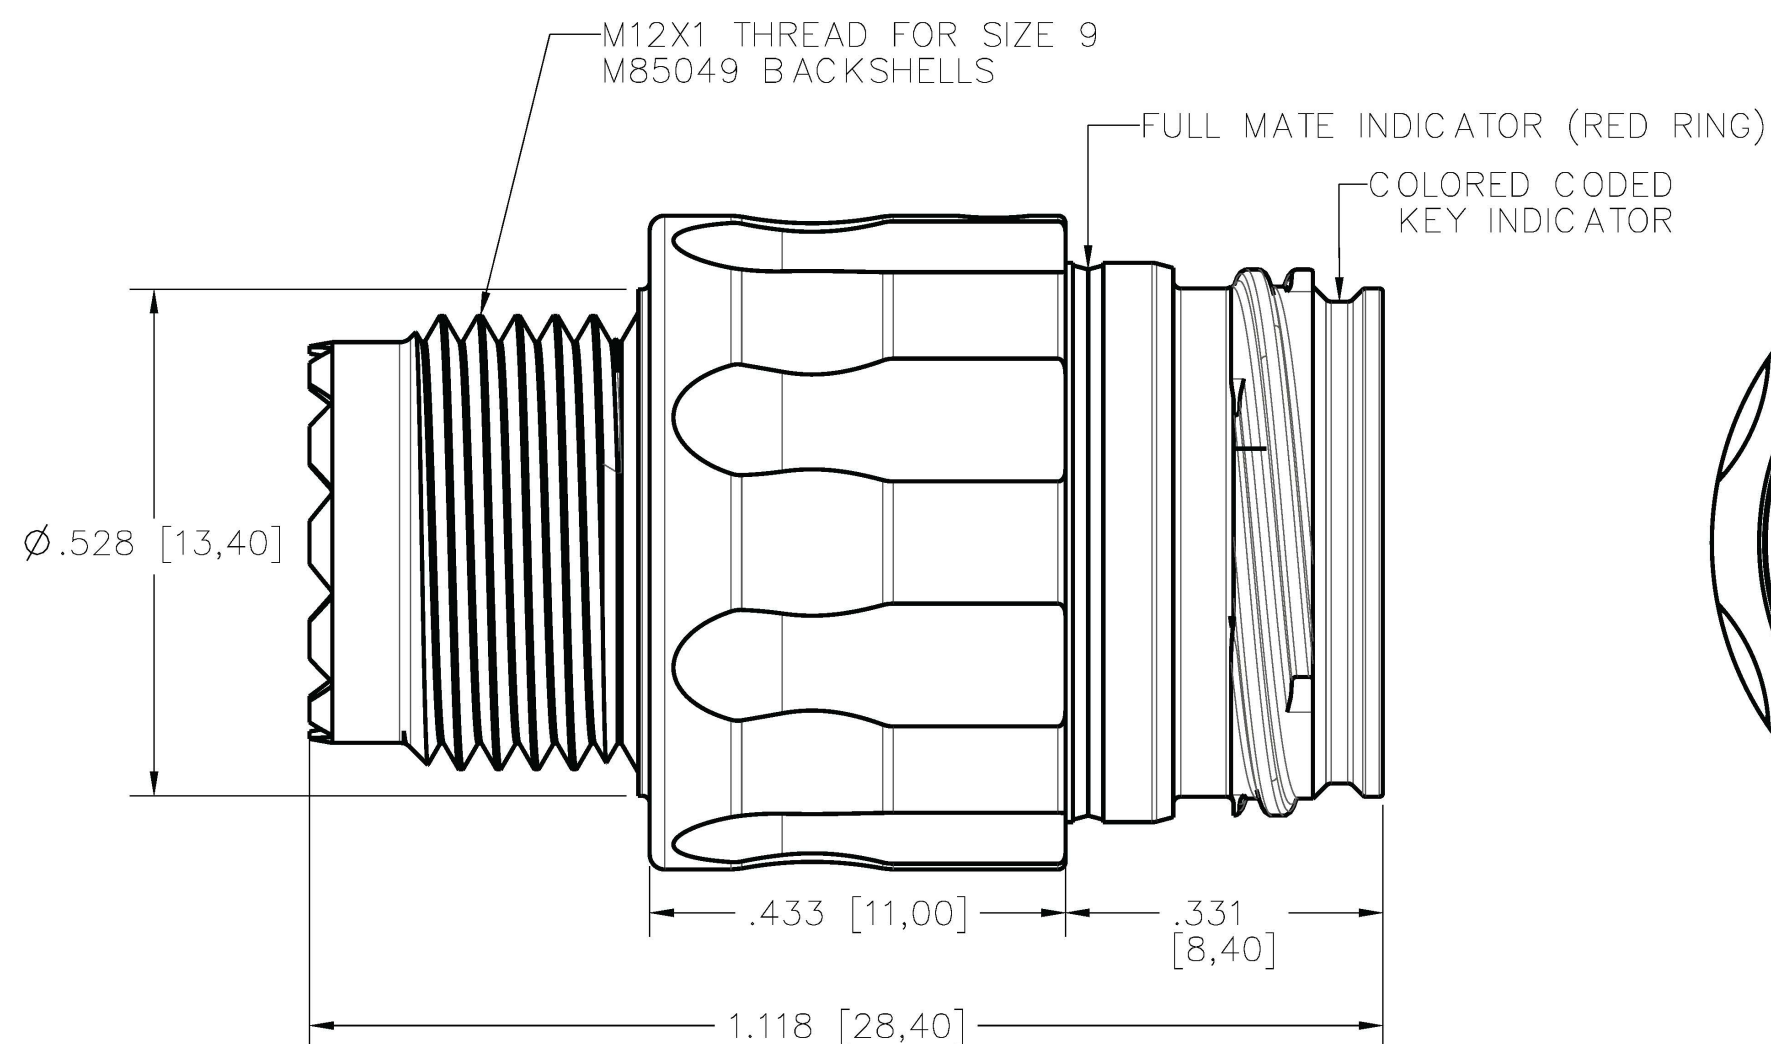


KEYING OPTIONS (VIEW LOOKING AT RECEPTACLE FACE)

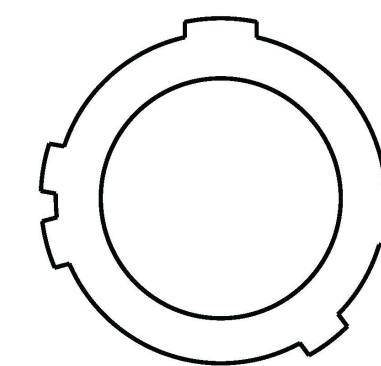


KEY A  
COLOR: LIGHT BROWN

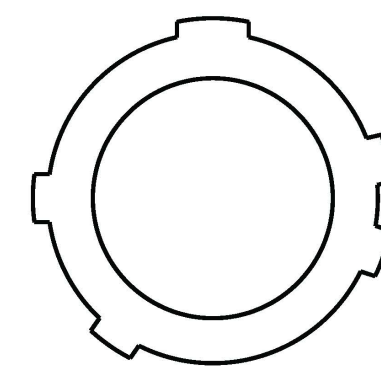

KEY B  
COLOR: RED

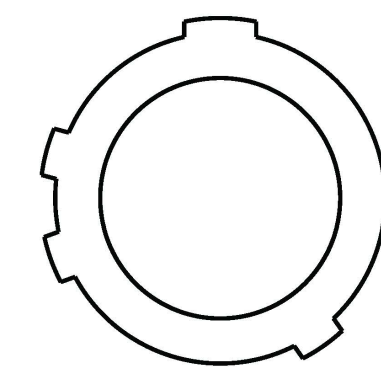

KEY C  
COLOR: BLUE

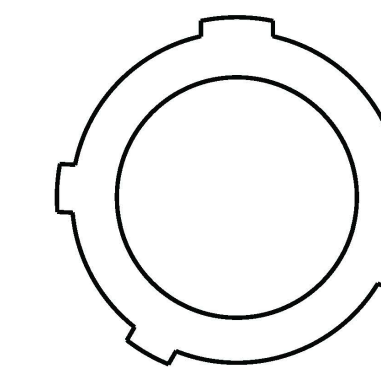

KEY D  
COLOR: GREEN

NOTES:

- SEE ESG6092 FOR MATERIAL AND PERFORMANCE SPECIFICATIONS
- SEE ESG6093 FOR ASSEMBLY INSTRUCTIONS
- SIZE 22D PIN CONTACTS PER M39029/58-360

**TRIMATE**™

MATERIAL: SEE NOTES  
Temper:  
Per Spec.:  
R/M P/N ref: N/A  
Certification required: NO

HEAT TREAT: SEE NOTES  
Per Spec.:  
Certification required: NO

FINISH: SEE NOTES  
Per Spec.:  
Certification required: NO

MAKE FROM: N/A  
NEXT ASSY: N/A

UNLESS OTHERWISE SPECIFIED, TOLERANCES ARE:  
Decimals: .XX ± 0.01 Concentricity:  
Decimals: .XXX ± 0.008 Angles: ± 1°  
Decimals: .XXXX ± 0.0040 Radius: ±  
Parts are to be symmetrical about centerline within ± .005  
Surfaces to be flat, perpendicular parallel within .004 T.I.R.  
Dimensions are in inches/DO NOT SCALE PRINT  
Surface finish to be √ or better

APPLICATION: TRIMATE SERIES

REV	DESCRIPTION	DR. BY DATE	CC 060923	CC 060923	ECO NO. APPD. BY
-	INITIAL RELEASE				

► = CRITICAL CHARACTERISTIC  
● = MAJOR CHARACTERISTIC  
THIRD ANGLE PROJECTION

**AirBorn**  
Georgetown, Texas 78626

Cage Code  
10400

DRAWING STATE: Released  
This drawing is not authorized for production unless it is released




RECEPTACLE, SIZE 9  
IN-LINE, THREADED EXIT  
PINS, CRIMP

DWG# TMR-LTXX09-XXXXPCXXX  
REV. 1/3

TMR-LTXX09-XXXXPCXXX

INSERT CODE	
008A	8 POSITION, STD

SIZE 22D CONTACTS, 8X

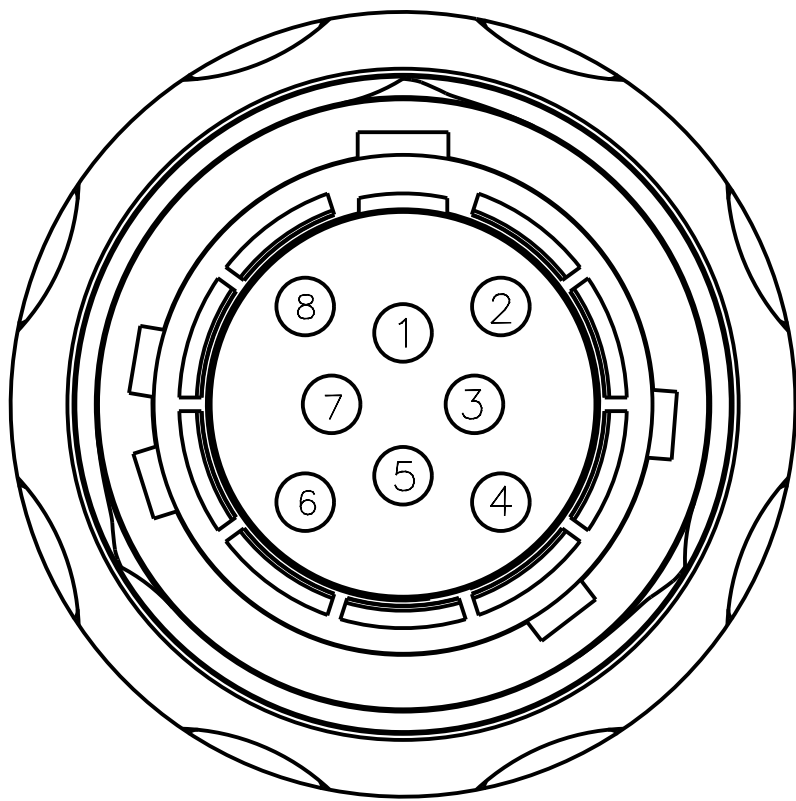
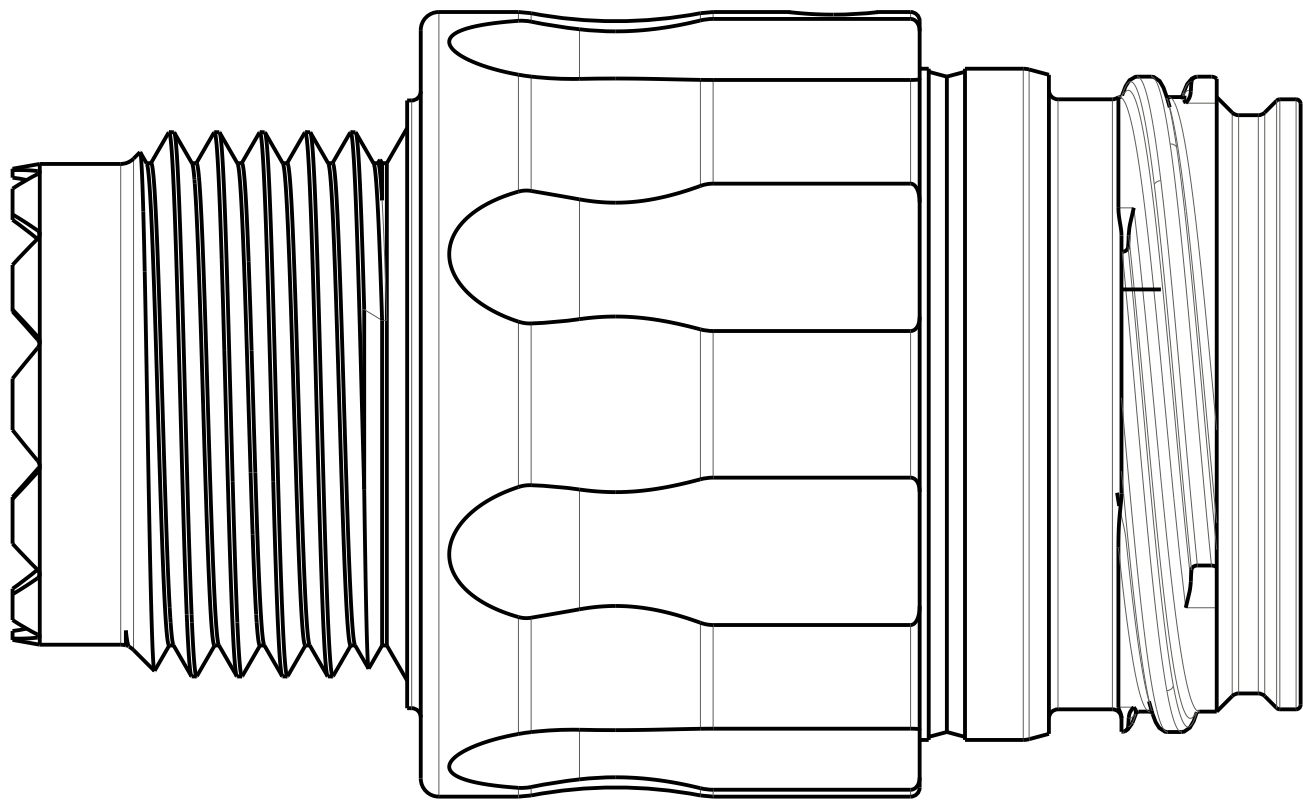
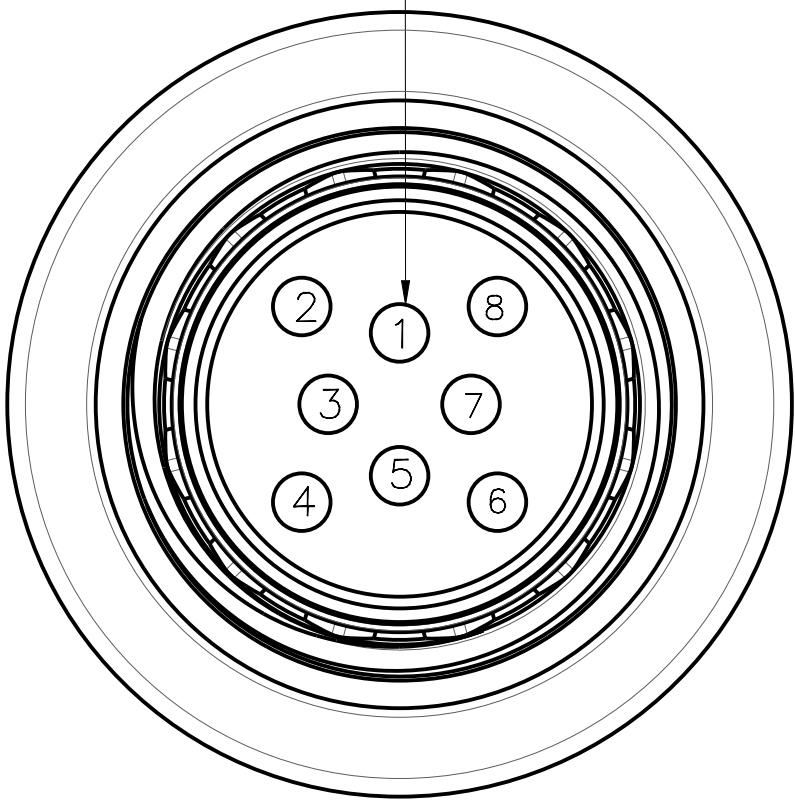


INSERT ARRANGEMENT 008A  
FIGURES SHOWN ASSEMBLED WITH KEY OPTION A

TMR-LTXX09-XXXXPCXXX

INSERT CODE	
010A	10 POSITION, STD

SIZE 22D CONTACTS, 10X 3

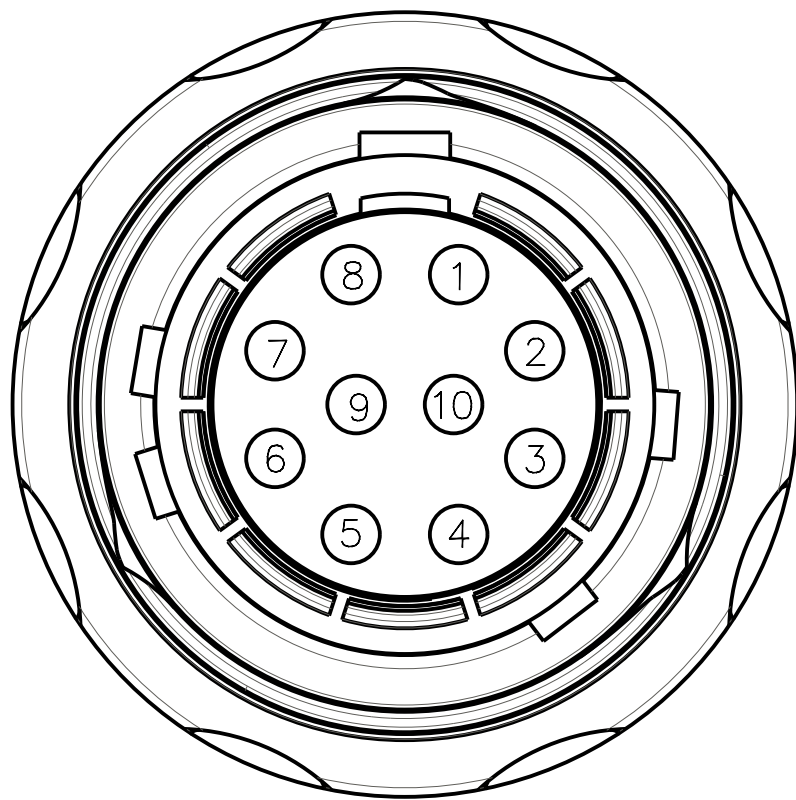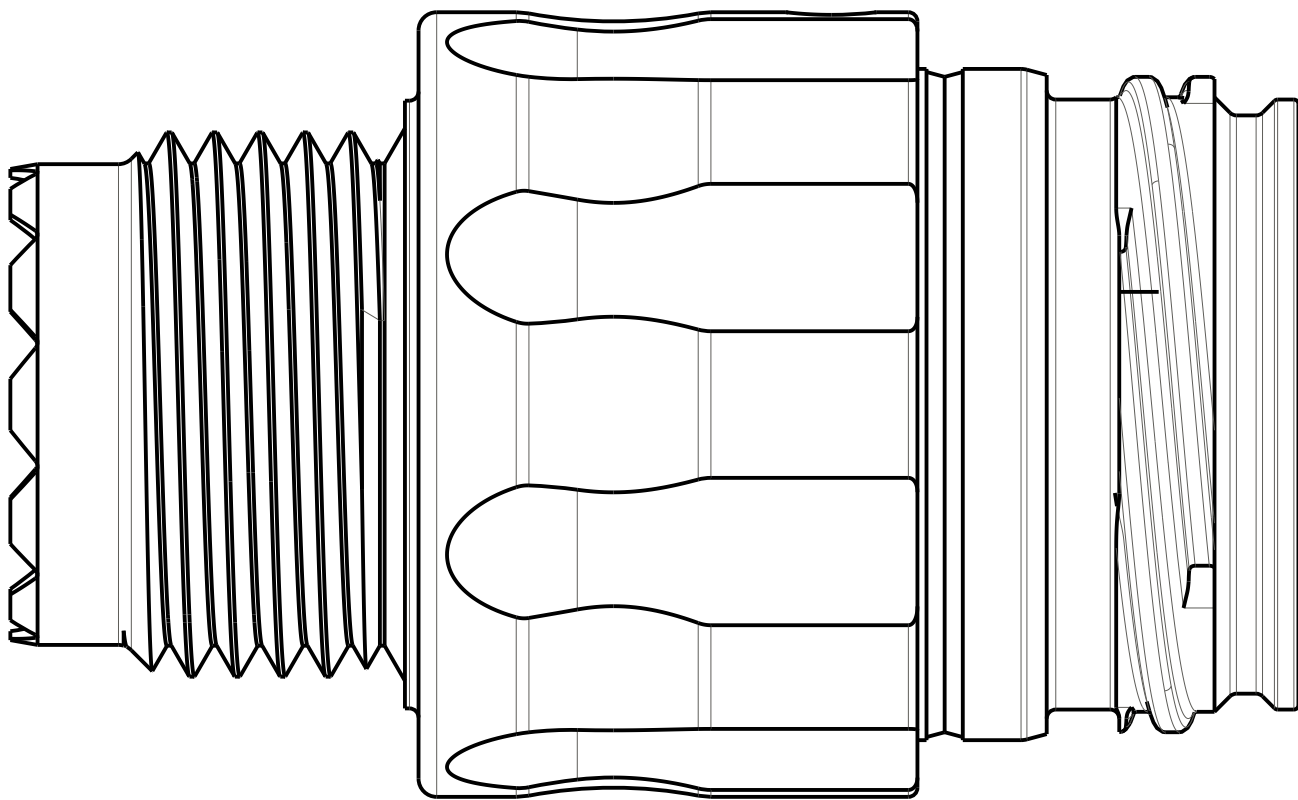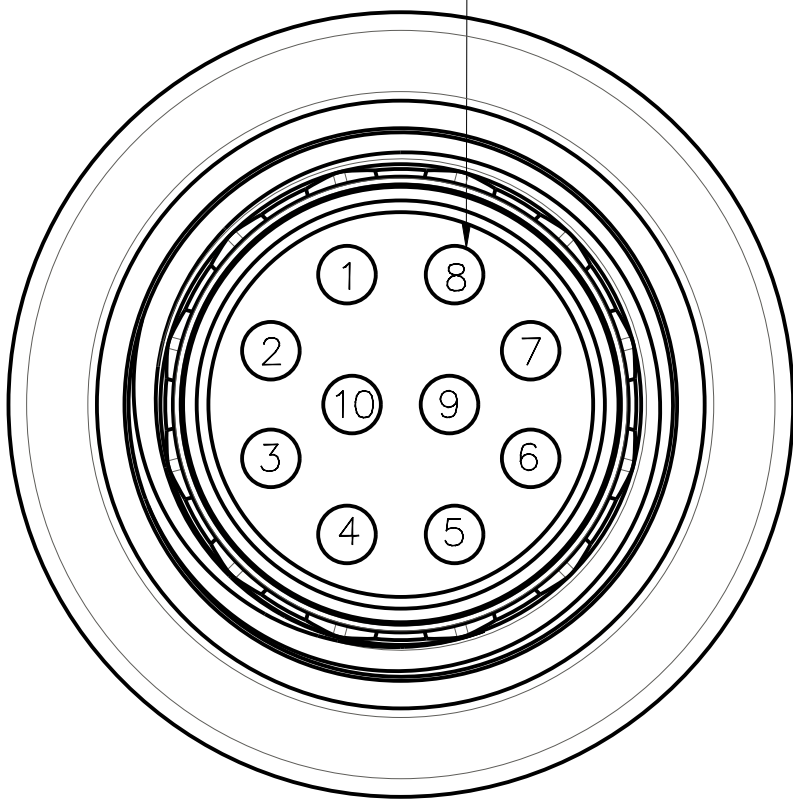

INSERT ARRANGEMENT 010A  
FIGURES SHOWN ASSEMBLED WITH KEY OPTION A