


# PSRC-2P

## 2-piece Non-Contacting Angular Position Sensor

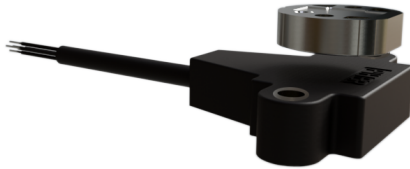

Available with  
**CANopen**

### KEY FEATURES



#### True touchless operation

Without any internal or external gears or linkages the sensor is easily assembled and calibrated and free from wear and tear over lifetime.




#### Unlimited mechanical life

The separation of electronics and magnet module allows for a virtually unlimited lifetime independent of number of revolutions.



#### Made for harsh environments

IP69K sealing, high operating temperature range as well as shock and vibration resistance allow the use in the most demanding environments.



#### Compact and low profile package

Without the need for a shaft the sensor is provided in an exceptionally compact and low profile package that fits in space constraint applications.



#### Adaptable to your requirements

Custom mechanical design, programmable transfer function and switch outputs as well as different output protocols and redundancy levels available.

### DESCRIPTION

The PSRC-2P rotary position sensor provides genuine touchless sensing for demanding industrial and vehicle environments, featuring a low-profile and robust magnetic design.

The magnet and sensor module are housed separately allowing them to be placed anywhere along the pivoting shaft. This design enables easy mounting, resulting in additional cost savings during production. Additionally, by eliminating wear and tear from radial forces, the product's reliability is significantly enhanced, offering a **virtually unlimited lifespan**.

Engineered for versatile applications, this encoder provides highly accurate angular measurements even in harsh conditions, thanks to its rugged construction and advanced engineering. The PSRC-2P is ideal for industrial automation, vehicle control systems, and medical devices, delivering optimal performance with minimal wear and an extended service life.

Key features include customizable electrical angles, multiple output options, and robust environmental resistance, including IP-rated protection against dust and moisture.

### APPLICATIONS

#### Off-Highway

- Bucket position
- Pedal / throttle position
- Hitch position
- Bus suspension / kneeling position
- Transmission systems

#### Automotive

- Gear selector
- Transmission systems

#### Home & Building Automation

- HVAC damper actuator monitoring

#### Marine

- Trim / tilt position

#### Industrial

- Robotic / hydraulic arm position
- Valve monitoring
- IoT modules
- Vacuum circuit breaker monitoring

# PSRC-2P

## 2-piece Non-Contacting Angular Position Sensor

MECHANICAL SPECIFICATIONS	
Life	Virtually unlimited
Nominal air gap	3mm, between plastic parts
Maximum air gap	5mm, higher on request
Maximum allowed radial offset	±3mm

ELECTRICAL SPECIFICATIONS	
Linearity <sup>1</sup>	±0.3% independent Typ.
Angular range	Programmable from 60 to 360 degrees
Output protocol	Analog (Ratiometric) CAN Open. Upon request: PWM, 4-20mA, 0-10V, SPI.
Output	Simple Redundant Full-redundant
Switch Output	On request
Resolution	Analog 12 bit CAN 16 bit from µC
Supply voltage <sup>2</sup>	05: 5V±10% RE: 8 - 35V
Supply current	Single version Typ 8.5 mA Redundant version Typ 17 mA CAN version Typ 47 mA
Voltage protection	±10V
Self-diagnostic features	Yes

<sup>1</sup> Ferromagnetic materials close to the sensor (i.e. shaft, mounting surface) may affect the sensor's linearity.

<sup>2</sup> Voltages up to 25V possible on request.

ENVIRONMENTAL SPECIFICATIONS	
Operating temperature <sup>1</sup>	-40°C to +85°C
Shock	50g
Vibration	5Hz to 2000 Hz; 20g; A <sub>max</sub> 0,75 mm
Sealing	IP67, IP69K






<sup>1</sup> Other specifications available

EMI/EMC Testing		
Characteristic	Standard	Level
Radiated emissions	CISPR 16-2-3 class B	30 MHz to 230 MHz, max. 30dB (µV/m) 230 MHz to 1000 MHz, max. 37dB (µV/m)
ESD on housing and connections	EN 61000-4-2:2009	±4 kV contact ±8 kV air
Burst (on supply lines / signal lines)	EN 61000-4-4:2012	±1kV
Surge (on supply lines / signal lines)	EN 61000-4-5:2014	±1kV
Immunity HF radiated (80 ... 2000 MHz)	EN 61000-4-3:2006	10 V/m
Immunity HF conducted (0,15 ... 80MHz)	EN 61000-4-6:2014	10 Vemk
Immunity magnetic field (50 Hz)	EN 61000-4-8:2010	30 A/m

# PSRC-2P

## 2-piece Non-Contacting Angular Position Sensor

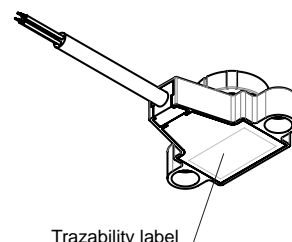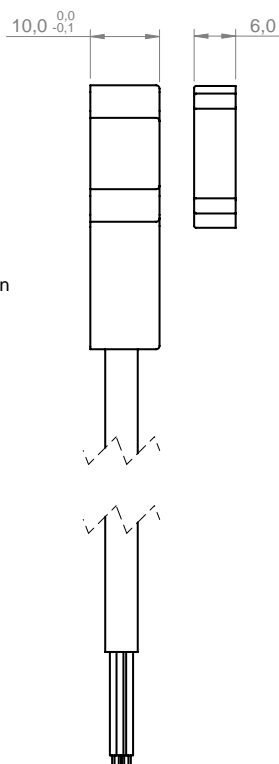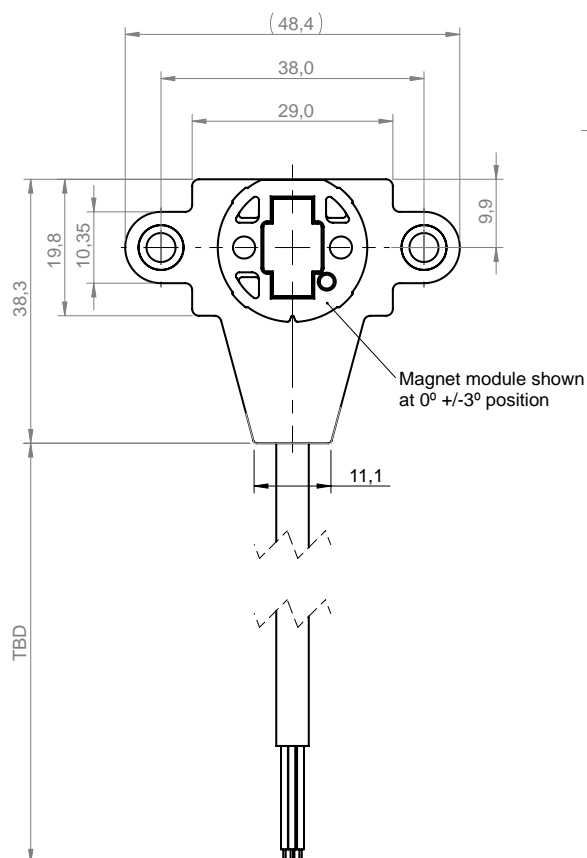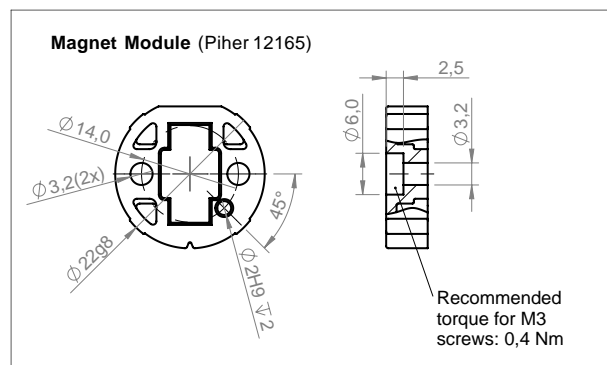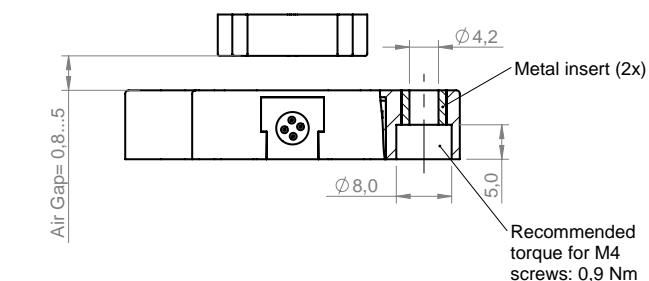


### DIMENSIONS (MM)



Line 1 YWW#### with:  
Y: Year letter (O=2024, P=2025...)  
WW: Week (From 01 to 52)  
Line 2: Individual Sensor  
Traceability number

Material: Silver Polyester

Magnet shown on 0° position. Drawings may not be to scale. Number and function of wires pictured in this datasheet may vary according to output configuration.

WIRING				
Output funtion	3-wire cable [AWG22] Length 1m		4-wire cable [AWG22] Length 1m	
Analog Simple S / I	✓			
Analog Full Redundant				✓
CAN simple			✓	
CAN redundant			✓	
				

# PSRC-2P

## 2-piece Non-Contacting Angular Position Sensor

### HOW TO ORDER (Example: PSRC2P-MC6-A-360S-05)

PSCR2P	-	MC6	-	—	-	—	-	—
Series	Actuator	Output protocol <sup>1</sup>	Electric rotational angle <sup>2</sup>	Output function	Voltage supply <sup>3</sup>			
	MC6 = standard magnet	A = analogic O = CAN OPEN	060 090 120 180 270 360	S = standard (CW) I = inverted (CCW) R = redundant F = full redundant	05 = 5V ±10% RE = 8V-35V			


1 The analog output is ratiometric, proportional:  
- for supply voltage "5V" to input voltage;  
- for supply voltage "RE" to 5V.

2 Models with ERA < 60° available on request



3 Voltages up to 25V possible on request.

### OUTPUT FUNCTIONS

#### ANALOG

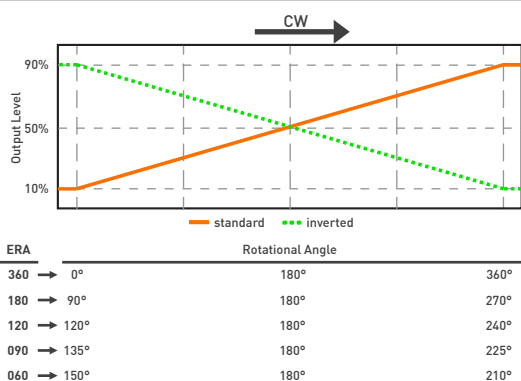

#### CAN OPEN

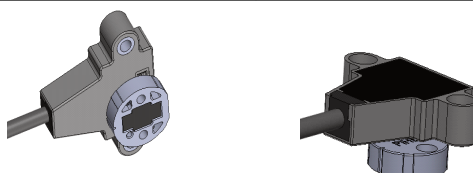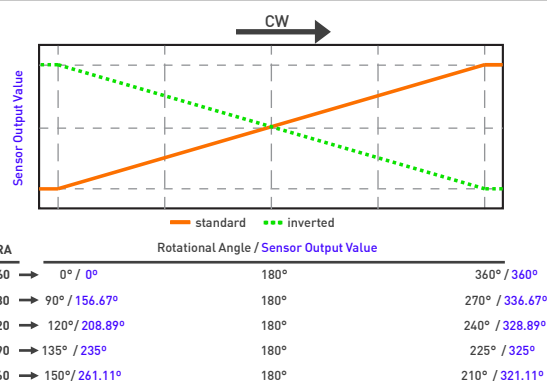

Magnet shown on 0° position.



All our products are customizable to meet your specific requirements.  
Please always use the latest updated datasheets and 3D models published on our website.

#### Disclaimer:

The product information in this catalog is for reference purposes. Please consult for the most up to date and accurate design information.  
Piher Sensors & Controls S.A., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Piher"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product described herein.  
Piher disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify Piher's terms and conditions of sale, including but not limited to the warranty expressed therein, which apply to these products.  
No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Piher.  
The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Piher products not expressly indicated for such applications do so entirely at their own risk and agree to fully indemnify Piher for any damages arising or resulting from such use or sale. Please contact authorized Piher personnel to obtain written terms and conditions regarding products designed for such applications.  
Product names and markings noted herein may be trademarks of their respective owners. Information contained in and/or attached to this catalog may be subject to export control regulations of the European Community, USA, or other countries. Each recipient of this document is responsible to ensure that usage and/or transfer of any information contained in this document complies with all relevant export control regulations. If you are in any doubt about the export control restrictions that apply to this information, please contact the sender immediately. For any Piher Exports, Note: All products / technologies are EAR99 Classified commodities. Exports from the United States are in accordance with the Export Administration Regulations. Diversion contrary to US law is prohibited.

### CONTACT

**Piher Sensing Systems**  
Polígono Industrial Municipal  
Vial T2, Nº22  
31500 Tudela  
Spain

[sales@piher.net](mailto:sales@piher.net)

+34 948 820 450



#### NEED QUICK HELP?

Our AI Virtual Assistant is available  
24/7 to provide instant support—  
visit [chat.piher.info](https://chat.piher.info) to chat now!

Rev-170724 © Piher Sensors & Controls S.A.