


- NOTES:
- 1) KITTING REQUIREMENT:
CUT 2 PIECES OF CABLE @ 3.25 FEET EACH.
 - 2) LABEL REQUIREMENT:
LABELS ARE DAT-38-292 OR TRANSVINYL (DAT-63-292-2.5). LOCATE APPROXIMATELY AS SHOWN.
 - 3) TERMINUS ENDFACE REQUIREMENTS SHALL MEET GR-326 AND IEC 61300-3-35.
 - 4) MAX IL @ 1310 nm SHALL BE 0.5 dB PER CONNECTION.

REVISION HISTORY – ALL SHEETS ARE AT THE SAME REVISION			
REV	DESCRIPTION	DATE	APPROVED
-	INITIAL RELEASE	2017/11/13	

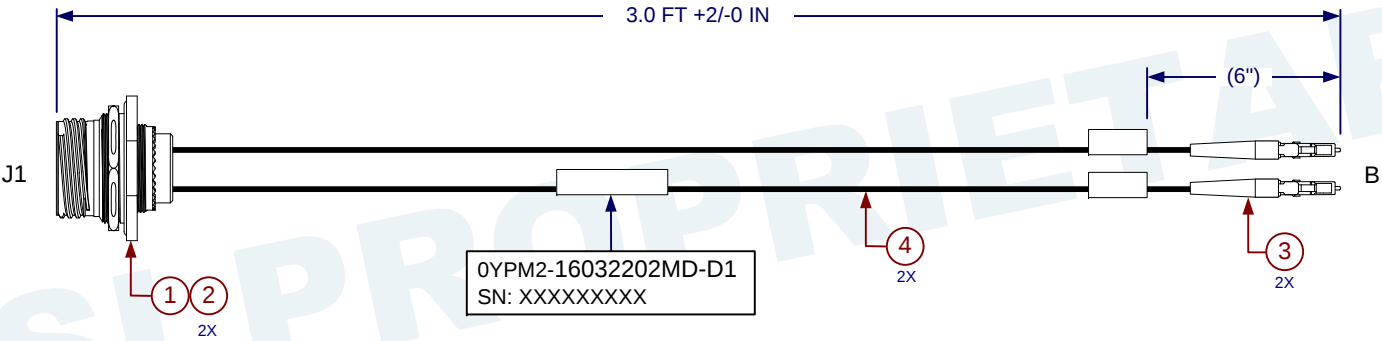

5	AFSI-PRE T BOX	BOX, SMALL FIBER CABLE 10X10X2 W/AFSI GRAPHICS	1
4	TH0355-WH-010H3	FG 900um BUFFER, SM	6.5 FEET (SEE NOTE 1)
3	BLCC1588709-1	CONNECTOR KIT, LC, SIMPLEX, SM JUMPER, 1.6-2.0MM	2
2	M801-SU2N	ARINC 801 TERMINI, UPC, NON-PULL PROOF	2
1	FS801-11J02ACN	JAM NUT RECEPTACLE ASSEMBLY, ARINC, SH 11	1
ITEM NO.	PART NO.	DESCRIPTION	QTY/ LENGTH

J1	PINOUT DIAGRAM	B LABEL INFORMATION
A		A
B		B

		MATERIAL:	DFTR/Designer: C. Hoang	2017/10/20					
			Check By: B. Waite	2017/10/24					
			Manufacturing: B. Waite	2017/10/24					
			Market Manager/PLM: Q. Abraham	2017/10/25					
		DRILLED HOLE DIAMETER TOLERANCE	Configuration Management: L. Brown	2017/11/13	TITLE: 2 CHANNEL ARINC JAM NUT RECEPTACLE TO LC ASSEMBLY, SM				
		Ø.000 TO Ø.125 ^{+.004} / _{-.005} Ø.251 TO Ø.500 ^{+.006} / _{-.005} Ø.126 TO Ø.250 ^{+.005} / _{-.005} Ø.501 TO Ø.750 ^{+.008} / _{-.005}							
		DO NOT SCALE DRAWING UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOL ON ANGLES 43° 1 PL ±.1 2 PL ±.02 3 PL ±.010							
NEXT ASSY	USED ON	INTERPRET DIM AND TOL PER ASME 14.5M-1994							
APPLICATION			This Document contains proprietary information and such information is prohibited from disclosure to others, publication or duplication in whole or in part without written permission from Amphenol Fiber Systems International. Copyright © 2017 Amphenol Fiber Systems International. Non published work. All rights reserved.			SIZE A	CAGE CODE 0YPM2	DWG NO 16032202MD-D1	REV -
						SCALE: NONE			SHEET 1 OF 1