

This document is the property of Amphenol Corporation and is delivered on the express condition that it is not to be disclosed, reproduced or used, in whole or in part, for manufacture or sale by anyone other than Amphenol Corporation without its prior consent, and that no right is granted to disclose or to use any information in this document.

The marking on this product doesn't contain environmental hazardous material and must follow one or more specifications per Material Specification SS-00259 for Sony GP compliant or per directive 2011/65/EC for RoHS compliant or per IEC 61249-2-21 for Halogen Free compliant.

FOR REFERENCE ONLY








REVISIONS				
SYM	ECN No.	DESCRIPTION	DATE	BY
AX1		UNAPPROVED REVISION	01/22/2014	Sondra Sang

PART NUMBER:
GSB4 171 X X HR

CONTACT FINISH ——— INSULATOR AND COLOR

3: 30μ" GOLD 1: LCP, Blue

4: 2μ" GOLD+30μ" Ni-Pd 4: Nylon, Blue

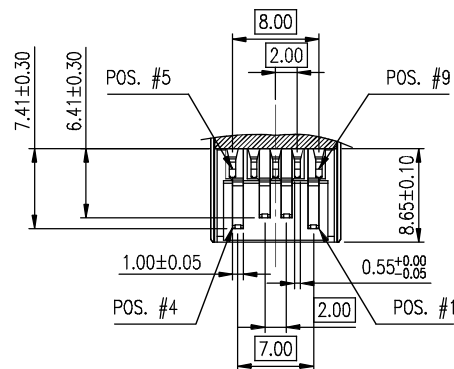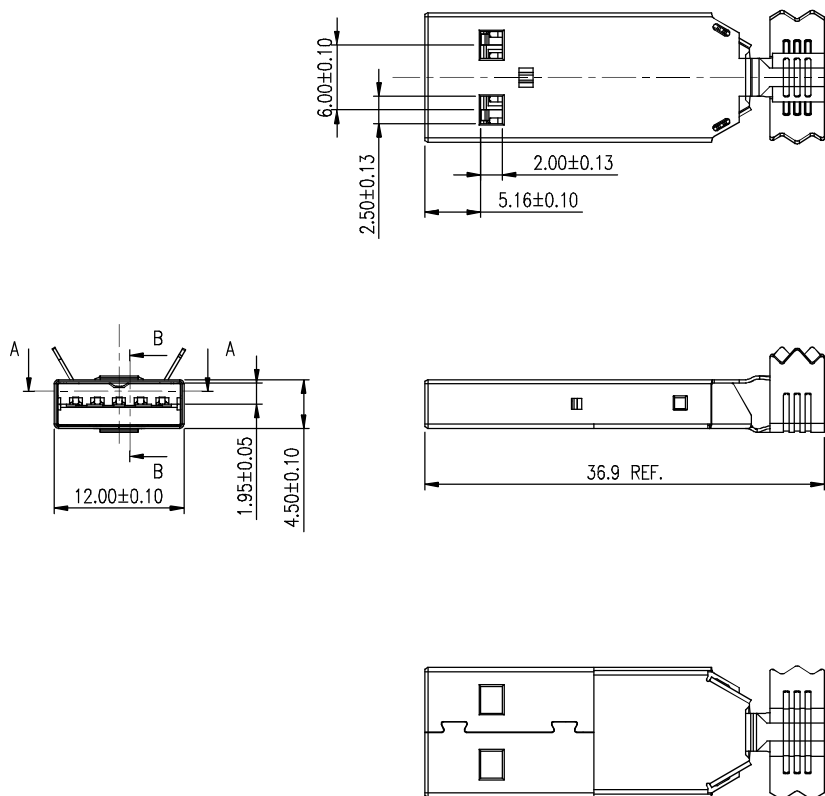

SECTION B-B

SECTION A-A

NOTES:

1. HOUSING: HIGH TEMPERATURE THERMOPLASTIC, UL 94V-0, COLOR- BLUE
2. USB TERMINAL: COPPER ALLOY, 0.25mm THICKNESS, 30μ" MIN. GOLD or 2μ" MIN. GOLD +30μ" MIN. Ni-Pd PLATED ON CONTACT AREA, 100μ" MIN. MATTE TIN ON SOLDERING TAIL, 50μ" MIN. NICKEL UNDER-PLATED OVERALL
3. METAL SHELL: STAINLESS STEEL, 0.3mm THICKNESS
4. THIS PRODUCT DOESN'T CONTAIN ENVIRONMENTAL HAZARDOUS MATERIALS PER DIRECTIVE 2011/65/EC FOR RoHS AND PER IEC 61249-2-21 FOR HALOGEN FREE COMPLIANT.



TOLERANCE	APPROVALS	DATE	TITLE			PART No.		
X.	DRAWN	Sondra Sang	USB 3.1 CONNECTOR STANDARD A, PLUG CABLE TYPE, OVERMOLD			GSB4 171 XX HR		
X.X ±0.30	CHECKED	Chenny Yeh						
X.XX ±0.20	APPROVED	Hank Hsu						
X.XXX ±0.10	DWG TYPE	CUST DWG						
ANGULAR ±1°		01/22/2014						
UNLESS OTHERWISE SPECIFIED		PROJECT CODE 1506						

UNIT	mm	SIZE	A3
SCALE	NA	SHEET	1 OF 1

DWG No.	GSB417131HR	REV.	AX1
---------	-------------	------	-----