


Oct.1.2023 Copyright 2023 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

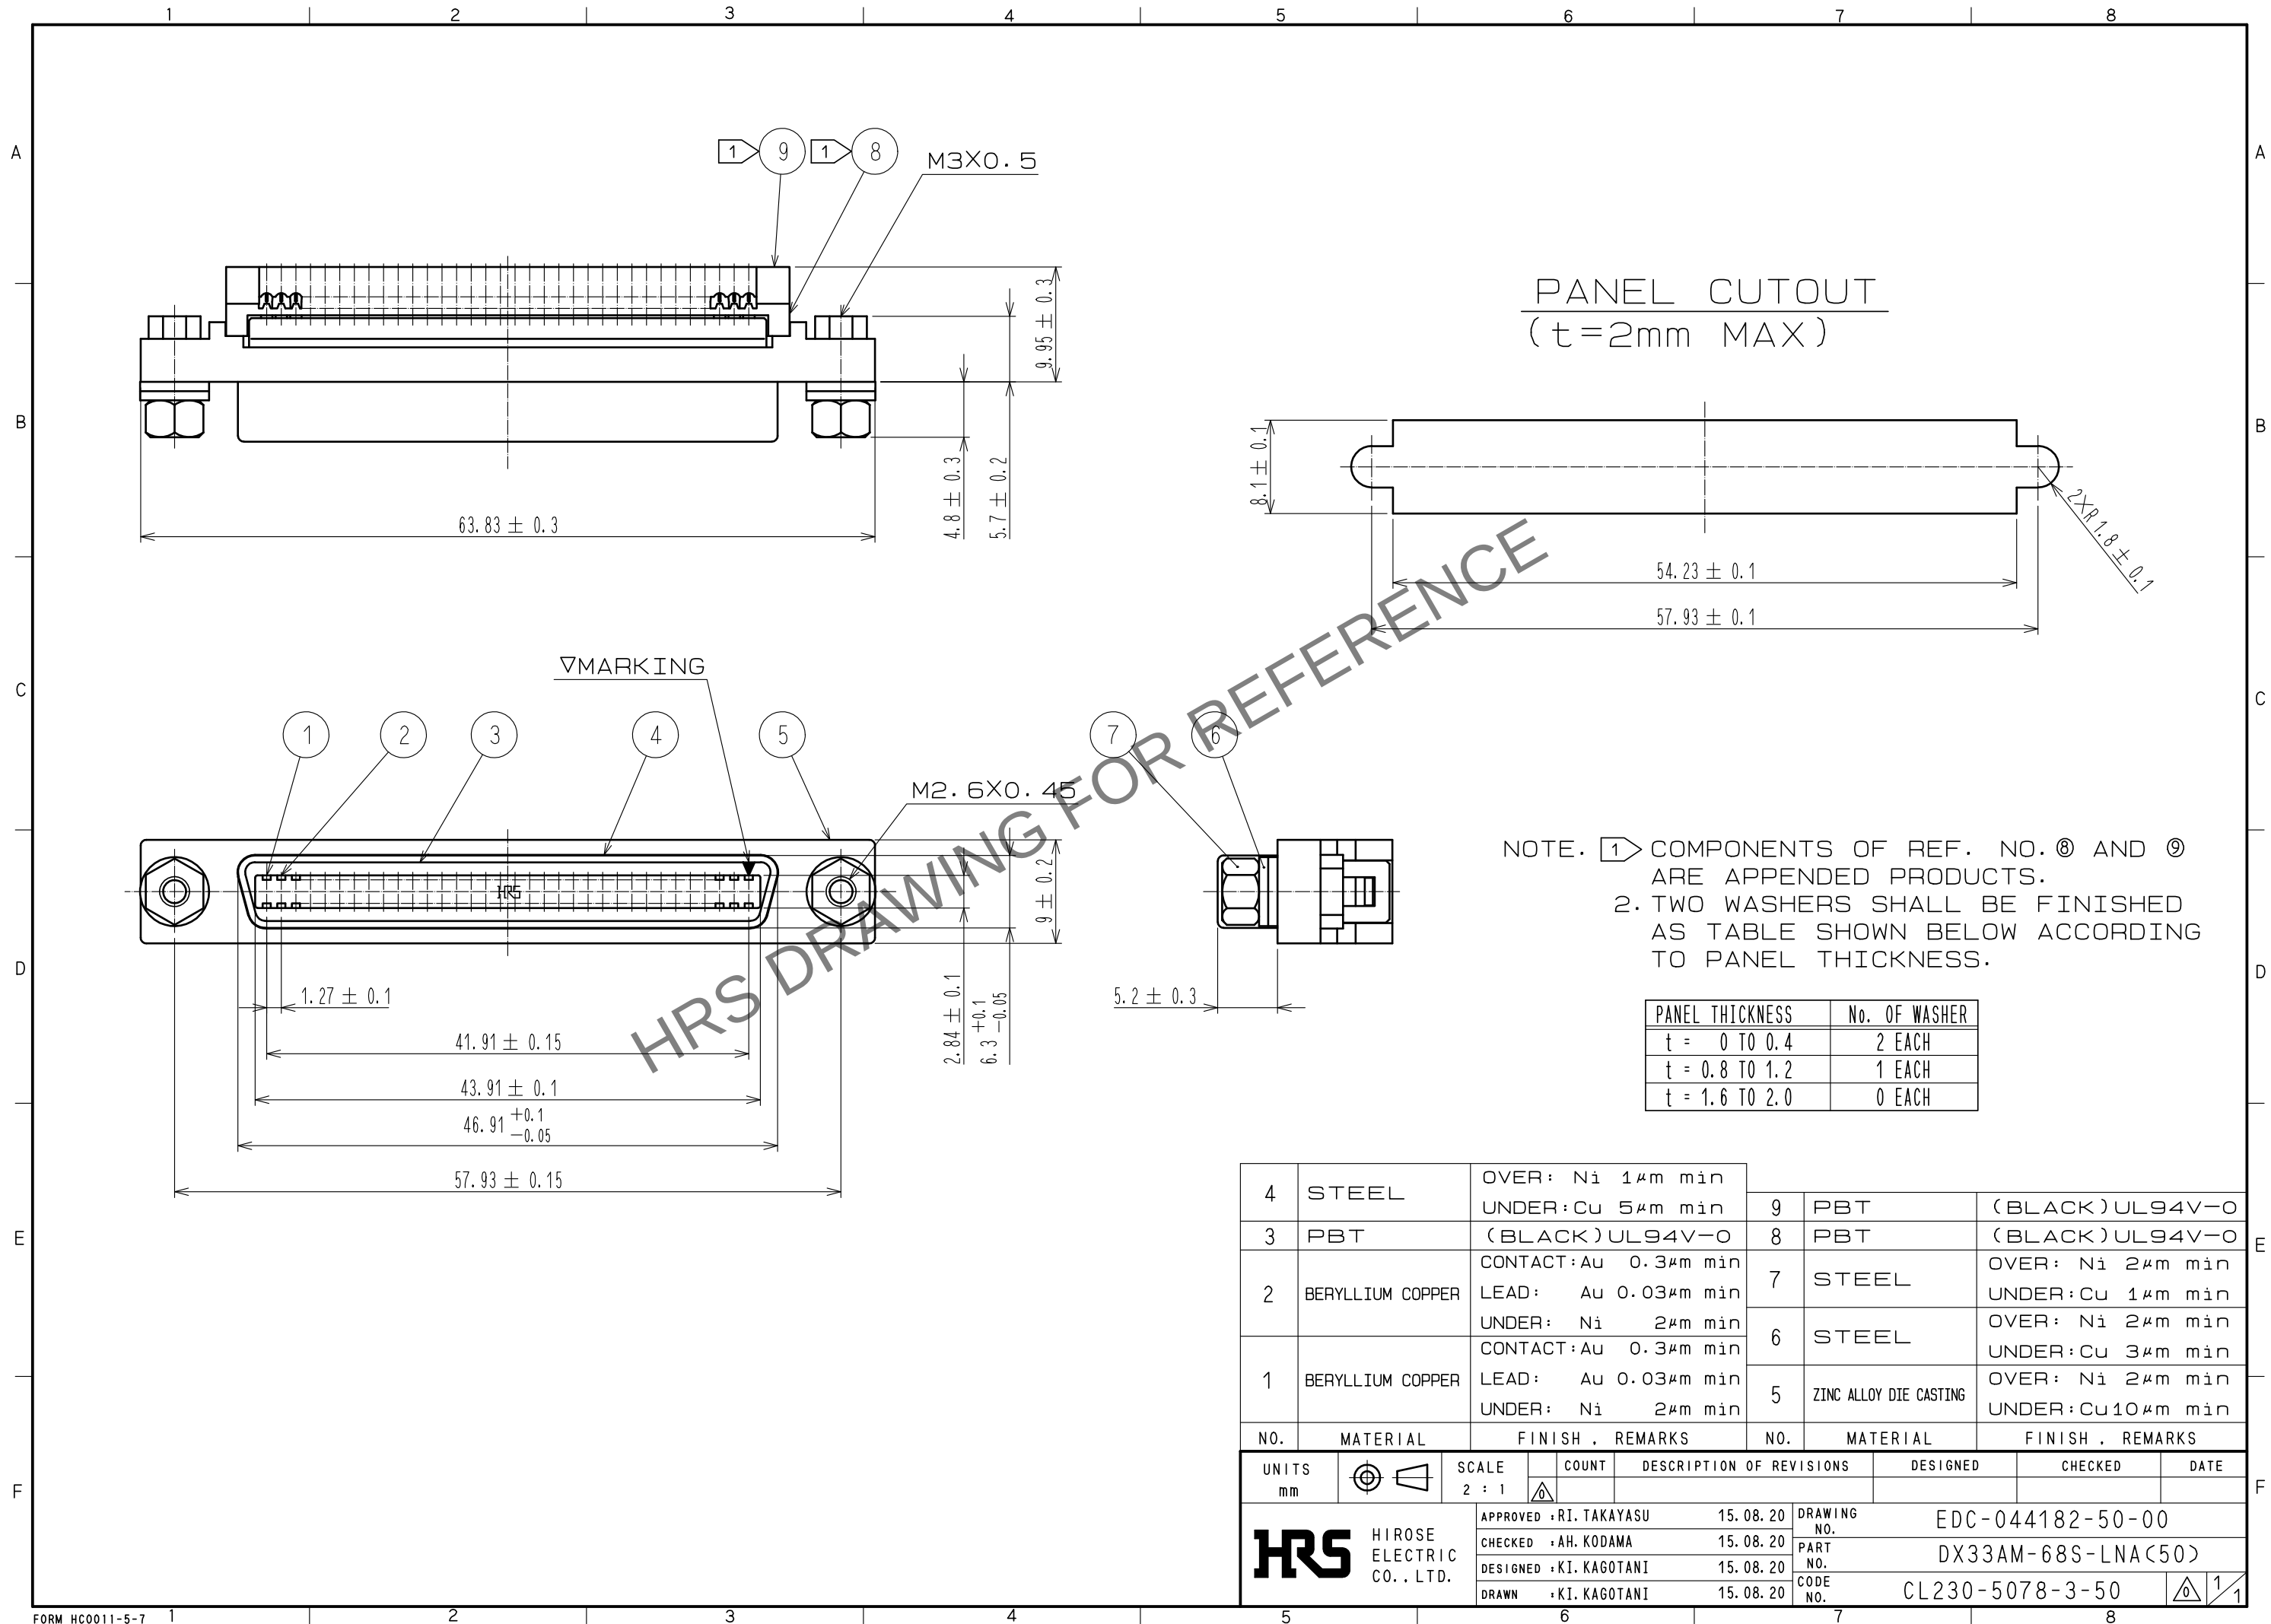

4	STEEL	OVER: Ni 1μm min UNDER: Cu 5μm min	9	PBT	(BLACK)UL94V-O
3	PBT	(BLACK)UL94V-O	8	PBT	(BLACK)UL94V-O
2	BERYLLIUM COPPER	CONTACT: Au 0.3μm min LEAD: Au 0.03μm min UNDER: Ni 2μm min	7	STEEL	OVER: Ni 2μm min UNDER: Cu 1μm min
1	BERYLLIUM COPPER	CONTACT: Au 0.3μm min LEAD: Au 0.03μm min UNDER: Ni 2μm min	6	STEEL	OVER: Ni 2μm min UNDER: Cu 3μm min
			5	ZINC ALLOY DIE CASTING	OVER: Ni 2μm min UNDER: Cu 10μm min
NO.	MATERIAL	FINISH . REMARKS	NO.	MATERIAL	FINISH . REMARKS

UNITS mm		SCALE 2 : 1	COUNT 	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
		APPROVED : RI. TAKAYASU 15.08.20		DRAWING NO. EDC-044182-50-00			
		CHECKED : AH. KODAMA 15.08.20		PART NO. DX33AM-68S-LNA(50)			
		DESIGNED : KI. KAGOTANI 15.08.20		CODE NO. CL230-5078-3-50			
		DRAWN : KI. KAGOTANI 15.08.20					