
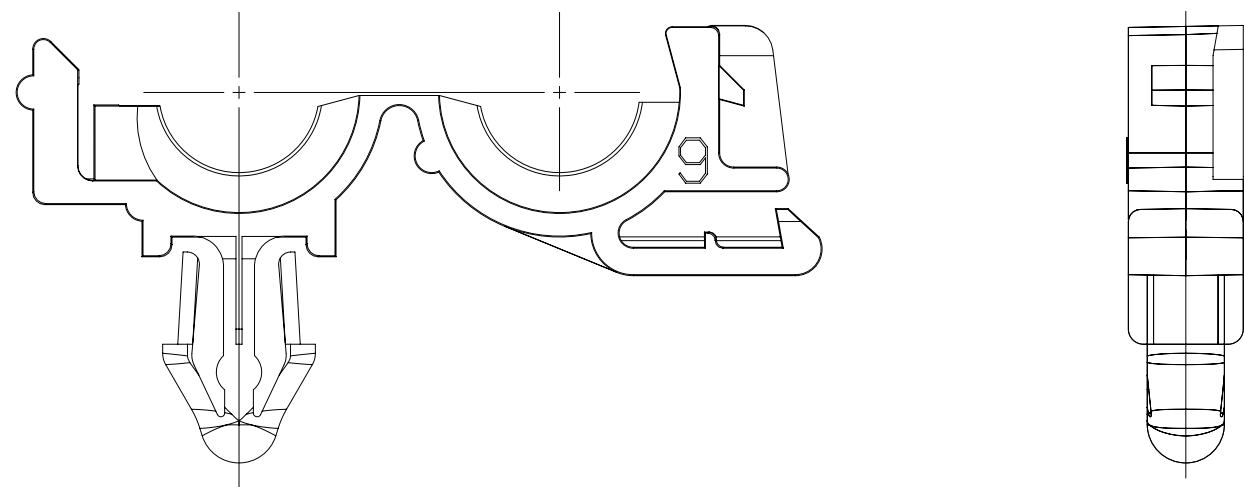
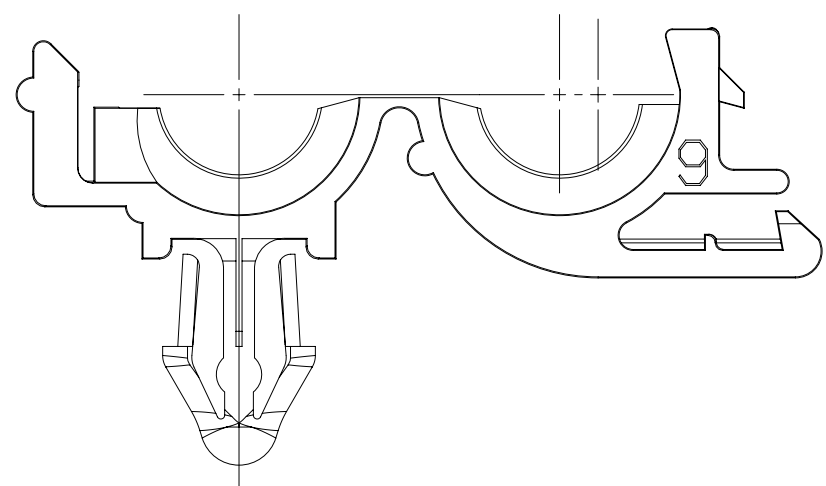
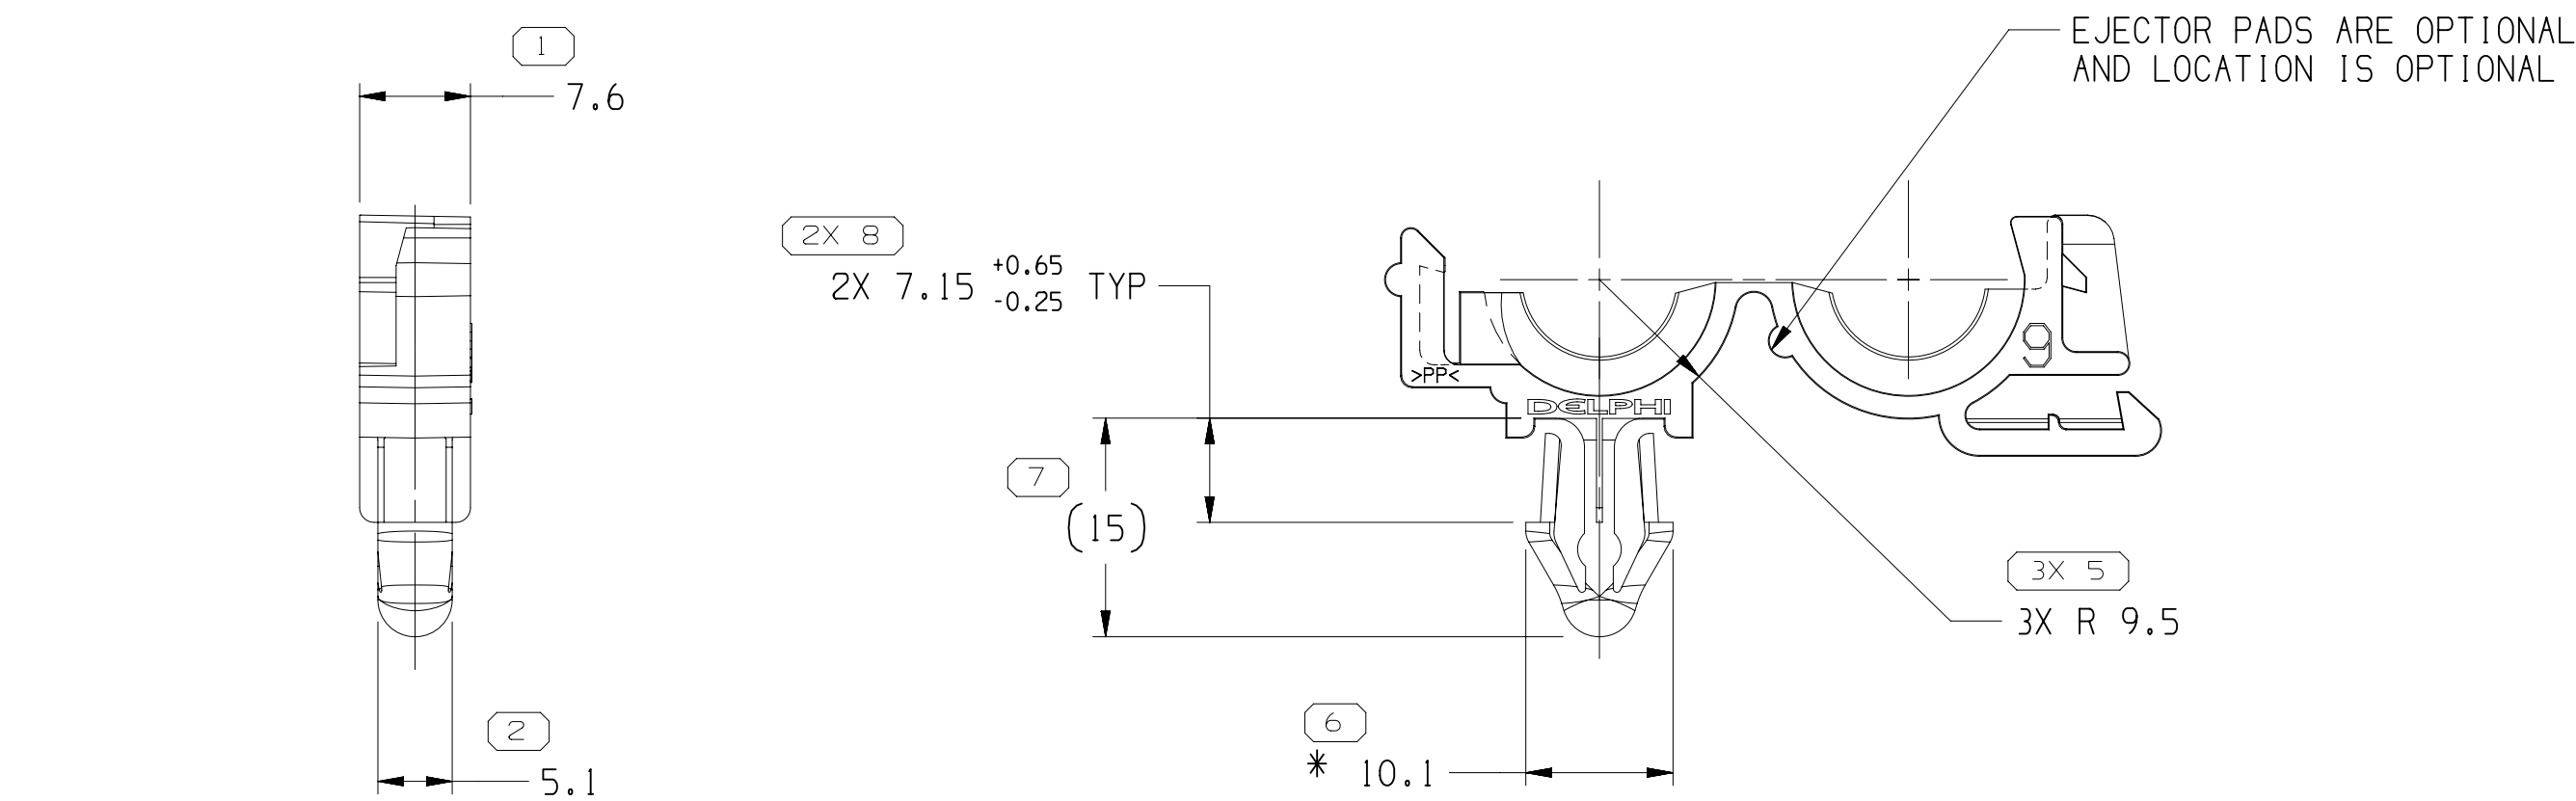


SYMBOL DEFINITION		
A DIMENSION WITHOUT AN INSPECTION REPORT SYMBOL ○ DOES NOT REQUIRE INSPECTION. IT MAY BE CONTROLLED ON THE INDIVIDUAL COMPONENT DRAWING.	TOTAL NO OF INSPECTIONS REQUIRED	11
	LAST NO. USED	8

MISSING SYMBOLS		NO MISSING SYMBOL NUMBER				
		DATE	STG	REV	N/P	CHG
		27N001	R	01	-	-
		10AP03	R	02	-	-
		14AP03	R	03	-	-
		16AP03	R	04	-	-
		18JL03	R	05	-	-
		30JL03	R	06	-	-
		04SE03	R	07	-	-
		16SE03	R	08	-	-
		19SE03	R	09	-	-
		14N018	R	10	-	-


THE DESIGN AND ENGINEERING CONTROL OF THIS COMPONENT HAS BEEN TRANSFERRED TO APTIV/HELLERMANNTYTON

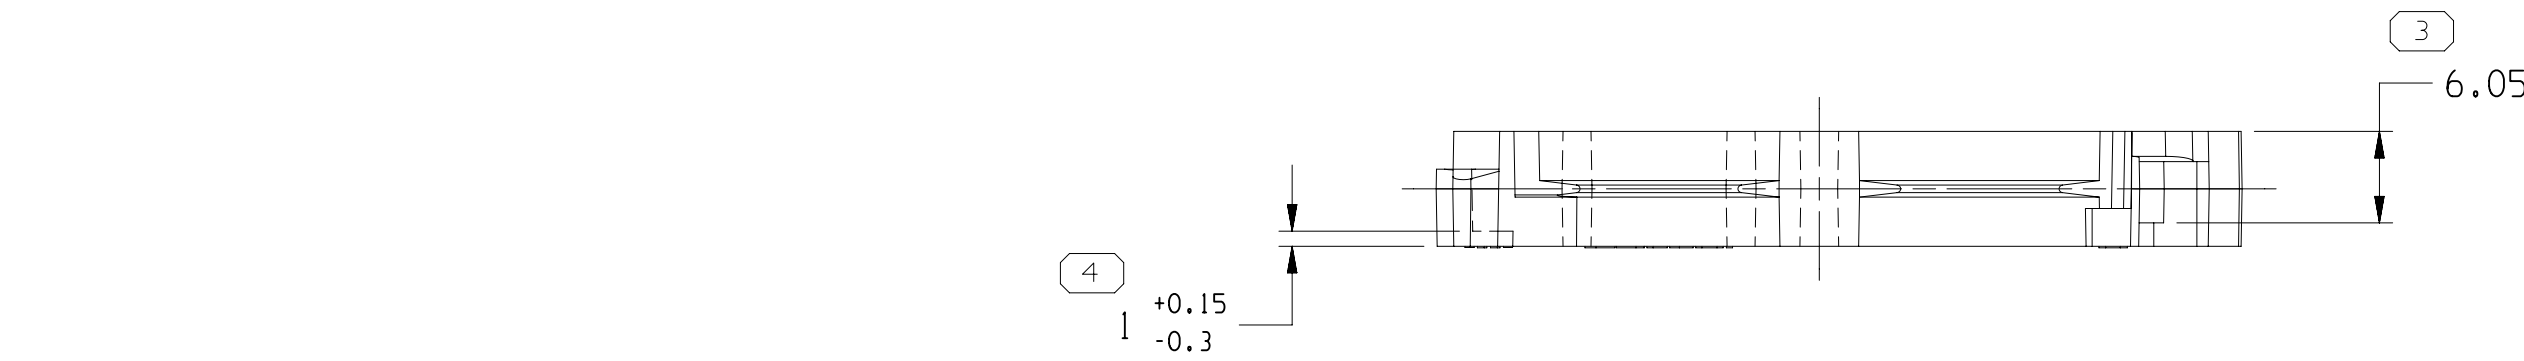

OPTIONAL CONSTRUCTION

NOTES

- UNLESS OTHERWISE SPECIFIED AND/OR INDICATED: DIMENSIONS ARE TO FACE OF VIEW SHOWN AND AUTOMATICALLY ROUNDED BY COMPUTER FOR INSPECTION (SEE MATH MODEL FOR PRECISE DIMENSIONS). FOR ALL OTHER DIMENSIONS NOT SHOWN BUT REQUIRED FOR TOOL BUILD, SEE MATH MODEL FOR PRECISE TOOL PATH DATA.
- MATERIAL RECYCLING CODE >PP< PER SAE J1344 TO APPEAR ON PART.
- RECOMMENDED HOLE SIZE FOR CLIP 6.1-6.6 DIA HOLE IN 5.1 MAX THICK STOCK.
- THIS PART TO FIT 9 ID CONVOLUTED CONDUIT.
- DIMENSION MARKED WITH "*" MAY VARY -0.65 DUE TO BOW.
- CORPORATE BRAND TO BE APPLIED TO PRODUCT DESIGN PER THE LATEST REVISION OF ESD S1085201.
- MATERIAL RECYCLING CODE PER ISO 11469. (11X10.1) CHARACTERS AS SHOWN TO BE LOCATED ON ANY EXTERIOR SURFACE.



A LINE DRAWN THROUGH A PART NUMBER INDICATES THAT PHYSICAL PARTS ARE NOT AVAILABLE FOR ORDERING.	
PART NUMBERS THAT DO NOT HAVE A LINE PRESENT INDICATE THAT PHYSICAL PARTS ARE AVAILABLE FOR ORDERING.	
CONTACT APTIV SALES TO ASSURE AVAILABILITY OF PARTS.	
DWG TYPE	
PART DRAWING	
STYLE	
VOLUME (CM³)	
SEE CHART	
DISTR CODE	
D	
UNLESS OTHERWISE SPECIFIED	
THIS DOCUMENT IS IN ACCORDANCE WITH ASME Y14.5M-1994 AS AMENDED BY THE QM GLOBAL DIMENSIONING AND TOLERANCING ADDENDUM - 1997. ALL GEOMETRIC TOLERANCES AND RELATED DATUMS APPLY RFS. RULE #1 (PERFECT FORM AT MMC) DOES NOT APPLY WHEN RELATIONSHIP BETWEEN FEATURES IS ESTABLISHED BY ORIENTATION OR LOCATION TOLERANCES. SEPARATE POSITION CALLOUTS MAY BE GAGED SEPARATELY, REGARDLESS OF DATUM REFERENCE.	
ALL DIMENSIONS ARE IN MILLIMETERS	
THIRD ANGLE PROJECTION	
DO NOT SCALE	
USE MATH DATA	
NX	

• APTIV •	
CONNECTION SYSTEMS	
WARREN, OH	
COPYRIGHT 1994 APTIV. ALL RIGHTS RESERVED.	
THIS DRAWING IS THE PROPERTY OF APTIV AND CONTAINS APTIV CONFIDENTIAL INFORMATION. THE REPRODUCTION, DISTRIBUTION AND UTILIZATION OF THIS DOCUMENT OR ITS RELATED CAD MATH DATA, AS WELL AS COMMUNICATION OF ANY CONTENT TO OTHERS, WITHOUT EXPRESS AUTHORIZATION, IS PROHIBITED.	
DR	DATE
APVD1 F. HESTON	05DE94
APVD2 F. HESTON	06DE94
APVD3 E. TRACEY	07DE94
APVD4	
APVD5	
SUBSTANCES OF CONCERN AND RECYCLED CONTENT PER APTIV 10949001	
MATERIAL SEE CHART	
DRAWING NAME	
TAXI MOUN CLIP CDT ROSEBUD	
DRAWING NUMBER	
12162699	
SIZE	SCALE
A1	2:1
FRAME NO	SHEET NO
1 OF 1	1 OF 1
STG	REV
R	10
N/P	-

12162698	02	AF	POLYPROPYLENE COMPOUND BLACK	1.854
12045468	02	AF	POLYPROPYLENE COMPOUND BROWN	1.854
PART NO	REV	N/P	MATERIAL SPECIFICATION AND COLOR	VOLUME CM³

DIMENSIONAL RANGE (MM)		CHART	
FROM	TO	1	2
> 0	> 20	> 30	> 70
> 20	> 30	> 70	> 100
> 30	> 70	> 100	> 150
> 70	> 100	> 150	> 200
> 100	> 150	> 200	> 250
> 150	> 200	> 250	> 300
> 200	> 250	> 300	> 400
TOLERANCE UNLESS OTHERWISE SPECIFIED			
±0.15	±0.2	±0.3	±0.4
±0.2	±0.3	±0.4	±0.5
±0.3	±0.4	±0.5	±0.6
±0.4	±0.5	±0.6	±0.8
±0.5	±0.6	±0.8	±1
±0.6	±0.8	±1	±1.2
ANGULAR TOLERANCE ±2°			