
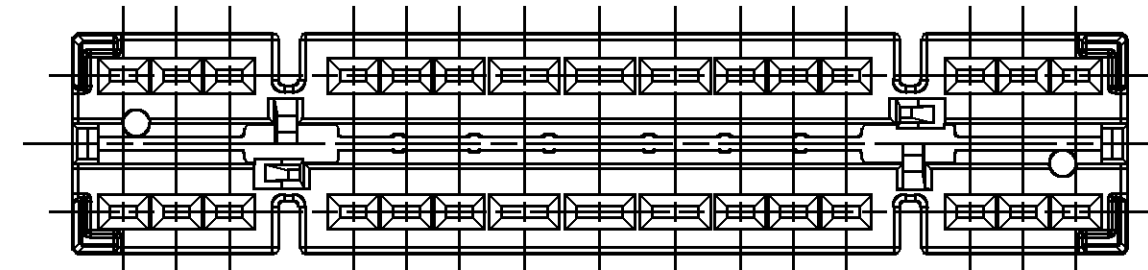
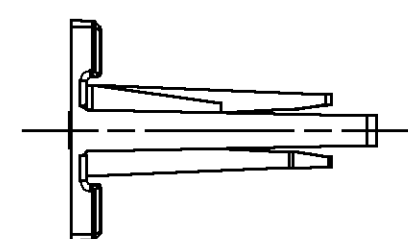


MISSING SYMBOLS
NO MISSING SYMBOL NUMBER

DWG STATUS					ZONE	REVISION HISTORY	AUTH	DR	APVD 1	APVD 2
DATE	STG	REV	N/P	CHG						
21AU01	R	001	-	-		RELEASED	214893	CJC	CJC	RAP
10JA02	R	002	-	-		REVISED LEAD IN POSTS - 2PLCS	219498	CJC	CJC	CAM
08MR02	R	002	AA	-		REVISED DIMENSIONS	222419	LMB	LMB	CAM
01OC03	R	02	AB	-		ADDED NOTE #6	246387	FKV	FKV	MP
10OC03	R	02	AC	-		UPDATED PDM ATTRIBUTES	247289	EES	EES	MLP
01JN09	R	03	-	-		REMOVED RECYCLING CODE FROM MODEL, ADDED DELPHI LOGO NOTE & MAT'L CALLOUT WAS POLYAMIDE COMPOUND	408096	JAH	JVM	DGL
22OC10	R	03	AA	-		69.8 +0.15/-0.25 WAS 69.8 ±0.15	412343	AGM	JAA	VMR

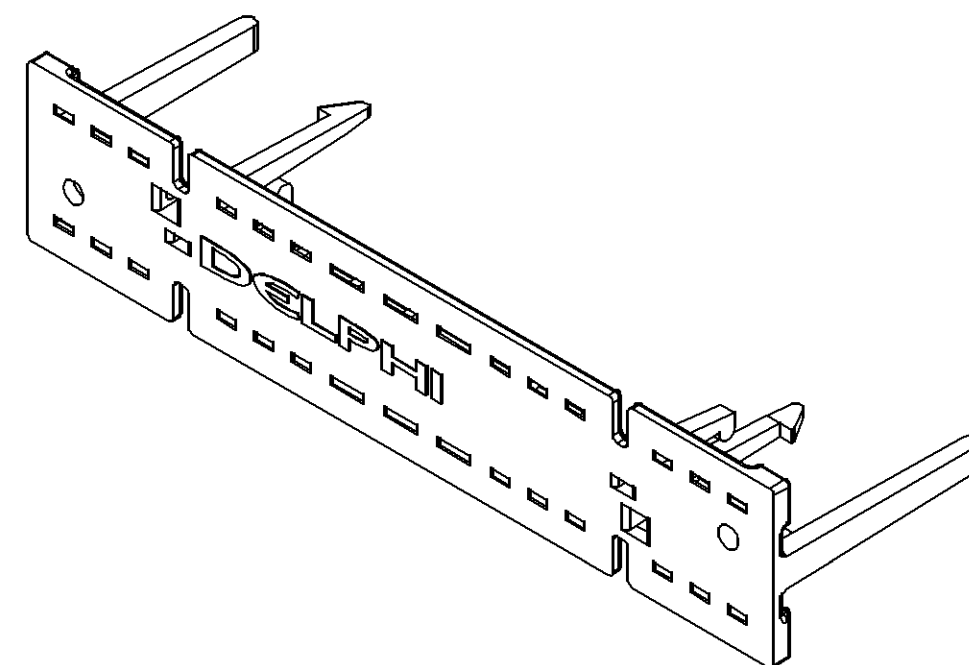


Technical drawing of a mechanical part, likely a pump or valve assembly, showing a top view with dimensions and a cross-section A-A.

Dimensions (mm):

- Overall width: $69.8^{+0.15}_{-0.25}$
- Overall height: 14.55
- Top flange width: 28 ± 0.15 (left) and 28 ± 0.15 (right)
- Top flange thickness: 5
- Top flange hole diameter: 4
- Top flange hole spacing: 16.3 (center-to-center)
- Top flange hole diameter: 3
- Top flange hole spacing: 12.8 (center-to-center)
- Top flange hole diameter: 2
- Top flange hole spacing: 9.3 (center-to-center)
- Top flange hole diameter: 6
- Top flange hole spacing: 5 (center-to-center)
- Top flange hole diameter: 7
- Top flange hole spacing: 3.5 (center-to-center)
- Top flange hole diameter: 8
- Top flange hole spacing: 7 (center-to-center)
- Top flange hole diameter: 9
- Top flange hole spacing: 5 (center-to-center)
- Top flange hole diameter: 11
- Top flange hole spacing: 9.3 (center-to-center)
- Top flange hole diameter: 12
- Top flange hole spacing: 12.8 (center-to-center)
- Top flange hole diameter: 14
- Top flange hole spacing: 16.3 (center-to-center)
- Top flange hole diameter: 15
- Top flange hole spacing: 34.9 ± 0.15 (center-to-center)
- Top flange hole diameter: 10
- Top flange hole spacing: 7 (center-to-center)
- Top flange hole diameter: 13
- Top flange hole spacing: 3.5 (center-to-center)
- Top flange hole diameter: 16
- Top flange hole spacing: 7 (center-to-center)
- Top flange hole diameter: 17
- Top flange hole spacing: 3.5 (center-to-center)
- Top flange hole diameter: 18
- Top flange hole spacing: 7.28 (center-to-center)
- Top flange hole diameter: 19
- Top flange hole spacing: 14.55 (center-to-center)
- Top flange hole diameter: 20
- Top flange hole spacing: 28 ± 0.15 (center-to-center)

Section A-A: A vertical section line A-A is shown, indicating a cross-section of the part.

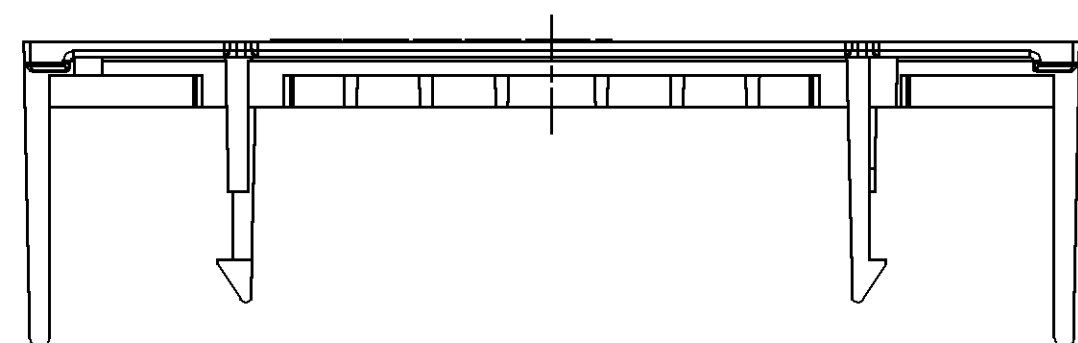

DIMENSIONAL RANGE (MM)										CHART	
FROM	> 0	> 20	> 30	> 70	> 100	> 150	> 200	> 250	> 300	> 400	
TO	20	30	70	100	150	200	250	300	400		
TOLERANCE UNLESS OTHERWISE SPECIFIED											
	±0.15	±0.2	±0.3	±0.4	±0.5	±0.6	±0.8	±1	±1		
ANGULAR TOLERANCE ±2°											

DELPHI									
DELPHI PACKARD ELECTRICAL/ELECTRONIC ARCHITECTURE WARREN, OH									
								DATE	
DR		CRAIG J. COGGINS						21AU01	
APVD1		CRAIG J. COGGINS						21AU01	
APVD2		CRAIG J. COGGINS						010C01	
APVD3		RON PUHL						020C01	
APVD4									
APVD5									
SUBSTANCES OF CONCERN AND RECYCLED CONTENT PER DELPHI 10949001									
MATERIAL POLYPROPYLENE COMPOUND BLUE									
DRAWING NAME									
MOUN STABILIZER									
DRAWING NUMBER									
15418984									
SIZE	SCALE	FRAME NO	SHEET NO	ST	REV	N/P			
A1	2:1	1 OF 1	1 OF 1		R	03	AA		