
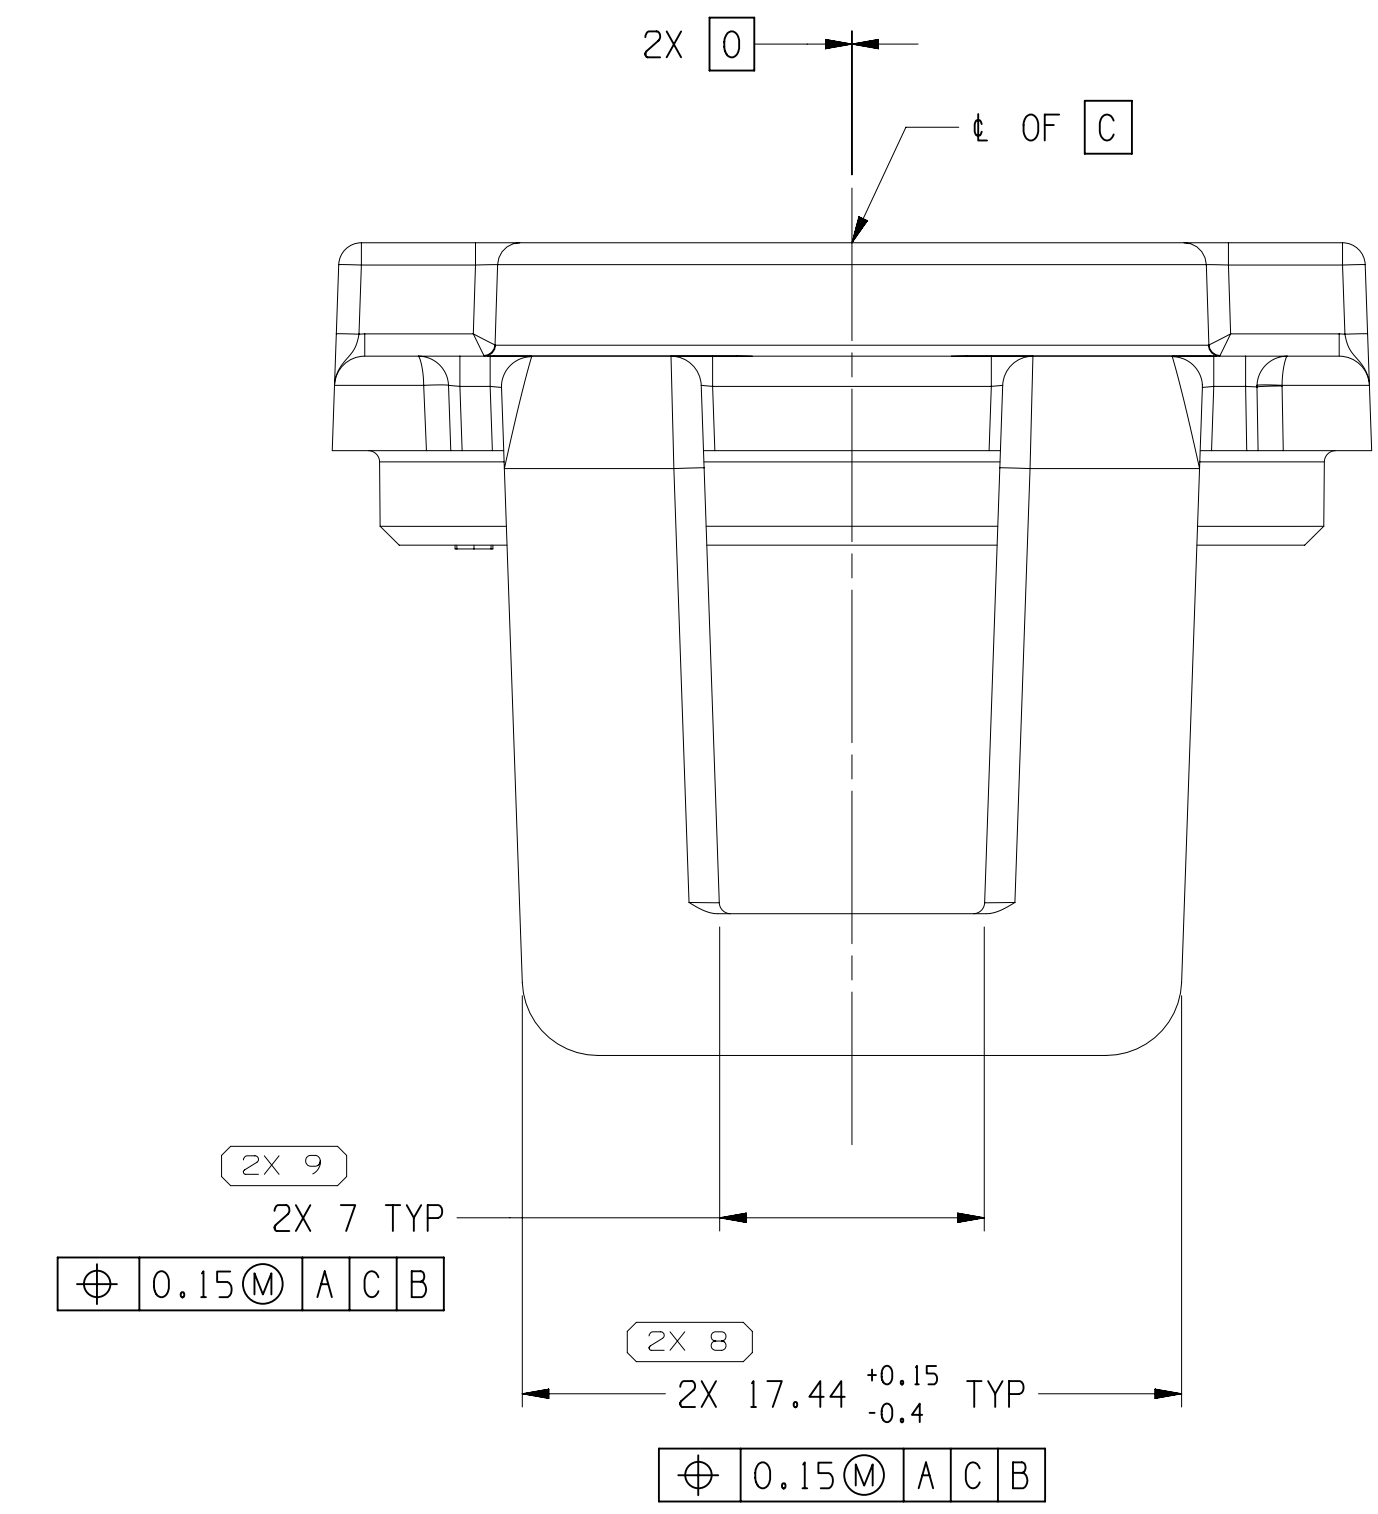
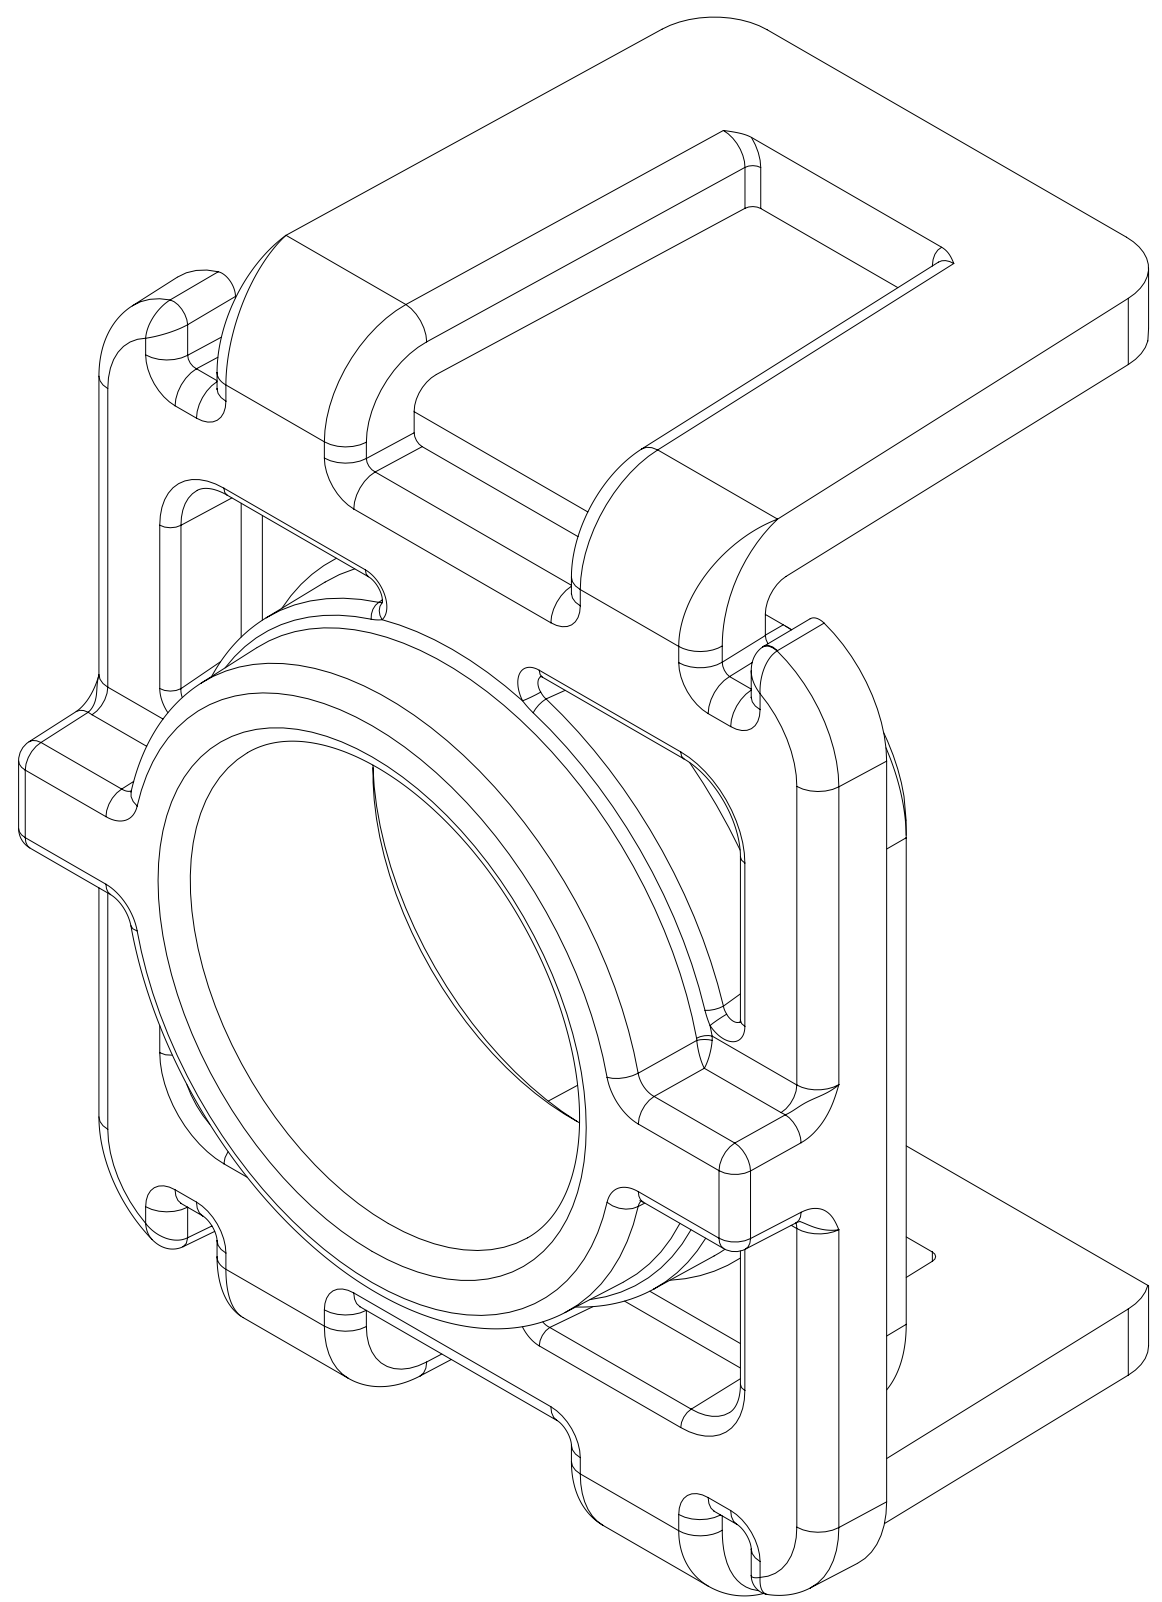
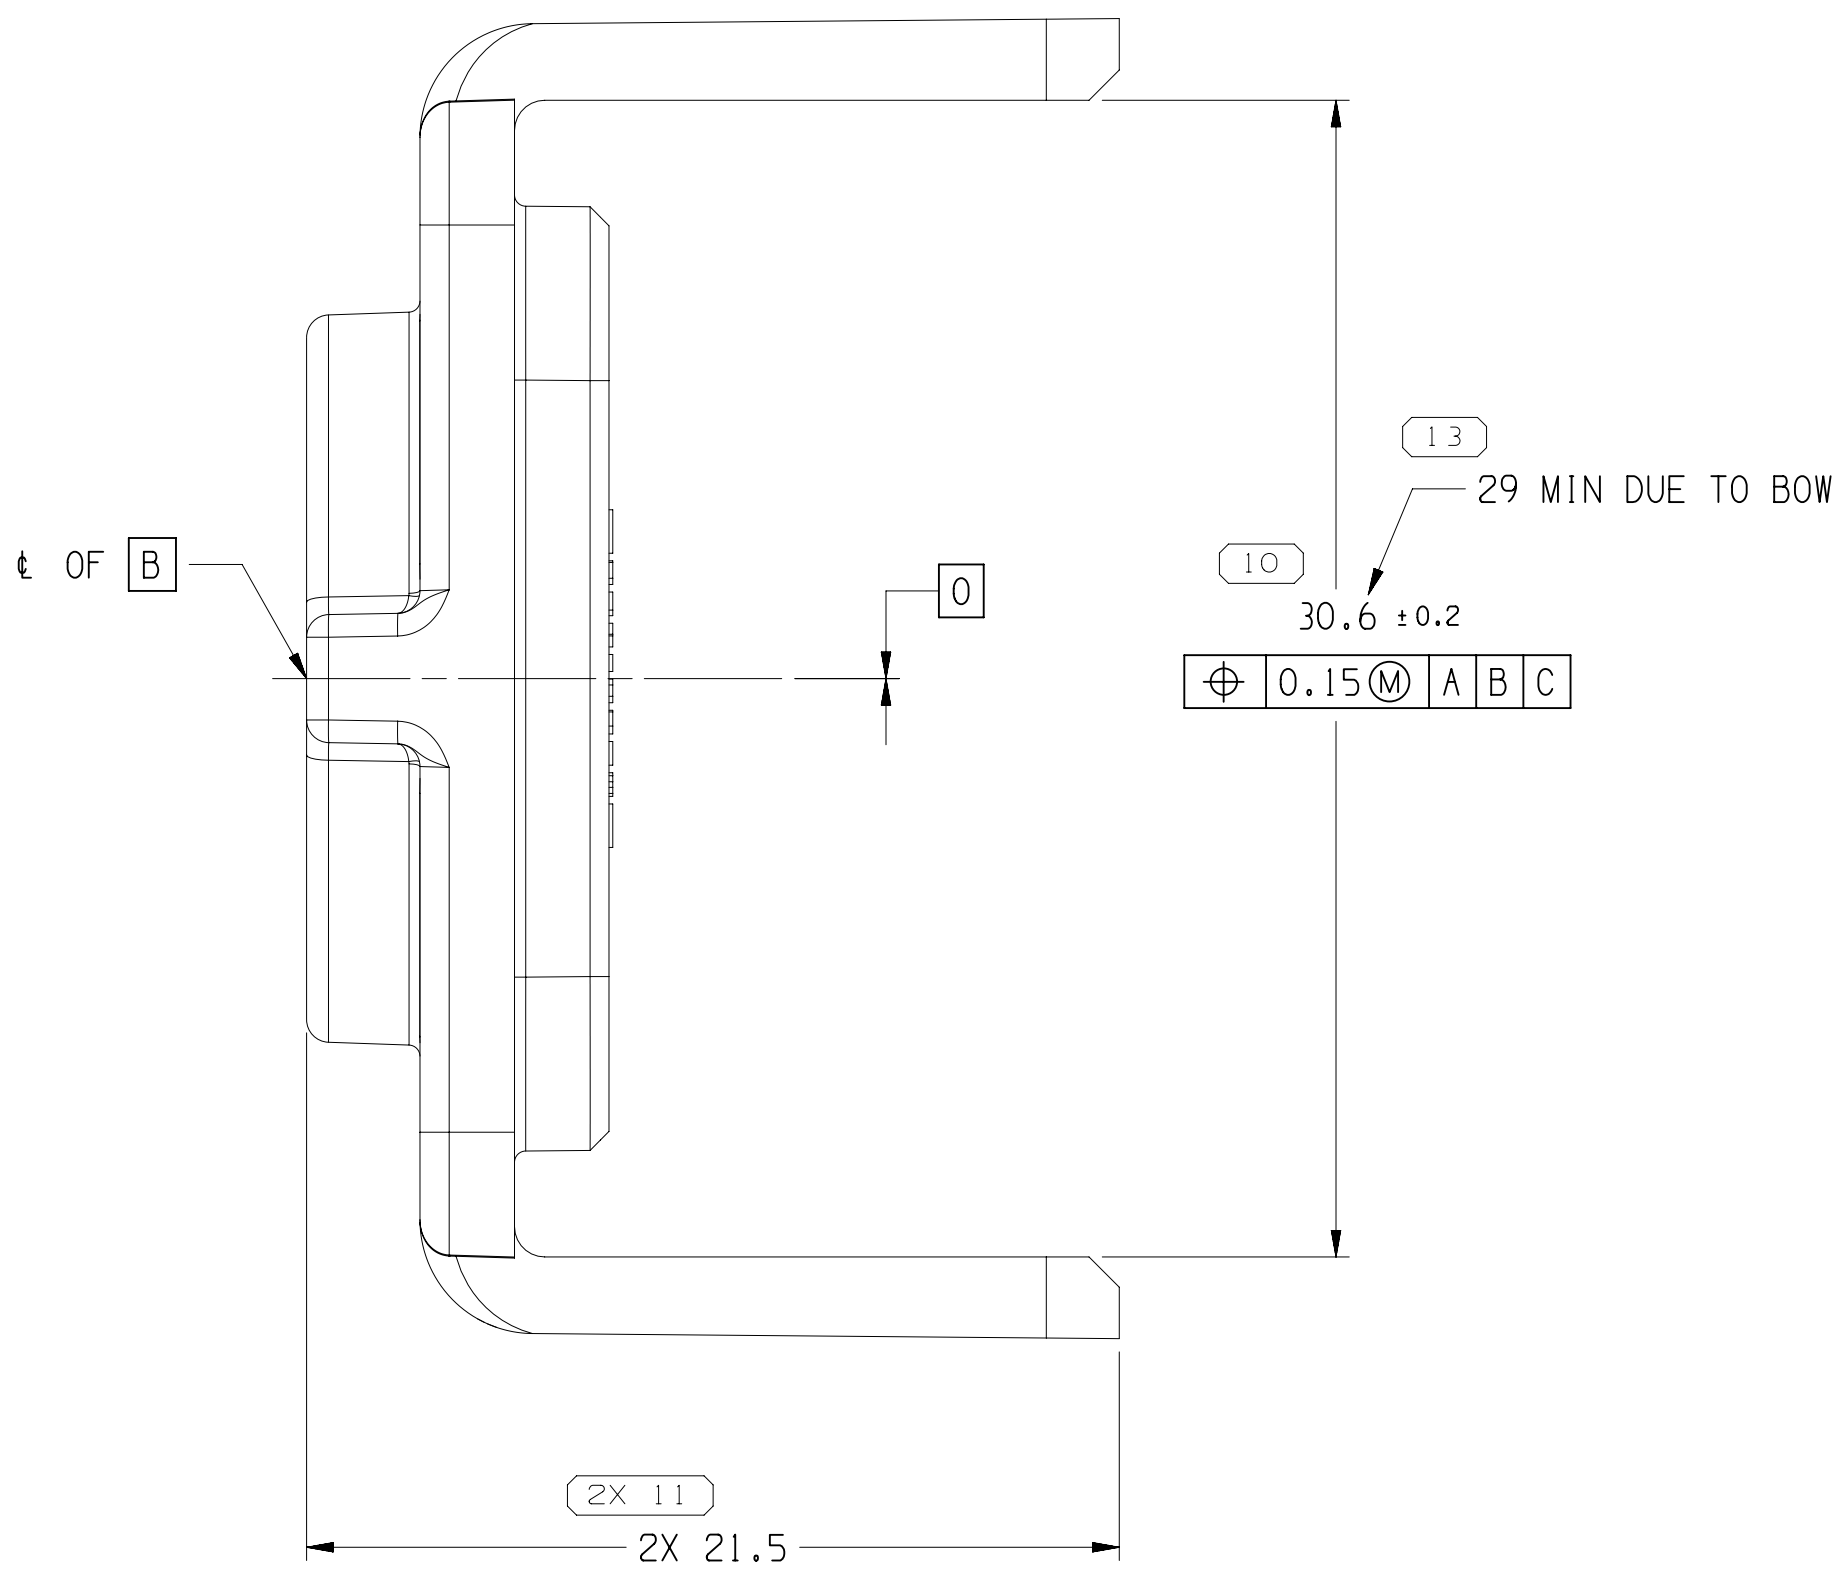
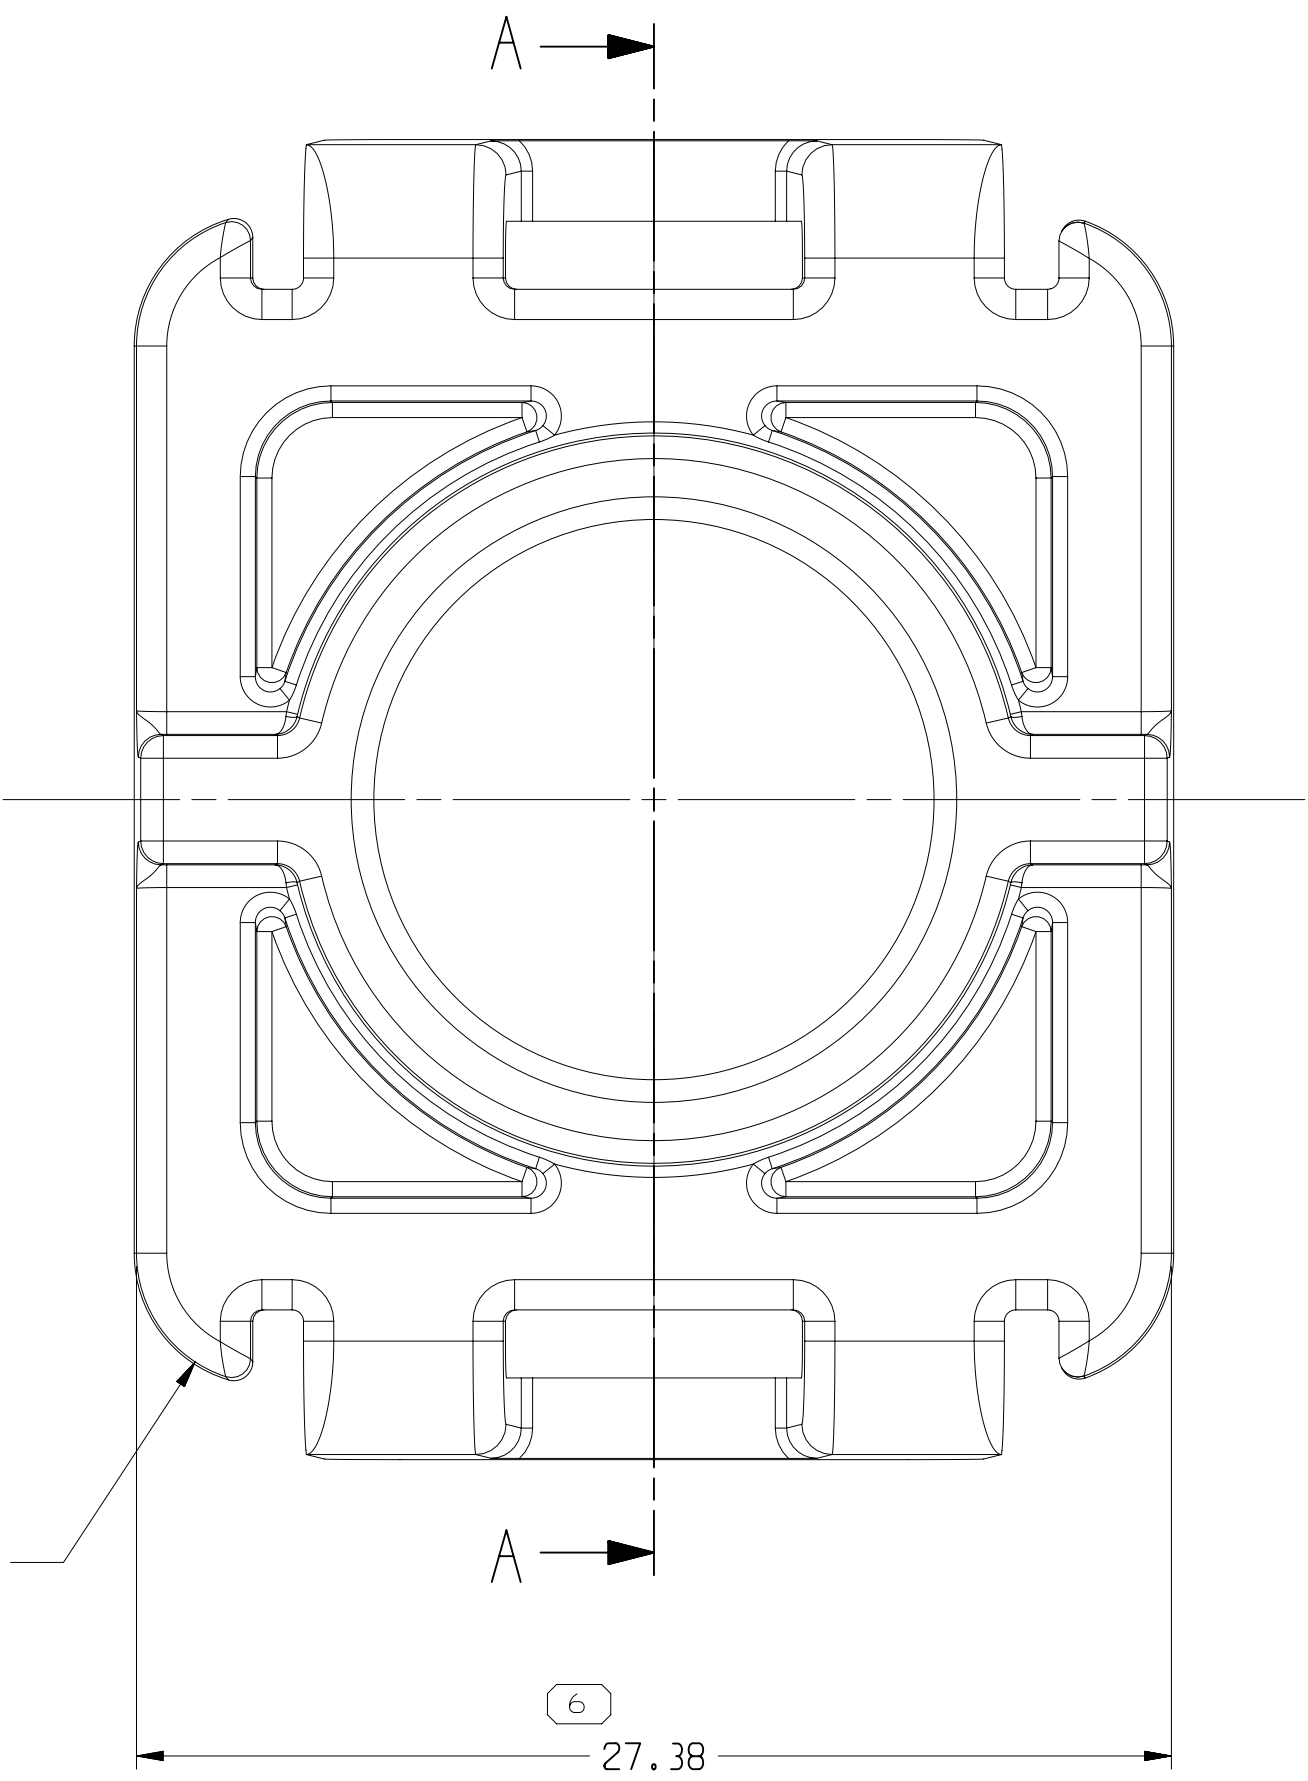
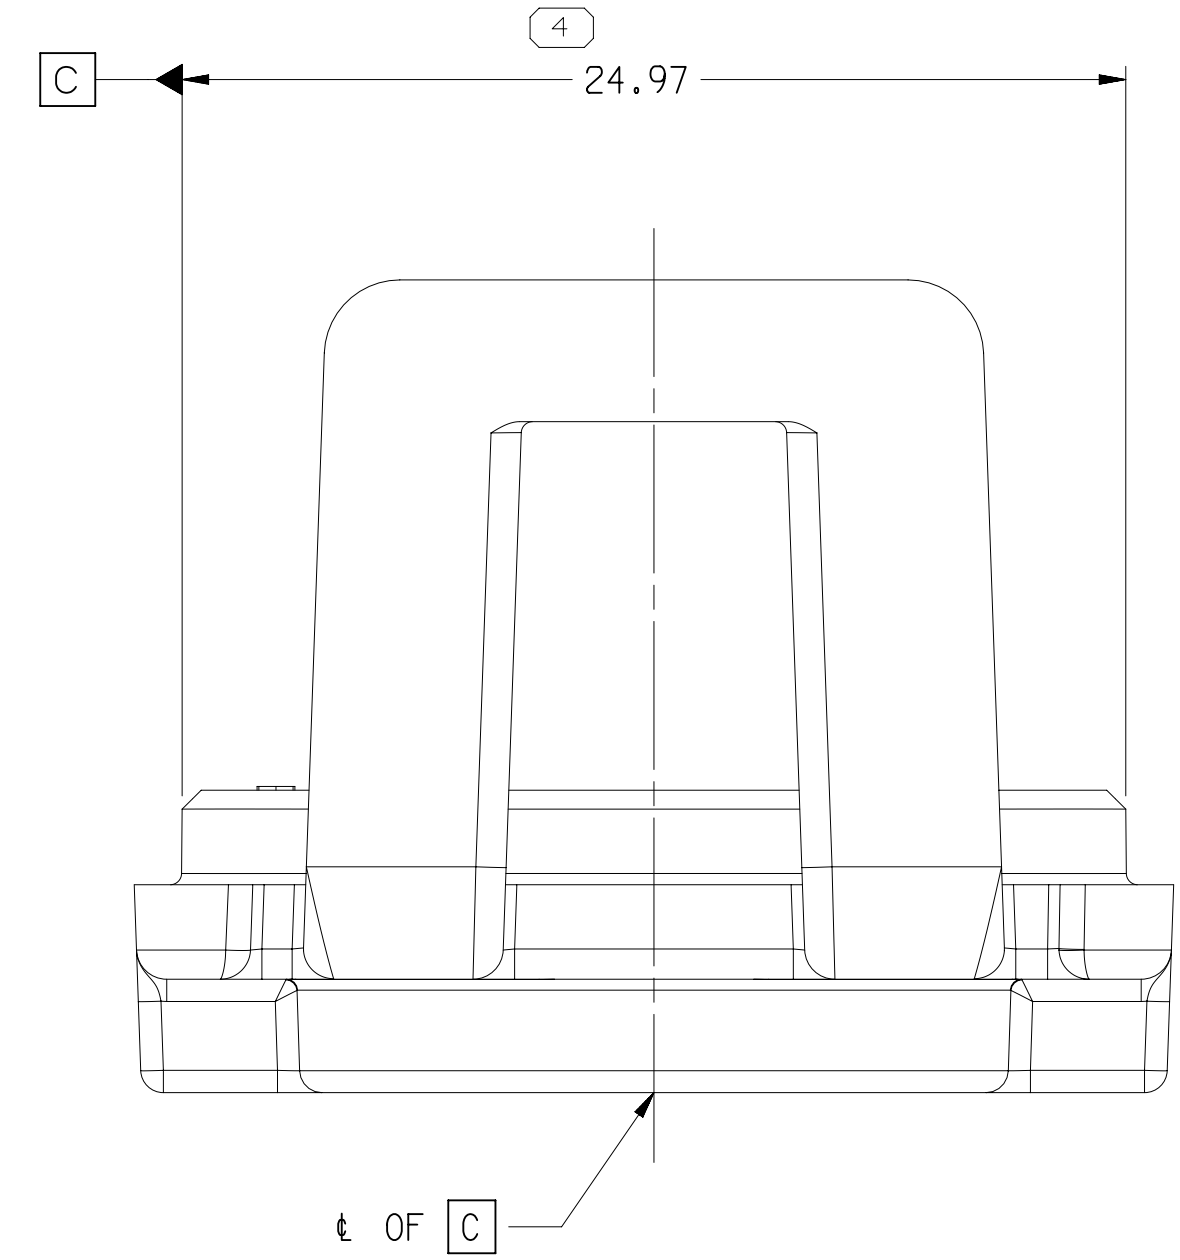
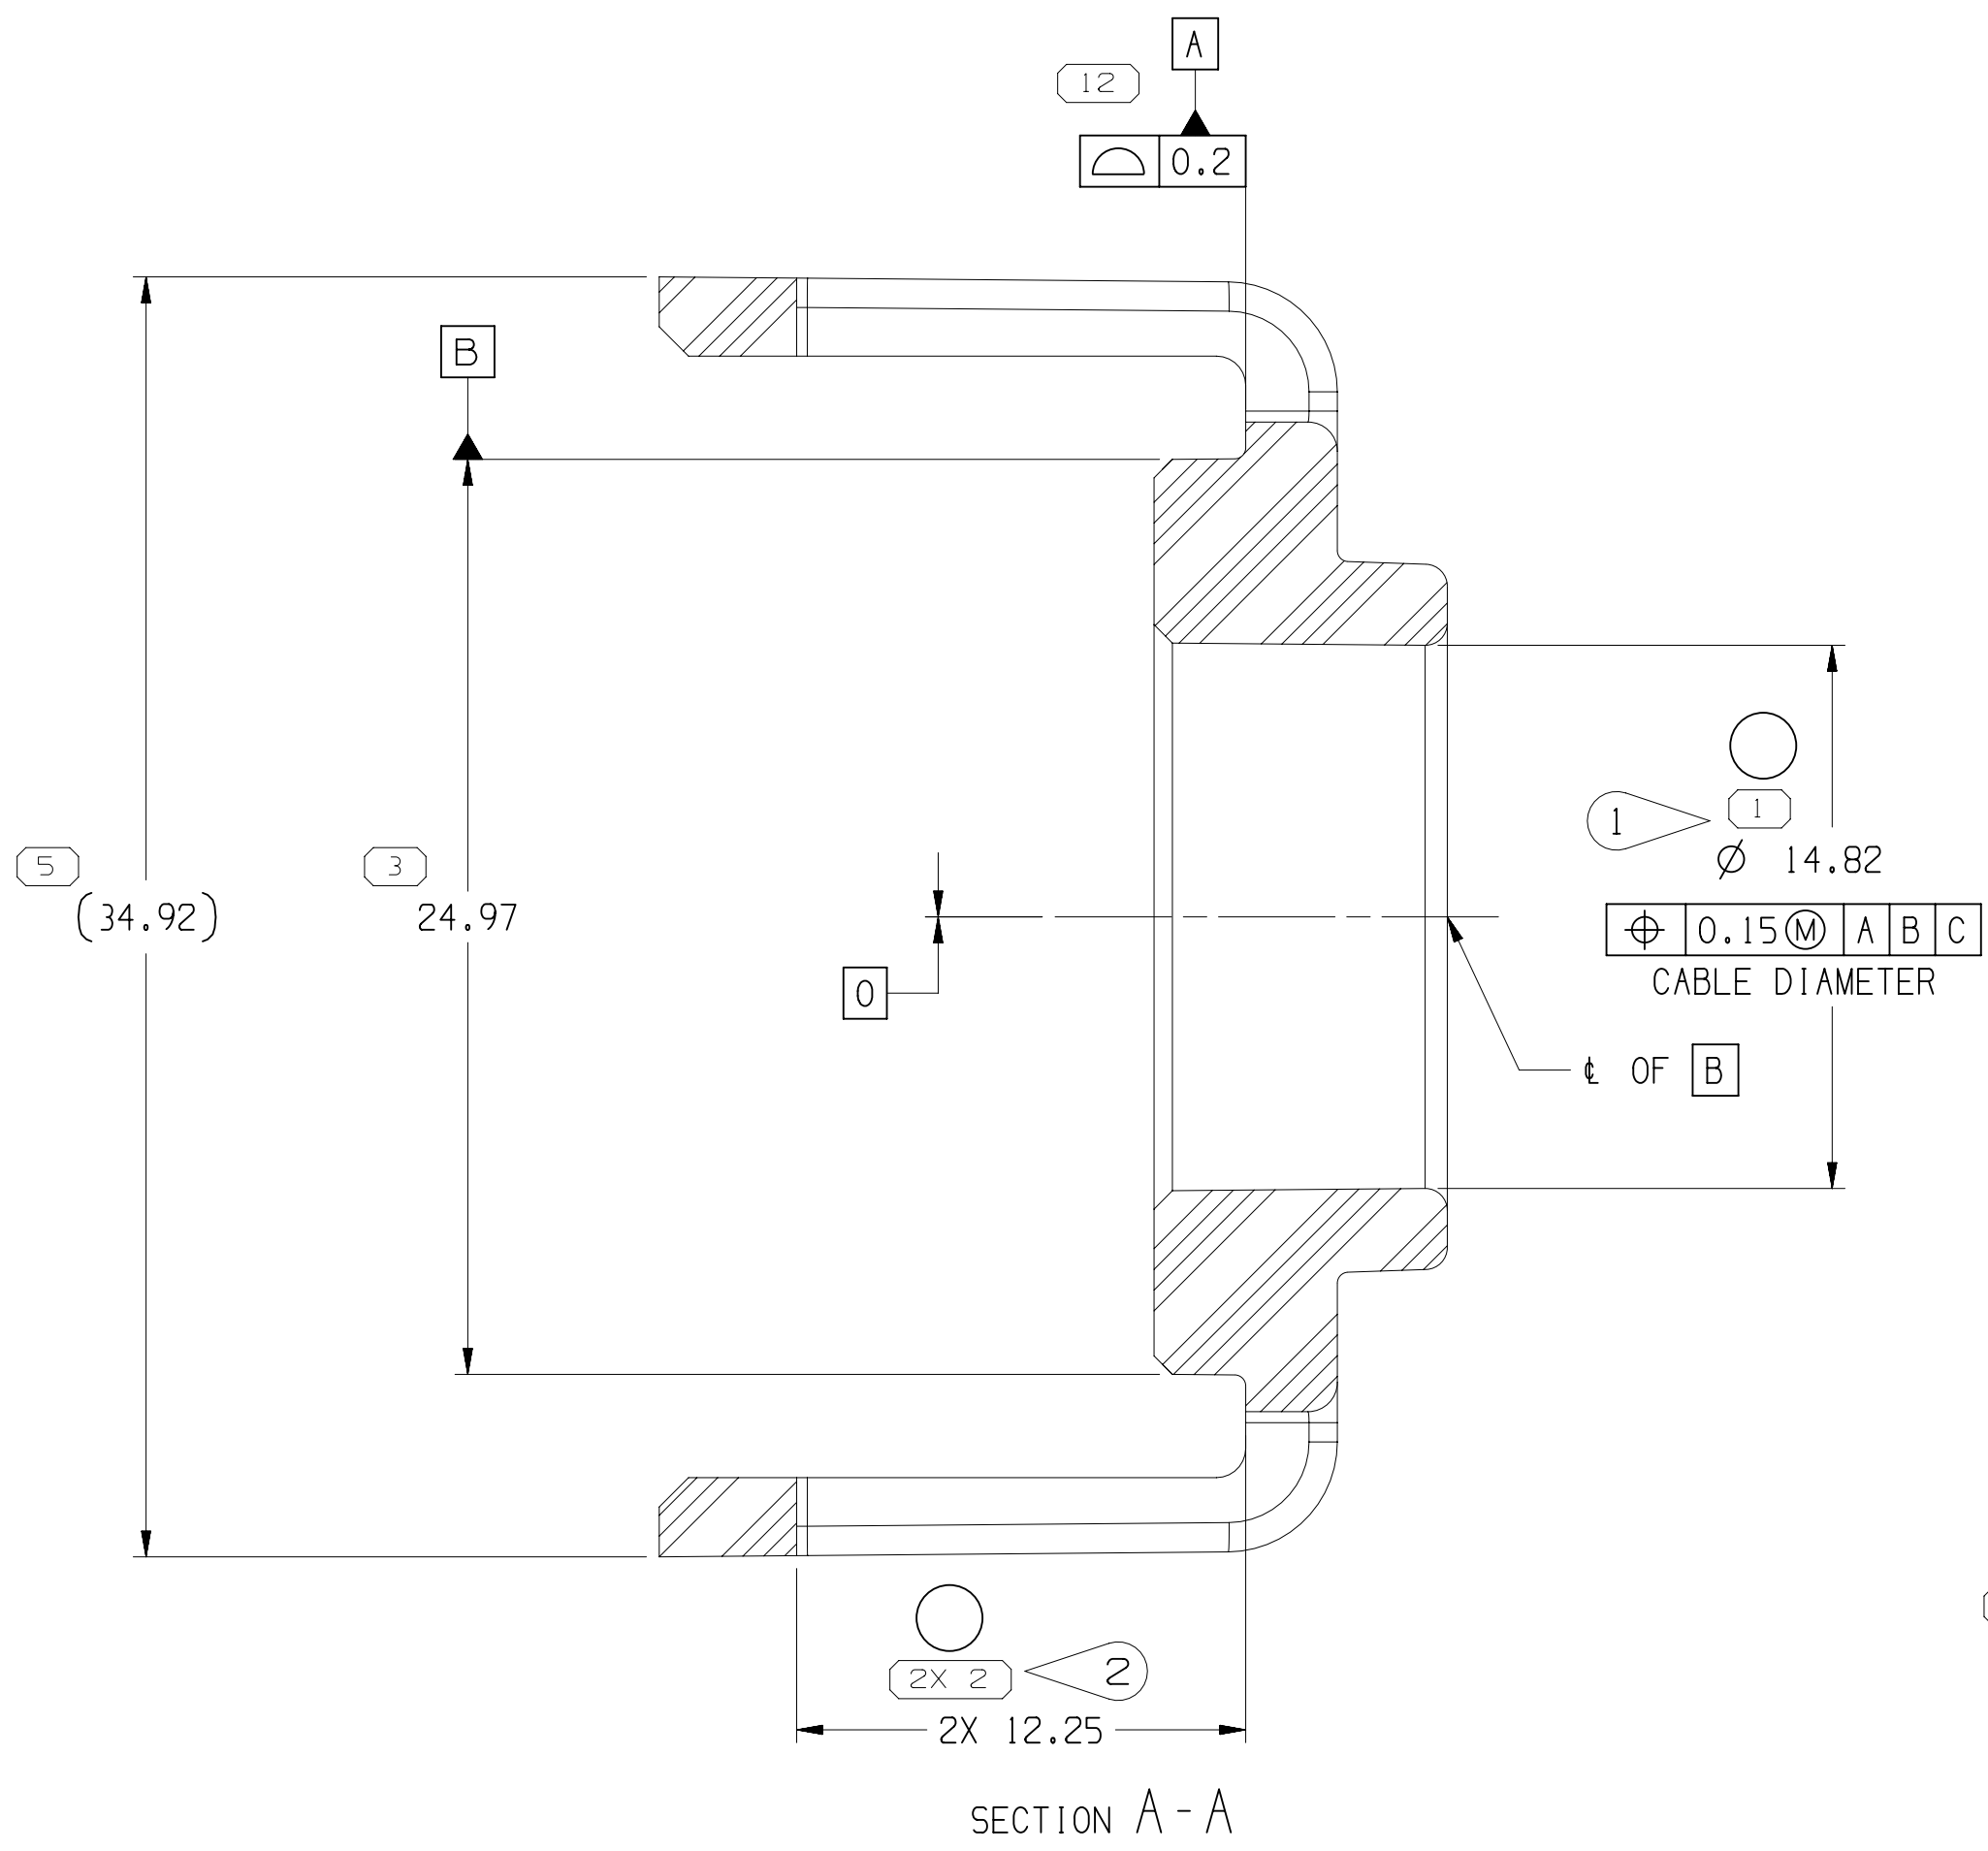


DESIGNATED CHARACTERISTICS					QC I	KPC
2	LAST NO USED	K OR Q IN SYMBOL INDICATES CHECKPOINT	FIT/FUNCTION		C I	FF
-	2	TOTAL ON DRAWING				
KPC	QC I	SAFETY/COMPLIANCE				
NO	NO	TYPE	DESCRIPTION	RATIONALE	ZONE	SH
-	1	C I	DIM#1 - CABLE DIAMETER	MATING INTERFACE RETAINER - CABLE	G10	1
-	2	C I	DIM#2 - STOP TO LOCK	LOCKING FEATURE FOR ASSEMBLY	E11	2

A DIMENSION WITHOUT AN INSPECTION REPORT SYMBOL DOES NOT REQUIRE INSPECTION. IT MAY BE CONTROLLED ON THE INDIVIDUAL COMPONENT DRAWING.

SYMBOL DEFINITION	TOTAL NO OF INSPECTIONS REQUIRED
	20
	13

MISSING SYMBOLS				NO MISSING SYMBOL NUMBER			
DATE	STG	REV	N/P	CHG	ZONE	REVISION HISTORY	AUTH
22MR23	R	01	-	-		RELEASED PART DRAWING	559867
24MY23	R	01	AA	-		ADDED NOTE : 29 MIN DUE TO BOW	560554
16.N23	R	01	AB	-		ADDED BACK VIEW & MATERIAL RECYCLING NOTE	560726
15.JL25	R	02	-	-		ADDED "KPC" CHART & SYMBOLS AND "CONTROL PLAN" NOTE	566051

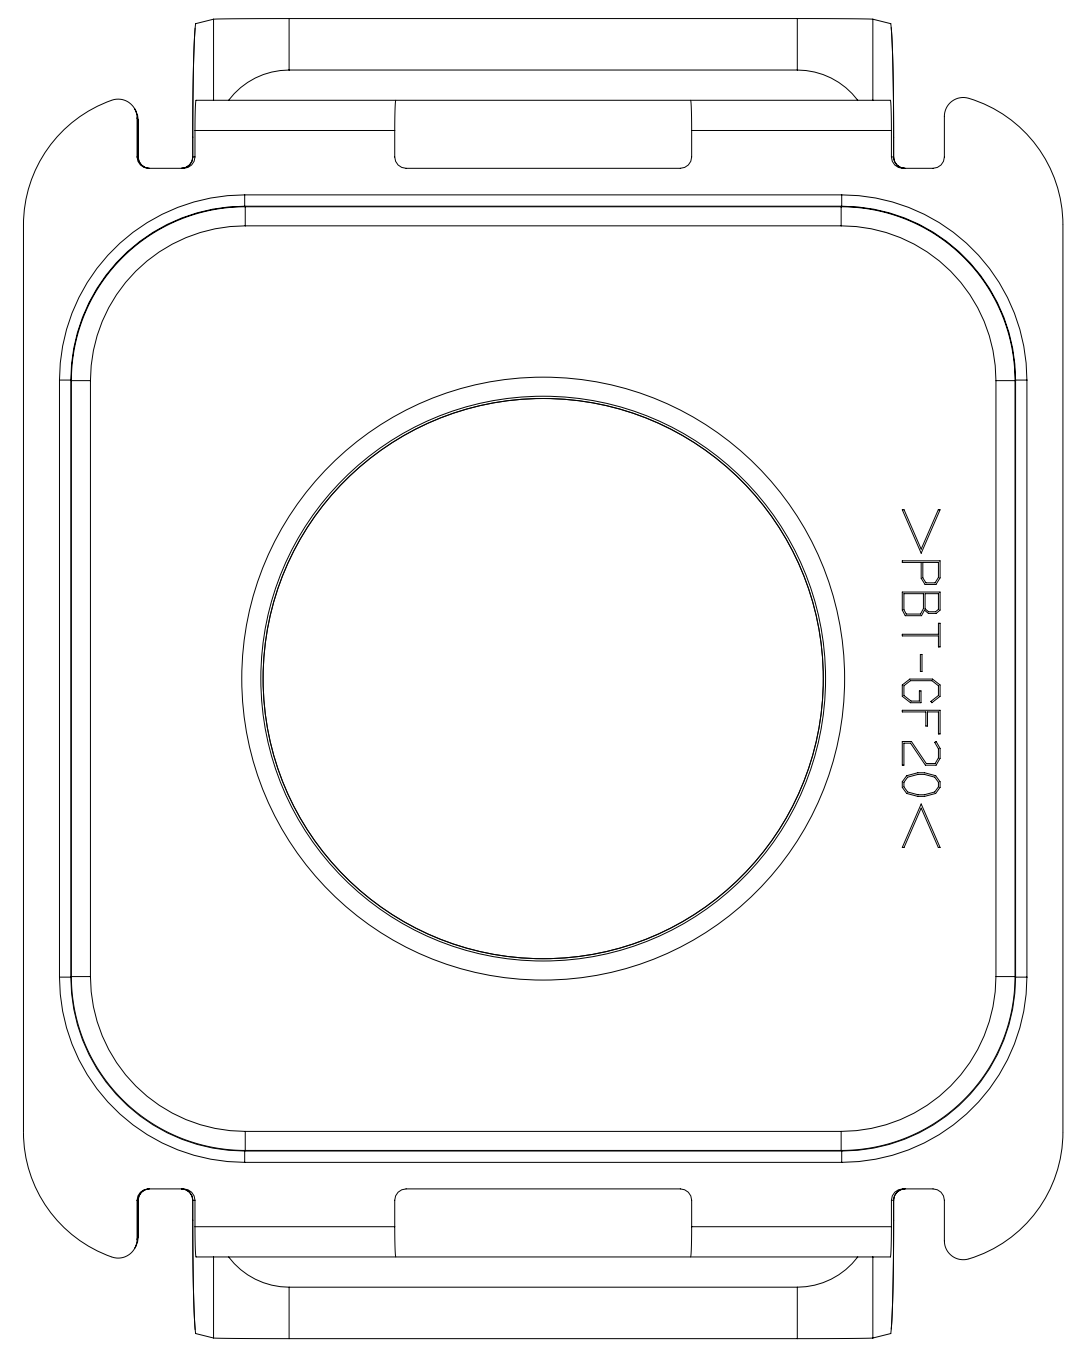

NOTES

- UNLESS OTHERWISE SPECIFIED AND/OR INDICATED:
DIMENSIONS ARE TO FACE OF VIEW SHOWN AND AUTOMATICALLY ROUNDED BY COMPUTER FOR INSPECTION (SEE MATH MODEL FOR PRECISE DIMENSIONS). FOR ALL OTHER DIMENSIONS NOT SHOWN BUT REQUIRED FOR TOOL BUILD, SEE MATH MODEL FOR PRECISE TOOL PATH DATA.
- THIS PRODUCT IS NOT CATEGORIZED AS AN APPEARANCE ITEM. MINOR IMPERFECTIONS INCLUDING, BUT NOT LIMITED TO, FLOW MARKS, COLOR BLEMISHES, GATE VESTIGE, AND SOFT FLASH THAT DO NOT AFFECT THE FIT, FORM, OR FUNCTION OF THE PART ARE PERMISSIBLE PER EANP_4-3-CS-01-EN.
- CORPORATE BRAND TO BE APPLIED TO PRODUCT DESIGN PER THE LATEST REVISION OF ESD 51085201.
- THIS PART USED IN ASSEMBLY 35759385 OR EQUIVALENT.
- MATERIAL RECYCLING CODE PER ISO 11469. (11X10.1) CHARACTERS AS SHOWN TO BE LOCATED ON ANY EXTERIOR SURFACE.
- SEE CONTROL PLAN FOR QUALITY REQUIREMENTS FOR ANY KEY PRODUCT CHARACTERISTICS

DIMENSIONAL RANGE (MM)		CHART	ET
FROM	TO		
0	20	20	20
20	30	30	30
30	40	40	40
40	50	50	50
50	60	60	60
60	70	70	70
70	80	80	80
80	90	90	90
90	100	100	100
100	150	150	150
150	200	200	200
200	250	250	250
250	300	300	300
300	400	400	400
TOLERANCE (UNLESS OTHERWISE SPECIFIED)			
ANGULAR TOLERANCE ±2°			

PART DRAWING	
STYLE	
VOLUME (CM)	3.593
DISTR CODE	D
UNLESS OTHERWISE SPECIFIED	
THIS DOCUMENT IS IN ACCORDANCE WITH ASME Y14.5-2019. SEE APTIV ENGINEERING DESIGN STANDARD 06-2017 FOR ISO 1101:2004 RECOMMENDATION REQUIREMENTS.	
ALL DIMENSIONS ARE IN MILLIMETERS	
REFERENCE	
THIRD ANGLE PROJECTION	DO NOT SCALE
USE MATH DATA	

• APTIV •	
CONNECTION SYSTEMS	
Chennai, India	
COPYRIGHT 2023 APTIV. ALL RIGHTS RESERVED.	
THIS DRAWING IS THE PROPERTY OF APTIV AND CONTAINS APTIV CONFIDENTIAL INFORMATION. THE REPRODUCTION, DISTRIBUTION AND UTILIZATION OF THIS DOCUMENT OR ITS RELATED CAD DATA, AS WELL AS COMMUNICATION OF ANY CONTENT TO OTHERS, WITHOUT EXPRESS AUTHORIZATION, IS PROHIBITED.	
DR	DATE
APVD1 J. GAMEZ	22MR23
APVD2 J.S. ALVARADO	22MR23
APVD3 MARK PLANT	22MR23
APVD4	
APVD5	
SUBSTANCES OF CONCERN AND RECYCLED CONT(10949001) (10949001)	
MATERIAL POLYESTER COMPOUND DARK GRAY	
DRAWING NAME	
LOCK RETAINER	
DRAWING NUMBER	
35758186	
SIZE	SCALE
A0	5:1
FRAME NO	SHEET NO
1	1
OF 1	OF 1
STG	REV
1	02