


## Wideband 1 W HPA with AGC

## TGA2509-FL

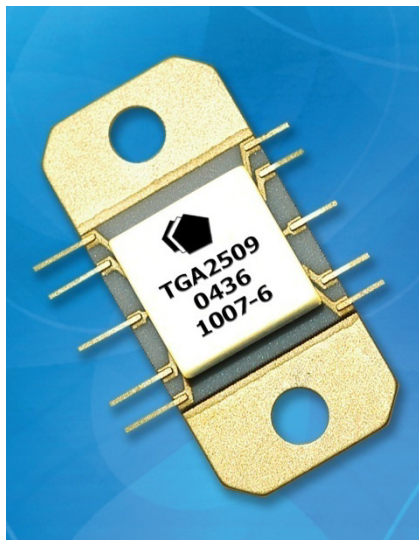

### Key Features

- Frequency Range: 2-20 GHz
- > 29 dBm Nominal P1dB
- 15 dB Nominal Gain, Midband
- 25dB AGC Range
- 10 lead flange package style
- Bias Conditions:  $V_d = 12\text{ V}$ ,  $I_{dq} = 1.1\text{ A}$
- Package Dimensions: 0.7 x 0.3 x 0.1 in.

### Primary Applications

- Wideband Gain Block
- Military EW and ECM
- Test Equipment
- Millimeter Radio
- VSAT
- Space

### Product Description

The TriQuint TGA2509-FL is a Wideband High Power Amplifier with 25 dB AGC range. The HPA operates from 2-20 GHz and is designed using TriQuint's power pHEMT production process.


The TGA2509-FL provides typical 29dBm of output power at 1 dB gain compression with small signal gain of 15 dB.

The TGA2509-FL is suitable for a variety of wideband electronic warfare systems such as radar warning receivers, electronic counter measures, decoys, jammers and phased array systems. The flange lead package has a high thermal conductivity copper alloy base.

Evaluation Boards are available.

### Measured Fixtured Data

Bias Conditions:  $V_d = 12\text{ V}$ ,  $I_{dq} = 1.1\text{ A}$

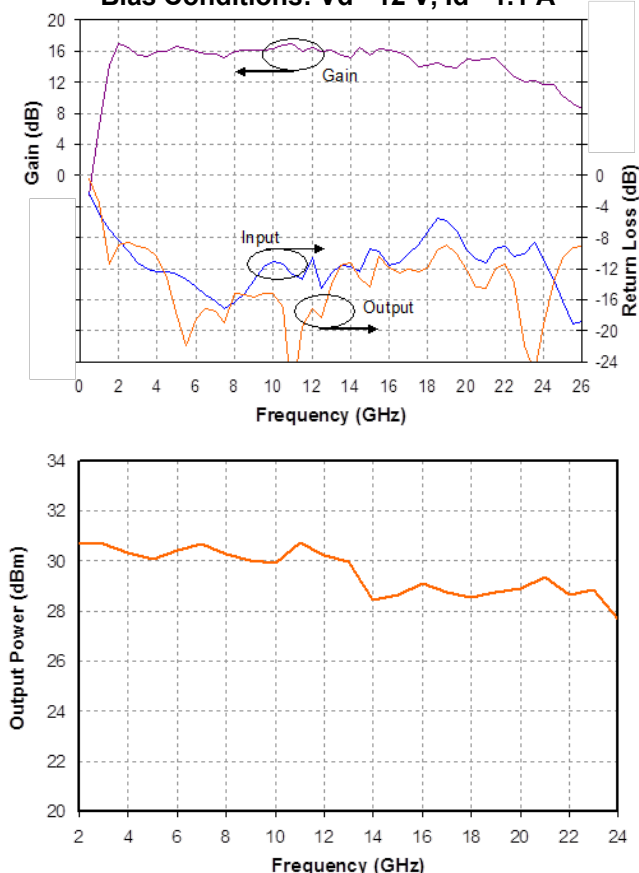

*Note: Datasheet is subject to change without notice.*

**TABLE I**  
**MAXIMUM RATINGS 1/**

SYMBOL	PARAMETER	VALUE	NOTES
$V^+$	Positive Supply Voltage	12.5 V	<u>2/</u>
$V_{g1}$	Gate 1 Supply Voltage Range	-2V TO 0 V	
$V_{g2}$	Gate 2 Supply Voltage Range	-2V TO 0 V	
$V_c$	AGC Control Voltage Range	$V_c < +5$ V $V^+ - V_c < 14$ V	
$I^+$	Positive Supply Current	1.4 A	<u>2/</u>
$ I_G $	Gate Supply Current	70 mA	
$P_{IN}$	Input Continuous Wave Power	30 dBm	<u>2/</u>
$P_D$	Power Dissipation (without using AGC)	13.2 W	<u>2/</u> , <u>3/</u>
$P_D$	Power Dissipation (when $V_c < +2$ V)	10.6 W	<u>2/</u> , <u>3/</u>
$T_{CH}$	Operating Channel Temperature	200 °C	<u>4/</u>
$T_M$	Mounting Temperature (30 Seconds)	230 °C	
$T_{STG}$	Storage Temperature	-65 to 150 °C	

- 1/ These ratings represent the maximum operable values for this device.
- 2/ Current is defined under no RF drive conditions. Combinations of supply voltage, supply current, input power, and output power shall not exceed  $P_D$ .
- 3/ When operated at this power dissipation with a base plate temperature of 60 °C, the median life is 1 E+6 hours.
- 4/ Junction operating temperature will directly affect the device median time to failure ( $T_M$ ). For maximum life, it is recommended that junction temperatures be maintained at the lowest possible levels.

**TABLE II**  
**RF CHARACTERIZATION TABLE**

(T<sub>A</sub> = 25 °C, Nominal)  
 V<sub>d</sub> = 12 V, I<sub>d</sub> = 1.08 A


SYMBOL	PARAMETER	TEST CONDITION	NOMINAL	UNITS
Gain	Small Signal Gain	f = 2-20 GHz	15	dB
IRL	Input Return Loss	f = 2-20 GHz	10	dB
ORL	Output Return Loss	f = 2-20 GHz	12	dB
P <sub>1dB</sub>	Output Power @ 1dB Gain Compression	f = 2-20 GHz	29	dBm

**TABLE III**  
**THERMAL INFORMATION**

Parameter	Test Conditions	T <sub>CH</sub> (°C)	R <sub>θJC</sub> (°C/W)	T <sub>M</sub> (HRS)
R <sub>θJC</sub> Thermal Resistance (channel to backside of package)	V <sub>d</sub> = 12 V I <sub>D</sub> = 1.08 A P <sub>diss</sub> = 13.2 W (without using AGC)	150	6.4	1 E+6
R <sub>θJC</sub> Thermal Resistance (channel to backside of package)	V <sub>d</sub> = 12 V I <sub>D</sub> = 0.88 A P <sub>diss</sub> = 10.6 W (when using AGC)	150	8.3	1 E+6


Note: Package attached with mounting hardware and metal shim (Al or In) to carrier at 65°C baseplate temperature. Worst case is at saturated output power when DC power consumption rises to 15 W with 1 W RF power delivered to load. Power dissipated is 14 W and the temperature rise in the channel is 90 °C. Baseplate temperature must be reduced to 60 °C to remain below the 150 °C maximum channel temperature.

**Median Lifetime vs Channel Temperature**

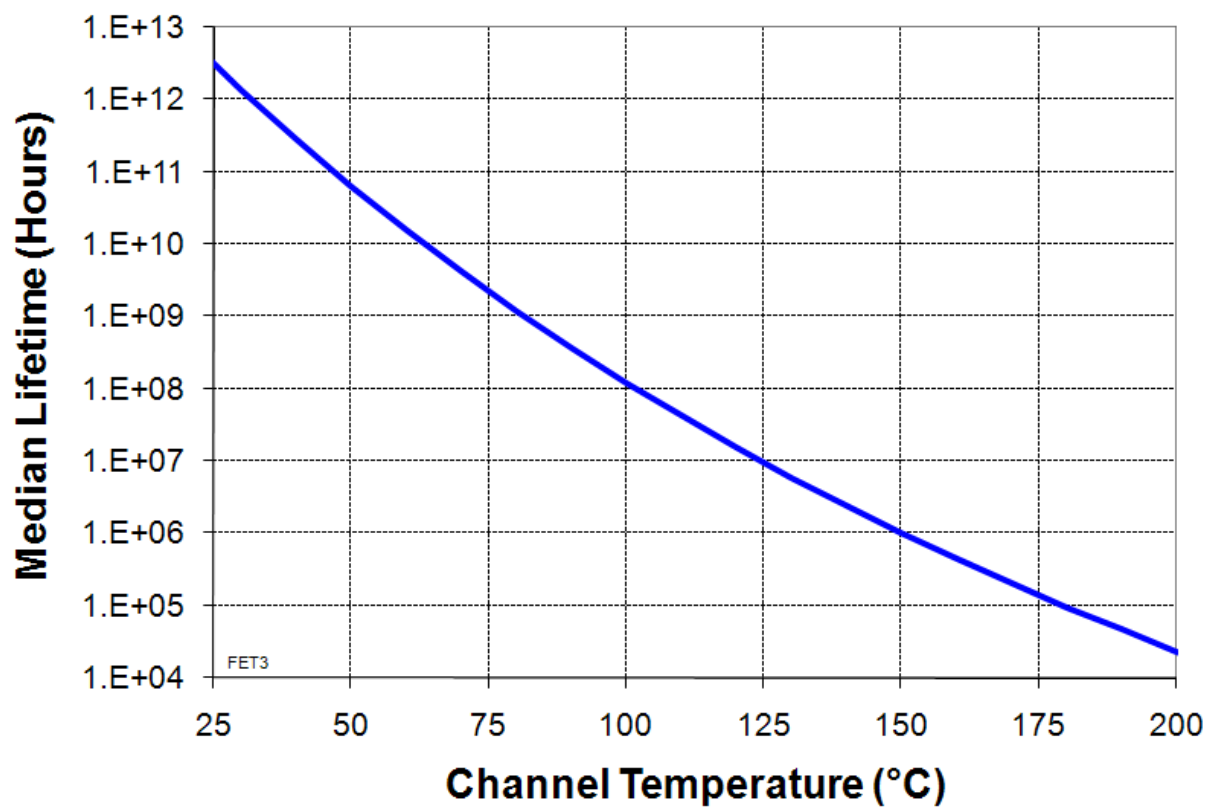


## Typical Fixtured Performance

Bias Conditions:  $V_d = 12V$ ,  $I_d = 1.08A$ ,  $V_{g1} = -0.28V$  Typical,  $V_{g2} = -0.35V$  Typical,  $V_c$  (optional) = 2.6V Typical

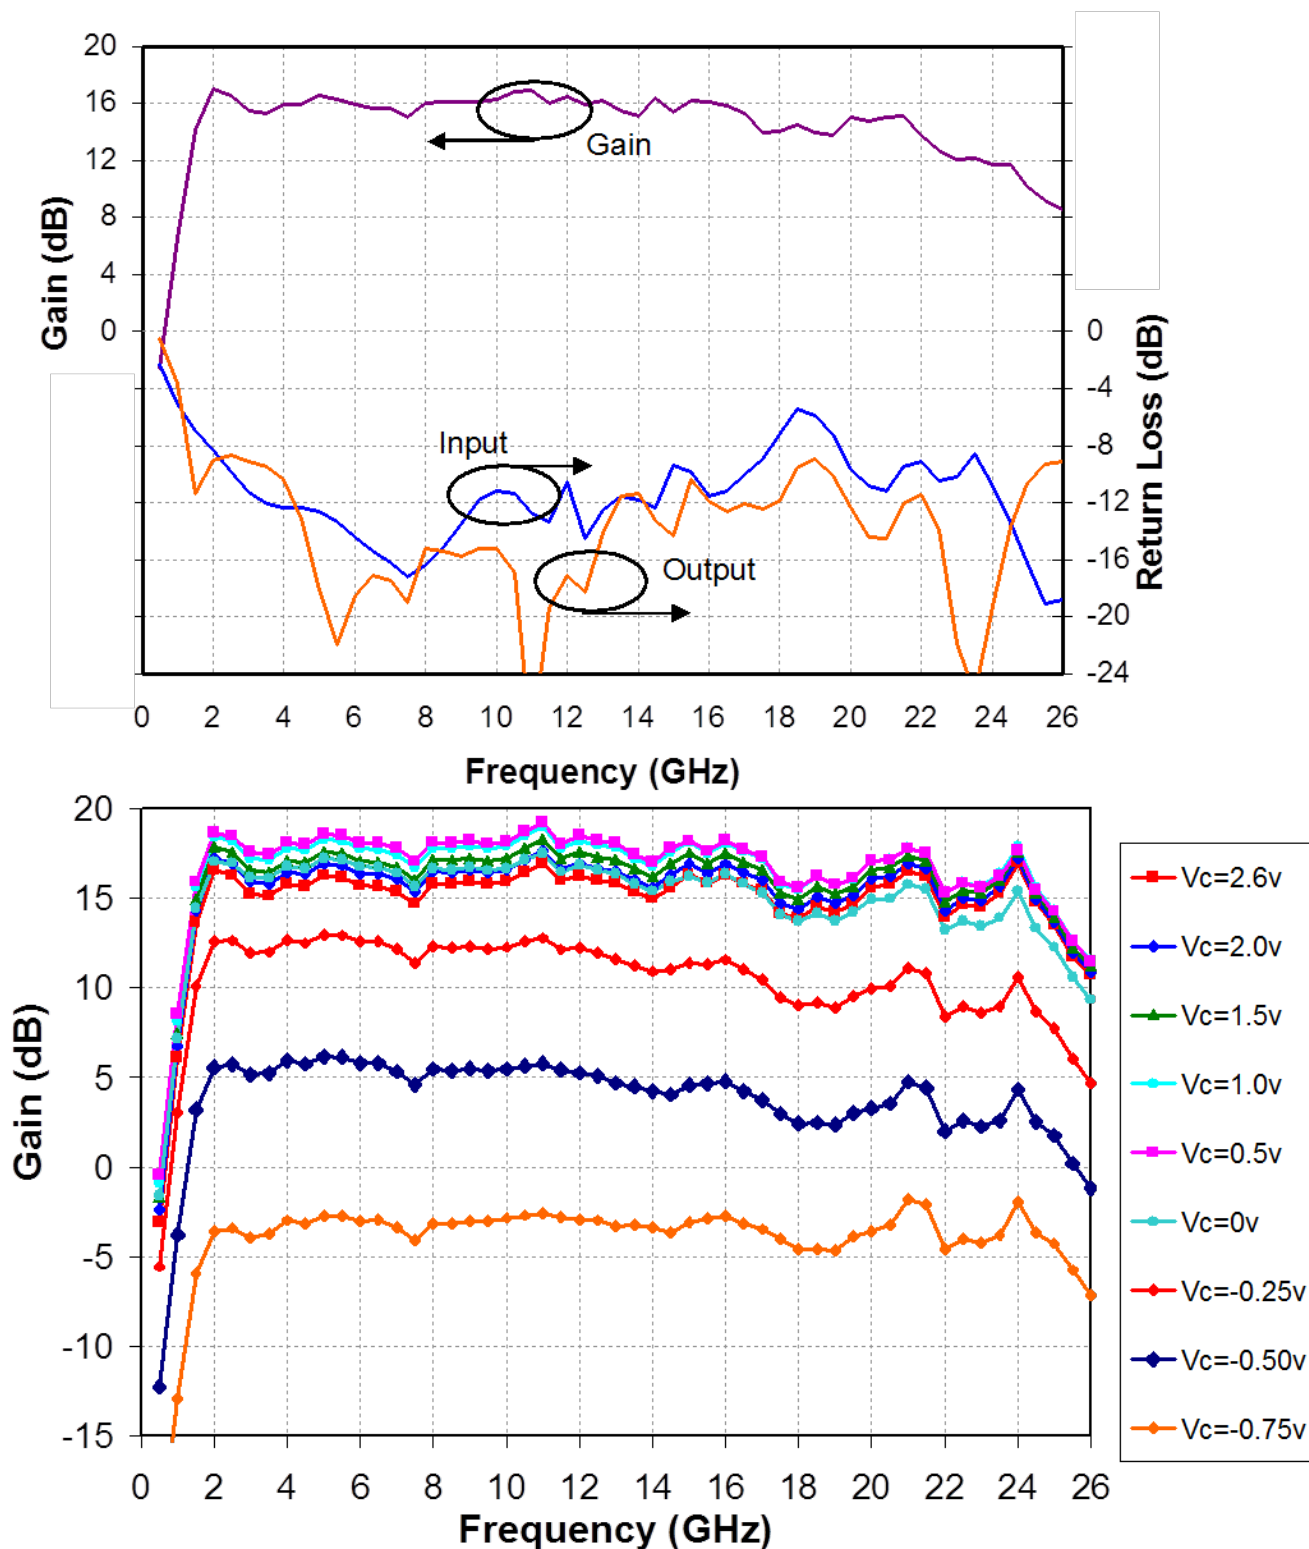


Typical Fixtured Performance

Bias Conditions:  $V_d = 12V$ ,  $I_d = 1.08A$ ,  $V_{g1} = -0.28V$  Typical,  $V_{g2} = -0.35V$  Typical,  $V_c$  (optional) =  $2.6V$  Typical

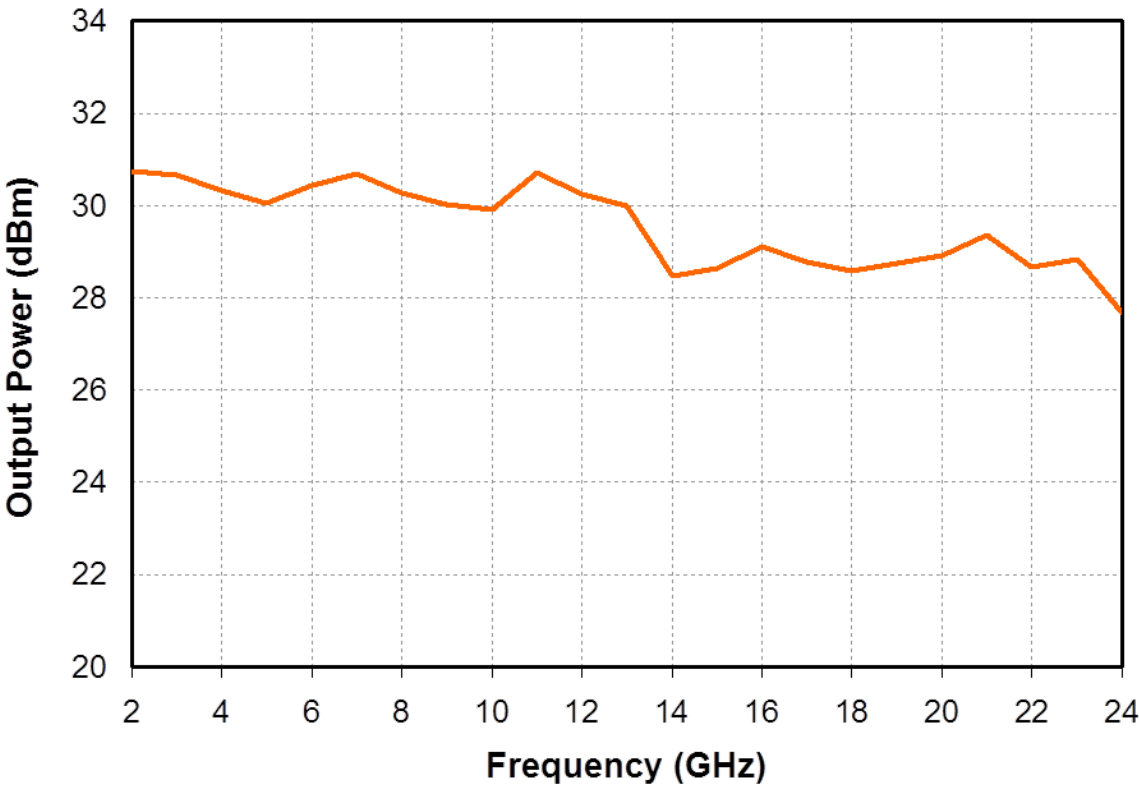


## Package Dimensional Drawing

Units: Inches

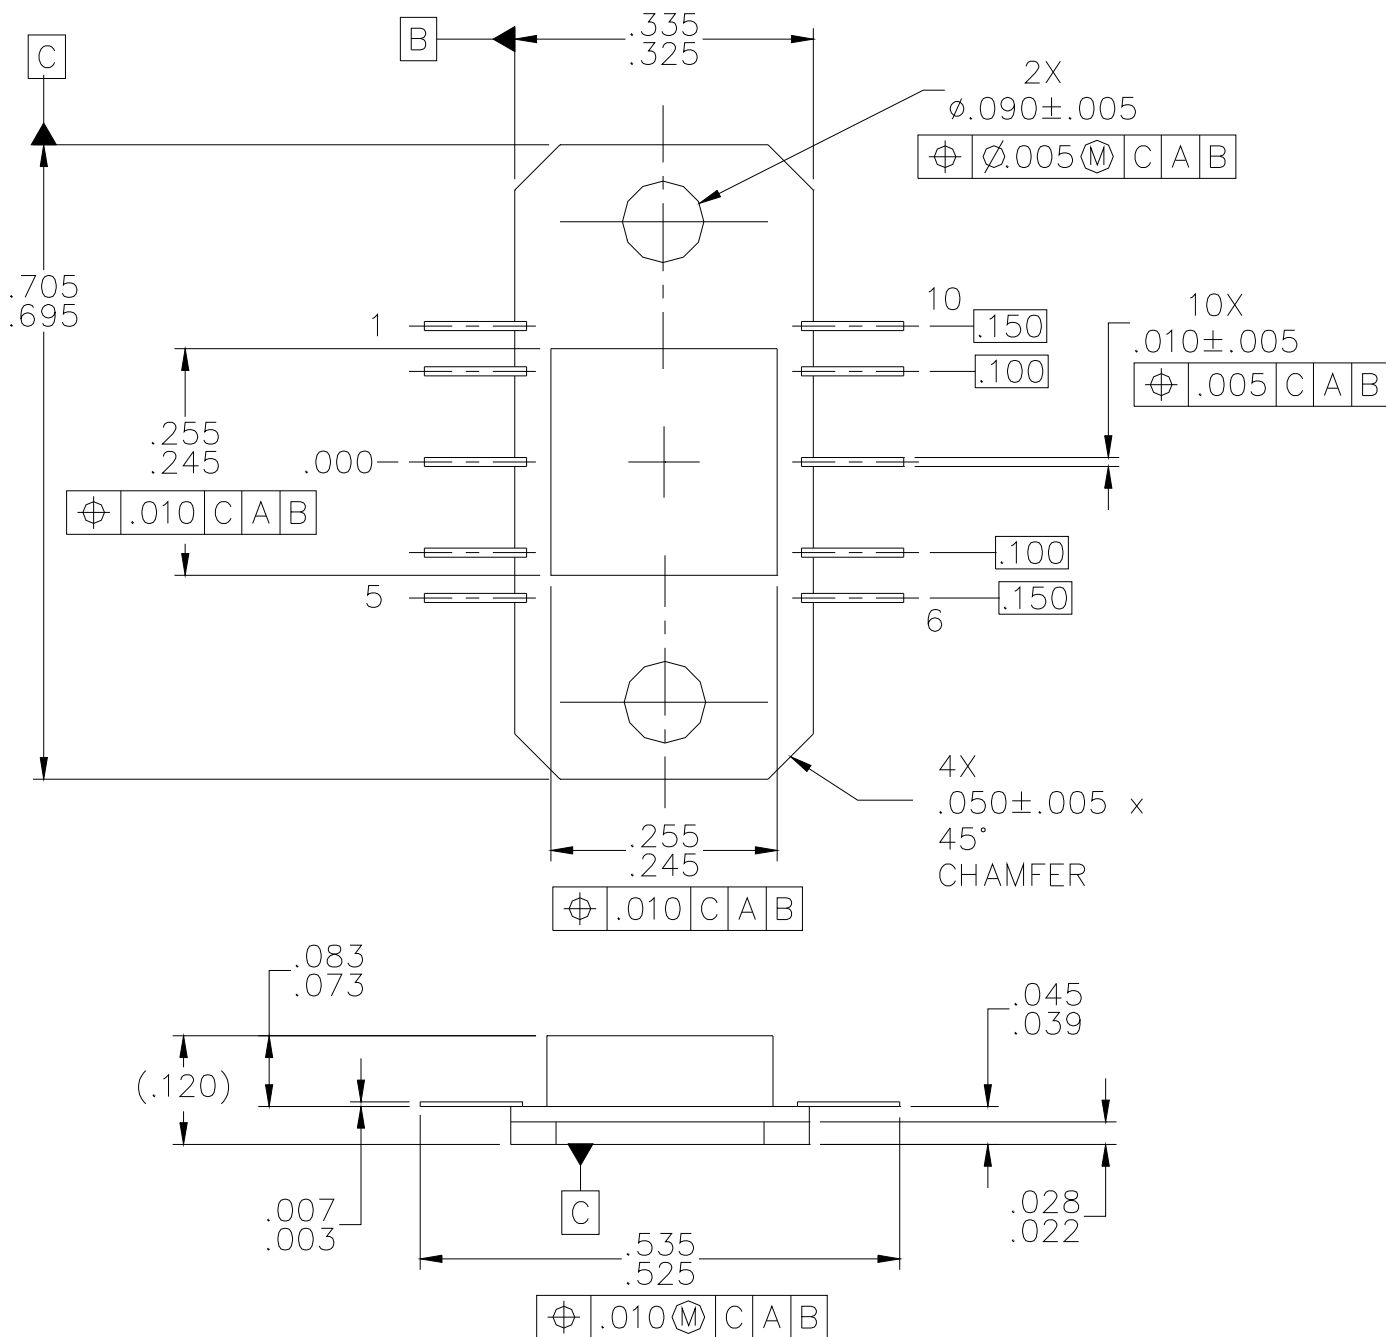

***GaAs MMIC devices are susceptible to damage from Electrostatic Discharge. Proper precautions should be observed during handling, assembly and test.***

## Evaluation Board Drawing

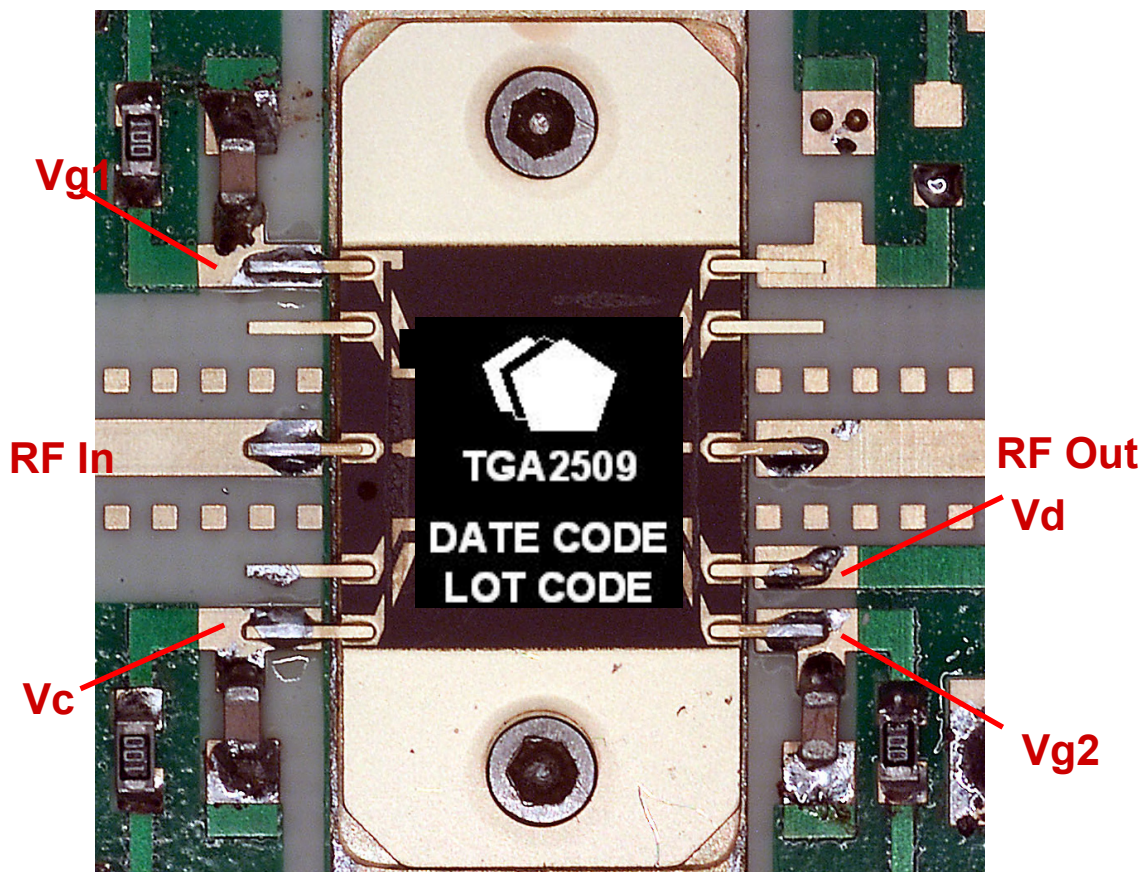

### Bias Procedures:

$V_c$  bias connection is optional, but the 0.1 $\mu$ F cap always needs to be connected.

#### For biasing without AGC control:

1. Apply -1.2V to  $V_{g1}$ , and -1.2V to  $V_{g2}$ .
2. Apply +12V to  $V_d$ .
4. Adjust  $V_{g1}$  to attain 580 mA drain current ( $I_d$ )
4. Adjust  $V_{g2}$  to attain 1080 mA total drain current ( $I_d$ ).


#### For biasing with AGC control:

1. Apply -1.2V to  $V_{g1}$  and -1.2V to  $V_{g2}$
2. Apply +12V to  $V_d$
3. Apply +2.6V to  $V_c$
4. Adjust  $V_{g1}$  to attain 580 mA drain current ( $I_d$ )
5. Adjust  $V_{g2}$  to attain 1080 mA total drain current ( $I_d$ ).
6. Adjust  $V_c$  as needed to control gain level.

*GaAs MMIC devices are susceptible to damage from Electrostatic Discharge. Proper precautions should be observed during handling, assembly and test.*



Typical Evaluation Board Layout

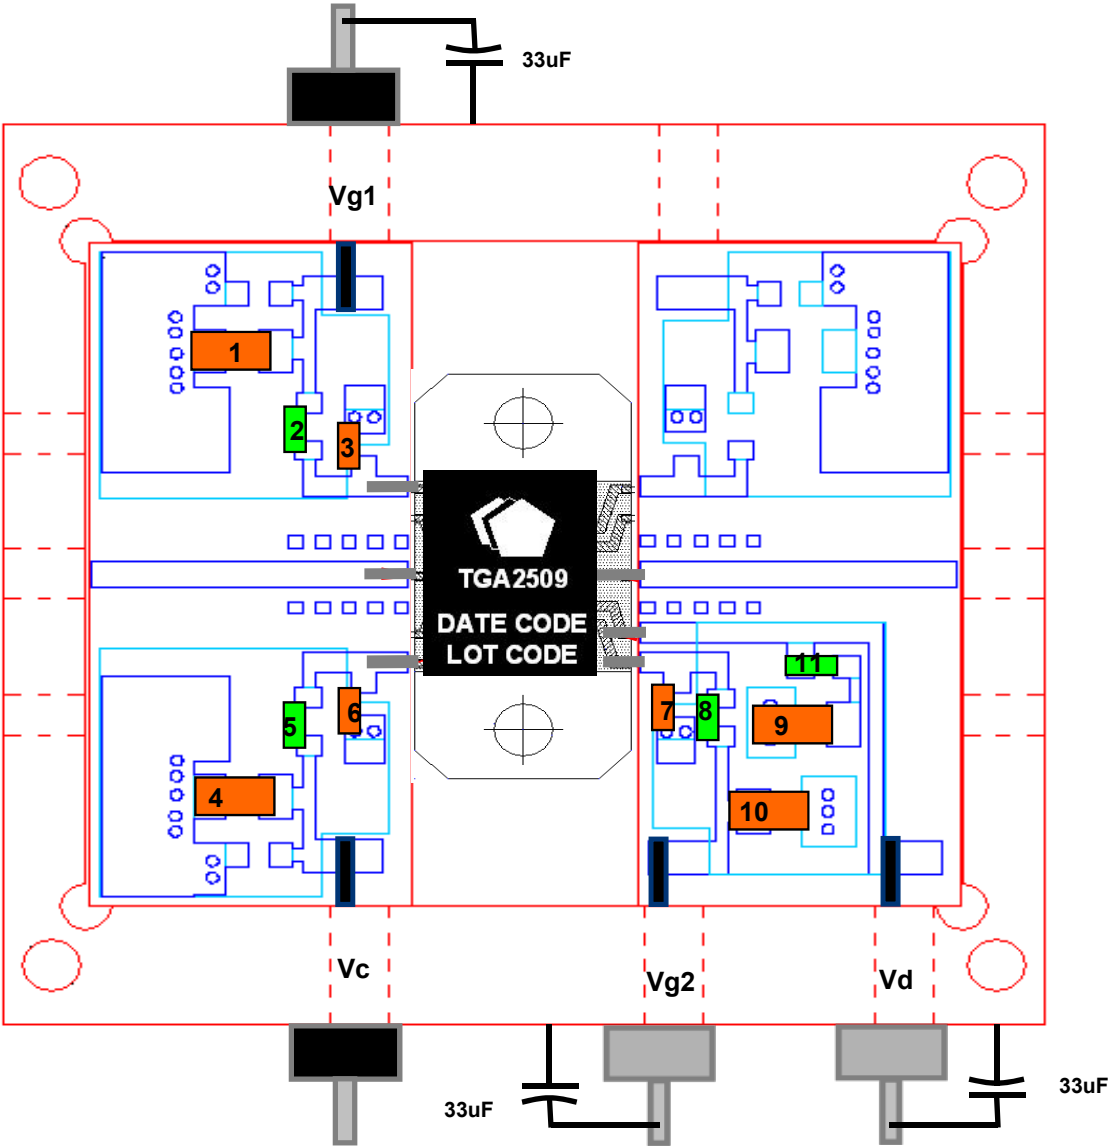

COMPONENT	VALUE
1, 4, 9,10	1 uF
2, 5, 9	10 $\Omega$
3, 6, 7	0.01 uF
11	100 $\Omega$

GaAs MMIC devices are susceptible to damage from Electrostatic Discharge. Proper precautions should be observed during handling, assembly and test.

## **Assembly of a TGA2509-FL Flange Mount Package onto a Motherboard**

### **Manual Assembly for Prototypes**

1. Clean the motherboard or the similar module with Acetone. Rinse with alcohol and DI water. Allow the circuit to fully dry.
2. To improve the thermal and RF performance, TriQuint recommends a heat sink attached to the bottom of the package with an indium alloy preform, or equivalent, between the two.
3. Apply Tin/Lead solder, or equivalent, to each active pin of the TGA2509-FL.
4. Clean the assembly with alcohol.

### **Ordering Information**

<b>Part</b>	<b>Package Style</b>
TG2509-FL	Flange (Leads bolted down)

***GaAs MMIC devices are susceptible to damage from Electrostatic Discharge. Proper precautions should be observed during handling, assembly and test.***

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Qorvo:

TGA2509-FL