




RFM products are now Murata products.

SF2069A-1

# 96.00 MHz SAW Filter



#### · Low Insertion Loss

- Hermetic 19 x 6.5 mm Surface-mount Case
- Complies with Directive 2002/95/EC (RoHS)



**Absolute Maximum Ratings** 

Rating	Value	Units	
Maximum Incident Power in Passband	+10	dBm	
Max. DC voltage between any 2 terminals	30	VDC	
Storage Temperature Range -40 to +150 °C			
Suitable for lead-free soldering - Max. Soldering Profile	260°C for 30 s		

### **Electrical Characteristics**

Characteristic		Sym	Notes	Min	Тур	Max	Units
Nominal Center Frequency ( @ 25°C )		f <sub>O</sub>		95.9	96.00	96.1	MHz
Minimum Insertion Loss Attenuation			1		14	16	dB
Passband	$\alpha$ min $\leq$ 1dB , B1dB			4.3	5.0		MHz
Amplitude Ripple (p-p)	±2.40MHz				0.8	1.5	dB
Group Delay Ripple	±2.40MHz				80	125	ns
Relative Attenuation (relative to αmin)							
	40 to 87 MHz			43	48		dB
	111 to 150 MHz			50	55		dB
Operating Temperature		T <sub>A</sub>	1	-40		+85	°C

Impedance Matching to 50 $\Omega$ unbalanced	External L-C
Case Style	SMP-75 19 x 6.5 mm Nominal Footprint
Lid Symbolization (YY = year, WW = week)	RFM SF2069A-1 YYWW

# **W**


### CAUTION: Electrostatic Sensitive Device. Observe precautions for handling.

### NOTES:

- 1. Unless noted otherwise, all specifications apply over the operating temperature range with filter soldered to the specified demonstration board with impedance matching to 50 W and measured with 50  $\Omega$  network analyzer.
- 2. Unless noted otherwise, all frequency specifications are referenced to the nominal center frequency, fc.
- 3. Rejection is measured as attenuation below the minimum IL point in the passband. Rejection in final user application is dependent on PCB layout and external impedance matching design. See Application Note No. 42 for details.
- 4. "LRIP" or "L" after the part number indicates "low rate initial production" and "ENG" or "E" indicates "engineering prototypes."
- 5. The design, manufacturing process, and specifications of this filter are subject to change.
- 6. Either Port 1 or Port 2 may be used for either input or output in the design. However, impedances and impedance matching may vary between Port 1 and Port 2, so that the filter must always be installed in one direction per the circuit design.
- US and international patents may apply.

# **SMP-75 Case**


### 10-Terminal Ceramic Surface-Mount Case 19 x 6.5 mm Nominal Footprint



	Case Dimensions					
Dimension	mm			Inches		
	Min	Nom	Max	Min	Nom	Max
Α	18.80	19.00	19.30	0.740	0.748	0.760
В	6.30	6.50	6.80	0.248	0.256	0.268
С		1.75	2.00		0.069	0.079
D		2.29			0.090	
E		1.02			0.040	
Н		1.0			0.039	
Р		1.905			0.075	

Electrical Connections			
	Connection	Terminals	
Port 1	Hot	10	
	Ground Return	1	
Port 2	Hot	5	
	Ground Return	6	
	Case Ground	All others	
Single Ended Operation		Return is ground	
Differential Operation		Return is hot	

	Materials
Solder Pad Termination	Au plating 30 - 60 μinches (76.2-152 μm) over 80-200 μinches (203-508 μm) Ni.
Lid	Fe-Ni-Co Alloy Electroless Nickel Plate (8-11% Phosphorus) 100-200 µinches Thick
Body	Al <sub>2</sub> O <sub>3</sub> Ceramic
Pb Free	

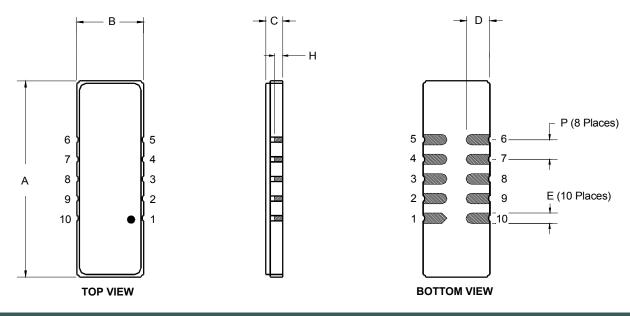

# **Mouser Electronics**

**Authorized Distributor** 

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Murata: SF2069A-1