


# T1/E1/CEPT/ISDN-PRI INTERFACE MODULES

Four Transformer Modules for Dual SMT  
T1/E1 Ports, Extended Temperature Range




-  RoHS peak reflow temperature rating 245°C
-  Optimized for enhanced EMC performance
-  SMT Dual Port package contains transformers with optional common mode chokes on both transmit and receive channels
-  Models matched to leading transceiver ICs
-  Patented Interlock Base construction for high-reliability
-  Recognized to UL 1950
-  Isolation Voltage: 1500 Vrms

## Electrical Specifications @ 25°C


| RoHS Compliant<br>Part Number                                                         |          | Turns Ratio <sup>2</sup><br>(Pri:Sec ± 2%) |            | Secondary<br>OCL @ 25°C<br>(mH MIN) | Cw/w<br>(pF MAX) | DCR Pri<br>(Ω MAX) | Package/<br>Schematic | Primary Pins |               |
|---------------------------------------------------------------------------------------|----------|--------------------------------------------|------------|-------------------------------------|------------------|--------------------|-----------------------|--------------|---------------|
| w/CMC                                                                                 | wo/CMC   | Transmit                                   | Receive    |                                     |                  |                    |                       | Transmit     | Receive       |
| EXTENDED TEMPERATURE RANGE MODELS <sup>1</sup> – OPERATING TEMPERATURE -40°C TO +85°C |          |                                            |            |                                     |                  |                    |                       |              |               |
| T1176NL                                                                               | —        | 1CT:2.4CT                                  | 1CT:1CT    | 1.20                                | 35               | .80                | WAT/2                 | 1-3 & 10-12  | 21-19 & 18-16 |
| TX1192NL                                                                              | TX1322NL | 1CT:2.42CT                                 | 1CT:2.42CT | 1.20                                | 25               | .80                | WAT/1                 | 4-6 & 10-12  | 1-3 & 7-9     |
| TX1193NL                                                                              | TX1323NL | 1CT:2CT                                    | 1CT:1CT    | 1.20                                | 35               | .80                | WAT/1                 | 4-6 & 10-12  | 24-22 & 18-16 |

- Extended Temperature Range Models** — For extended temperature range transformers (-40°C to +85°C operating temperature range), OCL (Open Circuit Inductance) is specified at both -40°C and +25°C. At -40°C, OCL is 600 µH minimum. All other parameters are specified at +25°C only.
- Turns ratio** is specified primary:secondary (CT = Center Tap).
- Standard packaging** for the surface mount package is anti-static tubes. Optional Tape & Reel packaging can be ordered by adding a “T” suffix to the part number, (i.e. T1176NLT).

## Mechanical

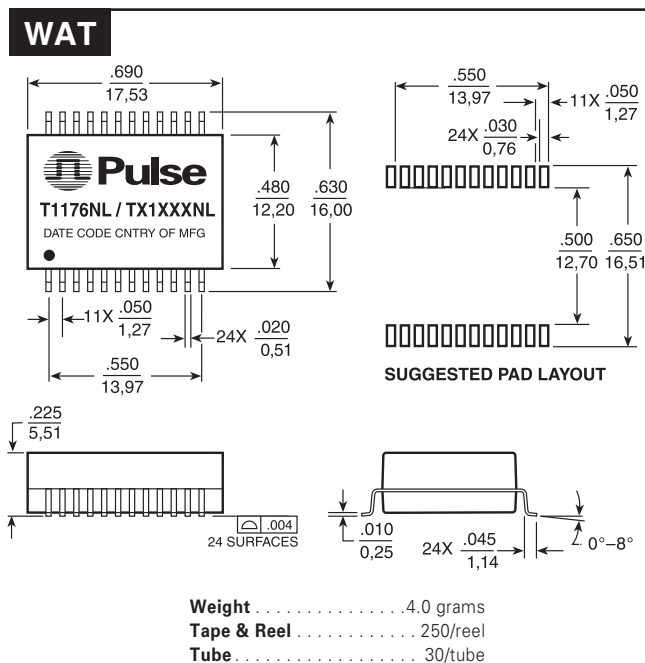

## Schematic

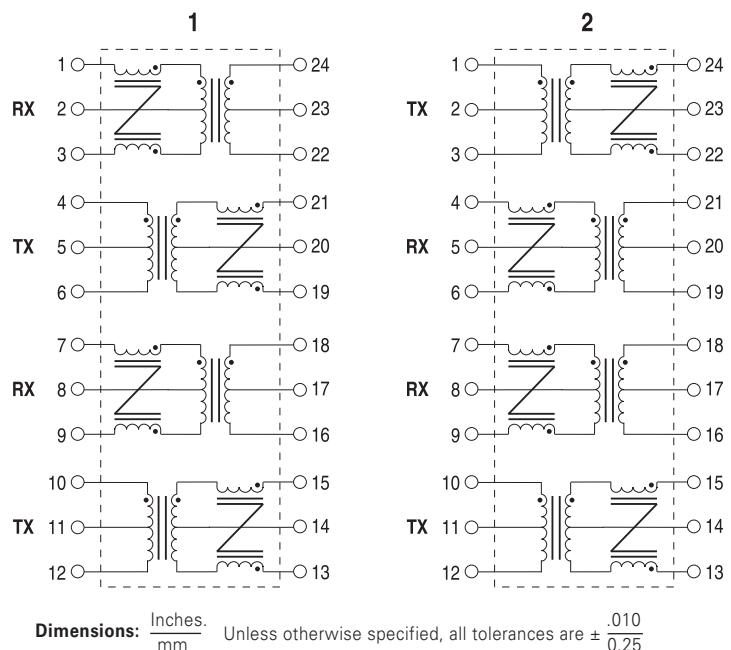

# T1/E1/CEPT/ISDN-PRI INTERFACE MODULES

Four Transformer Modules for Dual SMT  
T1/E1 Ports, Extended Temperature Range



## Application Notes

- 1. Flammability** — Materials used in these products are recognized as UL94-VO approved. Products meet the requirements of IEC 695-2-2 (Needle Flame Test).
- 2. Balance Characteristics** — The transformers meet the requirements for longitudinal balance of FCC part 68.
- 3. Common Mode Rejection Ratio** — the CMRR for all transformers is better than 50 dB at 1 MHz.
- 4. Crosstalk Attenuation** — In the packages which contain transmit and receive transformers side by side, sufficient crosstalk attenuation is achieved by the inherent characteristics of the toroid cores as well as by their proper positioning. The crosstalk attenuation is typically 65 dB or better.
- 5. Return Loss** — ITU-T G.703 and the European national regulatory documents specify minimum return loss levels. The transformers will allow these limits to be complied within the situations where they are applicable.

| Frequency   | 50-100 KHz | 100 KHz-2 MHz | 2-3 MHz |
|-------------|------------|---------------|---------|
| Return Loss |            |               |         |
| XMIT        | 9 dB       | 15 dB         | 11 dB   |
| RCV         | 12 dB      | 18 dB         | 14 dB   |

- 6. General Information** — The transformers are specifically designed for use in 1.544 Mbps (T1), 2.048 Mbps (CEPT) and ISDN Primary Rate Interface (PRI) applications. They are matched to the majority of the line interface transceiver ICs currently available. Use of the proper transformer allows the interface circuit to comply with ITU-T G.703 and other standards regarding pulse waveform, return loss, and balance.

## For More Information:

### Pulse Worldwide Headquarters

12220 World Trade Dr.  
San Diego, CA 92128  
U.S.A.

[www.pulseeng.com](http://www.pulseeng.com)

Tel: 858 674 8100  
Fax: 858 674 8262

### Pulse Europe

Einsteinstrasse 1  
D-71083 Herrenberg  
Germany

Tel: 49 7032 7806 0

Fax: 49 7032 7806 135

### Pulse China Headquarters

B402, Shenzhen Academy of  
Aerospace Technology Bldg.  
10th Kejinan Rd.  
High-Tech Zone  
Nanshan District  
Shenzhen, PR China 518057

Tel: 86 755 33966678

Fax: 86 755 33966700

### Pulse North China

Room 2704/2705  
Super Ocean Finance Ctr.  
2067 Yan An Rd. West  
Shanghai 200336  
China

Tel: 86 21 62787060

Fax: 86 2162786973

### Pulse South Asia

135 Joo Seng Rd.  
#03-02  
PM Industrial Bldg.  
Singapore 368363

Tel: 65 6287 8998

Fax: 65 6287 8998

### Pulse North Asia

3F, No. 198  
Zhongyuan Rd.  
Zhongli City  
Taoyuan County 320  
Taiwan R. O. C.

Tel: 886 3 4356768

Fax: FRE 886 3 4356820  
Pulse: 886 3 4356823

Performance warranty of products offered on this data sheet is limited to the parameters specified. Data is subject to change without notice. Other brand and product names mentioned herein may be trademarks or registered trademarks of their respective owners.

© Copyright, 2009. Pulse Engineering, Inc. All rights reserved.

[www.pulseeng.com](http://www.pulseeng.com)

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

## Pulse:

[TX1301](#) [TX1300](#) [TX1328](#) [TX1322](#) [TX1326](#) [TX1330](#) [TX1329](#) [TX1325](#) [TX1327](#) [TX1321](#) [TX1323](#) [TX1331](#)  
[TX1324](#) [T1176T](#) [TX1330T](#) [TX1331T](#) [T1176](#) [TX1301T](#) [TX1192](#) [TX1197](#) [TX1194](#) [TX1193](#) [TX1199](#) [TX1195](#)  
[TX1196](#) [TX1198](#) [TX1197T](#) [TX1195T](#) [TX1194T](#) [TX1199T](#) [TX1193T](#) [TX1324T](#) [TX1327T](#) [TX1322T](#) [TX1328T](#)  
[TX1326T](#) [TX1323T](#) [TX1325T](#) [TX1329T](#) [TX1321T](#) [TX1300T](#) [TX1198T](#) [TX1196T](#) [TX1192T](#) [TX1194NL](#) [TX1194NLT](#)  
[TX1195NL](#) [TX1195NLT](#) [TX1196NL](#) [TX1196NLT](#) [TX1197NL](#) [TX1197NLT](#) [TX1198NL](#) [TX1198NLT](#) [TX1199NL](#)  
[TX1199NLT](#) [TX1300NL](#) [TX1300NLT](#) [TX1301NL](#) [TX1301NLT](#) [TX1321NL](#) [TX1321NLT](#) [TX1322NL](#) [TX1322NLT](#)  
[TX1324NL](#) [TX1324NLT](#) [TX1325NL](#) [TX1325NLT](#) [TX1326NL](#) [TX1326NLT](#) [TX1327NL](#) [TX1327NLT](#) [TX1328NL](#)  
[TX1328NLT](#) [TX1329NL](#) [TX1329NLT](#) [TX1330NL](#) [TX1330NLT](#) [TX1331NL](#) [TX1331NLT](#)